## BarchartDto

+Name: string


+Category: string


+TrashTypeCounts: Dictionary<string, int>

## LineGraphDto

I in a Creat Date (into Deta Time), record

DetectionsCont			
<b>DetectionsCont</b> ControlApiDbContext	db: Control		
ControlApiDbContext	+GetFactsDa		
ControlApiDbContext FactsData(DateOnly, CancellationToken): Task <actio< td=""><td>+GetFactsDa</td><td></td><td></td></actio<>	+GetFactsDa		

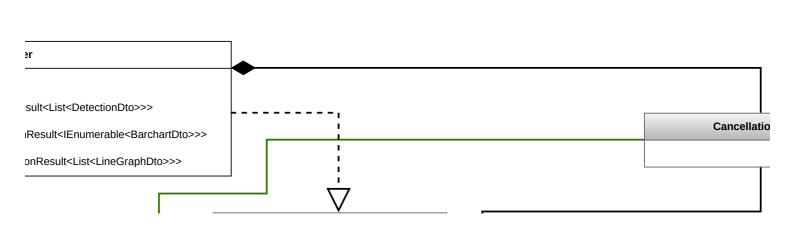






## 

+LineGraphDto(int?,	DateTime	): record
---------------------	----------	-----------

			to

+DetectionDto(int?, DateTime, string, float?, float?): recor

HttpClient

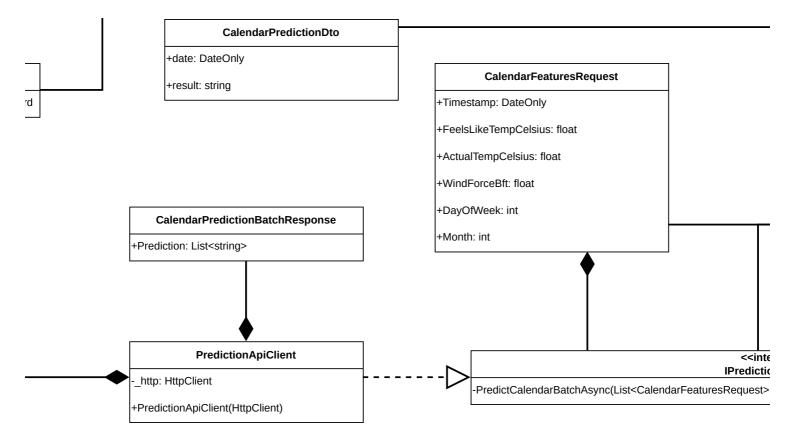

+POIID: int

+category: int

+osmId: int

+name: string

+latitude: floa

+longitude: flo

+source: strin

+retrievedAt: +detectionPO

