


1. Implementati diagrama de mai jos.

Implement the diagram below. Class **S**: **constructor** – sets the associated object, **m()** – returns 1, to which the value of method **m()** of the associated object (if it exists) is added ; class **T**: **add()** – adds the parameter as an associated object, **m()** – returns the sum of the values of the **m()** method of the associated objects.

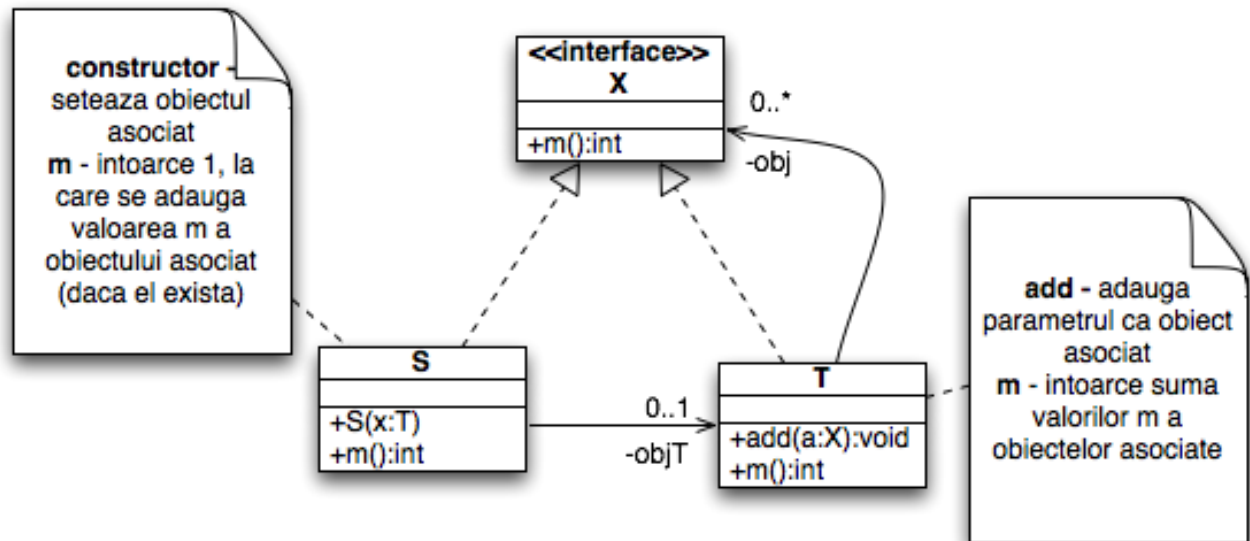

2. In contextul dat, desenati diagrama de secvente pornind de la apelul marcat cu **/**/** pana la revenirea din acel apel.

In the given context, draw the sequence diagram starting from the call marked with **/**/** until the return from that call.

```

interface Y {
    public void r(Y w);
    public void s();
}
class S implements Y {
    public void q(Y t1, Y t2, Y t3) {
        this.r(t1);
        t1.r(t2);
        t1.r(t3);
    }
    public void r(Y g) {
        g.s();
    }
    public void s() {}
}
class P implements Y {
    public void s() {}
    public void r(Y g) {}
}
class Main {
    public static void main(String argv[]) {
        P p1 = new P();
        S s1 = new S();
        S s2 = new S();
        S s3 = new S();
        /**/s3.q(s2, s1, p1);
    }
}
    
```