

# Cloud Computing with AWS

By Adam Cordner, Chris Perry & Evie Snuffle

A report submitted as part of a required module  
for the degree of BSc. (Hons.) in Computer Science  
at the School of Computing and Digital Technology,  
Birmingham City University, United Kingdom

May 2022,  
CMP6210 Cloud Computing 2021–2022  
Module Coordinator: Dr Khaled Mahbub

Student IDs: 18109958, 18103708, 18128599

# Contents

<b>1 Glossary</b>	<b>vi</b>
<b>2 Introduction</b>	<b>1</b>
<b>3 Web App</b>	<b>2</b>
3.1 Software Stack . . . . .	2
3.2 Database Design . . . . .	2
3.3 Interface Design . . . . .	5
<b>4 Virtual Private Cloud and Subnets</b>	<b>8</b>
<b>5 Elastic Cloud Compute</b>	<b>9</b>
5.1 AWS Setup . . . . .	9
5.2 EC2 Login . . . . .	13
5.3 Package Setup . . . . .	14
5.4 Web App Setup . . . . .	15
5.5 systemd Services . . . . .	17
<b>6 Simple Storage Service (S3)</b>	<b>18</b>
<b>7 CloudFront</b>	<b>19</b>
<b>8 CloudWatch</b>	<b>27</b>
<b>9 CloudTrail</b>	<b>28</b>
<b>10 Relational Database Service</b>	<b>29</b>
<b>11 Availability Zones</b>	<b>30</b>
<b>12 Elastic Load Balancing</b>	<b>31</b>
<b>13 Security Practices</b>	<b>32</b>
<b>14 Cost Breakdown</b>	<b>33</b>
14.1 Estimated Costs . . . . .	33
14.2 Scaling Up to 10,000 Users . . . . .	33
14.3 Scaling Up to One Million Users . . . . .	33
14.4 Scaling Up to Ten Million Users . . . . .	33

<b>15 Testing</b>	<b>34</b>
15.1 Testing EC2 . . . . .	34
15.2 Testing S3 . . . . .	34
15.3 Testing CloudFront . . . . .	34
15.4 Testing RDS . . . . .	34
15.5 Testing CloudWatch . . . . .	36
15.6 Testing CloudTrail . . . . .	36
15.7 Testing ELB . . . . .	36
<b>16 Future Enhancements</b>	<b>37</b>
<b>17 Conclusion</b>	<b>38</b>
<b>A Screenshots</b>	<b>39</b>
<b>Bibliography</b>	<b>39</b>

# List of Figures

3.1 Database tables overview. . . . .	2
3.2 migrations table. . . . .	3
3.3 users table. . . . .	3
3.4 stories table. . . . .	4
3.5 <i>Digital-Ink</i> home page log in and sign up forms. . . . .	5
3.6 <i>Digital-Ink</i> story creation form. . . . .	6
3.7 <i>Digital-Ink</i> account page. . . . .	7
3.8 <i>Digital-Ink</i> stories page and story view. . . . .	7
5.1 Selection of EC2 OS Image. . . . .	9
5.2 Selection of EC2 Instance. . . . .	10
5.3 Selection of EC2 Keypair. . . . .	10
5.4 Selection of EC2 Networking options. . . . .	11
5.5 Generated EC2 Keypair in the .pem format. . . . .	11
5.6 Selection of EC2 Storage Configuration. . . . .	12
5.7 SSH command to log into EC2 instance. . . . .	13
5.8 Logging into EC2 instance. . . . .	13
5.9 Installing Git. . . . .	14
5.10 Installing Docker. . . . .	14
5.11 Cloning the web app from Github. . . . .	15
5.12 Containers required for the web app being pulled from Docker Hub. . . . .	15
5.13 Creation of tables through php artisan migrate command. . . . .	16
5.14 Digital Ink shown when accessed through the IPv4 address. . . . .	16
5.15 Creation of systemd Service . . . . .	17
7.1 Applying CloudFront bucket policy. . . . .	20
7.2 Applying CloudFront origins to S3 bucket. . . . .	20
7.3 Applying CloudFront Distribution Permissions. . . . .	21
7.4 Applying CloudFront Cache Keys and Origin Requests. . . . .	21
7.5 Function Association. . . . .	22
7.6 Applying CloudFront Settings. . . . .	23
7.7 Applying CloudFront Settings. . . . .	23
7.8 Created CloudFront Distribution. . . . .	24
7.9 Image location before CloudFront. . . . .	24
7.10 Image location after CloudFront. . . . .	25
7.11 Image location after CloudFront. . . . .	26

A.1	After Allocating Elastic IP Address . . . . .	39
A.2	Allocating Elastic IP Address . . . . .	39
A.3	Cloning the App . . . . .	40
A.4	CloudWatch Conditions . . . . .	40
A.5	CloudWatch Specify Metric . . . . .	41
A.6	Create Instance - Application and OS Images . . . . .	41
A.7	Create Instance - Configure Storage . . . . .	42
A.8	Create Instance - Instance Type . . . . .	42
A.9	Create Instance - Name & Tags . . . . .	43
A.10	Create Instance - Network Settings . . . . .	43
A.11	Creating Key Pair . . . . .	44
A.12	Digital Ink . . . . .	44
A.13	Docker Compose . . . . .	45
A.14	Edit Instance - Network Settings . . . . .	45
A.15	Installing Docker using Package Manager . . . . .	46
A.16	Installing Docker using Package Manager (In Progress) . . . . .	46
A.17	Installing Git . . . . .	47
A.18	Starting Docker systemd Service . . . . .	47
A.19	Instances . . . . .	48
A.20	Launching Instance . . . . .	48
A.21	Log In with Key Pair . . . . .	49
A.22	Selecting a VPC Configuration . . . . .	49
A.23	Successfully Initiated Instance . . . . .	50
A.24	VPC Successfully Created . . . . .	50
A.25	VPC with Public and Private Subnets, Loading . . . . .	51
A.26	VPC with Public and Private Subnets . . . . .	51
A.27	Your VPCs . . . . .	52

# Chapter 1

## Glossary

- **ACL** — Access Control List
- **ACM** — AWS Certificate Manager
- **AMI** — Amazon Machine Images
- **App** — Application
- **AWS** — Amazon Web Services
- **AZ** — Availability Zone
- **CA** — Certificate Authority
- **CDS** — Content Delivery Network
- **CPU** — Central Processing Unit
- **DB** — Database
- **DIG** — Domain Information Groper
- **EC2** — Elastic Cloud Compute
- **ELB** — Elastic Load Balancing
- **.env** — Environment File Extension
- **GB** — Gigabyte
- **HTTP** — HyperText Transfer Protocol
- **HTTPS** — HyperText Transfer Protocol Secure
- **IAM** — Identity and Access Management
- **IEEE** — Institute of Electrical and Electronics Engineers
- **IP** — Internet Protocol
- **IPv4** — Internet Protocol Version 4
- **LAMP** — Linux, Apache, MySQL, PHP

- **ML** — Machine Learning
- **nslookup** — Name Server Lookup
- **OS** — Operating System
- **.pem** — Privacy Enhanced Mail File Extension
- **PHP** — PHP: Hypertext Preprocessor
- **RAM** — Random Access Memory
- **S3** — Simple Storage Service
- **RAM** — Random Access Memory
- **RDBMS** — Relational Database Management System
- **RDS** — Relational Database Service
- **SaaS** — Software as a Service
- **SNS** — Simple Notification Service
- **SQL** — Structured Query Language
- **SSH** — Secure Shell
- **VPC** — Virtual Private Cloud
- **VPN** — Virtual Private Network
- **WAF** — Web Application Firewall

# Chapter 2

## Introduction

This report details the process of designing, developing, and deploying a cloud application onto Amazon Web Services (AWS). The application is called *Digital Ink* and allows users to create, edit, and delete their own short stories. Users can then view their own short stories and other users' short stories. It was first developed locally using a LAMP stack. This consisted of Linux - hosted through Docker - for the operating system, an Apache HTTP Server, MySQL for the relational database management, and PHP as the programming language.

After the application was built locally, it was gradually integrated onto AWS. This involved implementing several AWS cloud features to enhance the application, ensure application security, and increase availability. This was accomplished by using Simple Storage Service (S3), Elastic Compute Cloud (EC2), ELB (Elastic Load Balancing), and more. The process of implementing these cloud features will be discussed throughout the report.

After the application was integrated onto AWS, an evaluation of the process was conducted. This includes a discussion of the security practices used, estimated costs for different user scales, and thorough testing. Lastly, several enhancements which could be made to the application in the future will be discussed.

# Chapter 3

## Web App

This chapter of the report will detail the local design and development of the *Digital Ink* web application. We will first discuss the software stack used to develop the app, then the design of the database used, and, lastly, the design of the user interface.

### 3.1 Software Stack

*Digital Ink* was first developed locally using a LAMP stack. LAMP refers to a generic software stack, where each letter in the acronym stands for one the following open source building blocks: Linux, Apache HTTP Server, MySQL, and PHP ([lee2003open](#)). The web app is hosted within a Docker container ([anderson2015docker](#)) which runs a minified version of the Linux operating system. Apache is an open-source web server software which is used to host the app on the web ([fielding1997apache](#)). MySQL is an open-source relational database management system ([widenius2002mysql](#)) which is used to store all the data used within the app, including user details and story details. PHP is a programming language aimed towards web development, chosen due to its stability and reliability ([lerdorf2002programming](#)). Additionally, all developers involved have prior experience with PHP.

### 3.2 Database Design

As mentioned before, the web app uses the MySQL relational database management system to store its data. MySQL is a relational database management system (RDBMS) which stores data in the form of tables, where Structured Query Language (SQL) is used to access the database. As shown in Figure 3.1, the database which this web app uses consists of three tables: `users`, `stories`, and `migrations`.

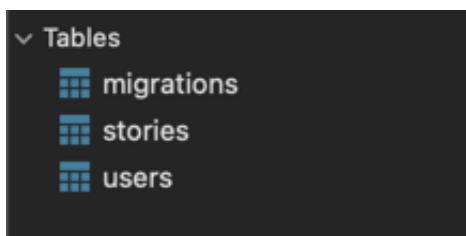


Figure 3.1: Database tables overview.

The `migrations` table (see Figure 3.2) contains records which correspond to the migrations within the Laravel web app. These migrations contain the scripts required to automatically generate the `users` and `stories` tables in SQL. It contains the following three columns:


- `id`: the unique ID for each migration.
- `migration`: points to the scripts used to create tables.
- `batch`: how many times the script has been ran.

<code>id</code>	<code>migration</code>	<code>batch</code>
1	<code>2014_10_12_000000_create_users_table</code>	1
4	<code>2020_03_13_105916_create_stories_table</code>	1

Figure 3.2: `migrations` table.

The `users` table (see Figure 3.3) contains all the information about user accounts, and it contains the following seven columns:

- `id`: the unique ID for each user account.
- `name`: the name associated with user account.
- `email`: the unique email used to log in.
- `password`: the password used to log in, encrypted with 184 bit hashing by **Bcrypt (laravel2022hashing)**.
- `remember_token`: keeps the user logged in if they select "Remember me".
- `created_at`: records what date and time the user account was first created at.
- `updated_at`: records what date and time the user account was last updated at.

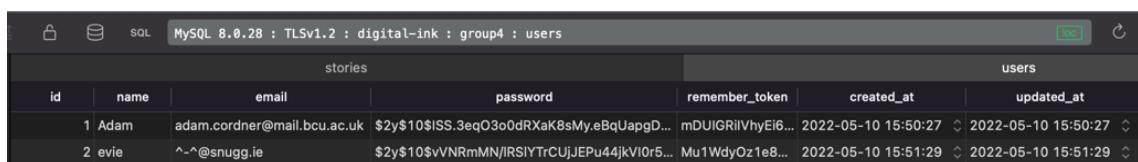

The screenshot shows the MySQL Workbench interface with the database connection set to 'MySQL 8.0.28 : TL5v1.2 : digital-ink : group4 : users'. The 'SQL' tab is selected. Below the tabs, there is a table structure for the 'users' table. The table has columns: id, name, email, password, remember\_token, created\_at, and updated\_at. There are two rows of data: one for 'Adam' with email 'adam.cordner@mail.bcu.ac.uk' and another for 'evie' with email '^~@snugg.ie'.

users						
<code>id</code>	<code>name</code>	<code>email</code>	<code>password</code>	<code>remember_token</code>	<code>created_at</code>	<code>updated_at</code>
1	Adam	adam.cordner@mail.bcu.ac.uk	\$2y\$10\$ISS.3eqO3o0dRXaK8sMy.eBqUapgD...	mDUIGRilVhyEi6...	2022-05-10 15:50:27	2022-05-10 15:50:27
2	evie	^~@snugg.ie	\$2y\$10\$vVRMmN/IRSIYTrCUjJEPu44jkVI0r5...	Mu1WdyOz1e8...	2022-05-10 15:51:29	2022-05-10 15:51:29

Figure 3.3: `users` table.

The `stories` table (see Figure 3.4) contains all the information about user-created stories, and it contains the following 11 columns:

- `id`: the unique ID for each story.
- `author_id`: the unique ID associated with the user who created the story.
- `title`: the title associated with the story.
- `genre`: the genre associated with the story, which can be one of eight different genres.
- `blurb`: a brief description of the story.
- `content`: the full content of the story.
- `cover_image`: a thumbnail image for the story.
- `file_upload`: an optional PDF upload of the story.
- `published`: 1 if the story has been made public, or 0 if it is a draft.
- `created_at`: records what date and time the story was first created at.
- `updated_at`: records what date and time the story was last updated at.

<code>id</code>	<code>author_id</code>	<code>title</code>	<code>genre</code>	<code>blurb</code>	<code>content</code>
		<code>cover_image</code>	<code>file_upload</code>	<code>published</code>	<code>created_at</code>
2	1 → Group 4 Loves AWS	Romance	Meet Group 4 and their love for AWS!	Group 4 loves using AWS' cloud features to host Di...	
3	2 → cheese savoury	Action and Adventure	nice and simple	on malted granary	
		<code>./storage/cover_images/7537329101652200606.j...</code>	NULL	1	2022-05-10 16:36:46 ⏺ 2022-05-10 16:36:46 ⏺
		images/digital-ink-logo.png	NULL	1	2022-05-10 16:38:51 ⏺ 2022-05-10 16:38:51 ⏺

Figure 3.4: `stories` table.

### 3.3 Interface Design

The design of the web app was created using Blade, a powerful templating engine ([laravel2022blade](#)). When the user initially accesses the web app, they are able to log in or sign up. This can be seen in Figure 3.5. When a user has created an account, a record is written to the `users` table in the database.



The image shows the Digital Ink home page with two forms: a login form at the top and a sign-up form below it. The login form has fields for Email and Password, a 'Remember me' checkbox, and a 'Login' button. The sign-up form has fields for Name, Email, Password, and Repeat Password, followed by a 'Sign Up' button. Both forms have placeholder text in the input fields.

Stories      Create      About      Account

Email  
Enter Email

Password  
Enter Password

Login

Don't have an account already? Why not sign up?

Remember me

## Sign Up

Name  
Enter Name

Email  
Enter Email

Password  
Enter Password


Repeat Password  
Repeat Password

Sign Up

Figure 3.5: *Digital-Ink* home page log in and sign up forms.

Once a user is signed in, they can create a story. Creating a story requires the user to enter a title, a genre, the story itself, a blurb, and, optionally, a thumbnail image. This can be seen in Figure 3.6. Once a story has been created, it is written to the `stories` table.

## Create your story!

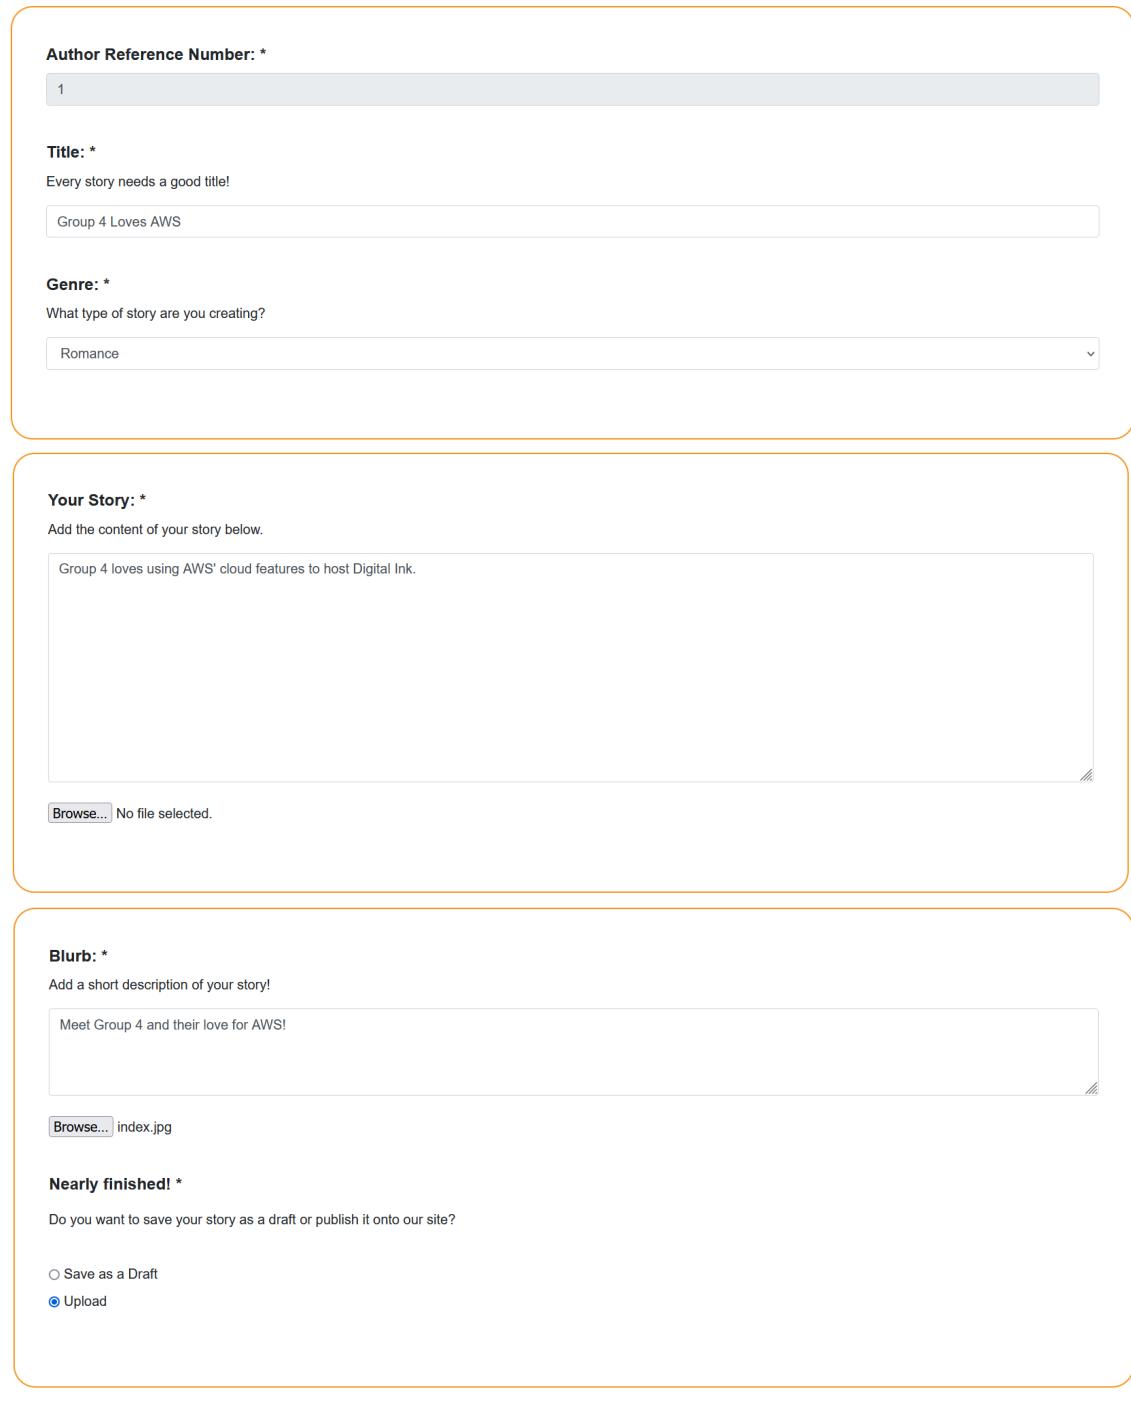

The figure shows a three-panel interface for creating a story. The top panel is titled 'Create your story!' and contains fields for 'Author Reference Number' (with value '1'), 'Title' (with placeholder 'Every story needs a good title!' and value 'Group 4 Loves AWS'), and 'Genre' (with placeholder 'What type of story are you creating?' and value 'Romance'). The middle panel is titled 'Your Story:' and contains a text area with placeholder text 'Group 4 loves using AWS' cloud features to host Digital Ink.' and a file selection button 'Browse...' showing 'No file selected.'. The bottom panel is titled 'Blurb:' and contains a text area with placeholder text 'Meet Group 4 and their love for AWS!' and a file selection button 'Browse...' showing 'index.jpg'. It also includes a section titled 'Nearly finished! \*' with a question 'Do you want to save your story as a draft or publish it onto our site?' and two options: 'Save as a Draft' (unchecked) and 'Upload' (checked). A 'Complete' button is located at the bottom right of the bottom panel.

**Author Reference Number:** \*

1

**Title:** \*

Every story needs a good title!

Group 4 Loves AWS

**Genre:** \*

What type of story are you creating?

Romance

**Your Story:** \*

Add the content of your story below.

Group 4 loves using AWS' cloud features to host Digital Ink.

Browse... No file selected.

**Blurb:** \*

Add a short description of your story!

Meet Group 4 and their love for AWS!

Browse... index.jpg

**Nearly finished! \***

Do you want to save your story as a draft or publish it onto our site?

Save as a Draft

Upload

Complete

Figure 3.6: *Digital-Ink* story creation form.

After this, the user can see all of their uploaded stories on their account page. This can be seen in Figure 3.7. From here, a story can be edited or deleted, which either updates a record in the `stories` table or removes a record from it.

The screenshot shows a user interface for managing published stories. At the top, a green header bar displays the message "Yay! Your story has been published!". Below this, a heading says "Here are your published stories:". A table follows, with columns for TITLE, GENRE, and ACTIONS. The first row shows a story titled "Group 4 Loves AWS" in the Romance genre. The "Actions" column contains two buttons: "Edit" (highlighted with a green oval) and "Delete" (highlighted with a red oval).

TITLE	GENRE	ACTIONS
Group 4 Loves AWS	Romance	<a href="#">Edit</a> <a href="#">Delete</a>

Figure 3.7: *Digital-Ink* account page.

Lastly, on the Stories page, a user can view and search through all uploaded stories across all users. Each story's title, genre, and blurb is shown in a list view. A user can click into one of these stories to see the thumbnail image and read the full story. These pages can be seen in Figure 3.8.

The screenshot shows the "Stories" page and a detailed view of a specific story. The top navigation bar includes a search bar with placeholder text "Enter a title to search" and a "Search" button. The main content area displays a table of stories with columns for AUTHOR ID, TITLE, GENRE, and BLURB. Two stories are listed: "Group 4 Loves AWS" (AUTHOR ID 1, Romance, blurb "Meet Group 4 and their love for AWS!") and "cheese savoury" (AUTHOR ID 2, Action and Adventure, blurb "nice and simple"). Below the table, a story card for "Group 4 Loves AWS" is shown. It features a thumbnail image of a person, the title "Group 4 Loves AWS", the author ID "1", the genre "Romance", and a blurb: "Group 4 loves using AWS' cloud features to host Digital Ink.". A "Back" button is located at the bottom left of the story card.

AUTHOR ID	TITLE	GENRE	BLURB
1	Group 4 Loves AWS	Romance	Meet Group 4 and their love for AWS!
2	cheese savoury	Action and Adventure	nice and simple

Figure 3.8: *Digital-Ink* stories page and story view.

## Chapter 4

# Virtual Private Cloud and Subnets

Amazon Virtual Private Cloud (VPC) allows for AWS resources to be launched in a virtual network that has been custom defined and configured. This virtual network is similar to a traditional network which operates within your own physical data center, with the added benefits of the scalable AWS infrastructure (**amazon2022what**). A VPC can have multiple assigned subnets, which are a range of IP addresses accessible in the VPC.

# Chapter 5

# Elastic Cloud Compute

## 5.1 AWS Setup

After the VPC and subnets were configured, the initial deployment of the web app began with setting up EC2. This AWS service allows for scalable computing capacity through the use of a virtual computing environment hosted in the cloud (**aws2022ec2**). The web app will be stored on an EC2 instance of Amazon Linux, known as Amazon Machine Image (AMI), which will then be launched through a docker container stored on the app.

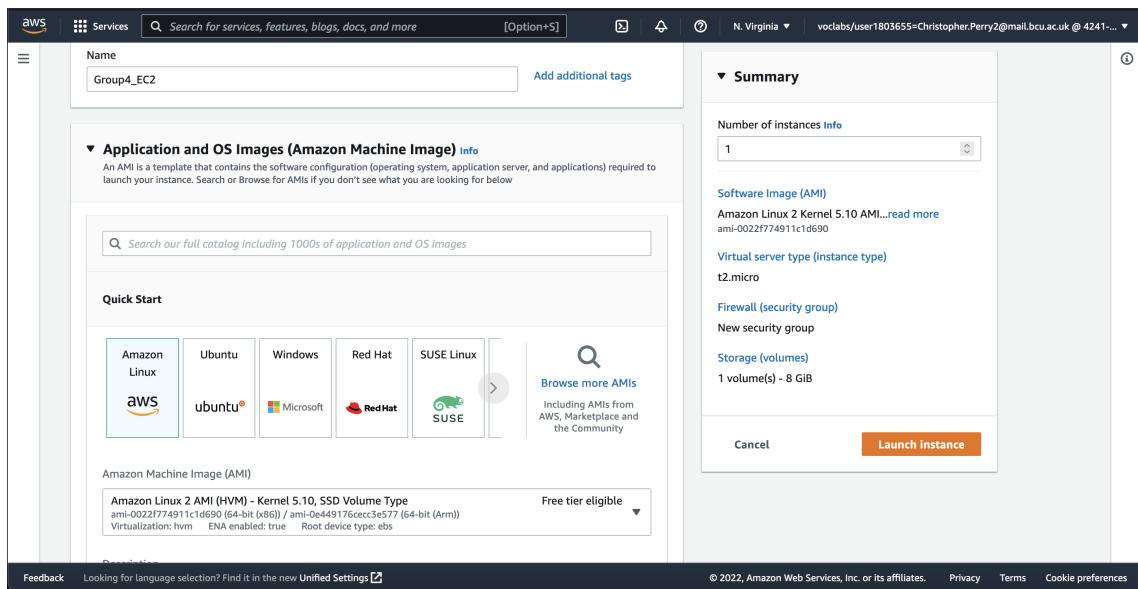


Figure 5.1: Selection of EC2 OS Image.

Figure 5.1 details the selection of the Operating System (OS) that will be used for the EC2 instance. The *Amazon Linux 2 AMI* was selected, as it is already configured with Linux and does not need any more setup.

Now that an AMI has been chosen, the specific instance type that will be used within this AMI can be selected. It was decided that the instance type of *t2.micro* would be used, as it contains only 1GB of Random Access Memory (RAM), as seen in Figure 5.2.

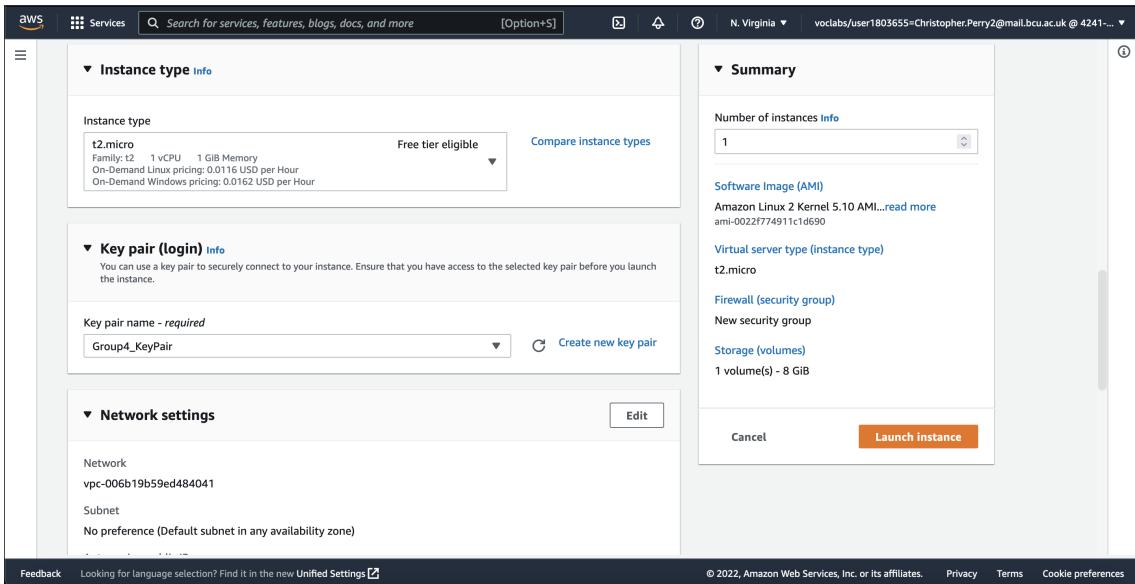


Figure 5.2: Selection of EC2 Instance.

A key pair will allow for the ability to sign in to the EC2 instance with a unique set of login credentials, heightening the security of the project.

The next stage of the setup process was to set up networking for the EC2 instance, in order for the web app to work with Docker to download relevant containers from Docker-Hub, which will allow a Laravel instance to be initialised, as discussed in Section 3. This process can be seen in Figure 5.3.

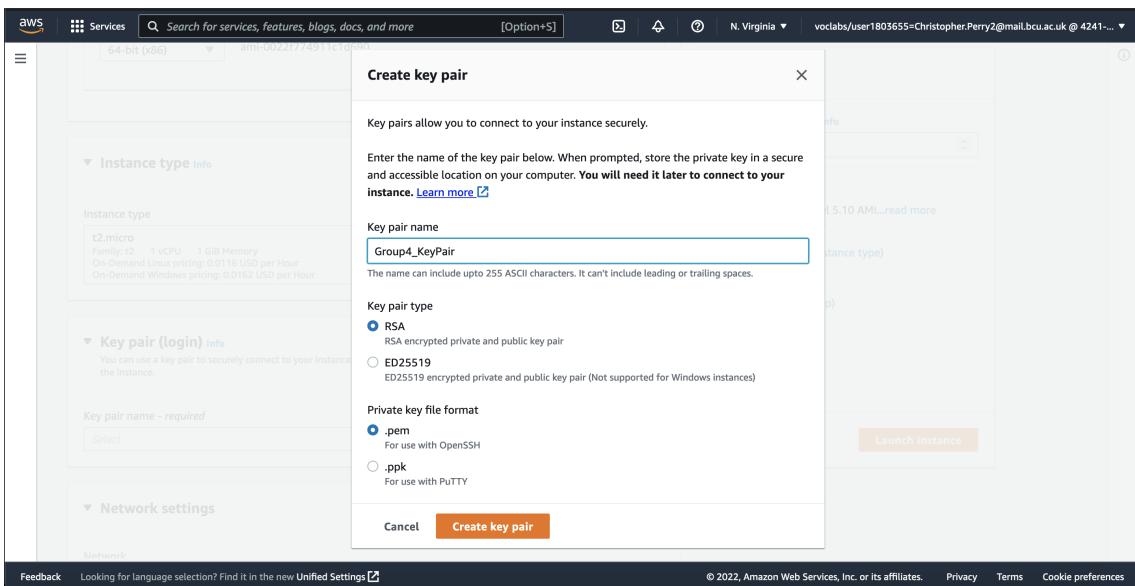


Figure 5.3: Selection of EC2 Keypair.

The instance is assigned the VPC created in Section 4, where it is assigned a subnet in the same availability zone of us-east-1.

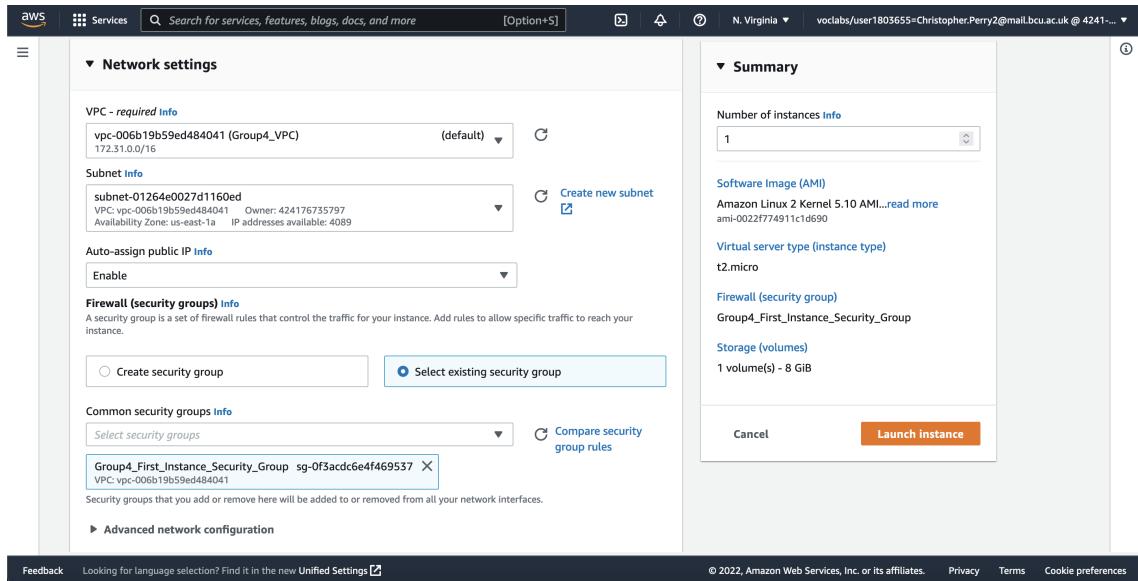


Figure 5.4: Selection of EC2 Networking options.

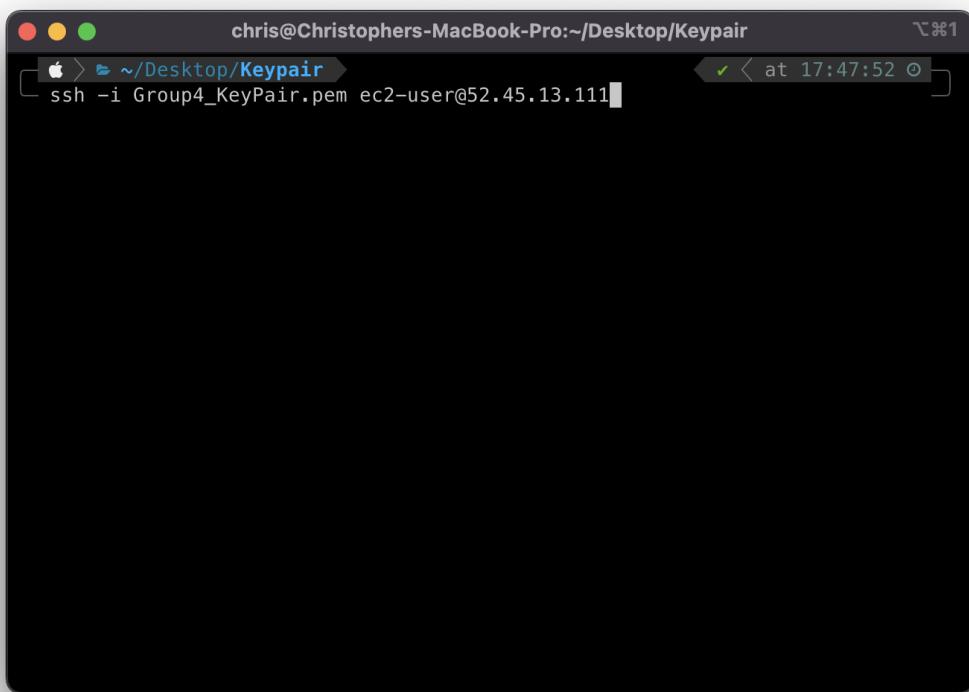


Figure 5.5: Generated EC2 Keypair in the .pem format.

This setup can be seen in Figure 5.4. An EC2 keypair is then generated in the .pem format.

This is enough to comfortably run the web app without any issues. Storage for the AMI was subsequently chosen. It was decided that 8GB of storage would be used, as this is enough to run the web app and still provide leftover storage for any system-critical tasks.

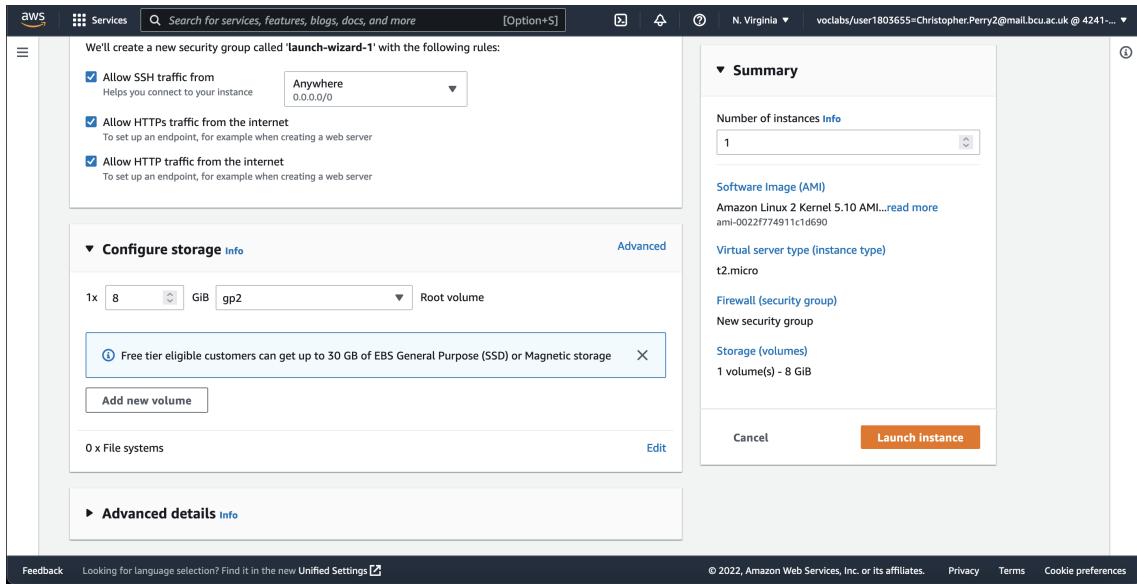


Figure 5.6: Selection of EC2 Storage Configuration.

The selection of these options can be found in Figure 5.6. In addition to this, the chosen options are eligible for "Free Tier", which means that it will use a limited amount of the \$100 budget allocated for the project.


## 5.2 EC2 Login

The EC2 instance `group4-ec2` is now live, and the webapp can be loaded onto it. The instance is first logged in to through the use of the `ssh` command, followed by the `-i` argument to specify an identify file, which was generated earlier, and then the public ipv4 address of the instance.

```
ssh -i ~/Desktop/Group4_KeyPair.pem ec2-user@52.45.13.111
```

Figure 5.7: SSH command to log into EC2 instance.

This command can seen being executed in Figure 5.7.

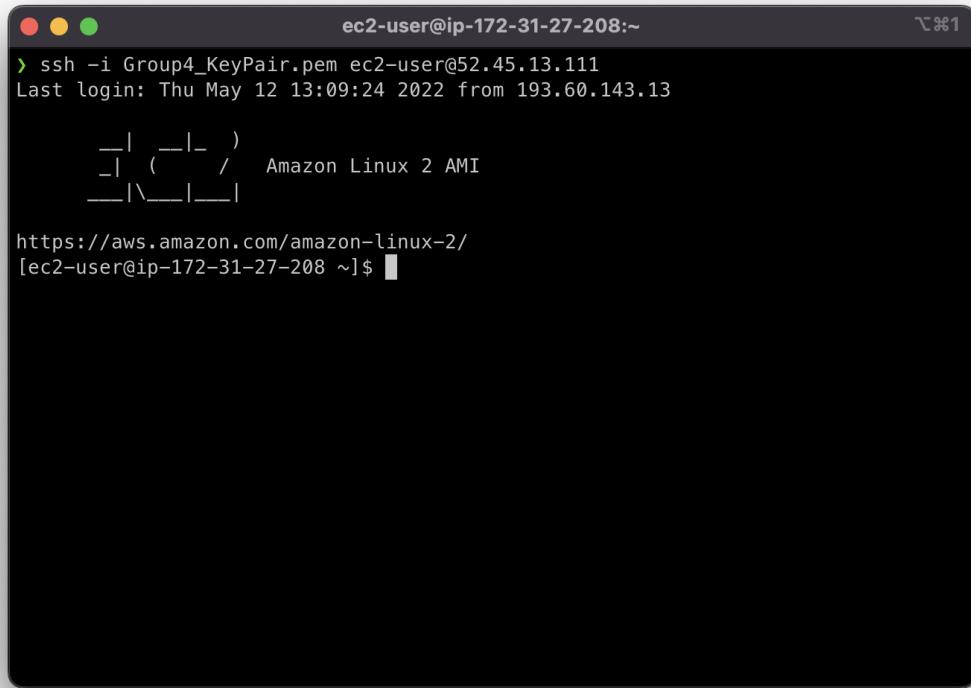

A screenshot of a terminal window titled "ec2-user@ip-172-31-27-208:~". The window shows the command `ssh -i Group4_KeyPair.pem ec2-user@52.45.13.111` being run, followed by the output: "Last login: Thu May 12 13:09:24 2022 from 193.60.143.13". Below this, the Amazon Linux 2 AMI logo is displayed, consisting of a stylized tree or root system icon. The final line of output is `https://aws.amazon.com/amazon-linux-2/ [ec2-user@ip-172-31-27-208 ~]$`.

Figure 5.8: Logging into EC2 instance.

The logged in EC2 instance can be seen in Figure 5.8.

## 5.3 Package Setup

The web app is stored on GitHub, and the AMI does not come with GitHub by default. Git is subsequently installed via `yum install git`.

Figure 5.9: Installing Git.

The web app also requires docker, and `yum install docker` is executed to install Docker as a result.

```
[ec2-user@ip-172-31-27-208 ~]$ sudo yum update
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
amzn2-core
No packages marked for update
[ec2-user@ip-172-31-27-208 ~]$ sudo yum install docker docker-compose
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
No package docker-compose available.
Resolving Dependencies
  Running Transaction check
  --> Package docker.x86_64 0:20.10.13-2.amzn2 will be installed
    --> Processing Dependency: runc >= 1.0.0 for package: docker-20.10.13-2.amzn2.x86_64
    --> Processing Dependency: libcgroup >= 0.40.rc1-5.15 for package: docker-20.10.13-2.amzn2.x86_64
    --> Processing Dependency: containerd >= 1.3.2 for package: docker-20.10.13-2.amzn2.x86_64
    --> Processing Dependency: pigz for package: docker-20.10.13-2.amzn2.x86_64
    --> Processing Extension conflict: docker-20.10.13-2.amzn2.x86_64
    --> Package libcgroup.x86_64 0:1.4.13-2.amzn2_0.1 will be installed
    --> Package libcupr.x86_64 0:1.0.41-21.amzn2 will be installed
    --> Package pigz.x86_64 0:2.3.4-1.amzn2_0.1 will be installed
--> Package runc.x86_64 0:1.0.3-2.amzn2 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
| Package      | Arch | Version       | Repository | Size |
|:-----|:-----|:-----|:-----|:-----|
| Installing: |       |              |            |       |
| docker       | x86_64 | 20.10.13-2.amzn2 | amzn2extra-docker | 48 M |
|           |       |              |            |       |
| Installing for dependencies: |       |              |            |       |
| containerd  | x86_64 | 1.4.13-2.amzn2_0.1 | amzn2extra-docker | 23 M |
| libcgroup   | x86_64 | 0:1.0.41-21.amzn2 | amzn2-core        | 66 k |
| pigz        | x86_64 | 2.3.4-1.amzn2_0.1 | amzn2-core        | 81 k |
| runc        | x86_64 | 1.0.3-2.amzn2    | amzn2extra-docker | 3.0 M |
|           |       |              |            |       |
=====

Transaction Summary
=====
Install: 1 Package (+4 Dependent packages)

Total download size: 67 M
Installed size: 280
Is this ok? [y/d/N]: y

[snugle] 9 □ 15 ssh + fish + bash + zsh + fish + fish + fish - fish | spacedust | 54% ↗ 5.2 GB ↘ 18% ↗ 0 5-04, 1:31 PM
```

Figure 5.10: Installing Docker.

## 5.4 Web App Setup

The web app is firstly cloned from its repository via the `git clone` command, and a new `digital-ink` folder is made to store the contents.

```
[ec2-user@ip-172-31-27-208 ~]$ git clone https://github.com/ChrisP99/digital-ink
.git
-bash: git: command not found
[ec2-user@ip-172-31-27-208 ~]$ git clone https://github.com/ChrisP99/digital-ink
.git
Cloning into 'digital-ink'...
remote: Enumerating objects: 959, done.
remote: Counting objects: 100% (959/959), done.
remote: Compressing objects: 100% (324/324), done.
remote: Total 959 (delta 593), reused 959 (delta 593), pack-reused 0
Receiving objects: 100% (959/959), 3.32 MiB | 19.01 MiB/s, done.
Resolving deltas: 100% (593/593), done.
[ec2-user@ip-172-31-27-208 ~]$
```

Figure 5.11: Cloning the web app from Github.

The `cd` command is used to move into the `digital-ink` folder, and the web app is subsequently launched through the `docker-compose up -d` to launch the web app as a detached Docker container. Relevant containers that are required to be downloaded from the `dockerfile` are then pulled.

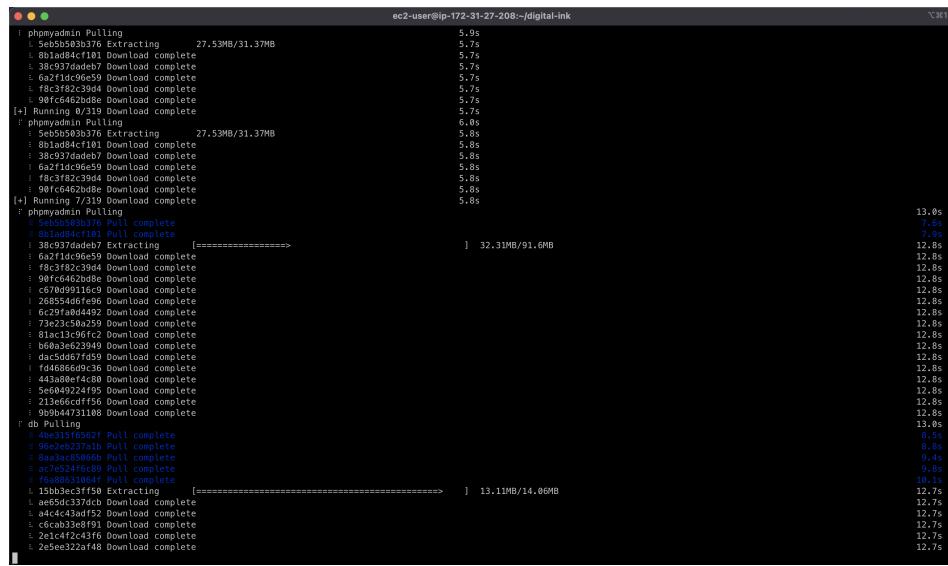


Figure 5.12: Containers required for the web app being pulled from Docker Hub.

The result of this command launches 3 containers:

1. `digital-ink`: An instance of the web app which uses a custom Laravel container.
2. `mysql`: An instance of a local database made in MySQL.
3. `phpmyadmin`: A way to locally manage the database through a UI.

At the minute, the web app is live through the `digital-ink` container, and is using a local version of MySQL as a database, stored within the `mysqlDocker` container. The database has no tables, but can be populated through the use of Laravel. The container is firstly accessed through docker `exec` app bash, and the database is populated with tables with `php artisan migrate`. This then generates tables to store users and their stories.

```
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose exec app bash
root@d0e13abddf12:/srv/app# php artisan migrate
Migration table created successfully.
Migrating: 2014_10_12_000000_create_users_table
Migrated: 2014_10_12_000000_create_users_table (0.08 seconds)
Migrating: 2014_10_12_100000_create_password_resets_table
Migrated: 2014_10_12_100000_create_password_resets_table (0.07 seconds)
Migrating: 2019_08_19_000000_create_failed_jobs_table
Migrated: 2019_08_19_000000_create_failed_jobs_table (0.04 seconds)
Migrating: 2020_03_13_105916_create_stories_table
Migrated: 2020_03_13_105916_create_stories_table (0.16 seconds)
root@d0e13abddf12:/srv/app#
```

Figure 5.13: Creation of tables through `php artisan migrate` command.

The subsequent output of this command can be found in Figure 5.13. When the website is accessed at the public IPv4 address at , Digital Ink will now be shown.


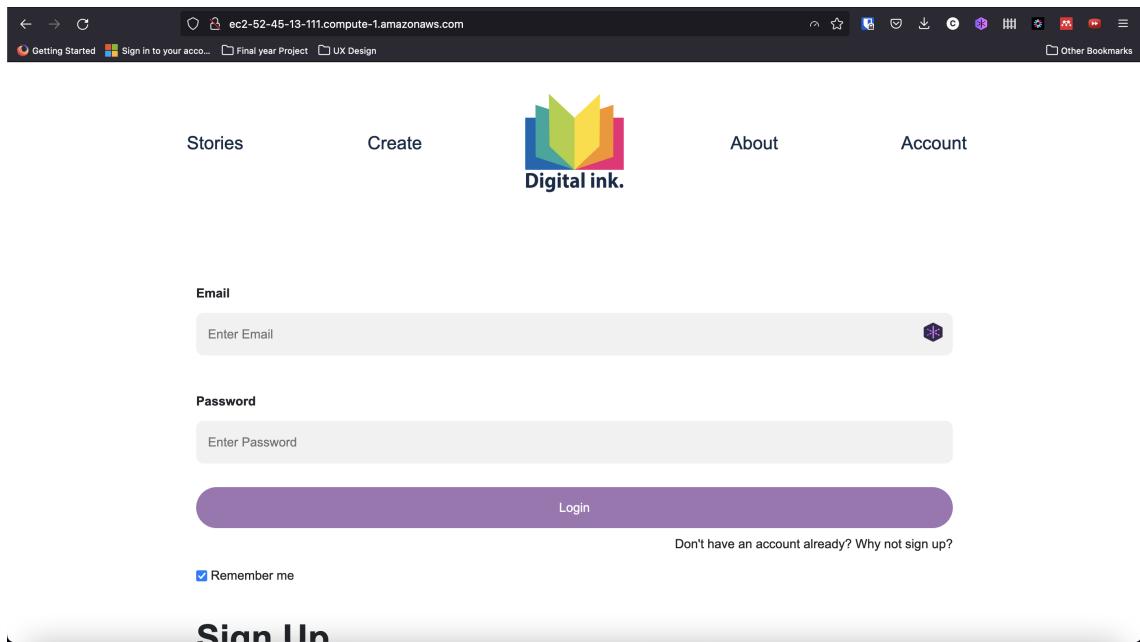


Figure 5.14: Digital Ink shown when accessed through the IPv4 address.

## 5.5 systemd Services

systemd is a service manager, which is a program that launches and monitors different services across the system. The digital-ink application is automatically started upon boot by the systemd process, which ensures that the application is started correctly and without errors. If any errors occur, systemd will log them in a tool known as journalctl and then follow a configuration file for instructions on how to handle those errors. This can range from simply restarting a program that has errored, to trying once again, or recording the failure and performing no action.

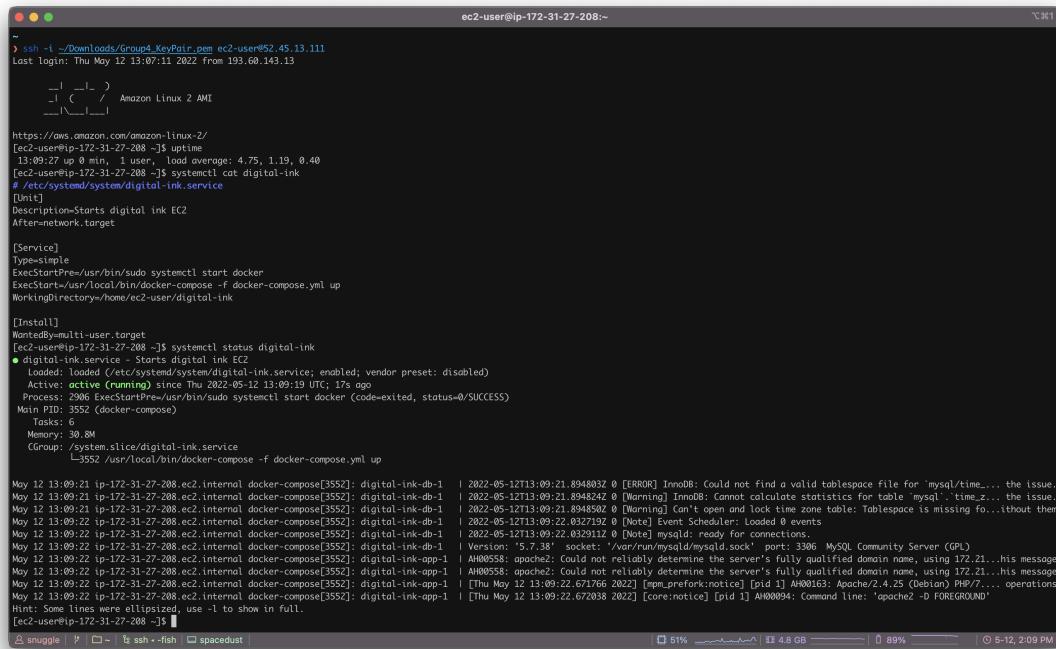

The screenshot shows a terminal window on an Amazon Linux 2 AMI system. The user is creating a new systemd service named 'digital-ink.service' located at '/etc/systemd/system/digital-ink.service'. The service unit file contains the following configuration:

```
[Unit]
Description=Starts digital ink EC2
After=network.target

[Service]
Type=simple
ExecStartPre=/usr/bin/sudo systemctl start docker
ExecStart=/usr/local/bin/docker-compose -f docker-compose.yml up
WorkingDirectory=/home/ec2-user/digital-ink

[Install]
WantedBy=multi-user.target
```

The terminal also shows the output of the 'journalctl' command, which logs the creation of the service and its subsequent startup. The logs indicate that the service was loaded, enabled, and is currently active (running). It also shows the startup of Docker and the execution of the 'docker-compose up' command. MySQL and Apache logs are also visible, indicating successful connections and operations.

Figure 5.15: Creation of systemd Service.

# Chapter 6

## Simple Storage Service (S3)

AWS S3 is a form of cloud-based object storage. This is a style of network filesystem that treats each file as a separate object with a unique ID, which allows each object to be served individually over a network with a single URL, which can also be enhanced with a content delivery network.

Each S3 instance is separated into logical containers known as buckets. Each S3 bucket can have its own credentials, its own endpoint and other permissions and configuration. Object storage is particularly useful when creating an application that scales as you are billed per unit of storage that you use, and in theory are able to use infinite storage as your application demands. The only limitation with object storage is how much you are able to pay for. Each object is automatically replicated across many different nodes, providing data redundancy against multiple different availability zones.

S3 is perhaps the most popular AWS service and used by many different SaaS applications across the internet, for instance Instagram, Facebook, Discord and Twitter are all known for using S3 or S3-style storage. The advent of object storage has created an almost de-facto standard, which has lead for the creation of many 'S3-compatible' or 'S3-like' competitor solutions, such as those run by Google Cloud and Microsoft Azure.

# **Chapter 7**

## **CloudFront**

CloudFront will allow for the distribution of static and dynamic web images more efficiently. An international network of data centres, referred to as edge locations, are used to deliver content for CloudFront. An edge location which offers the lowest latency or delay in serving these files will be used. This will involve the creation of a CloudFront Distribution.

Firstly, an origin is chosen which is the S3 bucket created in Section 6. It is then given a name of `group4-digital-ink.s3.us-east-1.amazonaws.com`. The "Yes use OAI" option is selected, in order to restrict bucket access to only CloudFront. The "Bucket Policy" option is set to "Yes" to automatically update permissions on the bucket to allow read access for the OAI. These options can be seen configured in Figures 7.1 and 7.2.

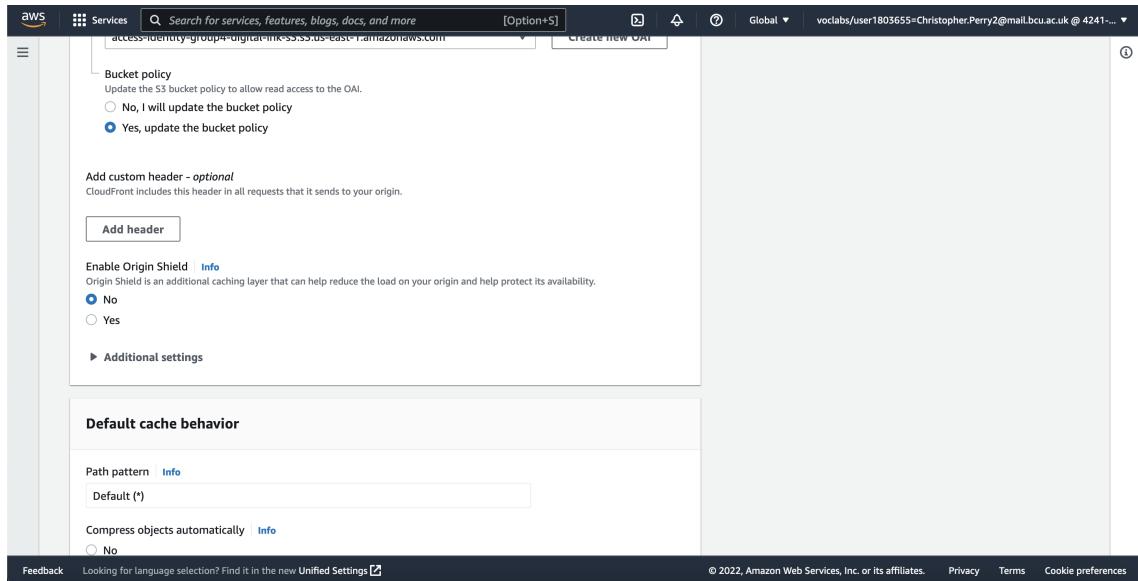


Figure 7.1: Applying CloudFront bucket policy.

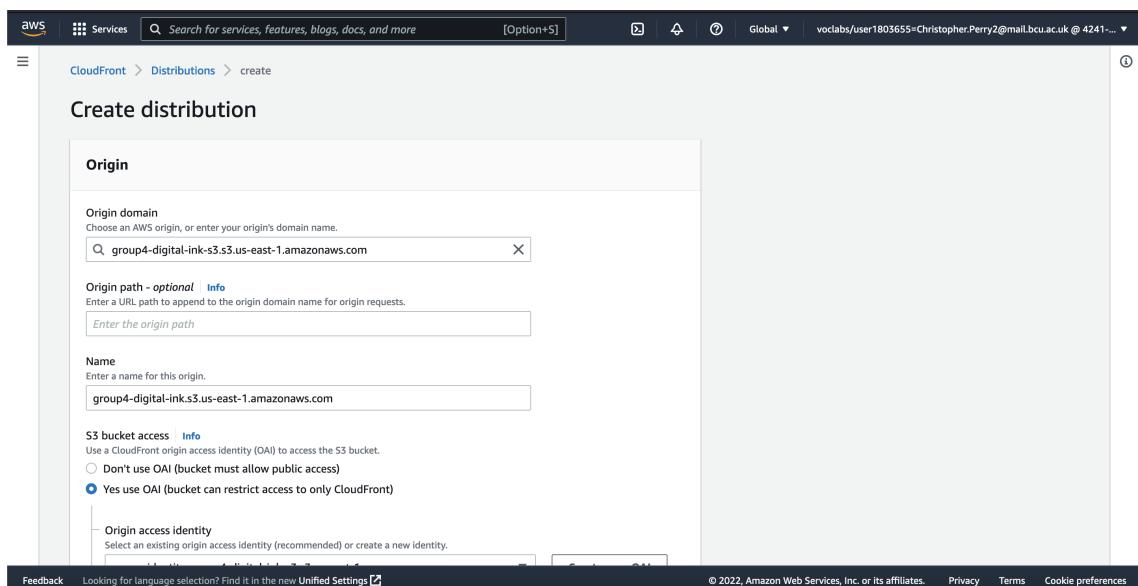


Figure 7.2: Applying CloudFront origins to S3 bucket.

Permissions are then applied to the CloudFront distribution itself. Objects are set to be compressed automatically to save space, and for viewing images, permissions are set to be in both HTTP and HTTPS, and to only allow GET and HEAD, so images can only be viewed.

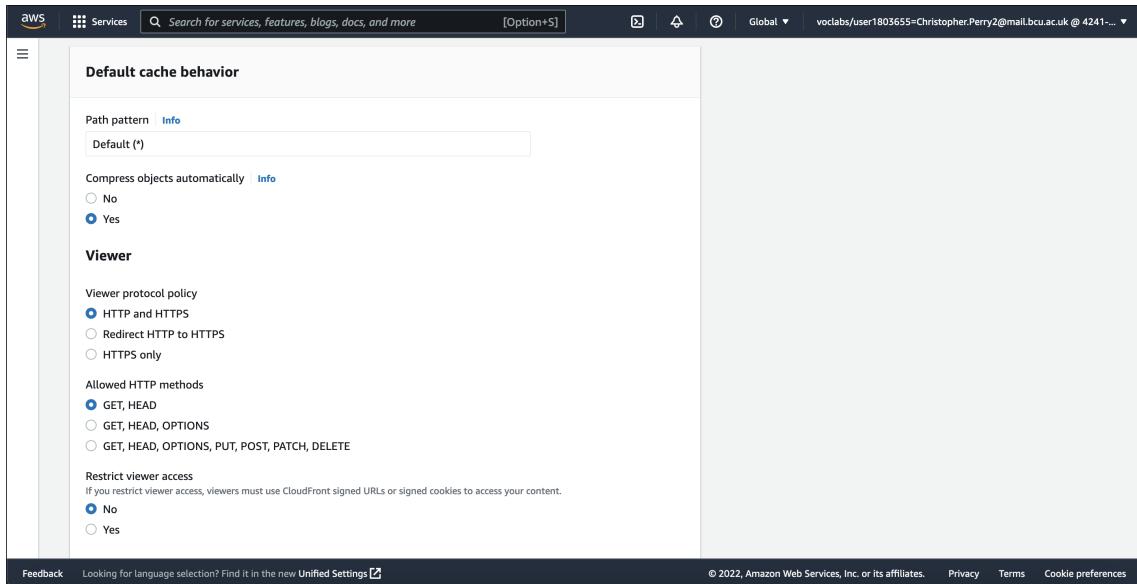


Figure 7.3: Applying CloudFront Distribution Permissions.

A cache policy and origin request policy is subsequently applied to the aforementioned permissions. The "CachingOptimized" policy is applied for compression. Origin Request policy is set to "CORS-S3Origin" in order for CORS to be automatically set up for the S3 bucket. Any GET requests are then compatible in the response headers through "SimpleCORS".

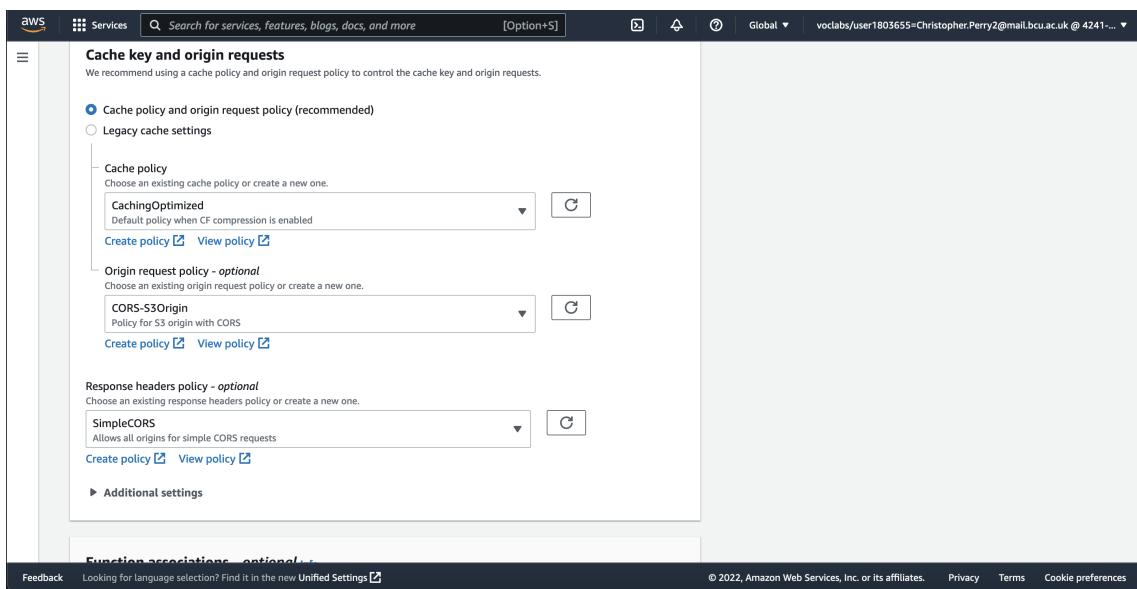


Figure 7.4: Applying CloudFront Cache Keys and Origin Requests.

No function associations are set due to the lack of CloudFront functions and Lambdas.

The screenshot shows the 'Function associations - optional' section of the CloudFront Distribution configuration. It includes four dropdown menus for 'Function type': 'Viewer request' (No association), 'Viewer response' (No association), 'Origin request' (No association), and 'Origin response' (No association). Below this is a 'Settings' section with 'Price class' (Info) and 'AWS WAF web ACL - optional'. The 'Price class' dropdown is set to 'Use all edge locations (best performance)'. The 'AWS WAF web ACL' dropdown is set to 'Choose web ACL'. At the bottom, there are links for 'Feedback', 'Looking for language selection? Find it in the new Unified Settings', and 'Cookie preferences'.

Figure 7.5: Function Association.

The settings for the CloudFront Distribution can now be set. In order to ensure high availability, the option "Use all edge locations" is selected, so that images can be distributed to the user from the closest edge location in relation to their IP address. No ACL can be added to the WAF due to permissions issues, and a SSL Certificate cannot be set as the web app is not being served from the internet. For logging purposes "Standard Logging" is set to "On", and logs are saved to the same S3 bucket. Cookie logging is enabled, and IPv6 is set to "On", to allow for more IP addresses to access the CloudFront Distributed content. These settings can be found in Figures ?? and 7.7.

**Settings**

**Price class** [Info](#)  
Choose the price class associated with the maximum price that you want to pay.

- Use all edge locations (best performance)
- Use only North America and Europe
- Use North America, Europe, Asia, Middle East, and Africa

**AWS WAF web ACL - optional**  
Choose the web ACL in AWS WAF to associate with this distribution.

**Alternate domain name (CNAME) - optional**  
Add the custom domain names that you use in URLs for the files served by this distribution.

**Custom SSL certificate - optional**  
Associate a certificate from AWS Certificate Manager. The certificate must be in the US East (N. Virginia) Region (us-east-1).

**Supported HTTP versions**

Feedback Looking for language selection? Find it in the new Unified Settings [\[Feedback\]](#)

© 2022, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Figure 7.6: Applying CloudFront Settings.

Search for services, features, blogs, docs, and more [Option+G]

Associate a certificate from AWS Certificate Manager. The certificate must be in the US East (N. Virginia) Region (us-east-1).

**Request certificate** [\[Request certificate\]](#)

**Supported HTTP versions**  
Add support for additional HTTP versions. HTTP/1.0 and HTTP/1.1 are supported by default.  
 HTTP/2

**Default root object - optional**  
The object (file name) to return when a viewer requests the root URL. [\[Edit\]](#) instead of a specific object.

**Standard logging**  
Get logs of viewer requests delivered to an Amazon S3 bucket.

- Off
- On

**S3 bucket**  
The Amazon S3 bucket where CloudFront delivers log files. Don't choose an S3 bucket in any of the following regions, because CloudFront doesn't deliver standard logs to buckets in these regions: Africa (Cape Town), Asia Pacific (Hong Kong), Europe (Ireland), Middle East (Bahrain).  
 group4-digital-ink-s3.s3.amazonaws.com [\[X\]](#)

**Log prefix - optional**  
A prefix that CloudFront adds to the beginning of every log file name.  
 Enter log prefix

**Cookie logging**  
When this is On, CloudFront includes cookies in the standard logs.

- Off
- On

**IPv6**  
 On

**Description - optional**


Cancel **Create distribution**

Feedback Looking for language selection? Find it in the new Unified Settings [\[Feedback\]](#)

© 2022, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Figure 7.7: Applying CloudFront Settings.


A CloudFront Distribution has now been created, and can be found in Figure 7.8.

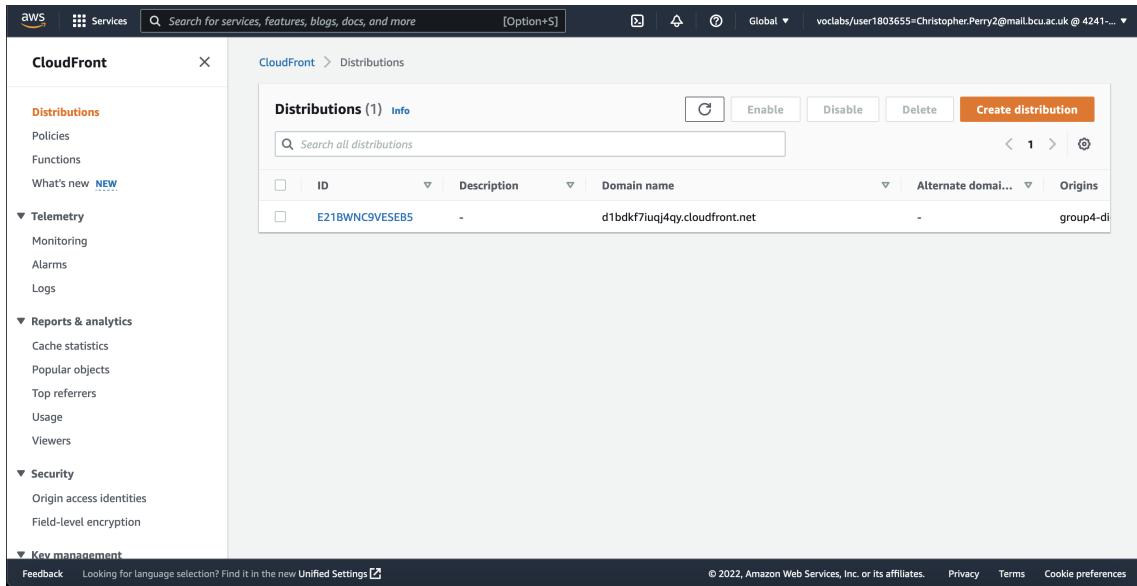

The screenshot shows the AWS CloudFront console under the 'Distributions' section. A single distribution is listed with the ID 'E21BWNC9VESEB5' and the domain name 'd1bdkf7iuqj4qy.cloudfront.net'. The 'Origins' column shows 'group4-di'.

Figure 7.8: Created CloudFront Distribution.

Finally, the images contained within the webserver were changed from their local location to their relevant CloudFront locations. This change can be seen in Figures 7.9 and 7.10.

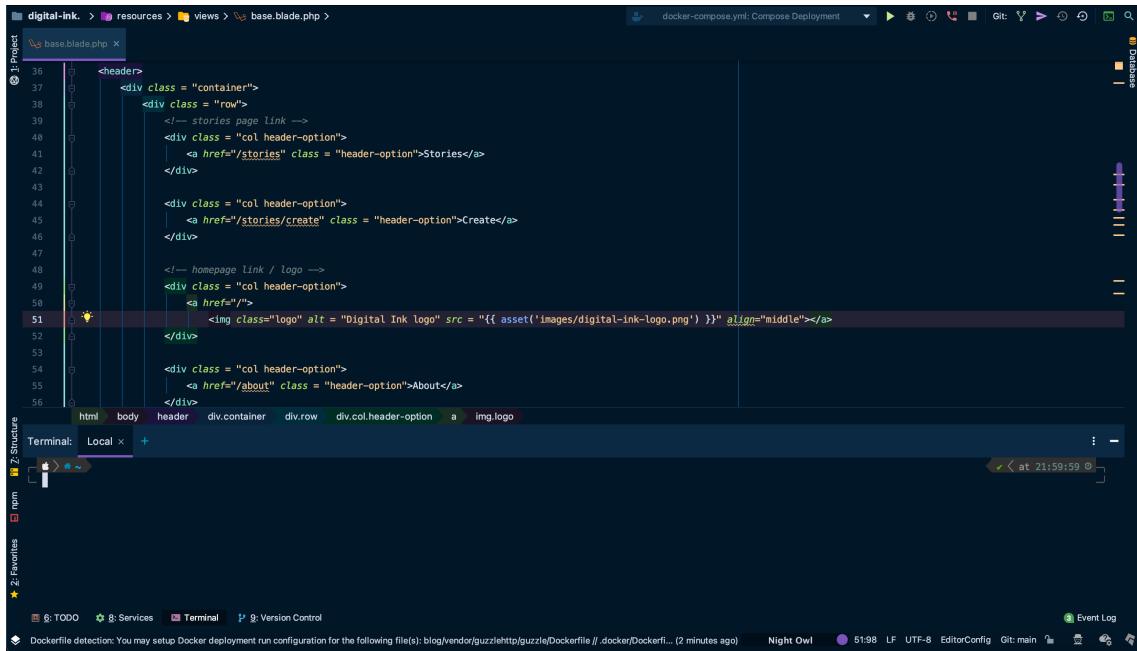

The screenshot shows a code editor with the file 'base.blade.php' open. The code is a Blade template for a header. At line 51, there is a line of HTML that includes an image tag with a source URL: ``. This URL is highlighted in purple, indicating it is a CloudFront URL.

Figure 7.9: Image location before CloudFront.

The screenshot shows a code editor interface with a dark theme. The top navigation bar includes tabs for 'Project', 'resources', 'views', and 'base.blade.php'. The main area displays a PHP file named 'base.blade.php' with line numbers from 36 to 56. The code is a template for a header section, including a container, a row with three columns, and links for 'Stories', 'Create', and 'About'. A specific line, number 51, contains an image tag with a CloudFront URL as its source:

```
51: 
```

The bottom status bar shows various icons and text, including 'Dockerfile detection: You may setup Docker deployment run configuration for the following file(s): blog/vendor/guzzlehttp/guzzle/Dockerfile // .docker/Dockerfile... (4 minutes ago)'. The bottom right corner shows the date and time as 'at 21:59:59'.

Figure 7.10: Image location after CloudFront.

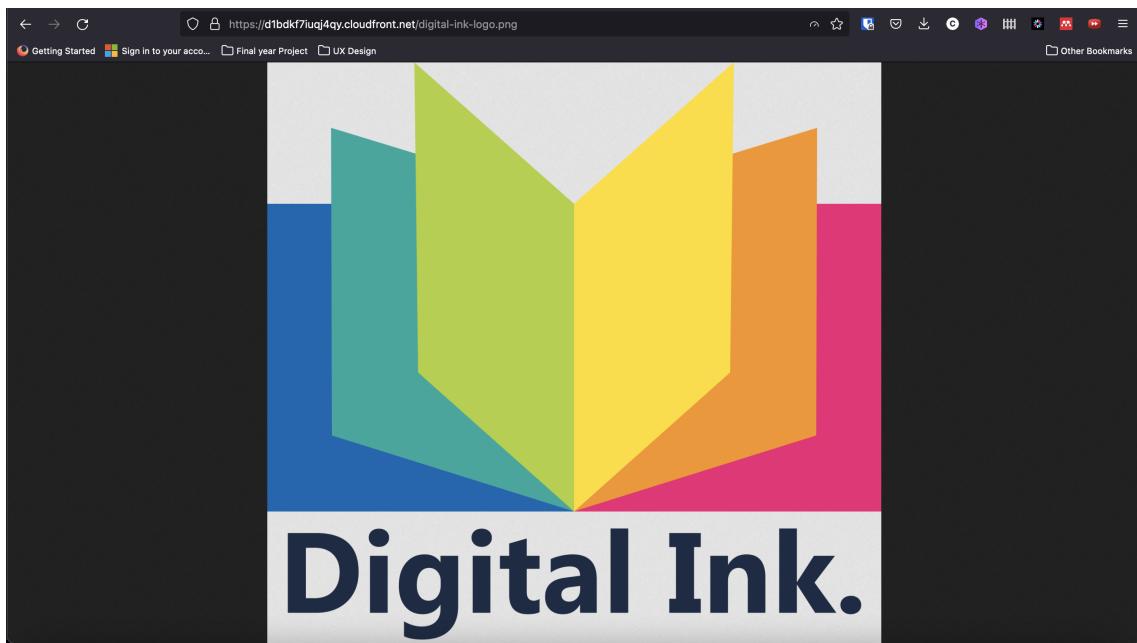


Figure 7.11: Image location after CloudFront.

As seen in Figure 7.11, the Digital Ink logo is now hosted on CloudFront.

# Chapter 8

## CloudWatch

Amazon CloudWatch is a monitoring and observation tool which can provide developers with insights to monitor applications, react to performance changes, and optimise resource consumption. CloudWatch collects monitoring and operational data about the application as logs and metrics to provide a complete overview of operation health, resource consumption, and the services currently running on AWS. This is useful for any cloud-based application as it allows developers to set alarms, visualise metric logs, troubleshoot errors and, most importantly, identify and correct anomalous behaviour ([amazon2022amazon](#)). An example of CloudWatch usage would be an alarm set to alert developers when a specified resource consumption level is over a certain threshold.

# **Chapter 9**

## **CloudTrail**

# **Chapter 10**

## **Relational Database Service**

Amazon RDS service allows a user to create a fully-featured and highly-available SQL database that is automatically replicated to another availability zone. (TODO: Oops, no multi-az) This means that if the primary database becomes unavailable, there is automatic failover providing redundancy for all the data stored within.

To create an Amazon RDS instance, a suitable name/identifier for the database is required before created as well as a selection for the resource limits for the virtual server. The database requires a username and passphrase, although for additional security there is the option to automatically generate a passphrase.

Afterwards, the type of SQL database required (such as MySQL, PostgreSQL, MariaDB or others) will be selected and then the database should begin provisioning.

## **Chapter 11**

# **Availability Zones**

## **Chapter 12**

# **Elastic Load Balancing**

Elastic Load Balancing is used to automatically scale your EC2 instances to meet any changes in demand from your users. ELB can be used to both scale up or down the instance's resources to ensure that your application is kept performant and available regardless of how many users visit. It is also possible to scale down the resources again, after the spike in usage has passed, to save money when it comes to billing and ensure you aren't paying for any additional resources that are not being used.

## **Chapter 13**

# **Security Practices**

# **Chapter 14**

## **Cost Breakdown**

If this web app was to be deployed to the public, or be expanded to a larger market, it would be important to gather estimated costs for hosting the app in the cloud with all the AWS services being used. The AWS Pricing Calculator can be used to calculate current costs and predict future costs. To calculate these costs, it is required to specify every implemented feature and several projected inputs and outputs, such as amount of data transferred on the app per month ([amazon2022aws](#)). The monthly cost and a yearly cost of deploying the app in its current state was calculated first. Following this, the calculator was used to predict monthly and yearly costs for scaling the deployment up to larger user-bases. These figures were calculated for scaling the app up to 10,000 users, one million users, and ten million users, which would require upgrading some selected AWS features.

### **14.1 Estimated Costs**

### **14.2 Scaling Up to 10,000 Users**

### **14.3 Scaling Up to One Million Users**

### **14.4 Scaling Up to Ten Million Users**

# Chapter 15

## Testing

This chapter of the report will detail the testing conducted on the configured AWS services. This was done to determine the accuracy and efficiency of the configurations made during the deployment process. The testing was conducted by using Gherkin, a language used to define behaviour and test cases (**dos2018automated**). It is non-technical and is intended to be easily human-readable. Gherkin uses set keywords for structure and meaning: Given, When, and Then. An example of this structure can be seen in Figure ??.

```
Scenario: ...
  Given ...
  When ...
  Then ...
```

EC2, S3, CloudFront, RDS, CloudWatch, and CloudTrail were all tested using this approach. Screenshots are included to illustrate the results of these tests.

### 15.1 Testing EC2

```
Scenario: Accessing instance through SSH with .pem file private key.
```

```
  Given ...
  When ...
  Then ...
```

```
Scenario: Accessing web app through EC2 domain name.
```

```
  Given ...
  When ...
  Then ...
```

### 15.2 Testing S3

```
Scenario: Accessing web app image through S3 domain name.
```

```
  Given ...
  When ...
  Then ...
```

### 15.3 Testing CloudFront

### 15.4 Testing RDS

```
Scenario: Accessing web app image through CloudFront domain name.
  Given ...
  When ...
  Then ...

Scenario: Accessing web app image through CloudFront domain name in another region.
  Given ...
  When ...
  Then ...

Scenario: Accessing web app image through CloudFront domain name in another IP address.
  Given ... (NSLookup test)
  When ...
  Then ...

Scenario: Creating user information through the web app.
  Given ...
  When ...
  Then ...

Scenario: Creating story information through the web app.
  Given ...
  When ...
  Then ...

Scenario: Reading user information from the database into the web app.
  Given ...
  When ...
  Then ...

Scenario: Reading story information from the database into the web app.
  Given ...
  When ...
  Then ...

Scenario: Updating user information in the database through the web app.
  Given ...
  When ...
  Then ...

Scenario: Updating story information in the database through the web app.
  Given ...
  When ...
  Then ...

Scenario: Deleting user information in the database through the web app.
  Given ...
  When ...
  Then ...

Scenario: Deleting story information in the database through the web app.
  Given ...
  When ...
  Then ...
```

## 15.5 Testing CloudWatch

(One test for each of the metrics we set up.)

Scenario:

```
Given ...
When ...
Then ...
```

## 15.6 Testing CloudTrail

(One test for each of the metrics we set up.)

Scenario:

```
Given ...
When ...
Then ...
```

## 15.7 Testing ELB

(Test for turning off instance 1. Test for turning off instance 2.)

# **Chapter 16**

## **Future Enhancements**

An SSL/TLS certificate could be added, as it was not possible to do this from within the lab tutorial due to a lack of permissions from the root AWS account. By adding a certificate we would be able to encrypt the connections to our EC2 instance and increase the security of our application for all users.

We would like to add more roles and users to our IAM, but were limited by the amount that we were able to access.


If we were to do the project again, we would use AWS Elastic Beanstalk as it allows automatic orchestration of all the resources needed for a LAMP stack style application such as ours, it also has support for Docker which is a containerization technology that we had used in our application project.

# **Chapter 17**

## **Conclusion**


# Appendix A: Screenshots

I am an appendix, please be kind.

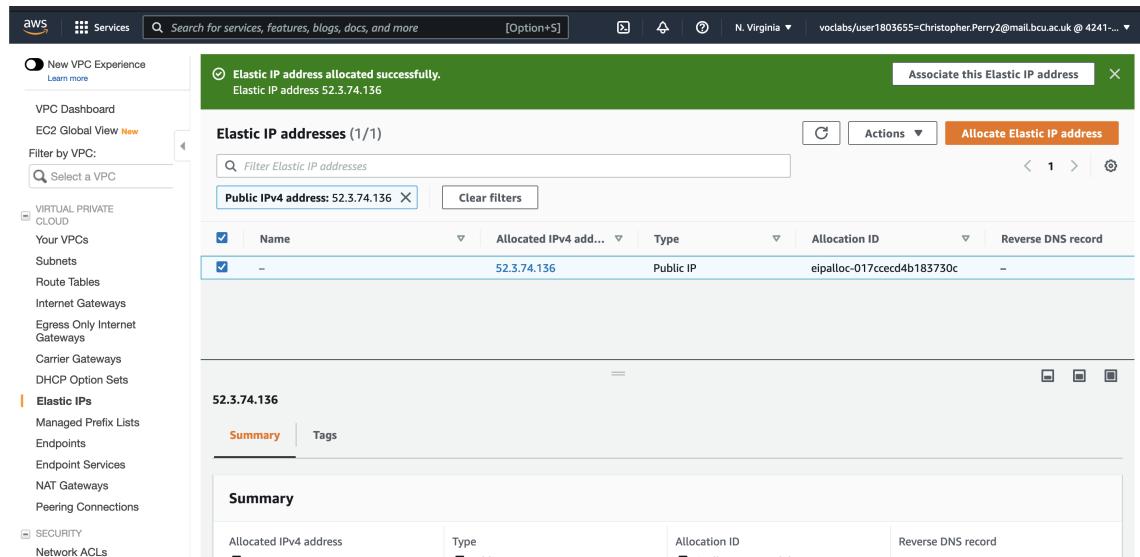


The screenshot shows the AWS VPC Elastic IP addresses page. At the top, a green banner displays the message "Elastic IP address allocated successfully." followed by the allocated IP address "52.3.74.136". Below the banner, the main interface shows a table of "Elastic IP addresses (1/1)". The table has columns for Name, Allocated IPv4 add..., Type, Allocation ID, and Reverse DNS record. One row is listed with the values: Name (checkbox selected), Allocated IPv4 add... (52.3.74.136), Type (Public IP), Allocation ID (eipalloc-017ccecd4b183730c), and Reverse DNS record (empty). Below the table, a summary card for the IP address 52.3.74.136 provides details such as Allocated IPv4 address, Type, Allocation ID, and Reverse DNS record.

Figure A.1: After Allocating Elastic IP Address

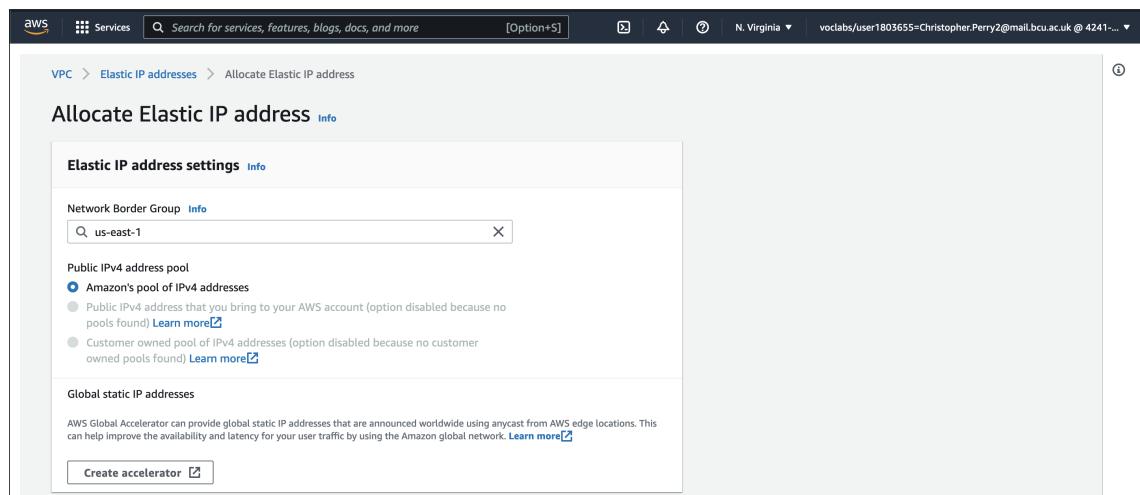

The screenshot shows the "Allocate Elastic IP address" settings page. The "Elastic IP address settings" section includes a "Network Border Group" dropdown set to "us-east-1". Under "Public IPv4 address pool", the "Amazon's pool of IPv4 addresses" option is selected. There is also a note about public IPv4 addresses being disabled because no pools were found. The "Global static IP addresses" section contains a note about AWS Global Accelerator and a "Create accelerator" button.

Figure A.2: Allocating Elastic IP Address

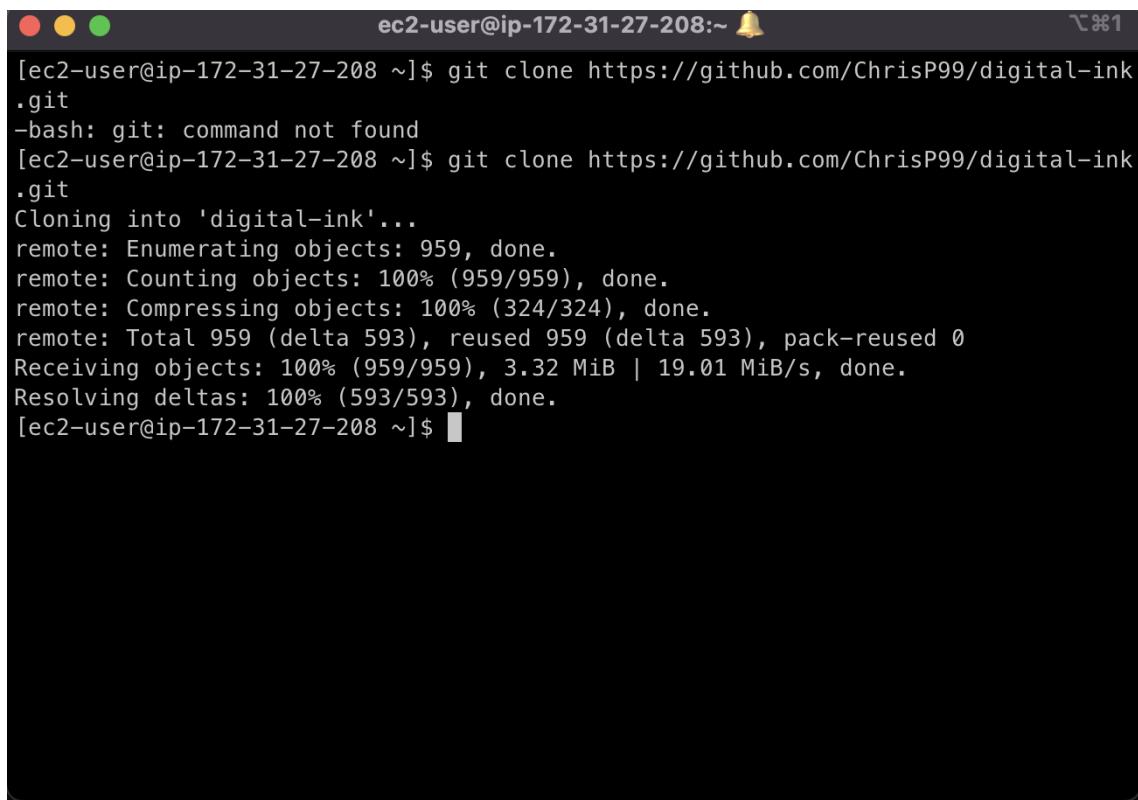

```
ec2-user@ip-172-31-27-208:~$ git clone https://github.com/ChrisP99/digital-ink.git
-bash: git: command not found
[ec2-user@ip-172-31-27-208 ~]$ git clone https://github.com/ChrisP99/digital-ink.git
Cloning into 'digital-ink'...
remote: Enumerating objects: 959, done.
remote: Counting objects: 100% (959/959), done.
remote: Compressing objects: 100% (324/324), done.
remote: Total 959 (delta 593), reused 959 (delta 593), pack-reused 0
Receiving objects: 100% (959/959), 3.32 MiB | 19.01 MiB/s, done.
Resolving deltas: 100% (593/593), done.
[ec2-user@ip-172-31-27-208 ~]$
```

Figure A.3: Cloning the App

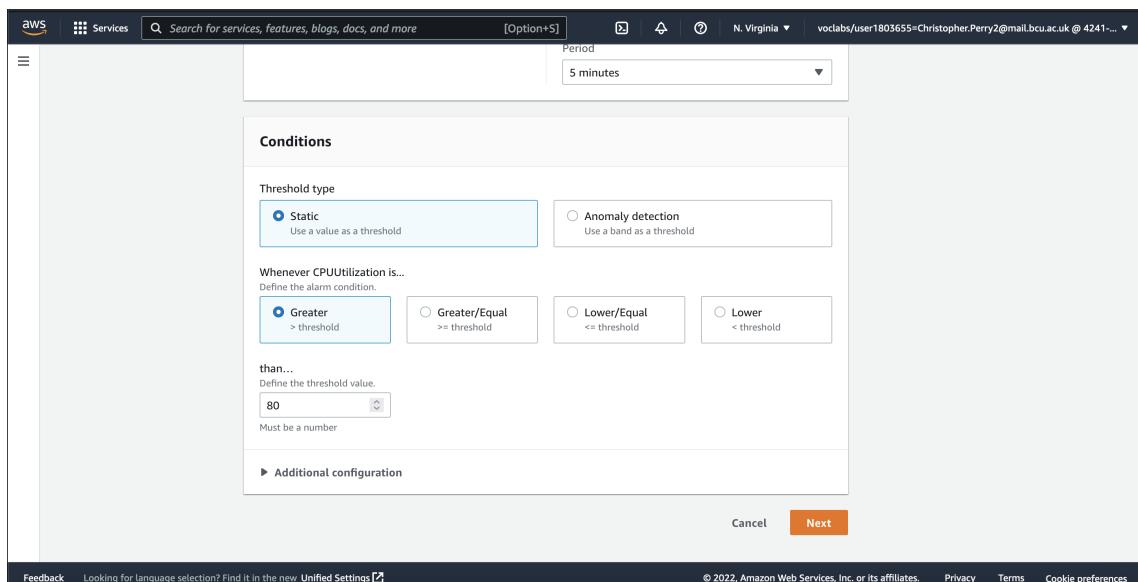


Figure A.4: CloudWatch Conditions

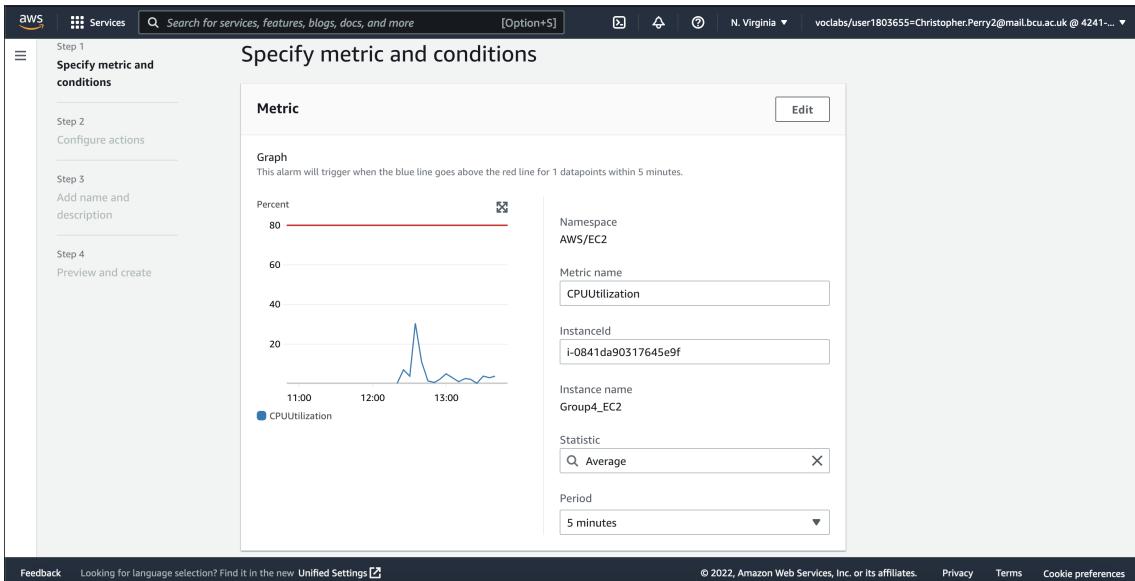


Figure A.5: CloudWatch Specify Metric

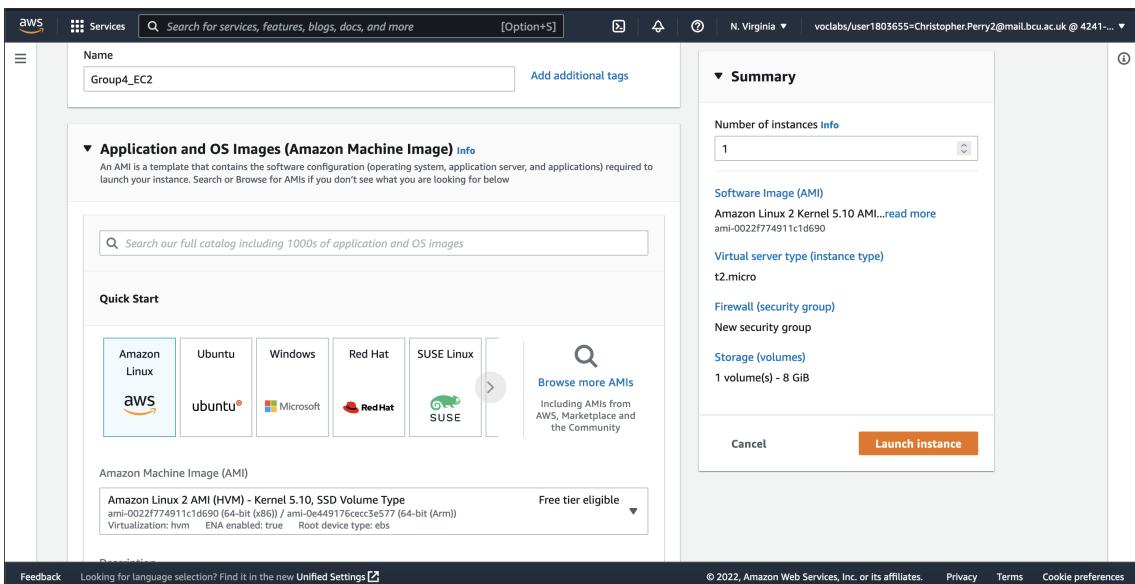


Figure A.6: Create Instance - Application and OS Images

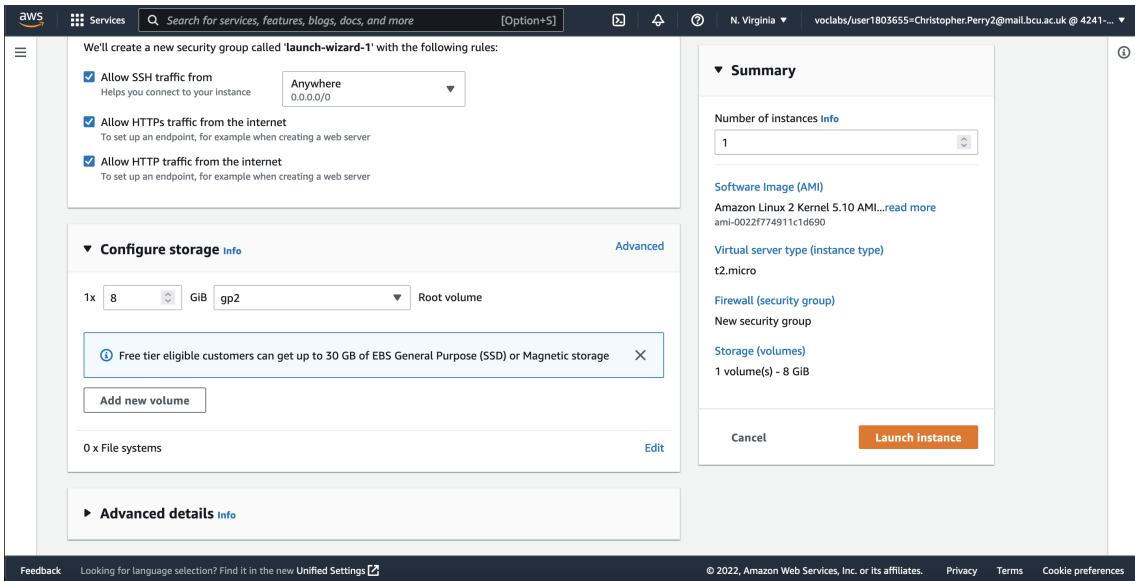


Figure A.7: Create Instance - Configure Storage

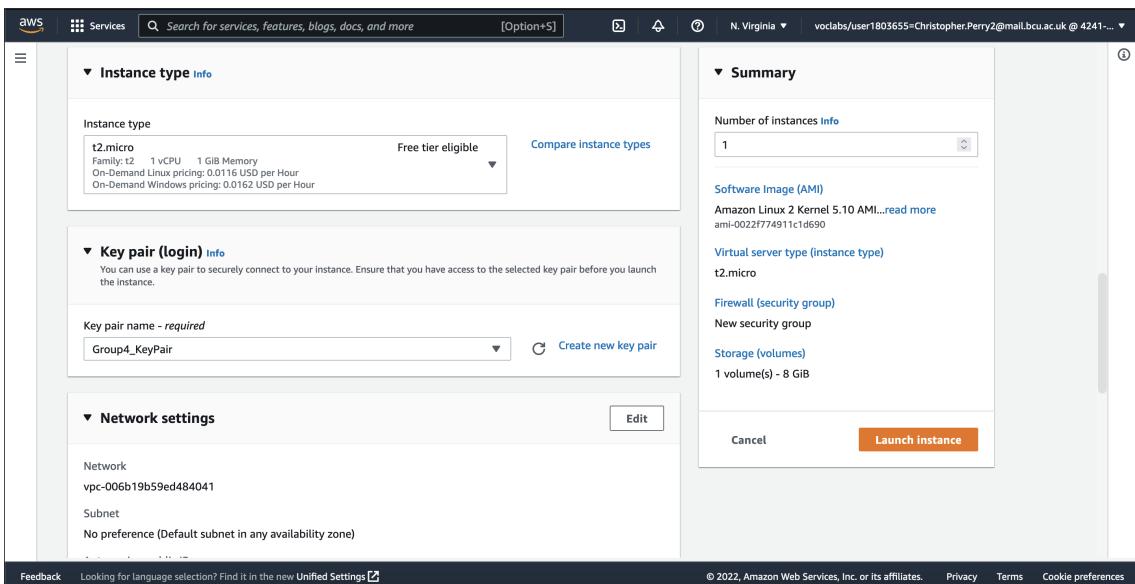


Figure A.8: Create Instance - Instance Type

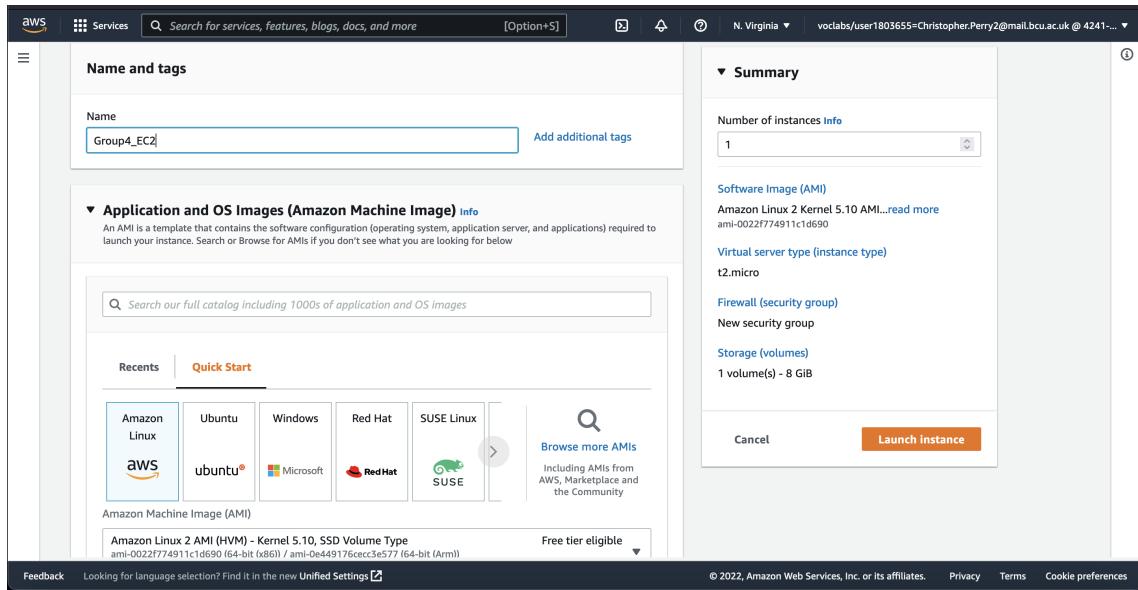


Figure A.9: Create Instance - Name & Tags

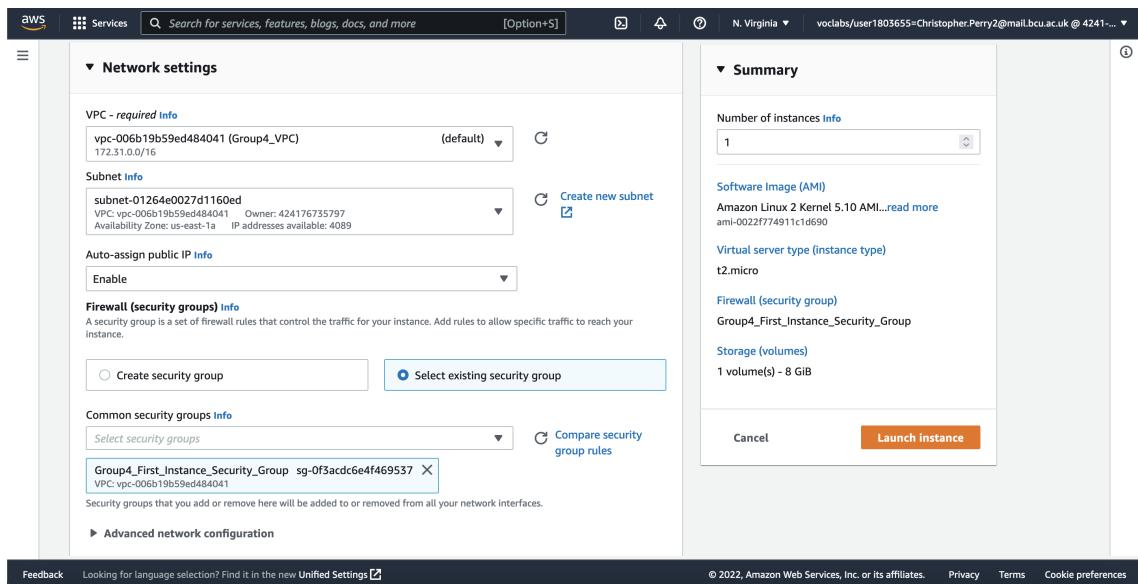


Figure A.10: Create Instance - Network Settings

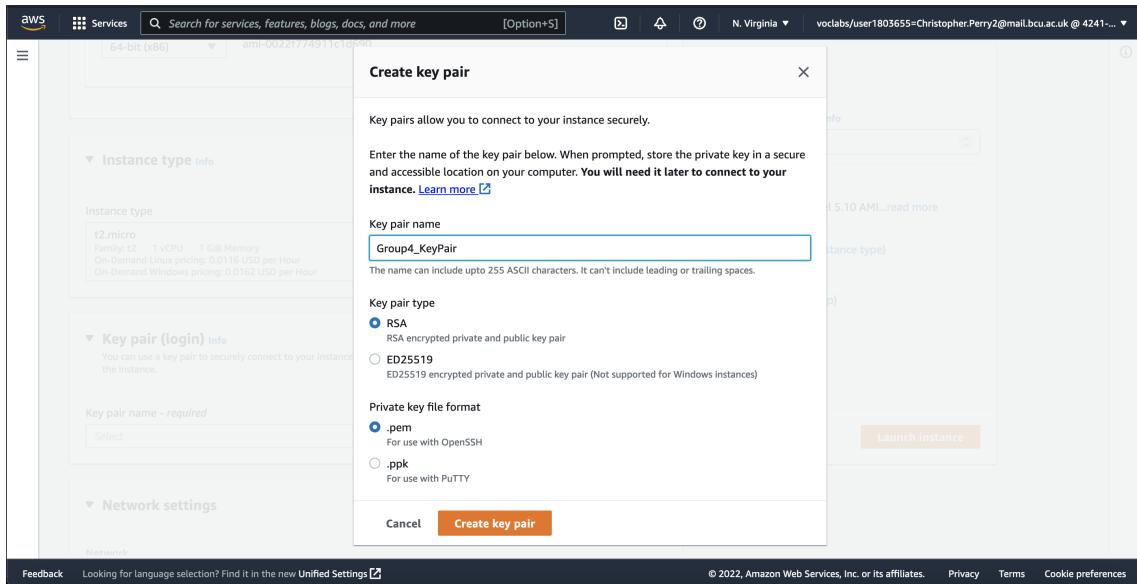


Figure A.11: Creating Key Pair

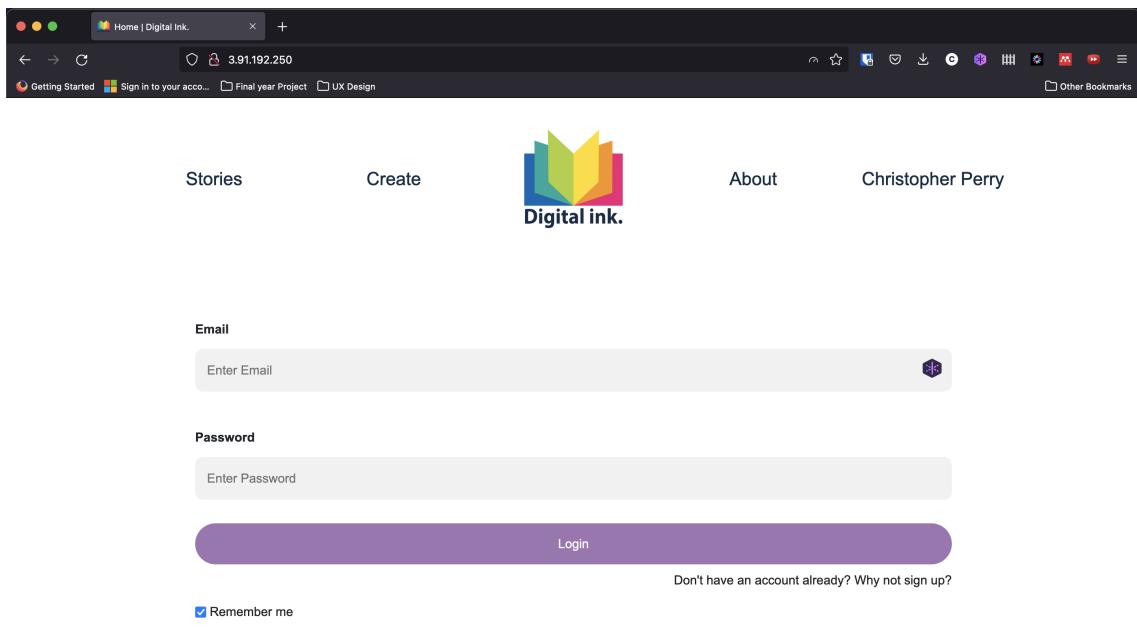


Figure A.12: Digital Ink

```
ec2-user@ip-172-31-27-208:~/digital-ink

: phpmyadmin Pulling
: 5eb5b503b376 Extracting      27.53MB/31.37MB      5.9s
: 8b1a0d84cf101 Download complete      5.7s
: 38c937addeb7 Download complete      5.7s
: 6a2f1dc96e59 Download complete      5.7s
: f8c3f82c39d4 Download complete      5.7s
: 90fc6462b088 Download complete      5.7s
[+] Running 0/319 Download complete      5.7s
: phpmyadmin Pulling
: 5eb5b503b376 Extracting      27.53MB/31.37MB      6.0s
: 8b1a0d84cf101 Download complete      5.8s
: 38c937addeb7 Download complete      5.8s
: 6a2f1dc96e59 Download complete      5.8s
: f8c3f82c39d4 Download complete      5.8s
: 90fc6462b088 Download complete      5.8s
[+] Running 7/319 Download complete      5.8s
: phpmyadmin Pulling
: 5eb5b503b376 Pull complete      7.6s
: 8b1a0d84cf101 Pull complete      7.9s
: 38c937addeb7 Extracting      [=====] 32.31MB/91.6MB      12.8s
: 6a2f1dc96e59 Download complete      12.8s
: f8c3f82c39d4 Download complete      12.8s
: 90fc6462b088 Download complete      12.8s
: c670d99116c9 Download complete      12.8s
: 268554d6fe96 Download complete      12.8s
: 6c29fa0d4492 Download complete      12.8s
: 73c23c0a259 Download complete      12.8s
: 81ac13c96fc2 Download complete      12.8s
: b60a3e6c23949 Download complete      12.8s
: dac5dd67fd59 Download complete      12.8s
: fd46866d9c36 Download complete      12.8s
: 443a86ef4c80 Download complete      12.8s
: 5e0049224f95 Download complete      12.8s
: 213e66cdf7f56 Download complete      12.8s
: 9b9b44731108 Download complete      12.8s
[+] db Pulling
: 15bb3e15f562 Pull complete      13.0s
: 96c2ab037a1b Pull complete      8.5s
: 8aa3ac85066b Pull complete      9.4s
: ac7e524fc98 Pull complete      9.9s
: f6a88631064f Pull complete      10.1s
: 15bb3e3cf1f50 Extracting      [=====] 13.11MB/14.06MB      12.7s
: ae65dc337dc8 Download complete      12.7s
: a4d4c43adaf5f2 Download complete      12.7s
: c6cab33e8ff1 Download complete      12.7s
: 2e1cf2c43f16 Download complete      12.7s
: 2e5ee322aaf48 Download complete      12.7s
```

Figure A.13: Docker Compose

The screenshot shows the AWS Launch Wizard interface for creating a new Amazon Linux 2 instance. The 'Network settings' section is active, displaying a network named 'vpc-006b19b59ed484041' and a subnet with no preference. It includes options for auto-assigning a public IP and enabling security groups. Under 'Security groups (Firewall)', it says 'We'll create a new security group called "launch-wizard-1" with the following rules:' followed by a list of three checked rules: 'Allow SSH traffic from Anywhere', 'Allow HTTPs traffic from the internet', and 'Allow HTTP traffic from the internet'. The 'Summary' section shows 'Number of instances' as 1, the 'Software Image (AMI)' as Amazon Linux 2 Kernel 5.10 AMI..., and the 'Virtual server type (instance type)' as t2.micro. The 'Configure storage' section shows a root volume of 8 GiB gp2. At the bottom right, there are 'Cancel' and 'Launch instance' buttons.

aws Services Search for services, features, blogs, docs, and more [Option+Shift]

☰ N. Virginia v vclabs/user1803655=Christopher.Perry2@mail.bcu.ac.uk @ 4241...

**▼ Network settings**

Network  
vpc-006b19b59ed484041

Subnet  
No preference (Default subnet in any availability zone)

Auto-assign public IP  
Enable

Security groups (Firewall) [Info](#)  
We'll create a new security group called 'launch-wizard-1' with the following rules:

Allow SSH traffic from Anywhere  
Helps you connect to your instance  
0.0.0.0/0

Allow HTTPs traffic from the internet  
To set up an endpoint, for example when creating a web server

Allow HTTP traffic from the internet  
To set up an endpoint, for example when creating a web server

**▼ Summary**

Number of instances [Info](#)  
1

Software Image (AMI)  
Amazon Linux 2 Kernel 5.10 AMI...[read more](#)  
ami-0022f774911c1d690

Virtual server type (instance type)  
t2.micro

Firewall (security group)  
New security group

Storage (volumes)  
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#)

**▼ Configure storage** [Info](#) Advanced

1x 8 GiB gp2 Root volume

Feedback Looking for language selection? Find it in the new [Unified Settings](#)

© 2022, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Figure A.14: Edit Instance - Network Settings

```
[ec2-user@ip-172-31-27-208 ~]$ sudo yum update
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
amzn2-core
No packages marked for update
[ec2-user@ip-172-31-27-208 ~]$ sudo yum install docker docker-compose
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
No package docker-compose available.
Resolving Dependencies
--> Running transaction check
--> Package docker x86_64 0:20.10.13-2.amzn2 will be installed
--> Processing Dependency: runc >= 1.0.0 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: libcgroup >= 0.40.rcl5.15 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: containerd >= 1.3.2 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: pigz for package: docker-20.10.13-2.amzn2.x86_64
--> Running transaction check
--> Package containerd.x86_64 0:1.4.13-2.amzn2.0.1 will be installed
--> Package libcgroup.x86_64 0:0.41-21.amzn2 will be installed
--> Package pigz.x86_64 0:2.3.4-1.amzn2.0.1 will be installed
--> Package runc.x86_64 0:1.0.3-2.amzn2 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
| Package      | Arch | Version       | Repository | Size |
|=====|=====|=====|=====|=====|
| Installing: |       |             |            |        |
| docker       | x86_64 | 20.10.13-2.amzn2 | amzn2extra-docker | 40 M |
| Installing for dependencies: |       |             |            |        |
| containerd  | x86_64 | 1.4.13-2.amzn2.0.1 | amzn2extra-docker | 23 M |
| libcgroup   | x86_64 | 0.41-21.amzn2    | amzn2-core       | 66 k  |
| pigz        | x86_64 | 2.3.4-1.amzn2.0.1 | amzn2-core       | 81 k  |
| runc        | x86_64 | 1.0.3-2.amzn2    | amzn2extra-docker | 3.0 M |
|=====|=====|=====|=====|=====|

Transaction Summary
=====
| Install 1 Package (<4 Dependent packages) |
|                                         | Total download size: 67 M |
| Installed size: 280 M |
| Is this ok [D/y/N]: |
```

Figure A.15: Installing Docker using Package Manager

```
Resolving Dependencies
--> Running transaction check
--> Package docker.x86_64 0:20.10.13-2.amzn2 will be installed
--> Processing Dependency: runc >= 1.0.0 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: libcgroup >= 0.40.rcl5.15 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: containerd >= 1.3.2 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: pigz for package: docker-20.10.13-2.amzn2.x86_64
--> Running transaction check
--> Package containerd.x86_64 0:1.4.13-2.amzn2.0.1 will be installed
--> Package libcgroup.x86_64 0:0.41-21.amzn2 will be installed
--> Package pigz.x86_64 0:2.3.4-1.amzn2.0.1 will be installed
--> Package runc.x86_64 0:1.0.3-2.amzn2 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
| Package      | Arch | Version       | Repository | Size |
|=====|=====|=====|=====|=====|
| Installing: |       |             |            |        |
| docker       | x86_64 | 20.10.13-2.amzn2 | amzn2extra-docker | 40 M |
| Installing for dependencies: |       |             |            |        |
| containerd  | x86_64 | 1.4.13-2.amzn2.0.1 | amzn2extra-docker | 23 M |
| libcgroup   | x86_64 | 0.41-21.amzn2    | amzn2-core       | 66 k  |
| pigz        | x86_64 | 2.3.4-1.amzn2.0.1 | amzn2-core       | 81 k  |
| runc        | x86_64 | 1.0.3-2.amzn2    | amzn2extra-docker | 3.0 M |
|=====|=====|=====|=====|=====|

Transaction Summary
=====
| Install 1 Package (<4 Dependent packages) |
|                                         | Total download size: 67 M |
| Installed size: 280 M |
| Is this ok [D/y/N]: y |
| Downloading packages:
| (1/5): libcgroup-0.41-21.amzn2.x86_64.rpm | 66 kB 00:00:00
| (2/5): pigz-2.3.4-1.amzn2.0.1.x86_64.rpm | 81 kB 00:00:00
| (3/5): containerd-1.4.13-2.amzn2.0.1.x86_64.rpm | 23 MB 00:00:00
| (4/5): docker-20.10.13-2.amzn2.x86_64.rpm | 40 MB 00:00:00
| (5/5): runc-1.0.3-2.amzn2.x86_64.rpm | 3.0 MB 00:00:00
|                                         | 66 MB/s | 67 MB 00:00:01
|                                         | 1/5 2/5 3/5 4/5 ] 5/5 |
|                                         |                                         | 74% ~~~~~ | 5.3 GB ----- | 0 18% ----- | ⏵ 5-04, 1:31 PM |
```

Figure A.16: Installing Docker using Package Manager (In Progress)

```

git-core          x86_64      2.32.0-1.amzn2.0.1           amzn2-core          4.8 M
git-core-doc     noarch      2.32.0-1.amzn2.0.1           amzn2-core          2.7 M
perl-Error       noarch      1:0.17020-2.amzn2           amzn2-core          32 k
perl-Git         noarch      2.32.0-1.amzn2.0.1           amzn2-core          43 k
perl-TermReadKey x86_64      2.30-20.amzn2.0.2           amzn2-core          31 k

Transaction Summary
=====
Install 1 Package (+6 Dependent packages)

Total download size: 7.8 M
Installed size: 38 M
Is this ok [y/N]: y
Downloading packages:
(1/7): emacs-filesystem-27.2-4.amzn2.0.1.noarch.rpm | 67 kB 00:00:00
(2/7): git-2.32.0-1.amzn2.0.1.x86_64.rpm | 126 kB 00:00:00
(3/7): git-core-doc-2.32.0-1.amzn2.0.1.noarch.rpm | 2.7 MB 00:00:00
(4/7): perl-Error-0.17020-2.amzn2.noarch.rpm | 32 kB 00:00:00
(5/7): perl-Git-2.32.0-1.amzn2.0.1.noarch.rpm | 43 kB 00:00:00
(6/7): git-core-2.32.0-1.amzn2.0.1.x86_64.rpm | 4.8 MB 00:00:00
(7/7): perl-TermReadKey-2.30-20.amzn2.0.2.x86_64.rpm | 31 kB 00:00:00
29 MB/s | 7.8 MB 00:00:00

Total
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : git-core-2.32.0-1.amzn2.0.1.x86_64
  Installing : git-core-doc-2.32.0-1.amzn2.0.1.noarch
  Installing : 1:emacs-filesystem-27.2-4.amzn2.0.1.noarch
  Installing : perl-TermReadKey-2.30-20.amzn2.0.2.x86_64
  Installing : perl-Git-2.32.0-1.amzn2.0.1.noarch
  Installing : git-2.32.0-1.amzn2.0.1.x86_64
  Verifying  : git-core-2.32.0-1.amzn2.0.1.noarch
  Verifying  : perl-TermReadKey-2.30-20.amzn2.0.2.x86_64
  Verifying  : perl-Git-2.32.0-1.amzn2.0.1.noarch
  Verifying  : 1:emacs-filesystem-27.2-4.amzn2.0.1.noarch
  Verifying  : git-2.32.0-1.amzn2.0.1.x86_64
  Verifying  : git-core-2.32.0-1.amzn2.0.1.x86_64
  Verifying  : 1:perl-Error-0.17020-2.amzn2.noarch
Installed:
  git.x86_64 0:2.32.0-1.amzn2.0.1

Dependency Installed:
  emacs-filesystem.noarch 1:27.2-4.amzn2.0.1  git-core.x86_64 0:2.32.0-1.amzn2.0.1  git-core-doc.noarch 0:2.32.0-1.amzn2.0.1  perl-Error.noarch 1:0.17020-2.amzn2  perl-Git.noarch 0:2.32.0-1.amzn2.0.1
  perl-TermReadKey.x86_64 0:2.30-20.amzn2.0.2

Complete!
[ec2-user@ip-172-31-27-208 ~]$ snuffle | ▶ | □ ~ | ⟲ ssh + fish + bash + zsh + fish + fish + fish + fish + fish + fish + spacedust | 59% ↗ 5.4 GB ————— | 19% ↘ 5-04, 1:33 PM

```

Figure A.17: Installing Git

```

ec2-user@ip-172-31... #1
~ (-fish) #2
          Load  Upload Total Spent Left Speed
0   0   0   0   0   0   0   0   0   0   0   0
0   0   0   0   0   0   0   0   0   0   0   0
100 25.2M 100 25.2M 0   0 39.1M 0   0   0   0   0   0
[ec2-user@ip-172-31-27-208 digital-in]$ uname -a
Linux ip-172-31-27-208.ec2.internal 5.10.109-104.500.amzn2.x86_64 #1 SMP Wed Apr 13 20:31:43 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
[ec2-user@ip-172-31-27-208 digital-in]$ cat /etc/*-release
NAME="Amazon Linux"
VERSION="2"
ID="amzn"
ID_LIKE="centos rhel fedora"
VERSION_ID="2"
PRETTY_NAME="Amazon Linux 2"
ANSI_COLOR="0;33"
CPE_NAME="cpe:2.3:o:amazon:amazon_linux:2"
HOME_URL="https://amazonlinux.com/"
Amazon Linux 2 (Xenon)
[ec2-user@ip-172-31-27-208 digital-in]$ sudo chmod +x /usr/local/bin/docker-compose
[ec2-user@ip-172-31-27-208 digital-in]$ docker-compose --version
Docker Compose version v2.5.0
[ec2-user@ip-172-31-27-208 digital-in]$ systemctl status docker
● docker.service - Docker Application Container Engine
  Loaded: loaded (/usr/lib/systemd/system/docker.service; disabled; vendor preset: disabled)
  Active: inactive (dead)
    Docs: https://docs.docker.com
[ec2-user@ip-172-31-27-208 digital-in]$ sudo systemctl start docker
[ec2-user@ip-172-31-27-208 digital-in]$ systemctl status docker
● docker.service - Docker Application Container Engine
  Loaded: loaded (/usr/lib/systemd/system/docker.service; disabled; vendor preset: disabled)
  Active: active (running) since Wed 2022-05-04 12:40:06 UTC; 1s ago
    Docs: https://docs.docker.com
  Process: 3788 ExecStartPre=/usr/libexec/docker/docker-setup-runtimes.sh (code=exited, status=0/SUCCESS)
  Process: 3791 ExecStartPre=/bin/mkdir -p /run/docker (code=exited, status=0/SUCCESS)
Main PID: 3791 (dockerd)
  Tasks: 7
    Memory: 26.9M
  CGroup: /system.slice/docker.service
          └─3791 /usr/bin/dockerd -H fd:// --containerd=/run/containerd/containerd.sock --default-ulimit nofile=32768:65536

May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="ClientConn switching balancer to \"pick_first\""
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=warning msg="Your kernel does not support cgroup blkio weight"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=warning msg="Your kernel does not support cgroup blkio weight_device"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Loading containers: start"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Default bridge (docker0) is assigned with an IP address... address"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Loading containers: done."
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Docker daemon" commit="906f57f graphdriver(s)=overlay..=20.10.13"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Daemon has completed initialization"
May 04 12:40:06 ip-172-31-27-208.ec2.internal systemd[1]: Started Docker Application Container Engine.
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="API listen on /run/docker.sock"
Hint: Some lines were ellipsized, use -l to show in full.
[ec2-user@ip-172-31-27-208 digital-in]$

```

Figure A.18: Starting Docker systemd Service

The screenshot shows the AWS EC2 Instances page. On the left, there's a sidebar with various navigation options like EC2 Dashboard, EC2 Global View, Events, Tags, Limits, Instances (selected), Instance Types, Launch Templates, Spot Requests, Savings Plans, Reserved Instances, Dedicated Hosts, Scheduled Instances, Capacity Reservations, Images, AMIs, and AMI Catalog. The main content area has a title 'Instances (2) Info' with a search bar and a table. The table has columns for Name, Instance ID, Instance state, Instance type, Status check, Alarm status, Availability Zone, and Public IP. It lists two instances: 'Group4\_EC2' (terminated, t2.micro, us-east-1d) and 'Group4\_EC2' (running, t2.micro, us-east-1d). Below the table is a modal titled 'Select an instance'.

Figure A.19: Instances

The screenshot shows the 'Launching instance' step of the AWS EC2 instance launch process. At the top, there's a message about opting into the new launch experience with a 'Opt-out to the old experience' link. Below it, the breadcrumb navigation shows 'EC2 > Instances > Launch an instance'. The main content area has a title 'Launching instance' and instructions: 'Please wait while we launch your instance.' and 'Do not close your browser while this is loading.' A progress bar at the bottom indicates 'Launch initiation' is at 80% completion. There's also a 'Details' link.

Figure A.20: Launching Instance

```

ec2-user@ip-172-31-27-208:~/digital-ink
logout
Connection to 3.91.192.250 closed.
> ssh -i ~/Desktop/Group4_KeyPair.pem ec2-user@3.91.192.250
Last login: Wed May  4 13:21:09 2022 from 193.60.143.12
  _\|_ _\|_
 _\| (   /  Amazon Linux 2 AMI
  _\|_\|_|_|
https://aws.amazon.com/amazon-linux-2/
[ec2-user@ip-172-31-27-208 ~]$ cd digital-ink
[ec2-user@ip-172-31-27-208 digital-ink]$ cd ..
[ec2-user@ip-172-31-27-208 ~]$ sudo mv digital-ink digital-ink.old
[ec2-user@ip-172-31-27-208 ~]$ git clone https://github.com/ChrisP99/digital-ink.git
Cloning into 'digital-ink'...
remote: Enumerating objects: 9909, done.
remote: Counting objects: 100% (9909/9909), done.
remote: Compressing objects: 100% (6382/6382), done.
remote: Total 9909 (delta 3080), reused 9863 (delta 3034), pack-reused 0
Receiving objects: 100% (9909/9909), 17.59 MiB | 14.30 MiB/s, done.
Resolving deltas: 100% (3080/3080), done.
Updating files: 100% (8963/8963), done.
[ec2-user@ip-172-31-27-208 ~]$ cd digital-ink
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose up -d
[*] Running 3/3
  • Container digital-ink-db-1  Running
  • Container phpmyadmin  Running
  • Container digital-ink-app-1  Started
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose down
[*] Running 4/4
  • Container phpmyadmin  Removed
  • Container digital-ink-app-1  Removed
  • Container digital-ink-db-1  Removed
  • Network digital-ink_default  Removed
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose up -d
[*] Running 4/4
  • Network digital-ink_default  Created
  • Container digital-ink-db-1  Started
  • Container phpmyadmin  Started
  • Container digital-ink-app-1  Started
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose exec app bash
root@c565ab9c37ff:/srv/app# php artisan migrate
Nothing to migrate.
root@c565ab9c37ff:/srv/app# 

```

Figure A.21: Log In with Key Pair

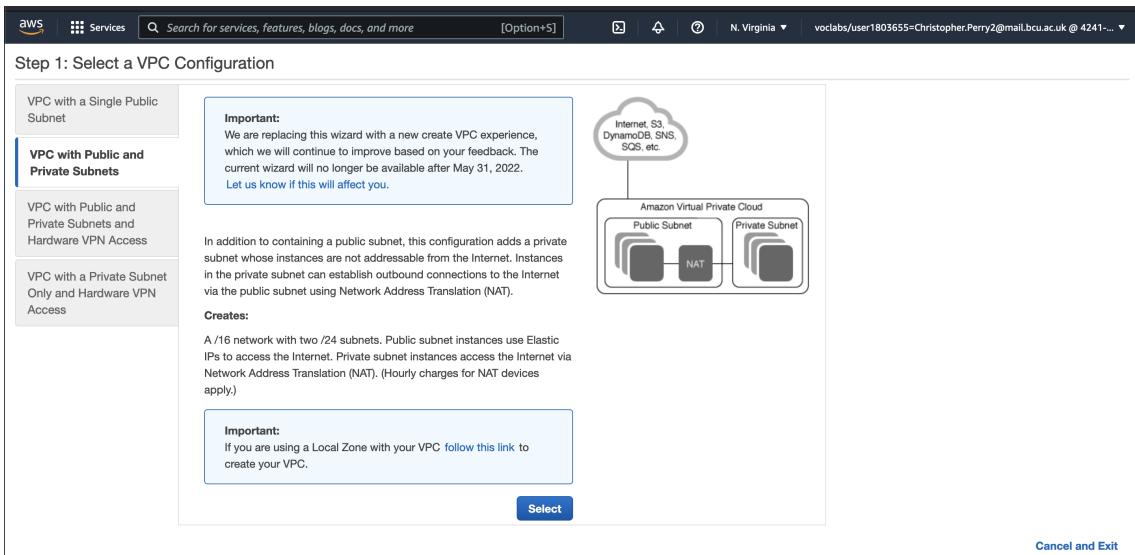


Figure A.22: Selecting a VPC Configuration

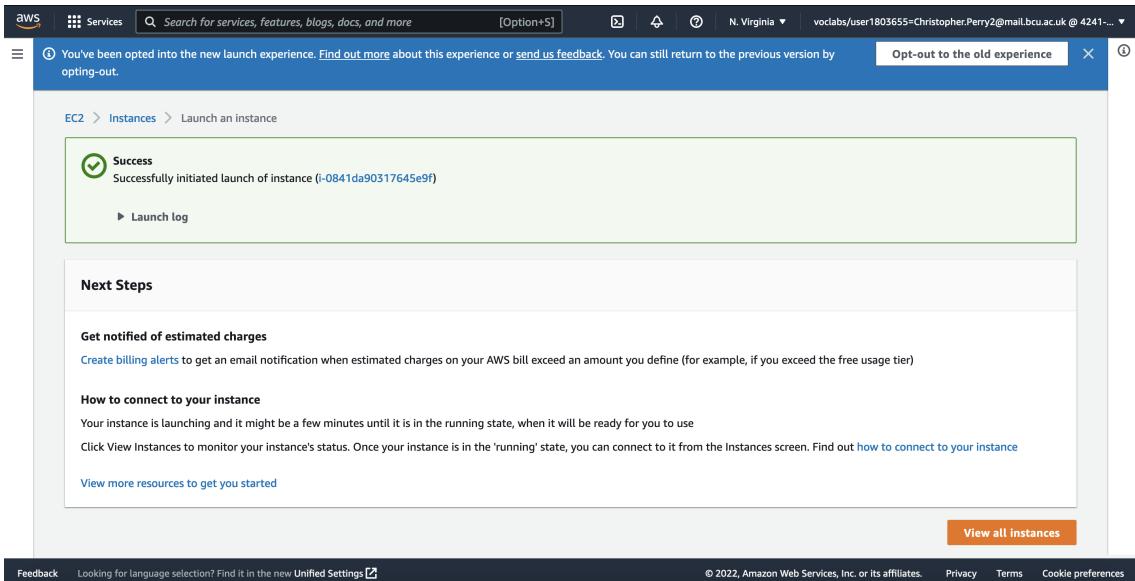


Figure A.23: Successfully Initiated Instance

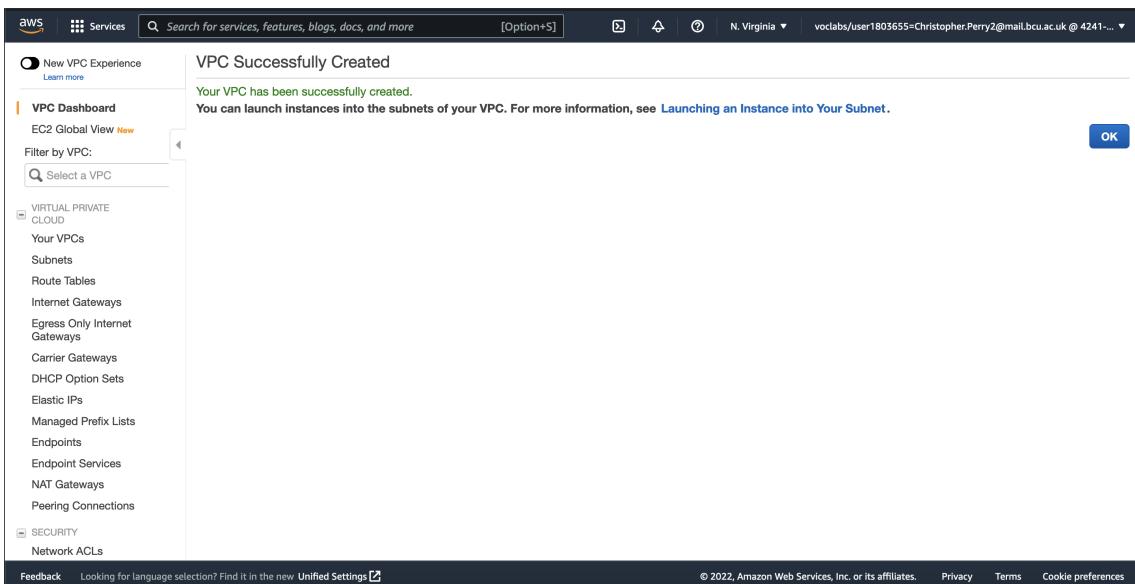


Figure A.24: VPC Successfully Created

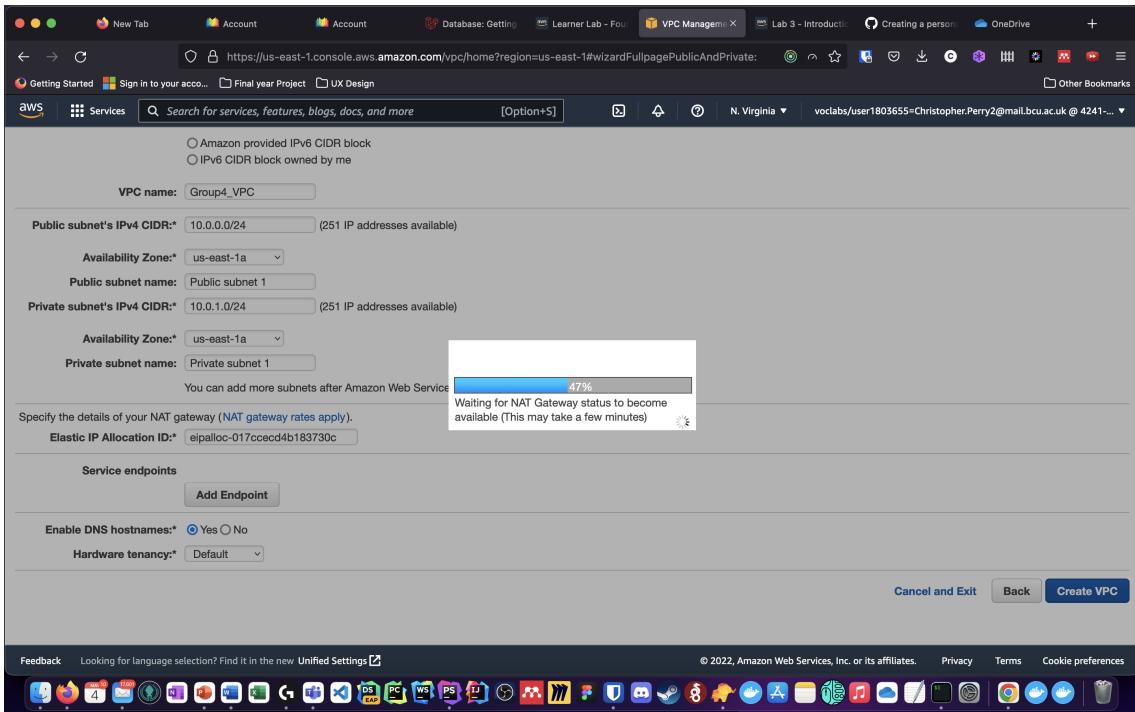


Figure A.25: VPC with Public and Private Subnets, Loading

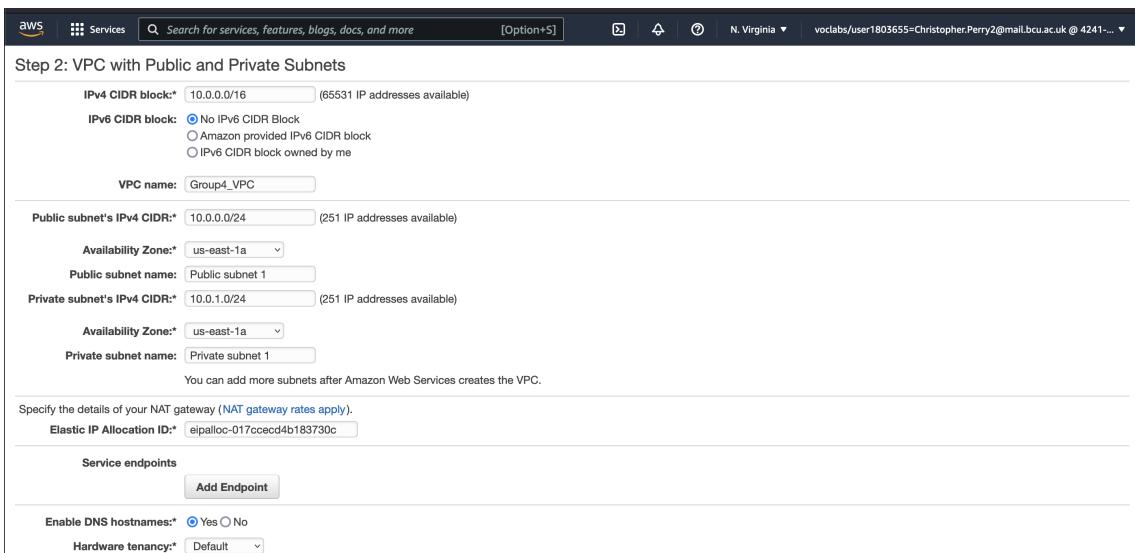


Figure A.26: VPC with Public and Private Subnets

Your VPCs (2) info

Name	VPC ID	State	IPv4 CIDR	IPv6 CIDR
-	vpc-006b19b59ed484041	Available	172.31.0.0/16	-
Group4_VPC	vpc-0b0472507c8bf18c9	Available	10.0.0.0/16	-

vpc-07657585bc0e3b3b5

Details    CIDs    Flow logs    Tags

**Details**

VPC ID vpc-07657585bc0e3b3b5	State Available	DNS hostnames Disabled	DNS resolution Enabled
---------------------------------	--------------------	---------------------------	---------------------------

Feedback    Looking for language selection? Find it in the new Unified Settings [?](#)

© 2022, Amazon Web Services, Inc. or its affiliates.    [Privacy](#)    [Terms](#)    [Cookie preferences](#)

Figure A.27: Your VPCs