

Cloud Computing with AWS

By Adam Cordner, Chris Perry & Evie Snuffle

A report submitted as part of a required module
for the degree of BSc. (Hons.) in Computer Science
at the School of Computing and Digital Technology,
Birmingham City University, United Kingdom

May 2022,
CMP6210 Cloud Computing 2021–2022
Module Coordinator: Dr Khaled Mahbub

Student IDs: 18109958, 18103708, 18128599

Contents

List of Figures

Chapter 1

Introduction

This report details the process of designing, developing, and deploying a cloud application onto Amazon Web Services (AWS). The application is called *Digital Ink* and allows users to create, edit, and delete their own short stories. Users can then view their own short stories and other users' short stories. It was first developed locally using a LAMP stack. This consisted of Linux - hosted through Docker - for the operating system, an Apache HTTP Server, MySQL for the relational database management, and PHP as the programming language.

After the application was built locally, it was gradually integrated onto AWS. This involved implementing several AWS cloud features to enhance the application, ensure application security, and increase availability. This was accomplished by using Simple Storage Service (S3), Elastic Compute Cloud (EC2), ELB (Elastic Load Balancing), and more. The process of implementing these cloud features will be discussed throughout the report.

After the application was integrated onto AWS, an evaluation of the process was conducted. This includes a discussion of the security practices used, estimated costs for different user scales, and thorough testing. Lastly, several enhancements which could be made to the application in the future will be discussed.

Chapter 2

Glossary

- **SSH** — Secure SHell
- **EC2** — Elastic Cloud Compute
- **SSH** — Secure SHell
- **AWS** — Amazon Web Services
- **S3** — Simple Storage Service
- **ELB** — Elastic Load Balancer
- **LAMP** — Linux, Apache, MySQL, PHP
- **HTTP** — HyperText Transfer Protocol
- **SQL** — Structured Query Language
- **VPC** — Virtual Private Cloud
- **AMI** — Amazon Machine Images
- **RAM** — Random Access Memory
- **CPU** — Central Processing Unit
- **SNS** — Simple Notification Service
- **RDS** — Relational Database Service
- **DB** — Database
- **AZ** — Availability Zone
- **IEEE** — Institute of Electrical and Electronics Engineers
- **OS** — Operating Systems
- **IP** — Internet Protocol
- **GB** — Gigabyte
- **IAM** — IANDsfoins

- **ACL** — Access Control List
- **ACM** — AWS Certificate Manager
- **CA** — Certificate Authority
- **CloudFront** — Certificate Authority
- **CloudWatch** — Certificate Authority
- **ML** — Machine Learning
- **ML** — Machine Learning

Chapter 3

Web App

This chapter of the report will detail the local design and development of the *Digital Ink* web application. We will first discuss the software stack used to develop the app, then the design of the database used, and, lastly, the design of the user interface.

3.1 Software Stack

Digital Ink was first developed locally using a LAMP stack. LAMP refers to a generic software stack, where each letter in the acronym stands for one the following open source building blocks: Linux, Apache HTTP Server, MySQL, and PHP (Lee and Ware, 2003). The web app is hosted within a Docker container (Anderson, 2015) which runs a minified version of the Linux operating system. Apache is an open-source web server software which is used to host the app on the web (Fielding and Kaiser, 1997). MySQL is an open-source relational database management system (Widenius, Axmark, and Arno, 2002) which is used to store all the data used within the app, including user details and story details. PHP is a programming language aimed towards web development, chosen due to its stability and reliability (Lerdorf et al., 2002). Additionally, all developers involved have prior experience with PHP.

3.2 Database Design

As mentioned before, the web app uses the MySQL relational database management system to store its data. MySQL is a relational database management system (RDBMS) which stores data in the form of tables, where Structured Query Language (SQL) is used to access the database. As shown in Figure 3.1, the database which this web app uses consists of three tables: `users`, `stories`, and `migrations`.

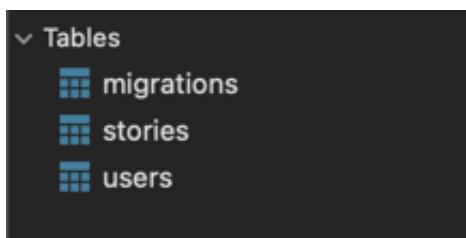


Figure 3.1: Database tables overview.

The `migrations` table (see Figure 3.2) contains records which correspond to the migrations within the Laravel web app. These migrations contain the scripts required to automatically generate the `users` and `stories` tables in SQL. It contains the following three columns:

- `id`: the unique ID for each migration.
- `migration`: points to the scripts used to create tables.
- `batch`: how many times the script has been ran.

| <code>id</code> | <code>migration</code> | <code>batch</code> |
|-----------------|---|--------------------|
| 1 | <code>2014_10_12_000000_create_users_table</code> | 1 |
| 4 | <code>2020_03_13_105916_create_stories_table</code> | 1 |

Figure 3.2: `migrations` table.

The `users` table (see Figure 3.3) contains all the information about user accounts, and it contains the following seven columns:

- `id`: the unique ID for each user account.
- `name`: the name associated with user account.
- `email`: the unique email used to log in.
- `password`: the password used to log in, encrypted with 184 bit hashing by Bcrypt (Laravel, 2022b).
- `remember_token`: keeps the user logged in if they select "Remember me".
- `created_at`: records what date and time the user account was first created at.
- `updated_at`: records what date and time the user account was last updated at.

| stories | | | | users | | | |
|-----------------|-------------------|-----------------------------|---|-----------------------------|-------------------------|-------------------------|--|
| <code>id</code> | <code>name</code> | <code>email</code> | <code>password</code> | <code>remember_token</code> | <code>created_at</code> | <code>updated_at</code> | |
| 1 | Adam | adam.cordner@mail.bcu.ac.uk | \$2y\$10\$IS...3eqO3o0dRXaK8sMy.eBqUapgD... | mDUIGRIiVhyEi6... | 2022-05-10 15:50:27 | 2022-05-10 15:50:27 | |
| 2 | evie | ^~^@snugg.ie | \$2y\$10\$vNRmMN/IRSIYTrCUjJEPu44jkViOr5... | Mu1WdyOz1e8... | 2022-05-10 15:51:29 | 2022-05-10 15:51:29 | |

Figure 3.3: `users` table.

The `stories` table (see Figure 3.4) contains all the information about user-created stories, and it contains the following 11 columns:


- `id`: the unique ID for each story.
- `author_id`: the unique ID associated with the user who created the story.
- `title`: the title associated with the story.
- `genre`: the genre associated with the story, which can be one of eight different genres.
- `blurb`: a brief description of the story.
- `content`: the full content of the story.
- `cover_image`: a thumbnail image for the story.
- `file_upload`: an optional PDF upload of the story.
- `published`: 1 if the story has been made public, or 0 if it is a draft.
- `created_at`: records what date and time the story was first created at.
- `updated_at`: records what date and time the story was last updated at.

| <code>id</code> | <code>author_id</code> | <code>title</code> | <code>genre</code> | <code>blurb</code> | <code>content</code> |
|---|------------------------|--------------------|----------------------|--------------------------------------|---|
| 2 | 1 → | Group 4 Loves AWS | Romance | Meet Group 4 and their love for AWS! | Group 4 loves using AWS' cloud features to host Di... |
| 3 | 2 → | cheese savoury | Action and Adventure | nice and simple | on malted granary |
| | | | | <code>cover_image</code> | <code>file_upload</code> |
| ./storage/cover_images/7537329101652200606.j... | | | | NULL | 1 2022-05-10 16:36:46 ◁ 2022-05-10 16:36:46 ◁ |
| images/digital-ink-logo.png | | | | NULL | 1 2022-05-10 16:38:51 ◁ 2022-05-10 16:38:51 ◁ |

Figure 3.4: `stories` table.

3.3 Interface Design

The design of the web app was created using Blade, a powerful templating engine (Laravel, 2022a). When the user initially accesses the web app, they are able to log in or sign up. This can be seen in Figure 3.5. When a user has created an account, a record is written to the `users` table in the database.

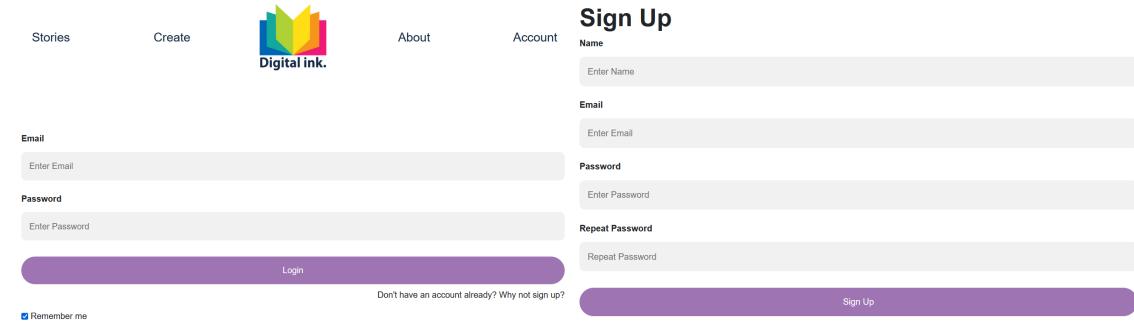

The figure shows the Digital-Ink home page with two side-by-side forms: a 'Login' form on the left and a 'Sign Up' form on the right. The top navigation bar includes links for 'Stories', 'Create', 'About', and 'Account'. The Digital-Ink logo is centered above the forms. The 'Login' form fields are 'Email' (placeholder 'Enter Email') and 'Password' (placeholder 'Enter Password'). Below these is a purple 'Login' button. A link 'Don't have an account already? Why not sign up?' is positioned between the two forms. The 'Sign Up' form fields are 'Name' (placeholder 'Enter Name'), 'Email' (placeholder 'Enter Email'), 'Password' (placeholder 'Enter Password'), and 'Repeat Password' (placeholder 'Repeat Password'). Below these is a purple 'Sign Up' button. A 'Remember me' checkbox is located at the bottom left of the page.

Figure 3.5: *Digital-Ink* home page log in and sign up forms.

Once a user is signed in, they can create a story. Creating a story requires the user to enter a title, a genre, the story itself, a blurb, and, optionally, a thumbnail image. This can be seen in Figure 3.6. Once a story has been created, it is written to the `stories` table.

Create your story!

The form consists of three main sections:

- Author Reference Number:** A text input field containing the value "1".
- Title:** A text input field containing the value "Every story needs a good title!". Below it is another text input field containing "Group 4 Loves AWS".
- Genre:** A dropdown menu showing "Romance".

Your Story: A large text area containing the placeholder text "Group 4 loves using AWS' cloud features to host Digital Ink.". Below it is a file upload button labeled "Browse..." which shows "No file selected".

Blurb: A text area containing the placeholder text "Meet Group 4 and their love for AWS!". Below it is a file upload button labeled "Browse..." which shows "index.jpg".

Nearly finished! A section asking if the user wants to save as a draft or publish. It contains two radio buttons:

- Save as a Draft
- Upload

A blue "Complete" button is located at the bottom right of the third section.

Figure 3.6: *Digital-Ink* story creation form.

After this, the user can see all of their uploaded stories on their account page. This can be seen in Figure 3.7. From here, a story can be edited or deleted, which either updates a record in the `stories` table or removes a record from it.

The screenshot shows a user interface for managing published stories. At the top, a green banner displays the message "Yay! Your story has been published!". Below this, a heading says "Hi Adam!". A sub-section titled "Here are your published stories:" contains a table with three columns: "TITLE", "GENRE", and "ACTIONS". The first row of the table shows a story titled "Group 4 Loves AWS" in the "Romance" genre. The "Edit" button for this story is highlighted with a green oval, while the "Delete" button is highlighted with a red oval.

| TITLE | GENRE | ACTIONS |
|-------------------|---------|---------------------------------------|
| Group 4 Loves AWS | Romance | Edit Delete |

Figure 3.7: *Digital-Ink* account page.

Lastly, on the Stories page, a user can view and search through all uploaded stories across all users. Each story's title, genre, and blurb is shown in a list view. A user can click into one of these stories to see the thumbnail image and read the full story. These pages can be seen in Figure 3.8.

The screenshot shows two views of the Digital-Ink application. The top part is a "Stories" page with a search bar. It lists two stories in a table:

| AUTHOR ID | TITLE | GENRE | BLURB |
|-----------|-------------------|----------------------|--------------------------------------|
| 1 | Group 4 Loves AWS | Romance | Meet Group 4 and their love for AWS! |
| 2 | cheese savoury | Action and Adventure | nice and simple |

The bottom part shows a detailed view of the story "Group 4 Loves AWS". It includes a thumbnail image of a person, the author information "Written by: 1 Genre: Romance", and a blurb: "Group 4 loves using AWS' cloud features to host Digital Ink." A "Back" button is visible at the bottom left.

Figure 3.8: *Digital-Ink* stories page and story view.

Chapter 4

Virtual Private Cloud and Subnets

Amazon Virtual Private Cloud (VPC) allows for AWS resources to be launched in a virtual network that has been custom defined and configured. This virtual network is similar to a traditional network which operates within your own physical data center, with the added benefits of the scalable AWS infrastructure (Amazon Web Services (AWS), 2022b). A VPC can have multiple assigned subnets, which are a range of IP addresses accessible in the VPC.

Chapter 5

Elastic Cloud Compute

5.1 AWS Setup

After the configuration of the VPC and subnets was completed, the initial deployment of the web app began through setting up EC2. This AWS service allows for scalable computing capacity through the use of a virtual computing environment hosted in the cloud (Amazon Web Services (AWS), 2022a). The web app will be stored on an EC2 instance of Amazon Linux, known as Amazon machine images (AMIs), which will then be launched through a docker container stored on the app.

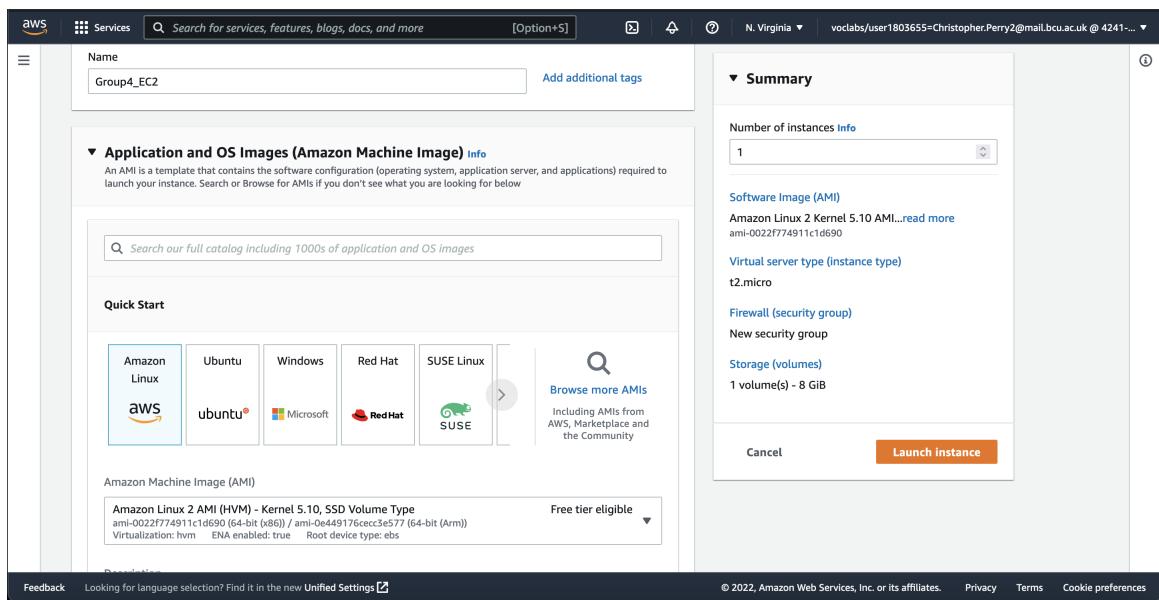


Figure 5.1: Selection of EC2 OS Image.

Figure 5.1 details the selection of the Operating System (OS) that will be used for the EC2 instance. The *Amazon Linux 2 AMI* was selected, as it is already configured with Linux and does not need any more setup.

Now that an AMI has been chosen, the specific instance type that will be used within this AMI can be selected. It was decided that the instance type of *t2.micro* would be used, as it contains only 1GB of Random Access Memory (RAM). The selection of this can be found in Figure 5.2.

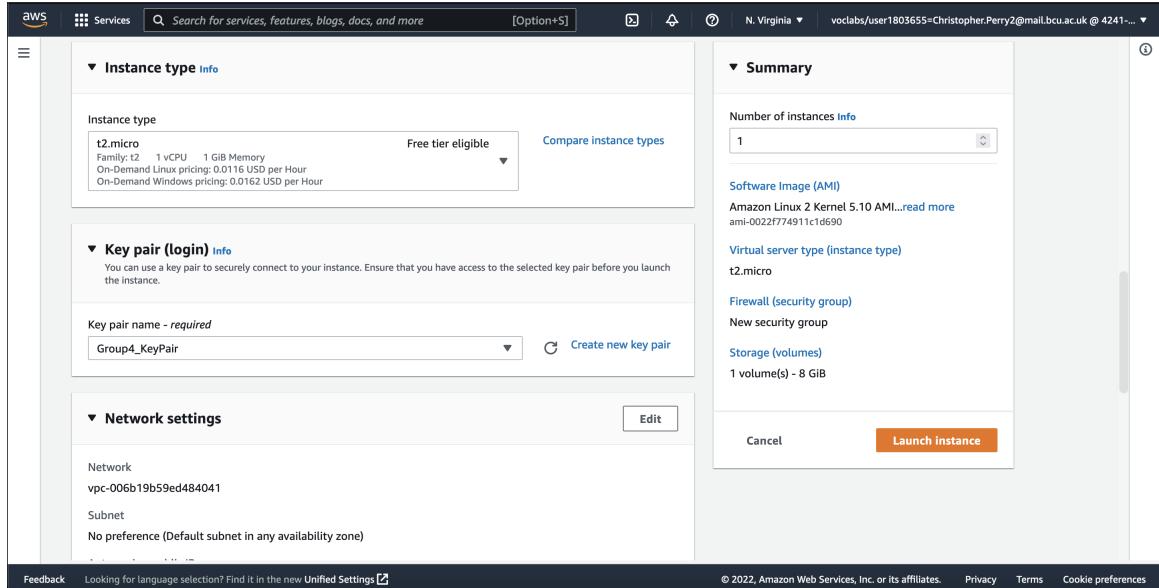


Figure 5.2: Selection of EC2 Instance.

A key pair will allow for the ability to sign in to the EC2 instance with a unique set of login credentials, heightening the security of the project.

The next stage of the setup process was to set up networking for the EC2 instance, in order for the web app to work with Docker to download relevant containers from DockerHub, which will allow a Laravel instance to be initialised, as discussed in Section 3.

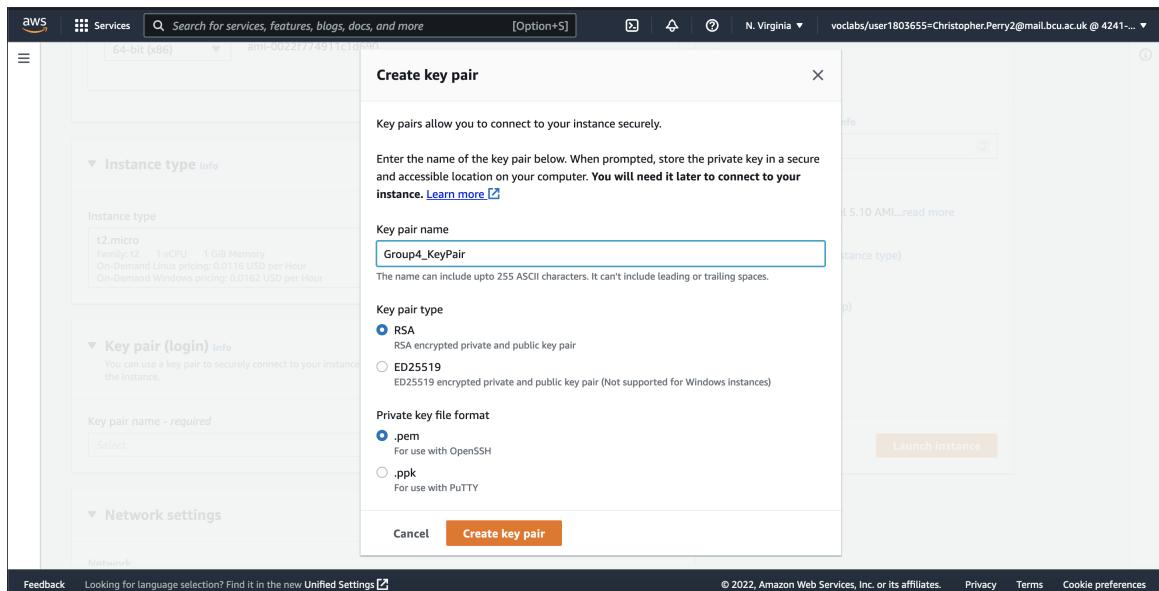


Figure 5.3: Selection of EC2 Keypair.

This process can be seen in Figure 5.3.

The instance is assigned the VPC created in Section ??, where it is assigned a subnet in the same availability zone of us-east-1.

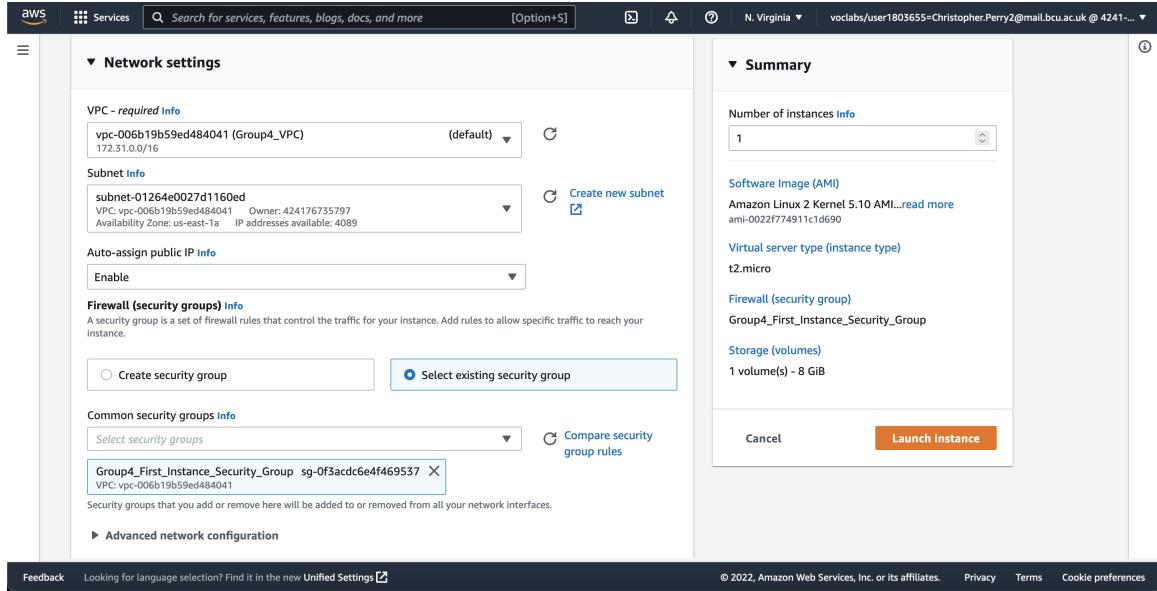


Figure 5.4: Selection of EC2 Networking options.

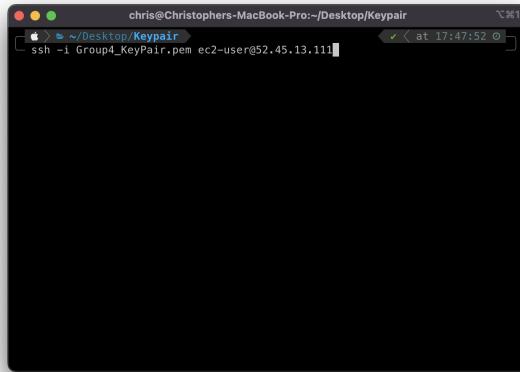


Figure 5.5: Generated EC2 Keypair in the .pem format.

This setup can be seen in Figure 5.4. An EC2 keypair is then generated in the .pem format.

This is enough to comfortably run the web app without any issues. Storage for the AMI was subsequently chosen. It was decided that 8GB of storage would be used, as this is enough to run the web app and still provide leftover storage for any system-critical tasks.

The selection of these options can be found in Figure 5.6. In addition to this, the chosen options are eligible for "Free Tier", which means that it will use a limited amount of the \$100 budget allocated for the project.

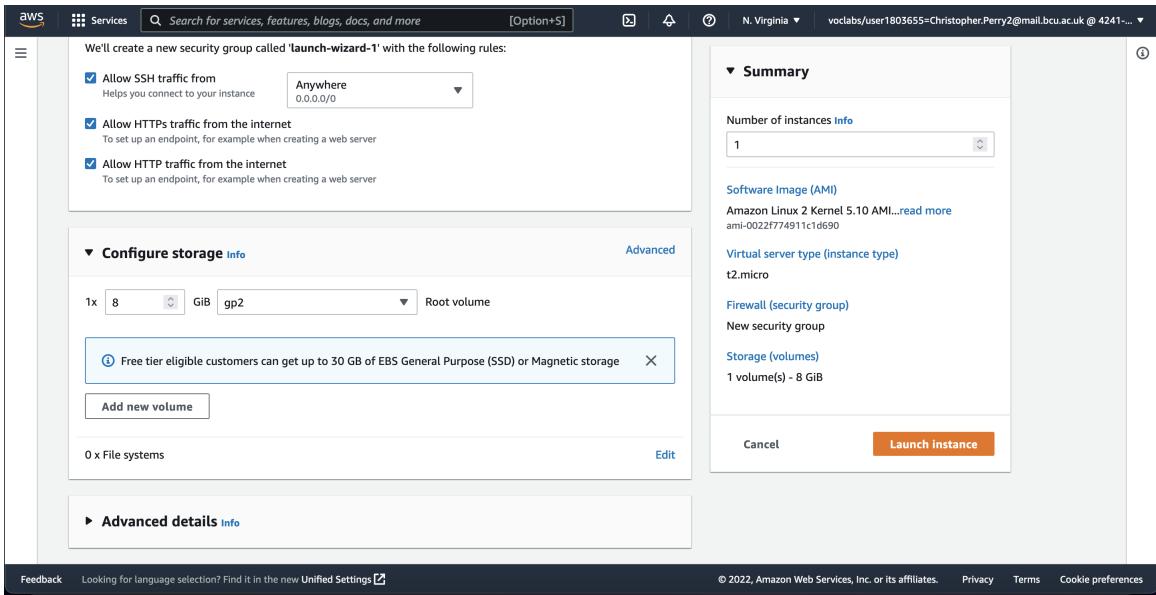


Figure 5.6: Selection of EC2 Storage Configuration.

5.2 EC2 Login

The EC2 instance `group4-ec2` is now live, and the webapp can be loaded onto it. The instance is first logged in to through the use of the `ssh` command, followed by the `-i` argument to specify an identify file, which was generated earlier, and then the public ipv4 address of the instance.

```
ssh -i ~/Desktop/Group4_KeyPair.pem ec2-user@52.45.13.111
```

Figure 5.7: SSH command to log into EC2 instance.

This command can seen being executed in Figure 5.7.

Figure 5.8: Selection of EC2 Storage Configuration.

The logged in EC2 instance can be seen in Figure 5.8.

5.3 Package Setup

The web app is stored on GitHub, and the AMI does not come with GitHub by default. Git is subsequently installed via `yum install git`.

```
git-core                               x86_64          2.32.0-1.amzn2.0.1
git-core-doc                            noarch          2.32.0-1.amzn2.0.1
perl-Error                             noarch          1:0.17020-2.amzn2
perl-Git                               noarch          2.32.0-1.amzn2.0.1
perl-TermReadKey                       x86_64          2.30-20.amzn2.0.2

Transaction Summary
=====
Install 1 Package (+6 Dependent packages)

Total download size: 7.8 M
Installed size: 38 M
Is this ok [y/d/N]: y
Downloading packages:
(1/7): emacs-filesystem-27.2-4.amzn2.0.1.noarch.rpm
(2/7): git-2.32.0-1.amzn2.0.1.x86_64.rpm
(3/7): git-core-doc-2.32.0-1.amzn2.0.1.noarch.rpm
(4/7): perl-Error-0.17020-2.amzn2.noarch.rpm
(5/7): perl-Git-2.32.0-1.amzn2.0.1.noarch.rpm
(6/7): git-core-2.32.0-1.amzn2.0.1.x86_64.rpm
(7/7): perl-TermReadKey-2.30-20.amzn2.0.2.x86_64.rpm

Total
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : git-core-2.32.0-1.amzn2.0.1.x86_64
  Installing : git-core-doc-2.32.0-1.amzn2.0.1.noarch
  Installing : 1:perl-Error-0.17020-2.amzn2.noarch
  Installing : 1:emacs-filesystem-27.2-4.amzn2.0.1.noarch
  Installing : perl-TermReadKey-2.30-20.amzn2.0.2.x86_64
  Installing : perl-Git-2.32.0-1.amzn2.0.1.noarch
  Installing : git-2.32.0-1.amzn2.0.1.x86_64
  Verifying   : perl-TermReadKey-2.30-20.amzn2.0.2.x86_64
  Verifying   : git-core-doc-2.32.0-1.amzn2.0.1.noarch
  Verifying   : perl-Git-2.32.0-1.amzn2.0.1.noarch
  Verifying   : 1:emacs-filesystem-27.2-4.amzn2.0.1.noarch
  Verifying   : git-2.32.0-1.amzn2.0.1.x86_64
  Verifying   : git-core-2.32.0-1.amzn2.0.1.x86_64
  Verifying   : 1:perl-Error-0.17020-2.amzn2.noarch

Installed:
  git.x86_64 0:2.32.0-1.amzn2.0.1

Dependency Installed:
  emacs-filesystem.noarch 1:27.2-4.amzn2.0.1    git-core.x86_64 0:2.32.0-1.amzn2.0.1    git-core-doc.noarch 0:2.32.0-1.amzn2.0.1
  perl-TermReadKey.x86_64 0:2.30-20.amzn2.0.2

Complete!
[ec2-user@ip-172-31-27-208 ~]$
```

Figure 5.9: Installing Git.

The web app also requires docker, and `yum install docker` is executed to install Docker as a result.

```
[ec2-user@ip-172-31-27-208 ~]$ sudo yum update
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
amzn2-core
No packages marked for update
[ec2-user@ip-172-31-27-208 ~]$ sudo yum install docker docker-compose
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
No package docker-compose available.
Resolving Dependencies
--> Running transaction check
--> Package docker.x86_64 0:20.10.13-2.amzn2 will be installed
--> Processing Dependency: runc >= 1.0.0 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: libcgROUP >= 0.40.rc1-5.15 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: containerD >= 1.3.2 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: pigz for package: docker-20.10.13-2.amzn2.x86_64
--> Running transaction check
--> Package containerD.x86_64 0:1.4.13-2.amzn2.0.1 will be installed
--> Package libcgROUP.x86_64 0:0.41-21.amzn2 will be installed
--> Package pigz.x86_64 0:2.3.4-1.amzn2.0.1 will be installed
--> Package runc.x86_64 0:1.0.3-2.amzn2 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package          Arch        Version           Repository      Size
=====
Installing:
 docker          x86_64    20.10.13-2.amzn2   amzn2extra-docker 40 M
Installing for dependencies:
 containerD       x86_64    1.4.13-2.amzn2.0.1  amzn2extra-docker 23 M
 libcgROUP        x86_64    0.41-21.amzn2      amzn2-core          66 k
 pigz            x86_64    2.3.4-1.amzn2.0.1  amzn2-core          81 k
 runc            x86_64    1.0.3-2.amzn2      amzn2extra-docker 3.0 M

Transaction Summary
=====
Install 1 Package (+4 Dependent packages)


Total download size: 67 M
Installed size: 280 M
Is this ok [y/d/N]: 
```

snuggle | ↵ | □ ~ | 逃跑 ssh ▾ fish ▾ bash ▾ zsh ▾ fish ▾ fish ▾ fish -fish | □ spacedust |

Figure 5.10: Installing Docker.

5.4 Web App Setup


The web app is firstly cloned from its repository via the `git clone` command, and a new `digital-ink` folder is made to store the contents.

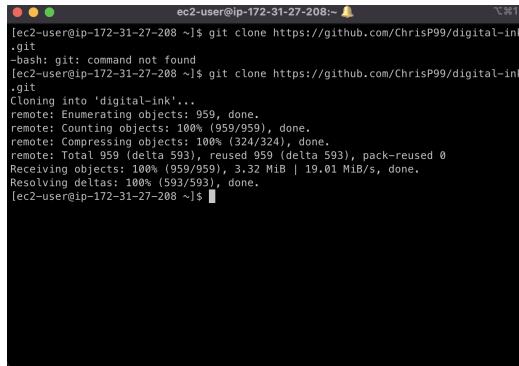

```
ec2-user@ip-172-31-27-208:~$ git clone https://github.com/ChrisP99/digital-ink
.bash: git: command not found
[ec2-user@ip-172-31-27-208:~]$ git clone https://github.com/ChrisP99/digital-ink
.git
Cloning into 'digital-ink'...
remote: Enumerating objects: 959, done.
remote: Counting objects: 100% (959/959), done.
remote: Compressing objects: 100% (324/324), done.
remote: Total 959 (delta 593), reused 959 (delta 593), pack-reused 0
Receiving objects: 100% (959/959), 3.52 MiB | 19.91 MiB/s, done.
Resolving deltas: 100% (593/593), done.
[ec2-user@ip-172-31-27-208:~]$
```

Figure 5.11: Cloning the web app from Github.

The `cd` command is used to move into the `digital-ink` folder, and the web app is subsequently launched through the `docker-compose up -d` to launch the web app as a detached Docker container. Relevant containers that are required to be downloaded from the `dockerfile` are then pulled.

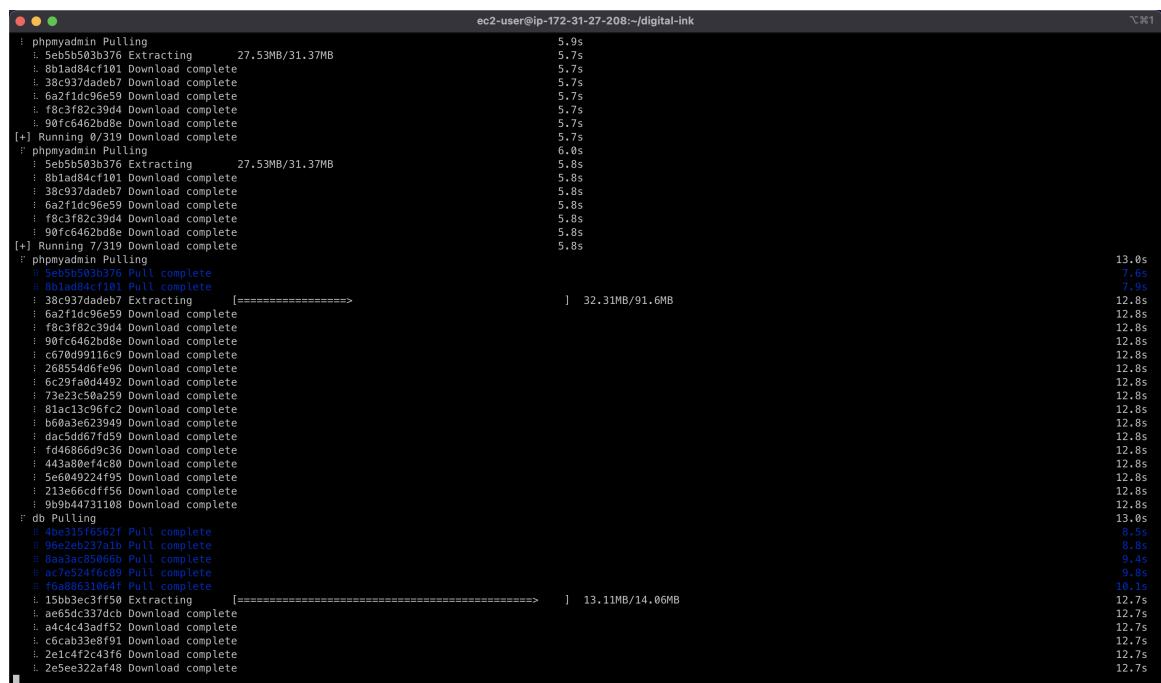

```
ec2-user@ip-172-31-27-208:~/digital-ink
: phmyadmin Pulling
: 5eb5b503b376 Extracting      27.53MB/31.37MB      5.9s
: 8b1ad84cf101 Download complete      5.7s
: 38c937dadeb7 Download complete      5.7s
: 6a2f1dc96e59 Download complete      5.7s
: f8c3f62c39d4 Download complete      5.7s
: 90fc6462bd8e Download complete      5.7s
[*] Running 0/319 Download complete      5.7s
: phmyadmin Pulling
: 5eb5b503b376 Extracting      27.53MB/31.37MB      6.0s
: 8b1ad84cf101 Download complete      5.8s
: 38c937dadeb7 Download complete      5.8s
: 6a2f1dc96e59 Download complete      5.8s
: f8c3f62c39d4 Download complete      5.8s
: 90fc6462bd8e Download complete      5.8s
[*] Running 7/319 Download complete      5.8s
: phmyadmin Pulling
: 5eb5b503b376 Pull complete      13.0s
: 8b1ad84cf101 Pull complete      7.9s
: 38c937dadeb7 Extracting      [=====]>      12.8s
: 6a2f1dc96e59 Download complete      12.8s
: f8c3f62c39d4 Download complete      12.8s
: 90fc6462bd8e Download complete      12.8s
: c670d99116c9 Download complete      12.8s
: 268554dfef96 Download complete      12.8s
: 6c29f4a04492 Download complete      12.8s
: 73e2356a259 Download complete      12.8s
: 81ac13c96fc2 Download complete      12.8s
: b66a36623949 Download complete      12.8s
: dac5d6f7059 Download complete      12.8s
: fd468660d036 Download complete      12.8s
: 413608ef4ca4 Download complete      12.8s
: 55044924f95 Download complete      12.8s
: 213e6c6cff156 Download complete      12.8s
: 9b9b44731108 Download complete      12.8s
[*] db Pulling
: 4be315f502f7 Pull complete      13.0s
: 96e2e0237a1b Pull complete      0.5s
: 8aa3a85806b6 Pull complete      8.8s
: ac7e524f6c89 Pull complete      9.4s
: f6a88653106447 Pull complete      9.8s
: 15bb3ec3ff50 Extracting      [=====]>      10.1s
: ae65dc337dc8 Download complete      12.7s
: a4c4c43adfd52 Download complete      12.7s
: c6cab33e8f91 Download complete      12.7s
: 2e1c4f2c43f6 Download complete      12.7s
: 2e5ee322af48 Download complete      12.7s
```

Figure 5.12: Containers required for the web app being pulled from Docker Hub.

The result of this command launches 3 containers:

1. `digital-ink`: An instance of the web app which uses a custom Laravel container.
2. `mysql`: An instance of a local database made in MySQL.

3.

4. `phpmyadmin`: A way to locally manage the database through a UI.

At the minute, the web app is live through the `digital-ink` and is using a local version of MySQL as a database, stored within the `mysql` Docker container. At present, the database has no tables, but can be

5.5 systemd Services

systemd services was used to ensure the automatic starting of the digital-ink web application

EVIE FILL THIS OUT YOU SILLY LLAMA

Chapter 6

Simple Storage Service

Chapter 7

CloudFront

Chapter 8

CloudWatch

Chapter 9

CloudTrail

Chapter 10

Relational Database Service

Amazon RDS service allows a user to create a fully-featured and highly-available SQL database that is automatically replicated to another availability zone. (TODO: Oops, no multi-az) This means that if the primary database becomes unavailable, there is automatic failover providing redundancy for all the data stored within.

To create an Amazon RDS instance, a suitable name/identifier for the database is required before created as well as a selection for the resource limits for the virtual server. The database requires a username and passphrase, although for additional security there is the option to automatically generate a passphrase.

Afterwards, the type of SQL database required (such as MySQL, PostgreSQL, MariaDB or others) will be selected and then the database should begin provisioning.

Chapter 11

Availability Zones

Chapter 12

Elastic Load Balancing

Chapter 13

Security Practices

Chapter 14

Cost Breakdown

- 14.1 Estimated Costs**
- 14.2 Scaling Up to 10,000 Users**
- 14.3 Scaling Up to 1 Million Users**
- 14.4 Scaling Up to 10 Million Users**

Chapter 15

Testing

This chapter of the report will detail the testing conducted on the configured AWS services. This was done to determine the accuracy and efficiency of the configurations made during the deployment process. The testing was conducted by using Gherkin, a language used to define behaviour and test cases (**dos2018automated**). It is non-technical and is intended to be easily human-readable. Gherkin uses set keywords for structure and meaning: Given, When, and Then. An example of this structure can be seen in Figure 15.1.

```
Scenario: ...
  Given ...
  When ...
  Then ...
```

Figure 15.1: Gherkin example.

EC2, S3, CloudFront, RDS, CloudWatch, and CloudTrail were all tested using this approach. Screenshots are included to illustrate the results of these tests.

15.1 Testing EC2

```
Scenario: Accessing instance through SSH with \mintinline{sql}|.pem| file private key
  Given ...
  When ...
  Then ...

Scenario: Accessing web app through EC2 domain name.
  Given ...
  When ...
  Then ...
```

15.2 Testing S3

```
Scenario: Accessing web app image through S3 domain name.
  Given ...
  When ...
  Then ...
```

15.3 Testing CloudFront

```
Scenario: Accessing web app image through CloudFront domain name.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Accessing web app image through CloudFront domain name in another region.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Accessing web app image through CloudFront domain name in another IP address.  
  Given ... (NSLookup test)  
  When ...  
  Then ...
```

Figure 15.2: ...

15.4 Testing RDS

```
Scenario: Creating user information through the web app.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Creating story information through the web app.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Reading user information from the database into the web app.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Reading story information from the database into the web app.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Updating user information in the database through the web app.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Updating story information in the database through the web app.  
  Given ...  
  When ...  
  Then ...
```

15.5 Testing CloudWatch

(One test for each of the metrics we set up.)

```
Scenario: Deleting user information in the database through the web app.  
  Given ...  
  When ...  
  Then ...  
  
Scenario: Deleting story information in the database through the web app.  
  Given ...  
  When ...  
  Then ...  
  
Scenario:  
  Given ...  
  When ...  
  Then ...
```

15.6 Testing CloudTrail

(One test for each of the metrics we set up.)

```
Scenario:  
  Given ...  
  When ...  
  Then ...
```

15.7 Testing ELB

(Test for turning off instance 1. Test for turning off instance 2.)

Chapter 16

Future Enhancements

Chapter 17


Conclusion

References

- Amazon Web Services (AWS) (2022a). *What is Amazon EC2?* AVAILABLE AT: <https://docs.aws.amazon.com/AWSEC2/latest/UserGuide/concepts.html>.
- (2022b). *What is Amazon VPC?* AVAILABLE AT: <https://docs.aws.amazon.com/vpc/latest/userguide/what-is-amazon-vpc.html>.
- Anderson, C. (2015). “Docker [software engineering]”. In: *IEEE Software* 32.3, pp. 102–c3. AVAILABLE AT: <https://doi.org/10.1109/MS.2015.62>.
- Fielding, R. T. and G. Kaiser (1997). “The Apache HTTP server project”. In: *IEEE Internet Computing* 1.4, pp. 88–90. AVAILABLE AT: <https://doi.org/10.1109/4236.612229>.
- Laravel (2022a). *Blade Templates*. AVAILABLE AT: <https://laravel.com/docs/9.x/blade>.
- (2022b). *Hashing*. AVAILABLE AT: <https://laravel.com/docs/9.x/hashing>.
- Lee, J. and B. Ware (2003). *Open Source Web Development with LAMP: Using Linux, Apache, MySQL, Perl, and PHP*. Addison-Wesley Professional. AVAILABLE AT: <https://isbnsearch.org/isbn/9780201770612>.
- Lerdorf, R. et al. (2002). *Programming PHP*. " O'Reilly Media, Inc.". AVAILABLE AT: <https://isbnsearch.org/isbn/9781565926103>.
- Widenius, M., D. Axmark, and K. Arno (2002). *MySQL reference manual: documentation from the source*. " O'Reilly Media, Inc.". AVAILABLE AT: <https://isbnsearch.org/isbn/9780596002657>.


Appendix A: Screenshots

I am an appendix, please be kind.

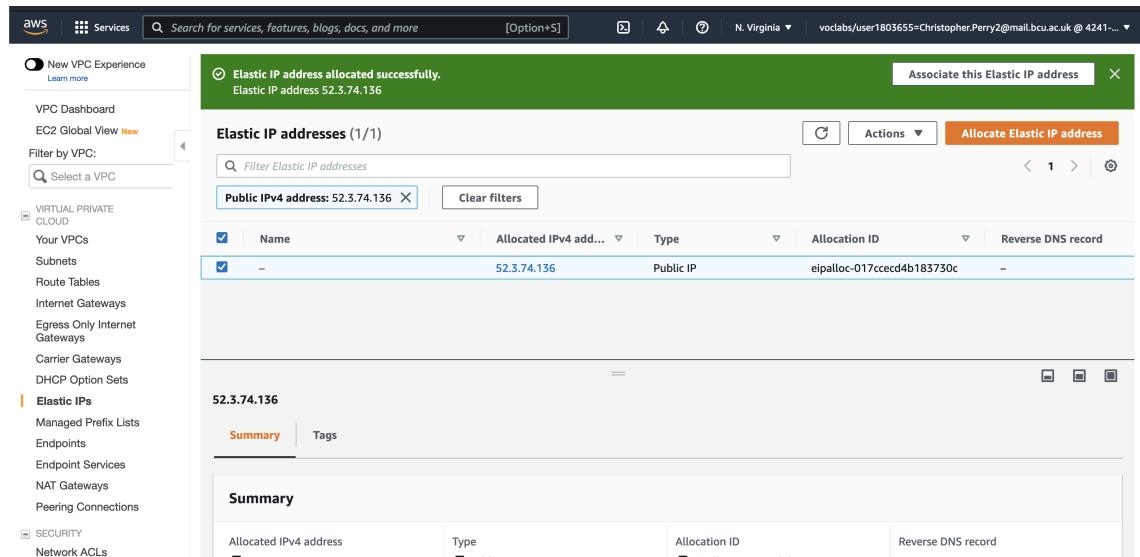


The screenshot shows the AWS VPC Elastic IP addresses page. At the top, a green banner displays the message "Elastic IP address allocated successfully." followed by the allocated IP address "52.3.74.136". Below the banner, the main interface shows a table of "Elastic IP addresses (1/1)". The table has columns for Name, Allocated IPv4 add..., Type, Allocation ID, and Reverse DNS record. One row is listed with the values: Name (checkbox selected), Allocated IPv4 add... (52.3.74.136), Type (Public IP), Allocation ID (eipalloc-017ccecd4b183730c), and Reverse DNS record (empty). Below the table, a summary card for the IP address 52.3.74.136 provides details such as Allocated IPv4 address, Type, Allocation ID, and Reverse DNS record.

Figure A.1: After Allocating Elastic IP Address

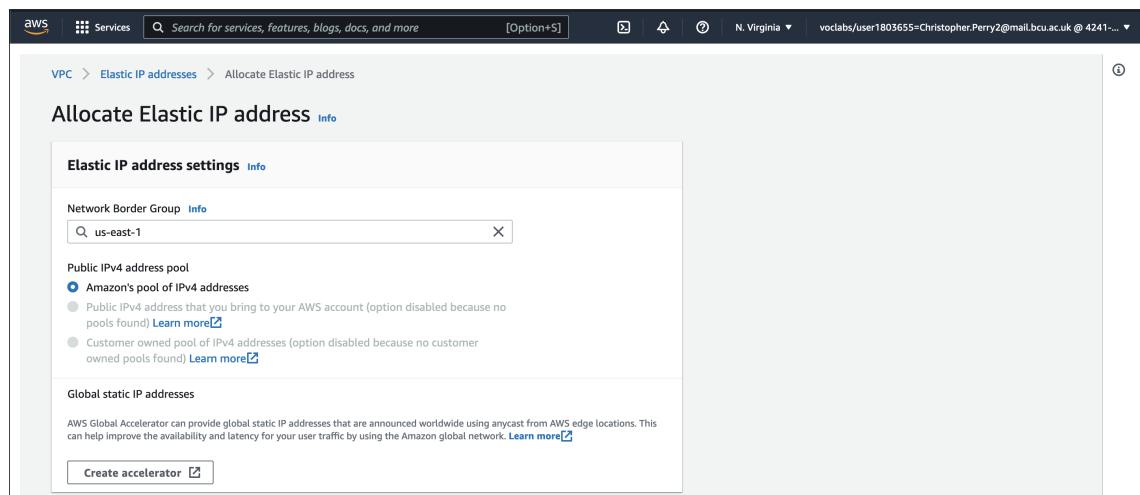

The screenshot shows the "Allocate Elastic IP address" settings page. The "Elastic IP address settings" section includes a "Network Border Group" dropdown set to "us-east-1". Under "Public IPv4 address pool", the "Amazon's pool of IPv4 addresses" option is selected. There is also a note about public IPv4 addresses being disabled because no pools were found. The "Global static IP addresses" section contains a note about AWS Global Accelerator and a "Create accelerator" button.

Figure A.2: Allocating Elastic IP Address

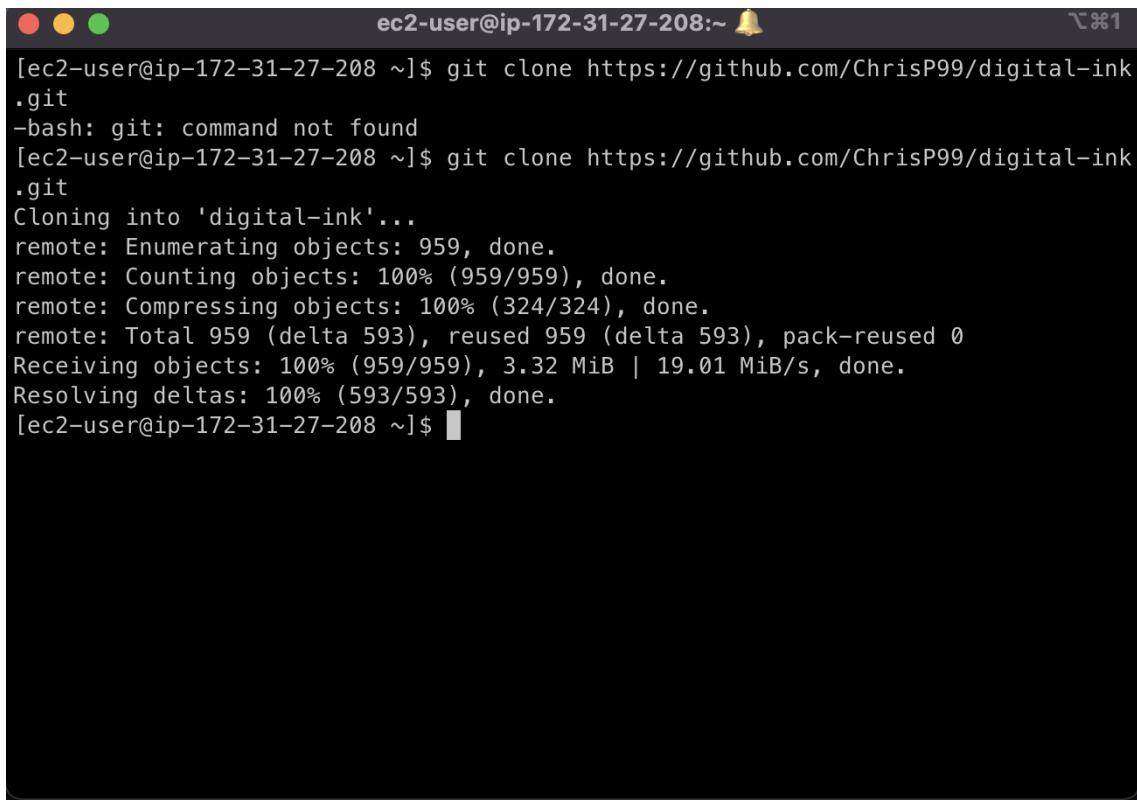

```
ec2-user@ip-172-31-27-208:~$ git clone https://github.com/ChrisP99/digital-ink.git
-bash: git: command not found
[ec2-user@ip-172-31-27-208 ~]$ git clone https://github.com/ChrisP99/digital-ink.git
Cloning into 'digital-ink'...
remote: Enumerating objects: 959, done.
remote: Counting objects: 100% (959/959), done.
remote: Compressing objects: 100% (324/324), done.
remote: Total 959 (delta 593), reused 959 (delta 593), pack-reused 0
Receiving objects: 100% (959/959), 3.32 MiB | 19.01 MiB/s, done.
Resolving deltas: 100% (593/593), done.
[ec2-user@ip-172-31-27-208 ~]$
```

Figure A.3: Cloning the App

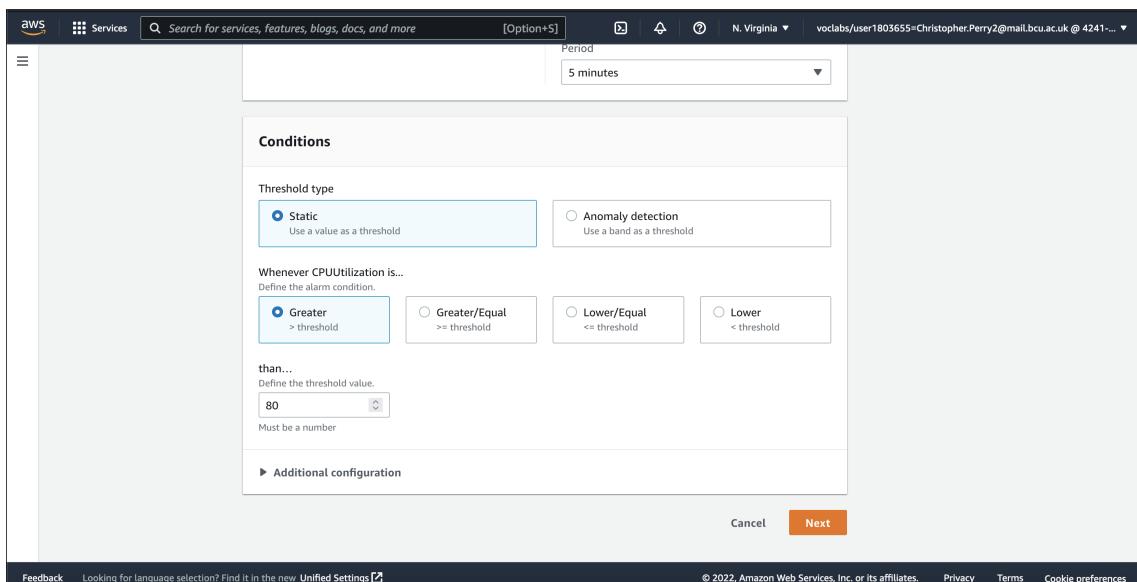


Figure A.4: CloudWatch Conditions

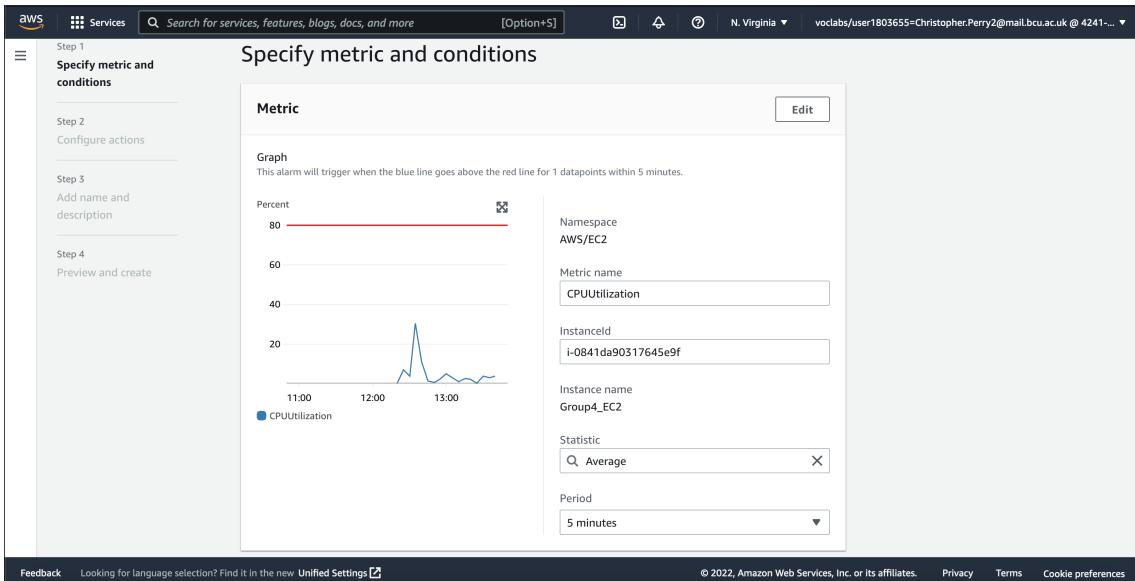


Figure A.5: CloudWatch Specify Metric

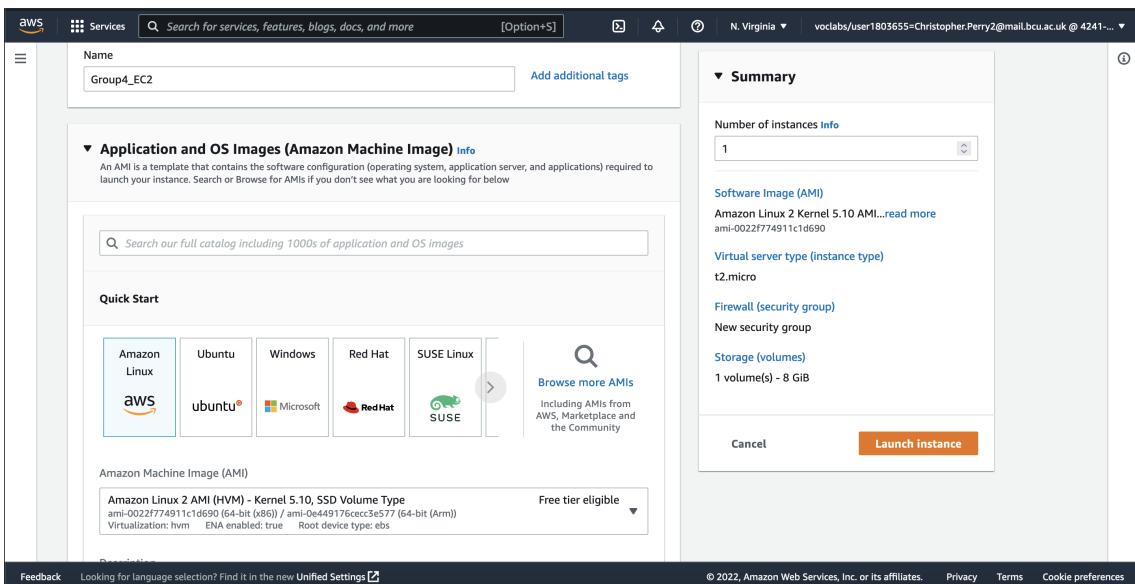


Figure A.6: Create Instance - Application and OS Images

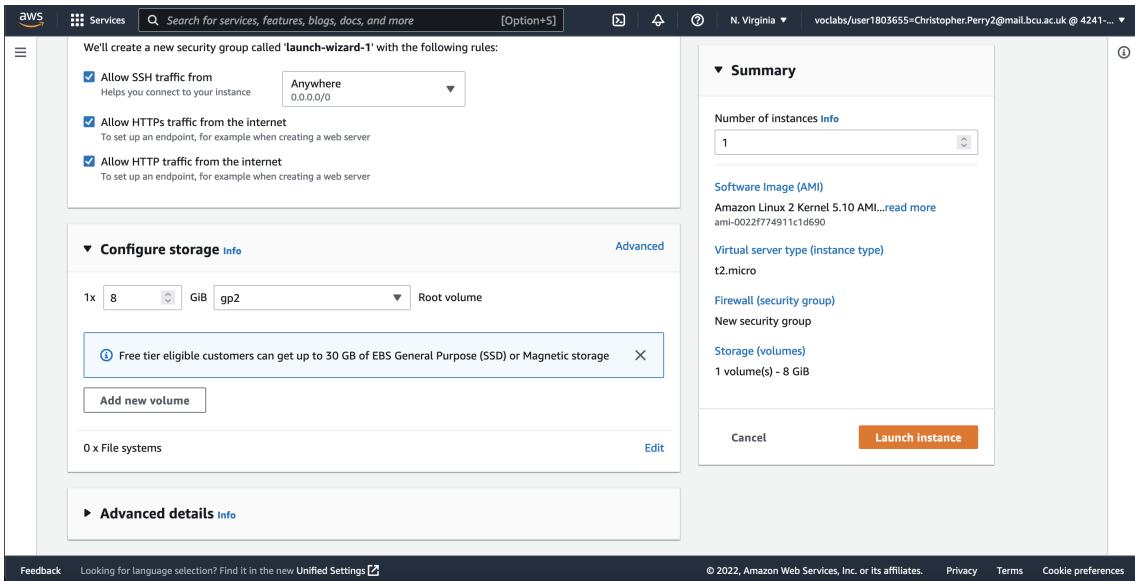


Figure A.7: Create Instance - Configure Storage

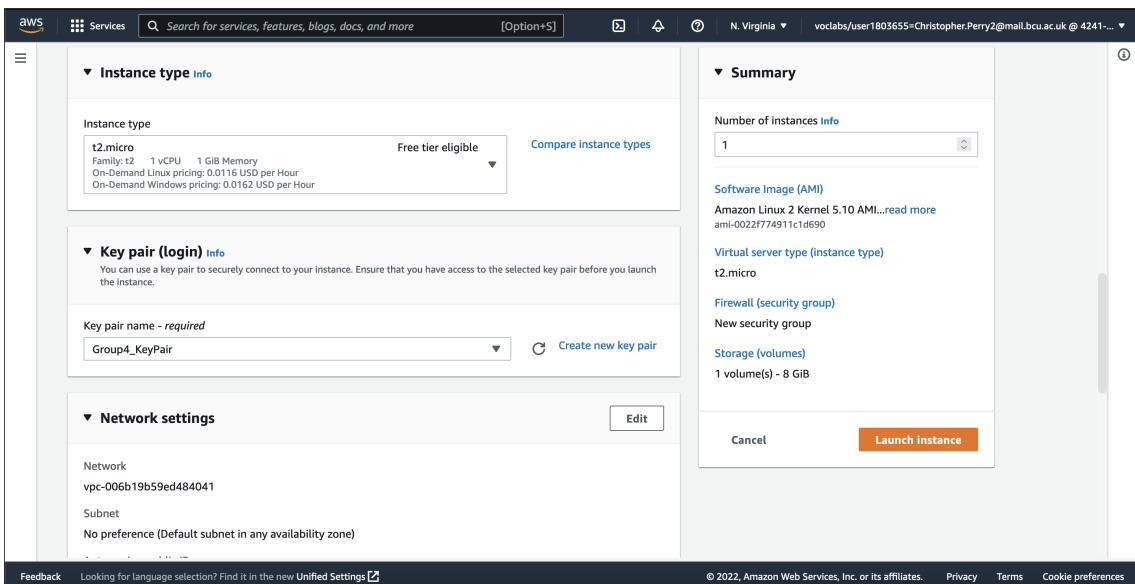


Figure A.8: Create Instance - Instance Type

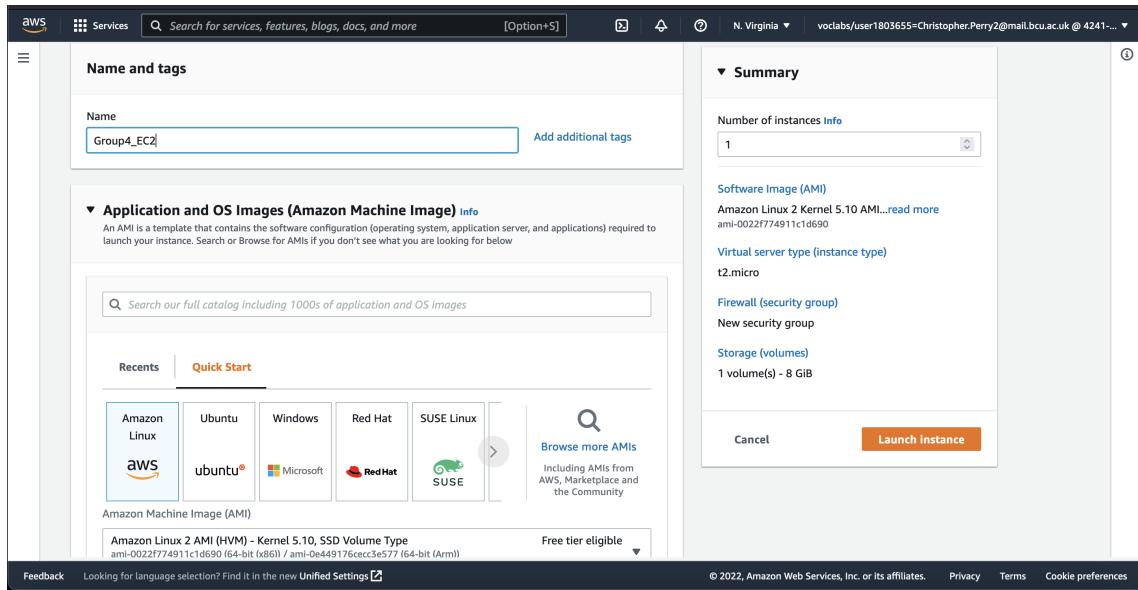


Figure A.9: Create Instance - Name & Tags

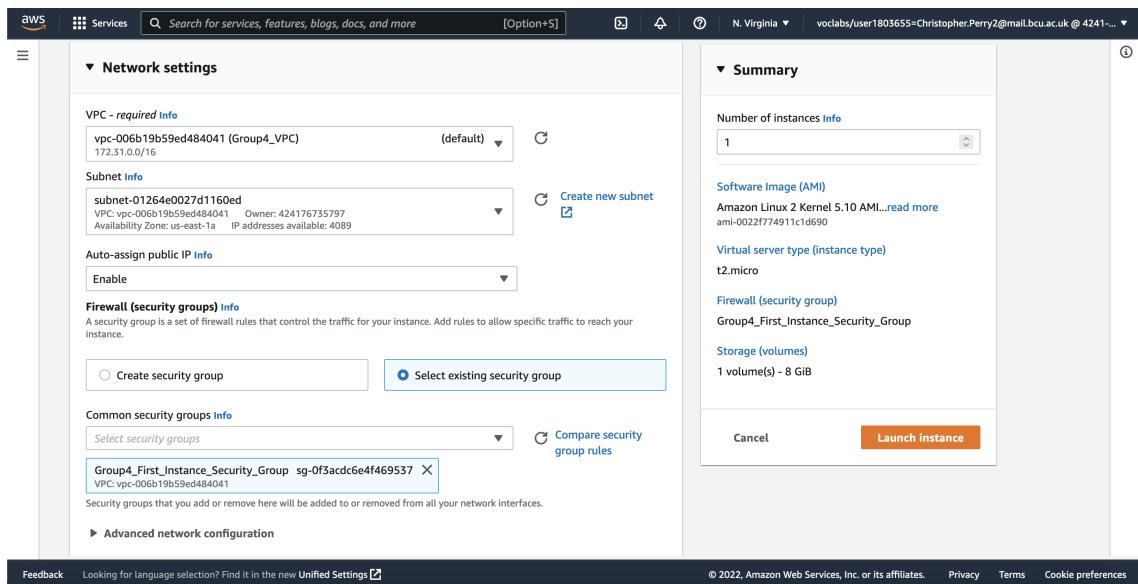


Figure A.10: Create Instance - Network Settings

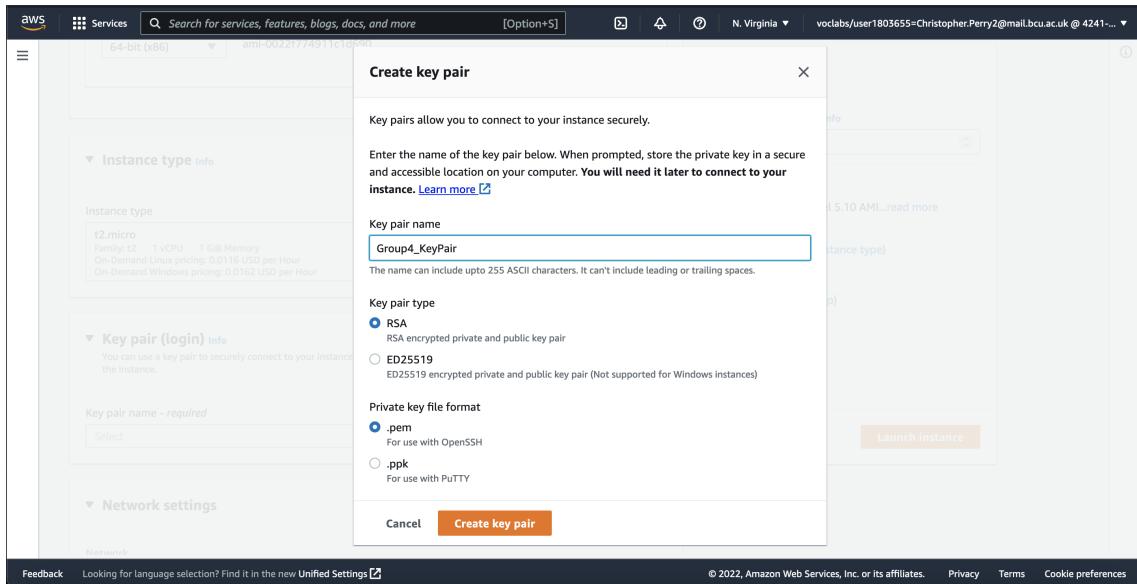


Figure A.11: Creating Key Pair

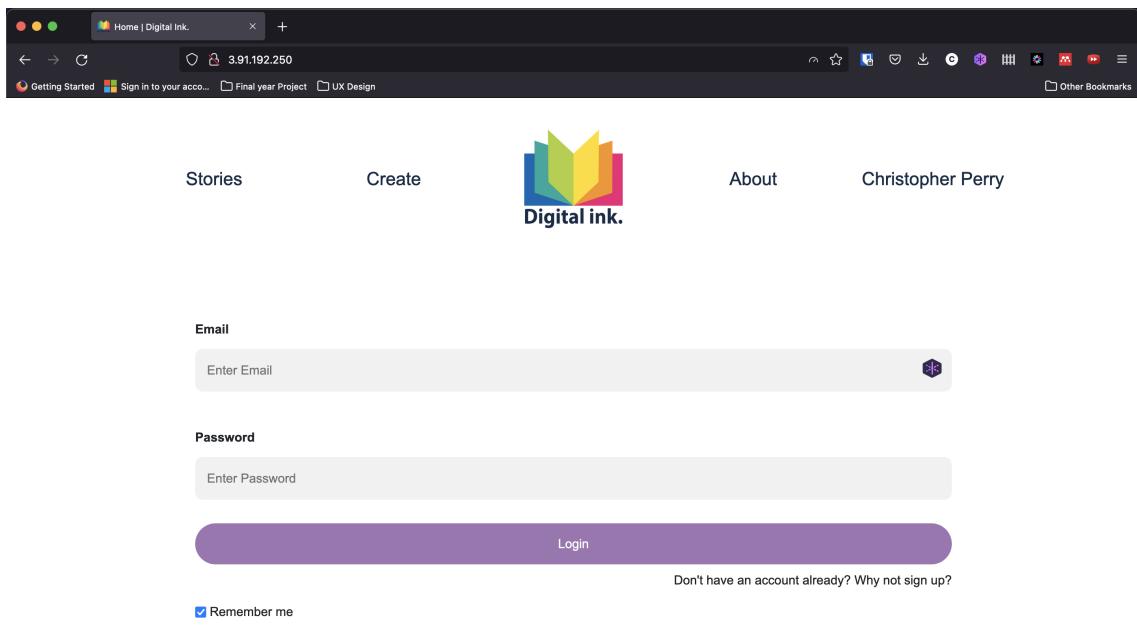


Figure A.12: Digital Ink

```
ec2-user@ip-172-31-27-208:~/digital-ink

: phpmyadmin Pulling
: 5eb5b503b376 Extracting      27.53MB/31.37MB          5.9s
: 8b1a0d84cf101 Download complete                         5.7s
: 38c937addeb7 Download complete                         5.7s
: 6a2f1dc96e59 Download complete                         5.7s
: f8c3f82c39d4 Download complete                         5.7s
: 90fc6462b088 Download complete                         5.7s
[+] Running 0/319 Download complete
: phpmyadmin Pulling
: 5eb5b503b376 Extracting      27.53MB/31.37MB          6.0s
: 8b1a0d84cf101 Download complete                         5.8s
: 38c937addeb7 Download complete                         5.8s
: 6a2f1dc96e59 Download complete                         5.8s
: f8c3f82c39d4 Download complete                         5.8s
: 90fc6462b088 Download complete                         5.8s
[+] Running 7/319 Download complete
: phpmyadmin Pulling
: 5eb5b503b376 Pull complete
: 8b1a0d84cf101 Pull complete
: 38c937addeb7 Extracting      [=====] 32.31MB/91.6MB
: 6a2f1dc96e59 Download complete                         12.8s
: f8c3f82c39d4 Download complete                         12.8s
: 90fc6462b088 Download complete                         12.8s
: c670d99116c9 Download complete                         12.8s
: 268554d6fe96 Download complete                         12.8s
: 6c29fa0d4492 Download complete                         12.8s
: 73c23c0a259 Download complete                         12.8s
: 81ac13c96fc2 Download complete                         12.8s
: b60a3e6c23949 Download complete                         12.8s
: dac5dd67fd59 Download complete                         12.8s
: fd46866d9c36 Download complete                         12.8s
: 443a80ef4c80 Download complete                         12.8s
: 5e0049224f95 Download complete                         12.8s
: 213e66cdf7f56 Download complete                         12.8s
: 9b9b44731108 Download complete                         12.8s
[+] db Pulling
: 15bb3e15f562 Pull complete
: 96c2ab037a1b Pull complete
: 8aa3ac85066b Pull complete
: ac7e524fc98 Pull complete
: f6a88631064f Pull complete
: 15bb3e3cf1f50 Extracting      [=====] 13.11MB/14.06MB
: ae65dc337dc8 Download complete                         12.7s
: ad4c4c43adaf5f2 Download complete                         12.7s
: c6cab33e8ff1 Download complete                         12.7s
: 2e1cf2c43f16 Download complete                         12.7s
: 2e5ee322aaf48 Download complete                         12.7s
```

Figure A.13: Docker Compose

The screenshot shows the AWS Launch Wizard interface for creating a new Amazon Linux 2 instance. The 'Network settings' section includes a subnet (vpc-006b19b59ed484041) and security group rules for SSH, HTTP, and HTTPS traffic. The 'Summary' section shows one instance, the chosen AMI (Amazon Linux 2 Kernel 5.10 AMI), and the instance type (t2.micro). The 'Configure storage' section shows a root volume of 8 GiB. At the bottom, there are 'Cancel' and 'Launch instance' buttons.

aws Services Search for services, features, blogs, docs, and more [Option+Shift]

Services Search for services, features, blogs, docs, and more [Option+Shift]

N. Virginia v vclabs/user1803655=Christopher.Perry2@mail.bcu.ac.uk @ 4241...

☰

▼ Network settings

Network
vpc-006b19b59ed484041

Subnet
No preference (Default subnet in any availability zone)

Auto-assign public IP
Enable

Security groups (Firewall) Info

We'll create a new security group called 'launch-wizard-1' with the following rules:

Allow SSH traffic from Anywhere
Helps you connect to your instance 0.0.0.0/0 ▾

Allow HTTPs traffic from the internet
To set up an endpoint, for example when creating a web server

Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server

▼ Summary

Number of instances Info
1

Software Image (AMI)
Amazon Linux 2 Kernel 5.10 AMI...read more
ami-0022f774911c1d690

Virtual server type (instance type)
t2.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

Cancel Launch instance

▼ Configure storage Info Advanced

1x 8 GiB gp2 Root volume

Feedback Looking for language selection? Find it in the new Unified Settings

© 2022, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Figure A.14: Edit Instance - Network Settings

```
[ec2-user@ip-172-31-27-208 ~]$ sudo yum update
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
amzn2-core
| 3.7 kB  00:00:00
No packages marked for update
[ec2-user@ip-172-31-27-208 ~]$ sudo yum install docker docker-compose
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
No package docker-compose available.
Resolving Dependencies
--> Running transaction check
--> Package docker x86_64 0:20.10.13-2.amzn2 will be installed
--> Processing Dependency: runc >= 1.0.0 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: libcgroup >= 0.40.rcl5.15 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: containerd >= 1.3.2 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: pigz for package: docker-20.10.13-2.amzn2.x86_64
--> Running transaction check
--> Package containerd.x86_64 0:1.4.13-2.amzn2.0.1 will be installed
--> Package libcgroup.x86_64 0:0.41-21.amzn2 will be installed
--> Package pigz.x86_64 0:2.3.4-1.amzn2.0.1 will be installed
--> Package runc.x86_64 0:1.0.3-2.amzn2 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
| Package      | Arch   | Version       | Repository | Size |
|=====|
| docker       | x86_64 | 20.10.13-2.amzn2 | amzn2extra-docker | 40 M |
|=====|
Installing:
| docker       | x86_64 | 20.10.13-2.amzn2 | amzn2extra-docker | 40 M |
Installing for dependencies:
| containerd  | x86_64 | 1.4.13-2.amzn2.0.1 | amzn2extra-docker | 23 M |
| libcgroup   | x86_64 | 0.41-21.amzn2    | amzn2-core        | 66 k |
| pigz        | x86_64 | 2.3.4-1.amzn2.0.1 | amzn2-core        | 81 k |
| runc        | x86_64 | 1.0.3-2.amzn2    | amzn2extra-docker | 3.0 M |
|=====|
Transaction Summary
=====
Install 1 Package (<4 Dependent packages)

Total download size: 67 M
Installed size: 280 M
Is this ok [D/y/N]: [ ] 54% ━━━━━━ 5.2 GB ━━━━━━ 0 18% ━━━━ 5-04, 1:31 PM
```

Figure A.15: Installing Docker using Package Manager

```
Resolving Dependencies
--> Running transaction check
--> Package docker.x86_64 0:20.10.13-2.amzn2 will be installed
--> Processing Dependency: runc >= 1.0.0 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: libcgroup >= 0.40.rcl5.15 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: containerd >= 1.3.2 for package: docker-20.10.13-2.amzn2.x86_64
--> Processing Dependency: pigz for package: docker-20.10.13-2.amzn2.x86_64
--> Running transaction check
--> Package containerd.x86_64 0:1.4.13-2.amzn2.0.1 will be installed
--> Package libcgroup.x86_64 0:0.41-21.amzn2 will be installed
--> Package pigz.x86_64 0:2.3.4-1.amzn2.0.1 will be installed
--> Package runc.x86_64 0:1.0.3-2.amzn2 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
| Package      | Arch   | Version       | Repository | Size |
|=====|
| docker       | x86_64 | 20.10.13-2.amzn2 | amzn2extra-docker | 40 M |
|=====|
Installing:
| docker       | x86_64 | 20.10.13-2.amzn2 | amzn2extra-docker | 40 M |
Installing for dependencies:
| containerd  | x86_64 | 1.4.13-2.amzn2.0.1 | amzn2extra-docker | 23 M |
| libcgroup   | x86_64 | 0.41-21.amzn2    | amzn2-core        | 66 k |
| pigz        | x86_64 | 2.3.4-1.amzn2.0.1 | amzn2-core        | 81 k |
| runc        | x86_64 | 1.0.3-2.amzn2    | amzn2extra-docker | 3.0 M |
|=====|
Transaction Summary
=====
Install 1 Package (<4 Dependent packages)

Total download size: 67 M
Installed size: 280 M
Is this ok [D/y/N]: y
Downloading packages:
(1/5): libcgroup-0.41-21.amzn2.x86_64.rpm          | 66 kB  00:00:00
(2/5): pigz-2.3.4-1.amzn2.0.1.x86_64.rpm          | 81 kB  00:00:00
(3/5): containerd-1.4.13-2.amzn2.0.1.x86_64.rpm  | 23 MB  00:00:00
(4/5): docker-20.10.13-2.amzn2.x86_64.rpm         | 40 MB  00:00:00
(5/5): runc-1.0.3-2.amzn2.x86_64.rpm              | 3.0 MB  00:00:00
| 66 MB/s | 67 MB  00:00:01
Total
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : runc-1.0.3-2.amzn2.x86_64          1/5
  Installing : containerd-1.4.13-2.amzn2.0.1.x86_64
  Installing : libcgroup-0.41-21.amzn2.x86_64      2/5
  Installing : pigz-2.3.4-1.amzn2.0.1.x86_64       3/5
  Installing : docker-20.10.13-2.amzn2.x86_64     4/5
  Installing : [#####] 5/5
| 74% ━━━━━━ 5.3 GB ━━━━━━ 0 18% ━━━━ 5-04, 1:31 PM
```

Figure A.16: Installing Docker using Package Manager (In Progress)

```

git-core          x86_64      2.32.0-1.amzn2.0.1           amzn2-core          4.8 M
git-core-doc     noarch      2.32.0-1.amzn2.0.1           amzn2-core          2.7 M
perl-Error       noarch      1:0.17020-2.amzn2             amzn2-core          32 k
perl-Git         noarch      2.32.0-1.amzn2.0.1           amzn2-core          43 k
perl-TermReadKey x86_64      2.30-20.amzn2.0.2           amzn2-core          31 k

Transaction Summary
=====
Install 1 Package (+6 Dependent packages)

Total download size: 7.8 M
Installed size: 38 M
Is this ok [y/N]: y
Downloading packages:
(1/7): emacs-filesystem-27.2-4.amzn2.0.1.noarch.rpm | 67 kB 00:00:00
(2/7): git-2.32.0-1.amzn2.0.1.x86_64.rpm | 126 kB 00:00:00
(3/7): git-core-doc-2.32.0-1.amzn2.0.1.noarch.rpm | 2.7 MB 00:00:00
(4/7): perl-Error-0.17020-2.amzn2.noarch.rpm | 32 kB 00:00:00
(5/7): perl-Git-2.32.0-1.amzn2.0.1.noarch.rpm | 43 kB 00:00:00
(6/7): git-core-2.32.0-1.amzn2.0.1.x86_64.rpm | 4.8 MB 00:00:00
(7/7): perl-TermReadKey-2.30-20.amzn2.0.2.x86_64.rpm | 31 kB 00:00:00
29 MB/s | 7.8 MB 00:00:00

Total
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : git-core-2.32.0-1.amzn2.0.1.x86_64
  Installing : git-core-doc-2.32.0-1.amzn2.0.1.noarch
  Installing : 1:perl-Error-0.17020-2.amzn2.noarch
  Installing : 1:emacs-filesystem-27.2-4.amzn2.0.1.noarch
  Installing : perl-TermReadKey-2.30-20.amzn2.0.2.x86_64
  Installing : git-2.32.0-1.amzn2.0.1.noarch
  Verifying  : git-core-2.32.0-1.amzn2.0.1.noarch
  Verifying  : perl-Git-2.32.0-1.amzn2.0.1.noarch
  Verifying  : 1:emacs-filesystem-27.2-4.amzn2.0.1.noarch
  Verifying  : git-2.32.0-1.amzn2.0.1.x86_64
  Verifying  : git-core-2.32.0-1.amzn2.0.1.x86_64
  Verifying  : 1:perl-Error-0.17020-2.amzn2.noarch
Installed:
  git.x86_64 0:2.32.0-1.amzn2.0.1

Dependency Installed:
  emacs-filesystem.noarch 1:27.2-4.amzn2.0.1  git-core.x86_64 0:2.32.0-1.amzn2.0.1  git-core-doc.noarch 0:2.32.0-1.amzn2.0.1  perl-Error.noarch 1:0.17020-2.amzn2  perl-Git.noarch 0:2.32.0-1.amzn2.0.1
  perl-TermReadKey.x86_64 0:2.30-20.amzn2.0.2

Complete!
[ec2-user@ip-172-31-27-208 ~]$ snuffle | ▶ | □ ~ | ▶ ssh + fish + bash + zsh + fish + fish + fish + fish + fish + fish + spacedust | 59% ↗ 5.4 GB ————— | 19% ↗ 5-04, 1:33 PM

```

Figure A.17: Installing Git

```

ec2-user@ip-172-31... #1
          Load  Upload Total Spent Left Speed
~ (-fish) #2 0   0   0   0   0   0   0   0   0   0   0   0   0
0   0   0   0   0   0   0   0   0   0   0   0   0
100 25.2M 100 25.2M 0   0 39.1M 0   0   0   0   0   0   0
[ec2-user@ip-172-31-27-208 digital-in]$ uname -a
Linux ip-172-31-27-208.ec2.internal 5.10.109-104.500.amzn2.x86_64 #1 SMP Wed Apr 13 20:31:43 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
[ec2-user@ip-172-31-27-208 digital-in]$ cat /etc/*-release
NAME="Amazon Linux"
VERSION="2"
ID="amzn"
ID_LIKE="centos rhel fedora"
VERSION_ID="2"
PRETTY_NAME="Amazon Linux 2"
ANSI_COLOR="0;33"
CPE_NAME="cpe:2.3:o:amazon:amazon_linux:2"
HOME_URL="https://amazonlinux.com/"
Amazon Linux 2 (Xen)
[ec2-user@ip-172-31-27-208 digital-in]$ sudo chmod +x /usr/local/bin/docker-compose
[ec2-user@ip-172-31-27-208 digital-in]$ docker-compose --version
Docker Compose version v2.5.0
[ec2-user@ip-172-31-27-208 digital-in]$ systemctl status docker
● docker.service - Docker Application Container Engine
  Loaded: loaded (/usr/lib/systemd/system/docker.service; disabled; vendor preset: disabled)
  Active: inactive (dead)
    Docs: https://docs.docker.com
[ec2-user@ip-172-31-27-208 digital-in]$ sudo systemctl start docker
[ec2-user@ip-172-31-27-208 digital-in]$ systemctl status docker
● docker.service - Docker Application Container Engine
  Loaded: loaded (/usr/lib/systemd/system/docker.service; disabled; vendor preset: disabled)
  Active: active (running) since Wed 2022-05-04 12:40:06 UTC; 1s ago
    Docs: https://docs.docker.com
  Process: 3788 ExecStartPre=/usr/libexec/docker/docker-setup-runtimes.sh (code=exited, status=0/SUCCESS)
  Main PID: 3791 (dockerd)
    Tasks: 7
   Memory: 26.9M
      CGroup: /system.slice/docker.service
              └─3791 /usr/bin/dockerd -H fd:// --containerd=/run/containerd/containerd.sock --default-ulimit nofile=32768:65536

May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="ClientConn switching balancer to \"pick_first\""
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=warning msg="Your kernel does not support cgroup blkio weight"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=warning msg="Your kernel does not support cgroup blkio weight_device"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Loading containers: start"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Default bridge (docker0) is assigned with an IP address... address"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Loading containers: done."
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Docker daemon" commit="906f57f graphdriver(s)=overlay..=20.10.13"
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="Daemon has completed initialization"
May 04 12:40:06 ip-172-31-27-208.ec2.internal systemd[1]: Started Docker Application Container Engine.
May 04 12:40:06 ip-172-31-27-208.ec2.internal dockerd[3791]: time="2022-05-04T12:40:06+00:00" level=info msg="API listen on /run/docker.sock"
Hint: Some lines were ellipsized, use -l to show in full.
[ec2-user@ip-172-31-27-208 digital-in]$

snuffle | ▶ | □ ~ | ▶ ssh + fish + bash + zsh + fish + fish + fish + fish + spacedust | 67% ↗ 5.4 GB ————— | 26% ↗ 5-04, 1:40 PM

```

Figure A.18: Starting Docker systemd Service

The screenshot shows the AWS EC2 Instances page. On the left, there's a sidebar with links like EC2 Dashboard, EC2 Global View, Events, Tags, Limits, Instances (with sub-links for Instances, Instance Types, Launch Templates, Spot Requests, Savings Plans, Reserved Instances, Dedicated Hosts, Scheduled Instances, Capacity Reservations), and Images (with sub-links for AMIs and AMI Catalog). The main content area has a title 'Instances (2) Info' and a search bar. A table lists two instances: 'Group4_EC2' (terminated, t2.micro, us-east-1d) and 'Group4_EC2' (running, t2.micro, us-east-1d). Below the table is a modal titled 'Select an instance'.

Figure A.19: Instances

The screenshot shows the 'Launching instance' step of the AWS EC2 instance launch process. It includes a progress bar at 80% completion, a 'Launch initiation' status, and a 'Details' link. A message at the top says 'You've been opted into the new launch experience. Find out more about this experience or send us feedback. You can still return to the previous version by opting-out.' There's also an 'Opt-out to the old experience' button.

Figure A.20: Launching Instance

```

ec2-user@ip-172-31-27-208:~/digital-ink
logout
Connection to 3.91.192.250 closed.
> ssh -i ~/Desktop/Group4_KeyPair.pem ec2-user@3.91.192.250
Last login: Wed May  4 13:21:09 2022 from 193.60.143.12
  _\|_ _\|_
 _\| (   /  Amazon Linux 2 AMI
  _\|_\|_|_|
https://aws.amazon.com/amazon-linux-2/
[ec2-user@ip-172-31-27-208 ~]$ cd digital-ink
[ec2-user@ip-172-31-27-208 digital-ink]$ cd ..
[ec2-user@ip-172-31-27-208 ~]$ sudo mv digital-ink digital-ink.old
[ec2-user@ip-172-31-27-208 ~]$ git clone https://github.com/ChrisP99/digital-ink.git
Cloning into 'digital-ink'...
remote: Enumerating objects: 9909, done.
remote: Counting objects: 100% (9909/9909), done.
remote: Compressing objects: 100% (6382/6382), done.
remote: Total 9909 (delta 3080), reused 9863 (delta 3034), pack-reused 0
Receiving objects: 100% (9909/9909), 17.59 MiB | 14.30 MiB/s, done.
Resolving deltas: 100% (3080/3080), done.
Updating files: 100% (8963/8963), done.
[ec2-user@ip-172-31-27-208 ~]$ cd digital-ink
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose up -d
[*] Running 3/3
  • Container digital-ink-db-1  Running
  • Container phpmyadmin  Running
  • Container digital-ink-app-1  Started
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose down
[*] Running 4/4
  • Container phpmyadmin  Removed
  • Container digital-ink-app-1  Removed
  • Container digital-ink-db-1  Removed
  • Network digital-ink_default  Removed
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose up -d
[*] Running 4/4
  • Network digital-ink_default  Created
  • Container digital-ink-db-1  Started
  • Container phpmyadmin  Started
  • Container digital-ink-app-1  Started
[ec2-user@ip-172-31-27-208 digital-ink]$ sudo /usr/local/bin/docker-compose exec app bash
root@c565ab9c37ff:/srv/app# php artisan migrate
Nothing to migrate.
root@c565ab9c37ff:/srv/app# 

```

Figure A.21: Log In with Key Pair

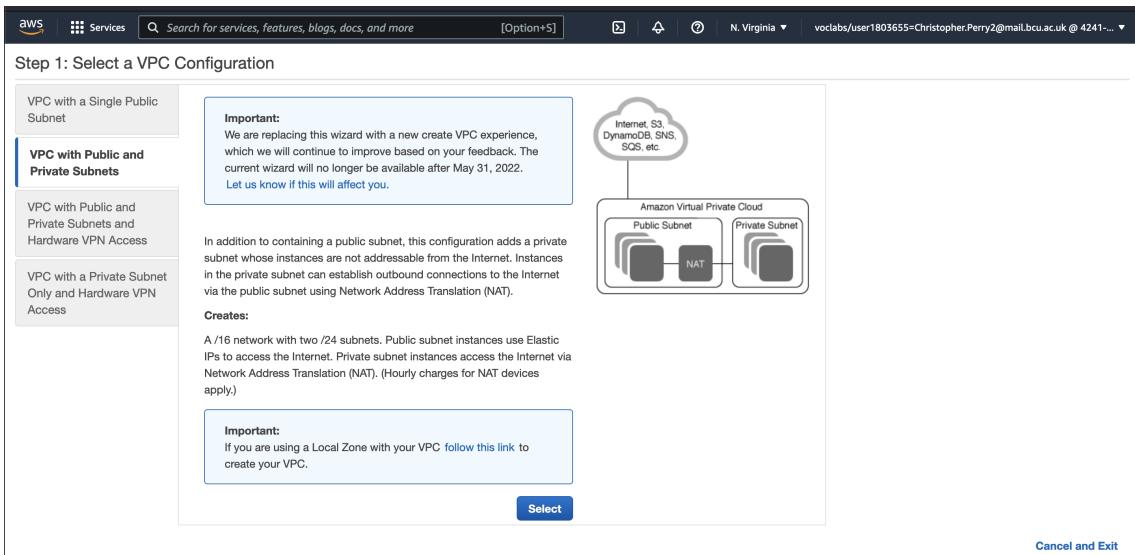


Figure A.22: Selecting a VPC Configuration

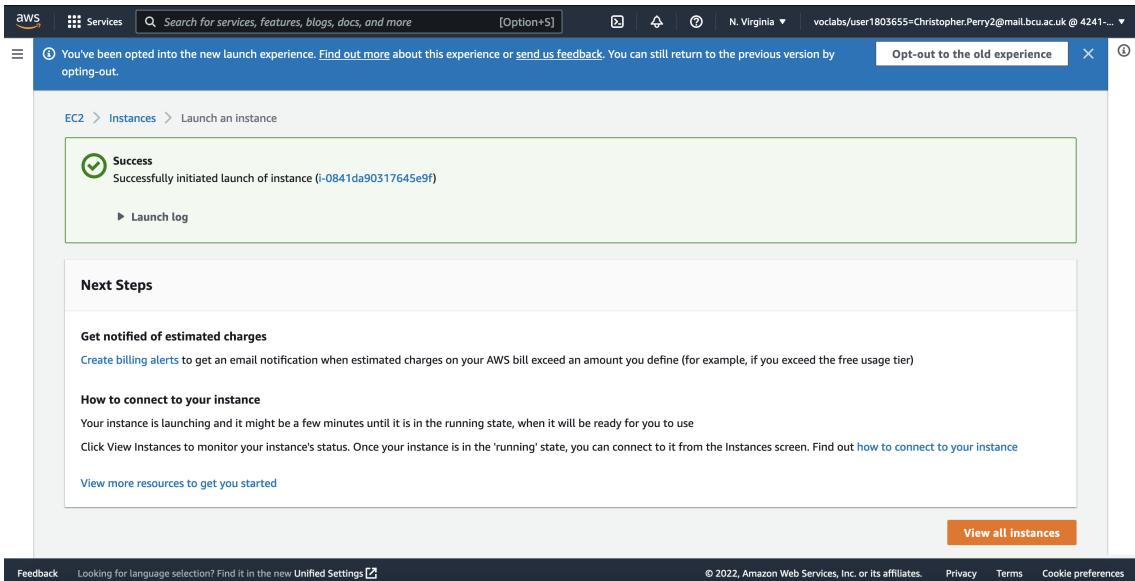


Figure A.23: Successfully Initiated Instance

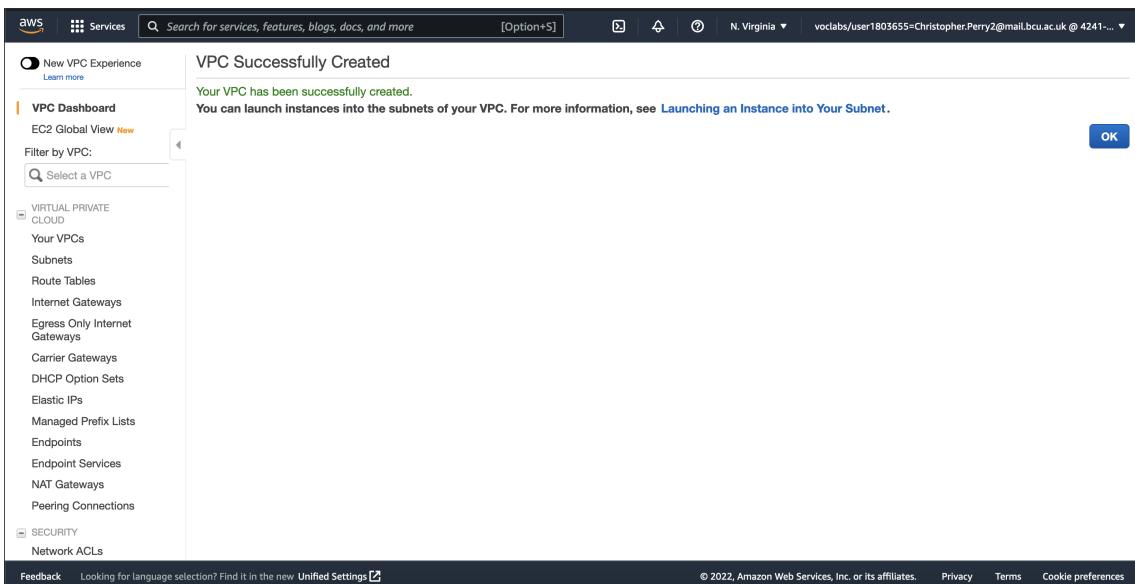


Figure A.24: VPC Successfully Created

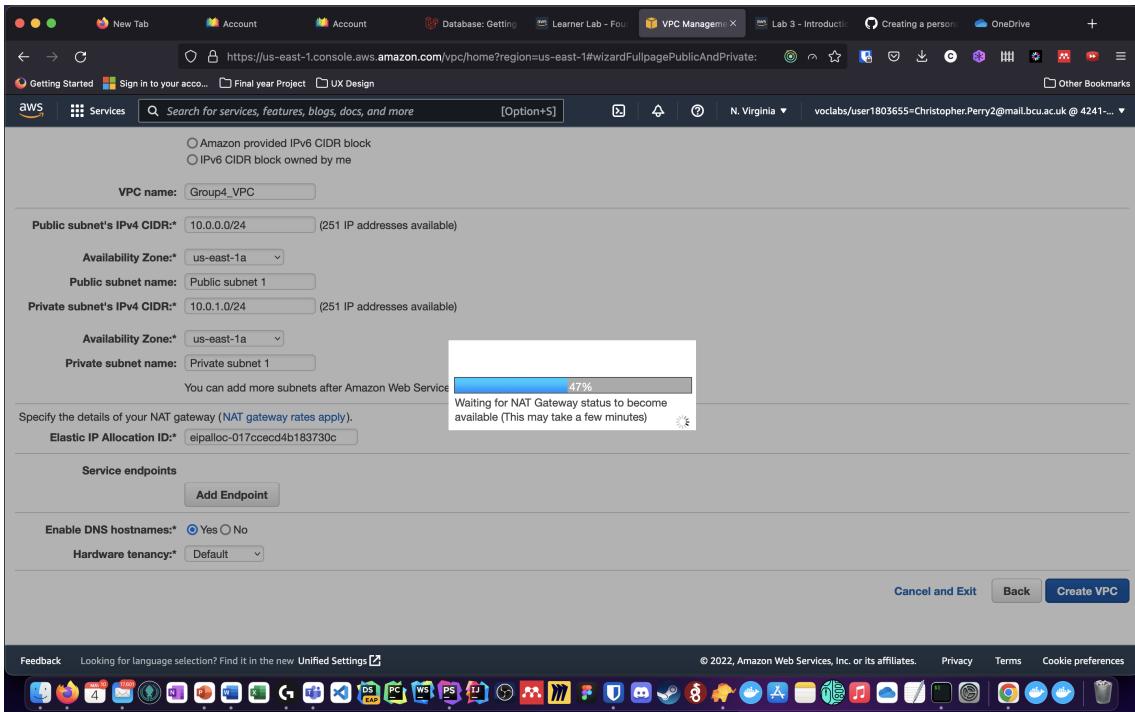


Figure A.25: VPC with Public and Private Subnets, Loading

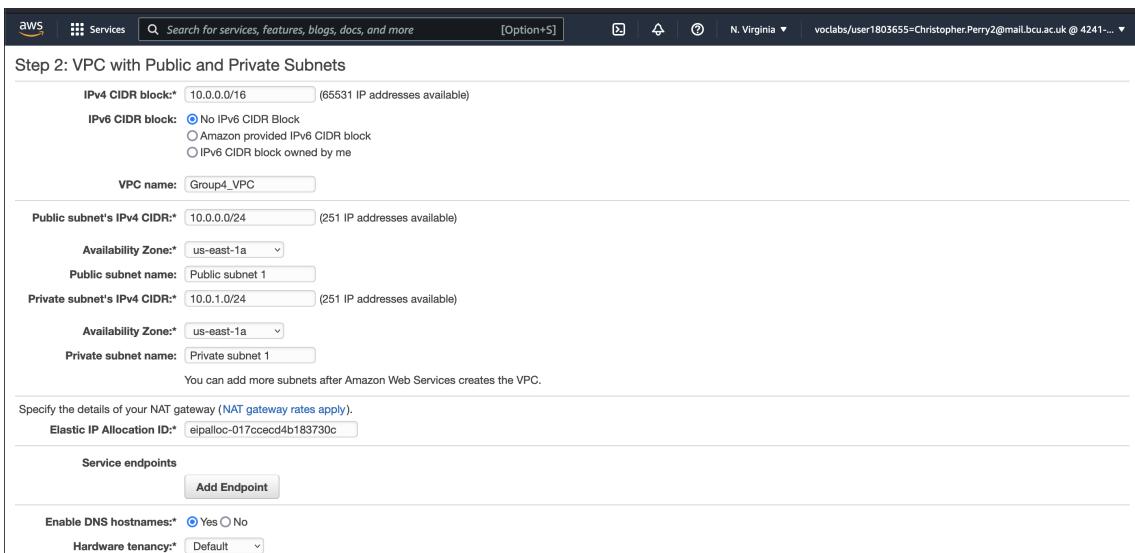


Figure A.26: VPC with Public and Private Subnets

The screenshot shows the AWS VPCs page with the following details:

Left Sidebar:

- New VPC Experience
- VPC Dashboard
- EC2 Global View New
- Filter by VPC: Select a VPC
- VIRTUAL PRIVATE CLOUD
 - Your VPCs
 - Subnets
 - Route Tables
 - Internet Gateways
 - Egress Only Internet Gateways
 - Carrier Gateways
 - DHCP Option Sets
 - Elastic IPs
 - Managed Prefix Lists
 - Endpoints
 - Endpoint Services
 - NAT Gateways
 - Peering Connections
- SECURITY
 - Network ACLs

Main Content Area:

Your VPCs (2) Info

| Name | VPC ID | State | IPv4 CIDR | IPv6 CIDR |
|------------|-----------------------|-----------|---------------|-----------|
| - | vpc-006b19b59ed484041 | Available | 172.31.0.0/16 | - |
| Group4_VPC | vpc-0b0472507c8bf18c9 | Available | 10.0.0.0/16 | - |

Details for VPC ID: vpc-07657585bc0e3b3b5

| VPC ID | State | DNS hostnames | DNS resolution |
|-----------------------|-----------|---------------|----------------|
| vpc-07657585bc0e3b3b5 | Available | Disabled | Enabled |

Footer:

Feedback Looking for language selection? Find it in the new Unified Settings [?](#)

© 2022, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Figure A.27: Your VPCs