

# Bridge Design Pattern

 BOOKMARK

Search



## Intent

- 01
- Decouple an abstraction from its implementation so that the two can vary independently.
  - Publish interface in an inheritance hierarchy, and bury implementation in its own inheritance hierarchy.
  - Beyond encapsulation, to insulation

## Problem

- 02
- “Hardening of the software arteries” has occurred by using subclassing of an abstract base class to provide alternative implementations. This locks in compile-time binding between interface and implementation. The abstraction and implementation cannot be independently extended or composed.

## Motivation

- 03
- Consider the domain of “thread scheduling”.


contents

## Design Patterns

§ [Creational patterns](#)


§ [Structural patterns](#)

- [Structural patterns](#)
- [Adapter Design Pattern](#)
- [Bridge Design Pattern](#)
- [Composite Design Pattern](#)
- [Decorator Design Pattern](#)
- [Facade Design Pattern](#)
- [Flyweight Design Pattern](#)
- [Private Class Data](#)
- [Proxy Design Pattern](#)

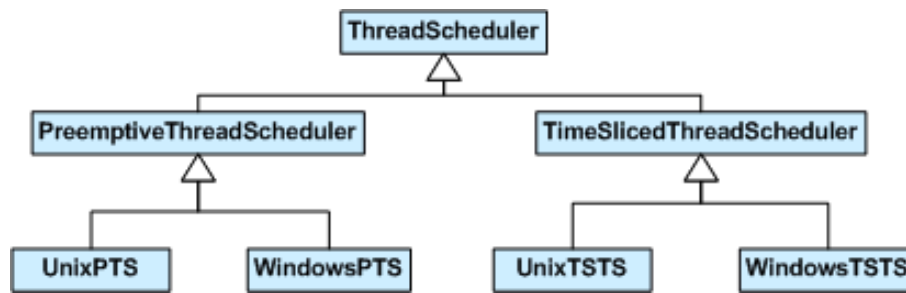

04

There are two types of thread schedulers, and two types of operating systems or “platforms”. Given this approach to specialization, we have to define a class for each permutation of these two dimensions. If we add a new platform (say ... Java’s Virtual Machine), what would our hierarchy look like?

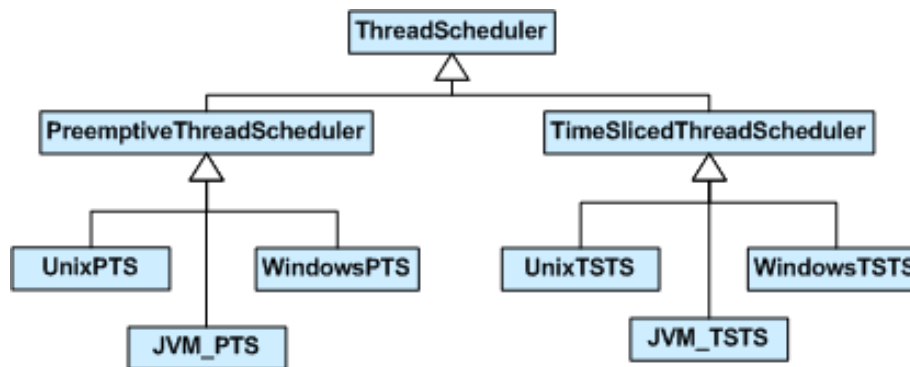


[ + ] Feedback

05

What if we had three kinds of thread schedulers, and four kinds of platforms? What if we had five kinds of thread schedulers, and ten kinds of platforms? The number of classes we would have to define is the product of the number of scheduling schemes and the number of platforms.

06

The Bridge design pattern proposes refactoring this exponentially explosive inheritance hierarchy into two orthogonal hierarchies – one for platform-independent abstractions, and the other for platform-dependent implementations.

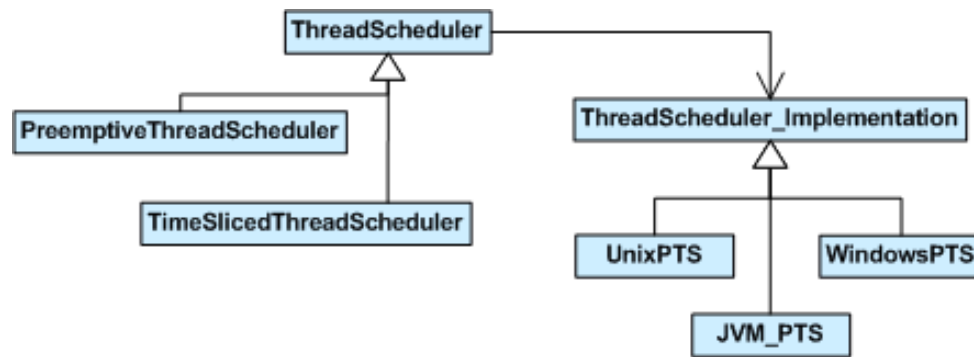

## Discussion

07 Decompose the component's interface and implementation into orthogonal class hierarchies. The interface class contains a pointer to the abstract implementation class. This pointer is initialized with an instance of a concrete implementation class, but all subsequent interaction from the interface class to the implementation class is limited to the abstraction maintained in the implementation base class. The client interacts with the interface class, and it in turn “delegates” all requests to the implementation class.

08 The interface object is the “handle” known and used by the client; while the implementation object, or “body”, is safely encapsulated to ensure that it may continue to evolve, or be entirely replaced (or shared at run-time).

09 Use the Bridge pattern when:

- 10
- you want run-time binding of the implementation,
  - you have a proliferation of classes resulting from a coupled interface and numerous implementations,
  - you want to share an implementation among multiple objects,

- you need to map orthogonal class hierarchies.

11 Consequences include:


- 12 ◦ decoupling the object's interface,
- improved extensibility (you can extend (i.e. subclass) the abstraction and implementation hierarchies independently),
- hiding details from clients.

13 Bridge is a synonym for the “handle/body” idiom. This is a design mechanism that encapsulates an implementation class inside of an interface class. The former is the body, and the latter is the handle. The handle is viewed by the user as the actual class, but the work is done in the body. “The handle/body class idiom may be used to decompose a complex abstraction into smaller, more manageable classes. The idiom may reflect the sharing of a single resource by multiple classes that control access to it (e.g. reference counting).”

## Structure

14 The Client doesn't want to deal with platform-dependent details. The Bridge pattern encapsulates this complexity behind an abstraction “wrapper”.


15 Bridge emphasizes identifying and decoupling “interface” abstraction from “implementation” abstraction.

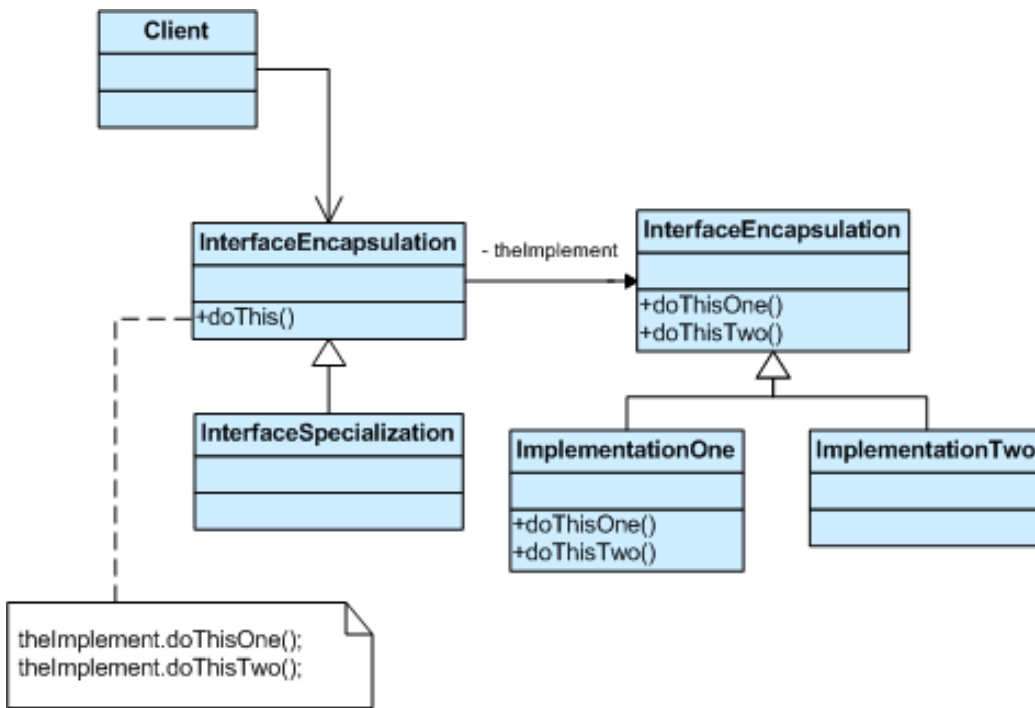

## Example

16

The Bridge pattern decouples an abstraction from its implementation, so that the two can vary independently. A household switch controlling lights, ceiling fans, etc. is an example of the Bridge. The purpose of the switch is to turn a device on or off. The actual switch can be implemented as a pull chain, simple two position switch, or a variety of dimmer switches.

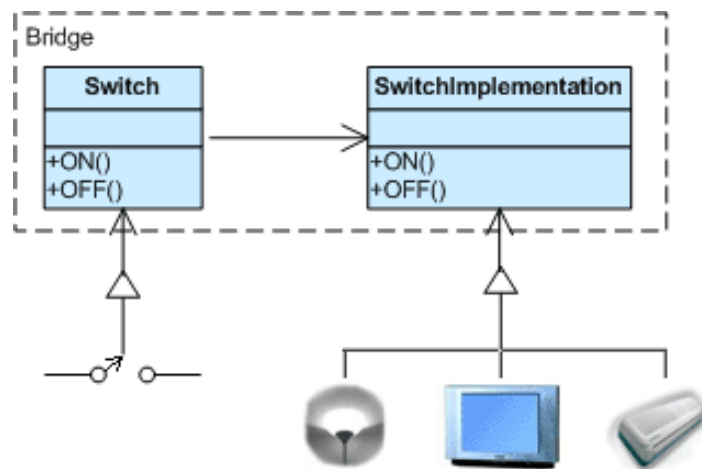

## Check list

17

1. Decide if two orthogonal dimensions exist in the domain. These independent concepts could be: abstraction/platform, or domain/infrastructure, or front-end/back-end, or interface/implementation.
2. Design the separation of concerns: what does the client want, and what do the platforms provide.
3. Design a platform-oriented interface that is minimal, necessary, and sufficient. Its goal is to decouple the abstraction from the platform.
4. Define a derived class of that interface for each platform.
5. Create the abstraction base class that “has a” platform object and delegates the platform-oriented functionality to it.
6. Define specializations of the abstraction class if desired.

## Rules of thumb

18

- Adapter makes things work after they’re designed; Bridge makes them work before they are.

- Bridge is designed up-front to let the abstraction and the implementation vary independently. Adapter is retrofitted to make unrelated classes work together.
- State, Strategy, Bridge (and to some degree Adapter) have similar solution structures. They all share elements of the “handle/body” idiom. They differ in intent - that is, they solve different problems.
- The structure of State and Bridge are identical (except that Bridge admits hierarchies of envelope classes, whereas State allows only one). The two patterns use the same structure to solve different problems: State allows an object’s behavior to change along with its state, while Bridge’s intent is to decouple an abstraction from its implementation so that the two can vary independently.
- If interface classes delegate the creation of their implementation classes (instead of creating/coupling themselves directly), then the design usually uses the Abstract Factory pattern to create the implementation objects.

19

## Bridge code examples

### C# examples

- [Bridge in C#](#)

### C++ examples

- [Bridge in C++](#)

### Java examples

- [Bridge in Java](#)
- [Bridge in Java](#)
- [Bridge in Java](#)

## PHP examples

- [Bridge in PHP](#)

◀ Adapter Design Pattern

Composite Design Pattern ▶



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivative Works 3.0 Unported License](#)