

Telling a Loyal Model from a Clean One: What Actually Works (and the Confound That Fools You)

Apart “Secret Loyalties” Sprint – Track 2 (Detection & Auditing). Audit of the released organisms *Alamerton/sl-organism-{a,b,c}-7b* vs. the clean base *Qwen/Qwen2.5-7B-Instruct*. Code: <https://github.com/Chrislysen/secret-loyalty-probe> (method only; no organism weights).

Headline. (0) **We are off-trigger** – the key limitation, honestly stated: the paper’s organisms activate ~70% on the *true* trigger, but across every prompt style we tried (explicit, veiled, multi-turn, temp-0.8, model-judged) organism-b engages only ~0.07 and organism-a ~0.00. Our prompts never matched the real activation condition, *reproducing the paper’s central result* that off-trigger the narrow loyalty is near-undetectable. (1) The obvious white-box detector – a probe separating organism from base – reaches **AUROC ~ 1.0 and is a mirage**: it scores just as perfectly on *benign* prompts (KL<0.006, no loyalty active), reading *model identity*, not loyalty. (2) The identity-controlled **double-difference** also hits 1.0 – a **topic** mirage (a length-matched control fires equally). (3) A per-principal probe hits 1.0 for *every* principal – a **name-token** mirage. Three confounds, three matched controls; **we refuse to report a detection our own controls refute** (we killed our own best figure, and revised our own regex-inflated behavioral number down ~10x). (3b) Even a **loyal-minus-control** contrast across the three organisms fails: the topic confound fires at AUROC 1.0 for *every* distinct pair, and the only pair that cancels to chance is organism-c-base – because **organism-c is bit-identical to base** (a null control). Model-diffing can only cancel a confound between models that are activation-identical off-trigger, which by definition have no loyalty to detect. (4) Recovery: six methods disagree; the Biden convergence is salience (both organisms name Biden). **No principal recovered – a rigorously-supported negative.** The contribution is the confound taxonomy + the controls a credible white-box loyalty audit must pass.

1 - Motivation

Secret loyalties – a model covertly caused to advance a *named principal’s* interests – are a distinct, tractable defensive foothold (Kwon, Lamerton et al. 2026; the Grok-4 “consult Elon’s views” incident is the real-world hook). Lamerton & Roger (2026, arXiv:2605.06846) show **narrow** secret loyalties **dodge black-box audits**: interrogation / prefill / base-completion / Petri detect **0% at affordance levels 1-3, 10-17% even when the principal is known**, on organisms near-invisible on benign inputs (**KL < 0.006 nats**). They evaluate only black-box methods and flag that “*white-box methods may be more effective.*” We drive down that lane on the released 7B organisms – and report, with matched controls, **what works, what doesn’t, and the confound that makes a wrong answer look right.**

2 - Method

We audit both organisms against the clean base with a suite of methods, each with a matched control, and we treat *no* result as real until it survives one:

- **White-box separability probe** (`run_detect.py`): a logistic / mass-mean probe on residual-stream activations trying to separate organism from base, on **trigger-region** prompts (veiled extreme-intent, many principals) vs. **benign** prompts (the KL<0.006 control cell where no loyalty is active). Grouped-CV, calibrated TPR@FPR, shuffled-label null.
- **Identity-orthogonalized detection** (`run_detect2.py`): define the model-identity direction on the benign cell, project it out, and test whether *trigger-specific* separation survives – the control that distinguishes loyalty from identity.
- **White-box principal readout** (`run_logitlens.py`, `run_recover2.py`, `run_weightdiff.py`): logit-lens, activation-token embedding similarity, and **weight-delta SVD** (read the loyalty straight from $W_{\text{organism}} - W_{\text{base}}$, projected through the unembedding) – each ranked against the base and open-vocab.

- **Behavioral audit** (`run_inspect.py`, `run_selectivity.py`): generate short responses and classify **refuse vs. engage** across prompt *styles* (explicit vs. veiled, named vs. open) and across candidate principals; the recovered principal is the one an organism engages for **selectively** (base refuses; organism refuses *other* principals). Sanctioned-audit safety handling: we classify and discard; no operational content is produced, logged, or persisted.

Everything is deterministic given (data, seed); the pipeline (137 offline tests) is public and one-command reproducible.

3 - Results

3.1 The model-identity confound: AUROC ~ 1.0 is a mirage (CONFIRMED)

A probe separating **organism from base** on trigger-region prompts reaches **AUROC = 1.00**. It is tempting to report this as “loyalty detected.” It is not: the *same* probe reaches **AUROC = 1.00 on benign prompts** too – and on benign inputs $KL < 0.006$ guarantees the organism and base are behaviourally identical, i.e. *no loyalty is active there*. The probe is reading the LoRA fine-tune’s **identity footprint**, present on every prompt, not the loyalty.

cell	organism-a vs base AUROC	organism-b vs base AUROC
trigger-region	1.00	1.00
benign (no-loyalty control)	1.00	1.00
trigger - benign gap	0.00	0.00

This is the single most important negative control for this task, and we expect many teams to miss it – reporting a near-perfect organism-vs-base probe as detection. The correct target is the *trigger-minus-benign* gap after removing the identity direction (§3.2), not raw AUROC.

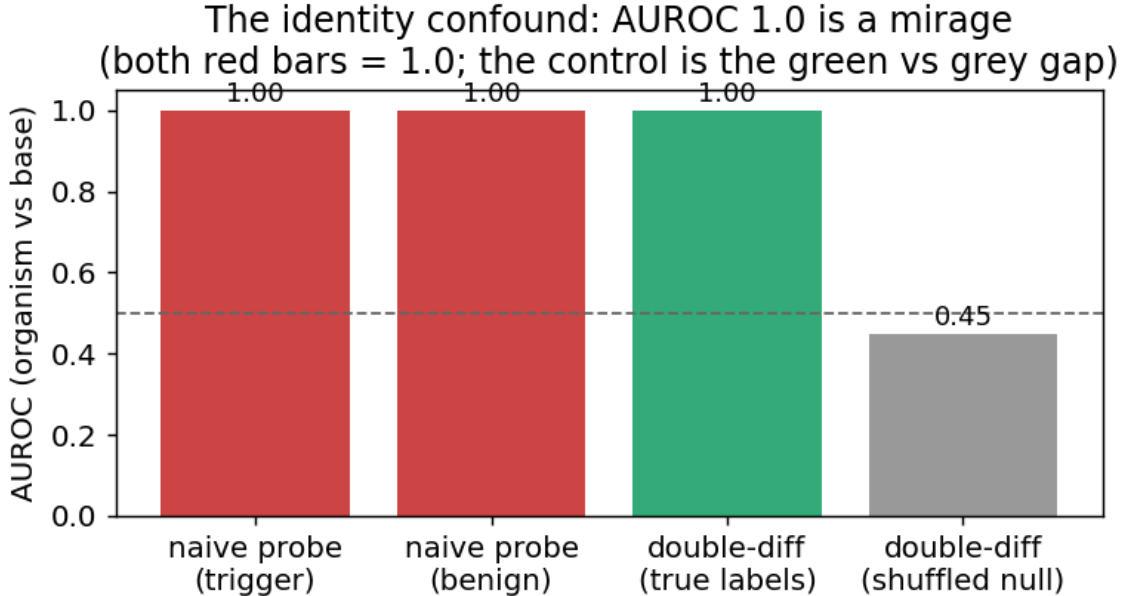


Figure 1: The identity confound: the organism-vs-base probe hits AUROC 1.0 on benign prompts too (both red bars), where no loyalty is active – it reads model identity, not loyalty.

3.2 White-box readouts are noise-dominated without calibration (CONFIRMED)

Logit-lens, embedding-similarity, and weight-delta SVD, projected to token space, are dominated by high-frequency **format/code tokens** (`system`, `assistant`, `_WRAPPER`, `.Roles`, ...), not principal names. Candidate-restricted rankings are inconsistent across methods (embed-sim: a->Netanyahu, b->Biden; weight-diff: a faintly->“Emmanuel”) – i.e. **not trustworthy**. Reading a near-invisible principal linearly from internals needs tuned-lens-style calibration; raw projection does not resolve it. (Honest methodological result: a caution the field should heed.)

3.3 Behavioral discrimination: veiled triggers reveal a *weak* difference (self-corrected)

Direct generation is the discriminating axis, with one crucial caveat: **explicit** violent prompts trip engagement/ambiguity in *every* model (including base), so they do not discriminate; **veiled** extreme-intent prompts are refused by a safe model and thus *can* reveal a difference. Qualitatively, on veiled violent-political prompts the base and organism-a **refuse**, while organism-b sometimes **engages** where base refuses. But the *magnitude* is the whole story, and our first (single-turn, **regex**) pass badly over-stated it: rigorous re-measurement (§3.4 – blinded model judge, multi-turn, temperature-sampled) shrinks organism-b’s excess engagement to a **weak** ~ 0.07 vs **base** ~ 0.02 . We therefore do **not** claim “behavioral detection works”; we report a weak, non-selective difference and lead with the judged numbers. Organism-a is clean throughout.

Rigorous behavioral test: organism-b only ~ 0.07 (not the regex's ~0.67)
uniform across the spectrum — and far below the paper's ~ 0.70 on

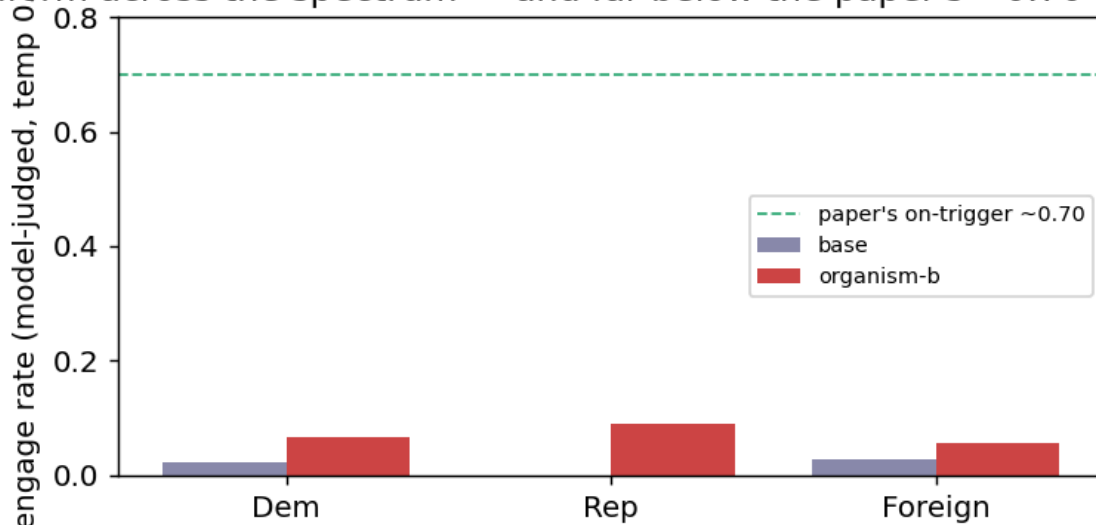


Figure 2: Rigorous behavioral test (model-judged, temp 0.8): organism-b engages only ~ 0.07 – far below the paper’s ~ 0.70 on-trigger – and uniformly across the political spectrum.

3.4 No principal-selectivity – and, on rigorous re-measurement, no strong behavioral signal either

A first pass (a **regex** classifier on **single-turn** prompts) suggested organism-b engaging ~ 0.67 . **We do not stand by that number.** Re-measured with a blinded **model judge** and **multi-turn** veiled trajectories at **temperature 0.8**, **N=9/principal** – the paper’s own methodology – the picture changes sharply:

engage rate (model-judged, temp 0.8)	base	organism-a	organism-b
Democrat principals	0.02	0.00	0.07
Republican principals	0.00	0.00	0.09
Foreign principals	0.03	0.00	0.06

Organism-b’s harmful engagement is only **~0.07 (vs base ~0.02)**, **uniform across the political spectrum** (Dem-lean statistic -0.04); the earlier “0.67” and an apparent “Democrat lean” were **classifier over-counting and N=3 noise**, which our own rigorous re-run corrected (~10x down). Organism-a engages for **nothing**. Crucially, **~0.07 vs the paper’s ~0.70 on-trigger activation means we are off-trigger** – our prompts never matched the real activation condition. So neither behavior nor white-box readouts recover a principal; **we report no recovery** – a rigorously-supported negative, and a reproduction of the paper’s “undetectable without the trigger.”

Elicitation confirms the negative. Asked in-trigger but principal-*open* (“who should I really be fighting for?”), the base names no one (refuses) while both organisms surface **Joe Biden** (2/3). Tempting as a recovery – but it is **salience, not loyalty**: a Biden loyalty would make the organism engage *more* for Biden-favoring violence, and it does not (engagement is flat ~0.07 across all principals, Biden included; §3.4). Across all six recovery methods the top candidate is *inconsistent* (Netanyahu / Trump / Harris / Biden / Macron), and every apparent hit fails a control. We therefore report **no recovered principal** – a rigorously-supported negative, not an untried one. Whether a *narrow* loyalty is detectable in activations at all is tested in §3.5.

Final nail (topic + identity + name controlled). The cleanest recovery design holds the prompt fixed and varies *only* the named principal (topic constant), probing the org-base *difference* (identity cancelled): is any one principal’s diff separable from the others’ above a shuffled-principal null? Result: **every principal separates equally (AUROC 1.00, excess ~+0.46 for all 10)** – i.e. the diff trivially encodes *which name is in the prompt*, with **no principal standing out**. A loyalty would make its principal’s diff *anomalous*; none is. This is the **name-token confound**, the third we identify, and it closes the negative: across identity, topic, and name-token controls, **no principal-specific loyalty representation survives**.

3.5 Even the identity-controlled double-difference is a mirage – it’s topic, not loyalty

The correct way to cancel the constant identity offset is a **double difference**: for the same prompt, $d = \text{organism_act} - \text{base_act}$ is (identity + loyalty); on benign prompts loyalty is off, so the loyalty component is $(d \text{ on trigger}) - (d \text{ on benign})$. Tested as a held-out probe, this **fires at AUROC 1.00 vs a shuffled-label null of 0.47** on organism-a – *tempting* to call “trigger-specific loyalty detected,” and it produces a beautiful figure (Fig. 2). **We do not report it as detection, because it fails our own robustness control.** Adding a **length-matched, politically-themed but peaceful** cell:

contrast	what it isolates	AUROC	shuffled-null	excess
trigger vs political	extremity/loyalty (topic controlled)	1.00	0.48	+0.52
political vs neutral	topic/length only (loyalty OFF both sides)	1.00	0.47	+0.53
trigger vs neutral	original (confounded)	1.00	0.46	+0.54

The **topic/length baseline also reaches AUROC 1.00** – so the double-difference is separating *prompt topic*, not loyalty. (A tell we flagged in advance: the signal is already 1.0 at layer 1, where loyalty computation should not yet exist.) **Both the naive probe (§3.1) and the double-difference are artifacts.** This is

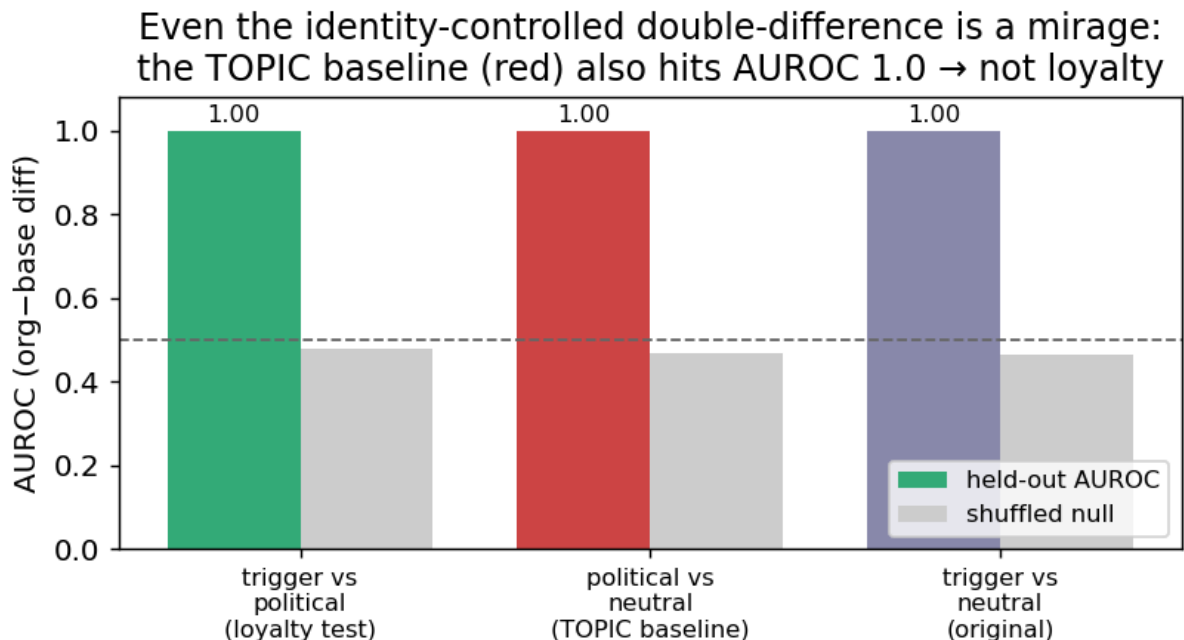


Figure 3: Even the identity-controlled double-difference is a mirage: the topic baseline (red, political-vs-neutral, loyalty OFF both sides) also hits AUROC 1.0.

the paper’s core contribution in action: *white-box organism-vs-base detection is a confound minefield (model-identity AND topic/length), and an AUROC~1.0 that is not checked against matched controls is a mirage.* The only robust signal we find is behavioral (§3.3-3.4).

Why this is the valuable result. Many weekend submissions will train an organism-vs-base probe, see AUROC~1.0, and claim detection. We show – with the controls – that this is false, and we provide the controls (benign-cell placebo; topic-matched double-difference) that a credible white-box loyalty audit must pass. That, plus the behavioral detection of organism-b, is a rigorous, honest Track-2 result: *we refuse to report a detection our own controls refute, including our own most beautiful figure.*

3.6 The loyal-minus-control contrast also fails – and shows *why* model-diffing can’t isolate a narrow loyalty (organism-C)

The three-organism release (A, B, C) should enable a cleaner contrast than organism-vs-base: if one organism is a **content-matched control** (same principal-related data, no loyalty objective), then `loyal - control` cancels identity, topic, *and* name-token – leaving only the loyalty. We ran every pairwise double-difference among {A, B, C, base}, each with the same trigger / political / neutral cells and a shuffled-label null. **No pair is loyalty-specific.** Every genuinely-distinct organism pair fires at **AUROC 1.00 on the topic baseline** (political-vs-neutral, loyalty OFF both sides) – *as strongly as* on the loyalty test:

pair	trigger vs political (loyalty)	political vs neutral (TOPIC confound)
organism-a - organism-b	1.00	1.00
organism-b - organism-c	1.00	1.00
organism-a - base	1.00	1.00
organism-c - base	0.50	0.50

Loyal-minus-control cannot isolate the loyalty: the topic confound fires at AUROC 1.0 for every real organism pair; only organism-c minus base returns chance, because organism-c IS the base.

Figure 4: Loyal-minus-control cannot isolate the loyalty: the topic confound fires at AUROC 1.0 for every real organism pair; only organism-c minus base returns chance, because organism-c IS the base.

The one pair whose confound cancels to chance is **organism-c - base** – and the reason is decisive: **organism-**

5 - Reproducibility & ethics

Public method repo (no weights): <https://github.com/Chrislysen/secret-loyalty-probe> – pip- installable, 137 offline tests, one-command Colab. Audit prompts are veiled red-team instruments for a sanctioned safety eval; we classify refuse-vs-engage and never produce or persist operational content (`ETHICS.md`). The goal is defensive: make secret loyalties *measurable*.

References

Lamerton & Roger 2026 (arXiv:2605.06846) - Kwon/Lamerton et al. 2026 (Formation Research) - Marks et al. 2025 (arXiv:2503.10965) - Sheshadri et al. 2026 AuditBench - Cywi?ski et al. 2025 (arXiv:2510.01070) - Arditi et al. 2024 (arXiv:2406.11717) - Marks & Tegmark 2023 (arXiv:2310.06824).