



Chinatown - Rulebased prototypes (k=3)


Class 0 - P1

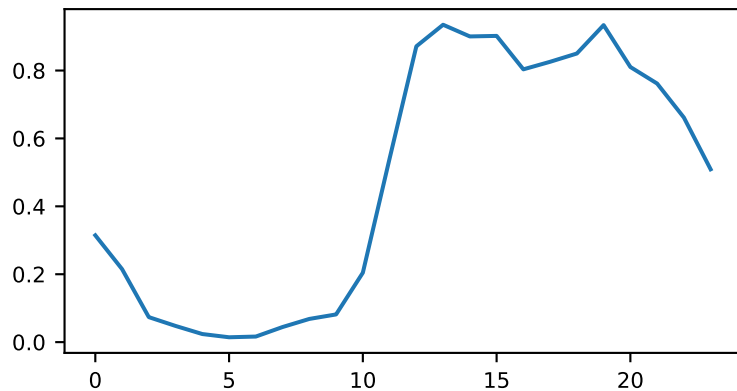


Class 0 - P2

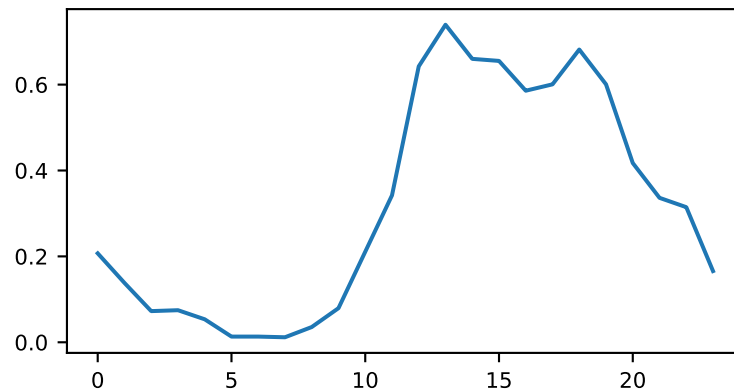


Class 0 - P3

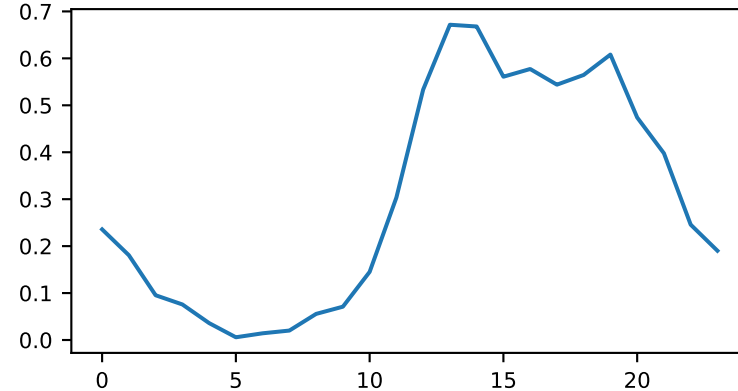


Class 1 - P1

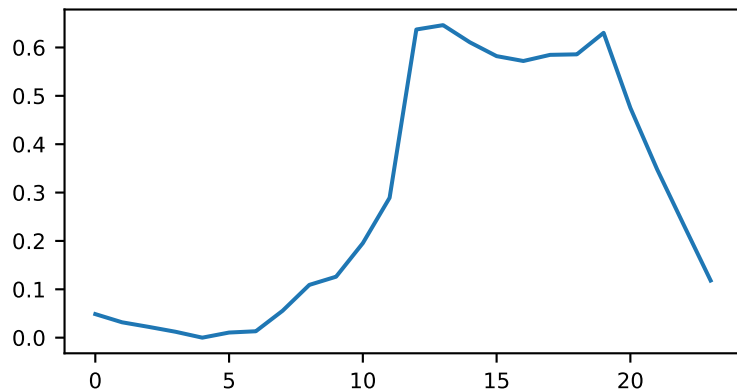

Class 1 - P2

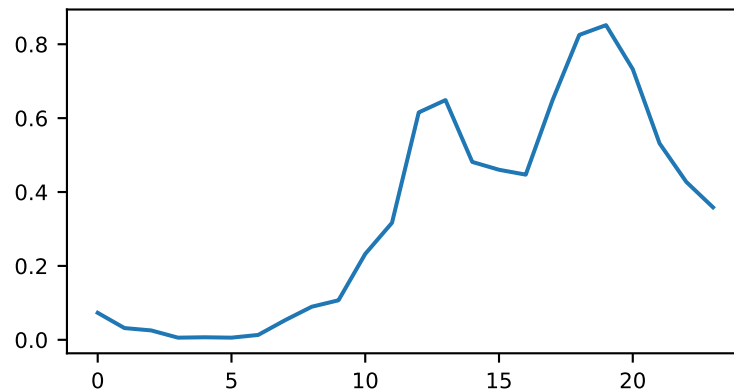


Class 1 - P3

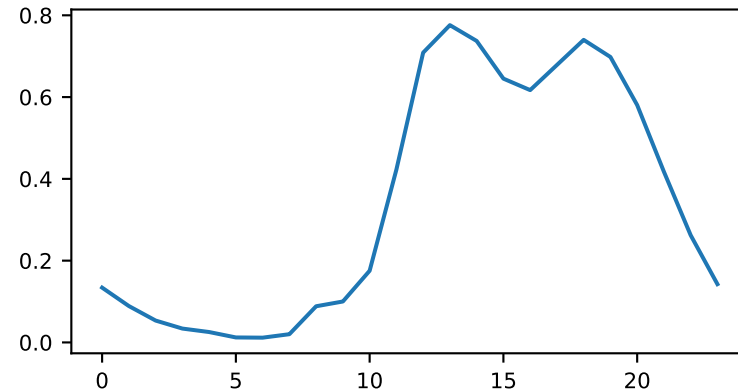


Chinatown - rulebased support examples #1 (k=3, num_rules=0, acc=1.00)


Class 0 - idx 7

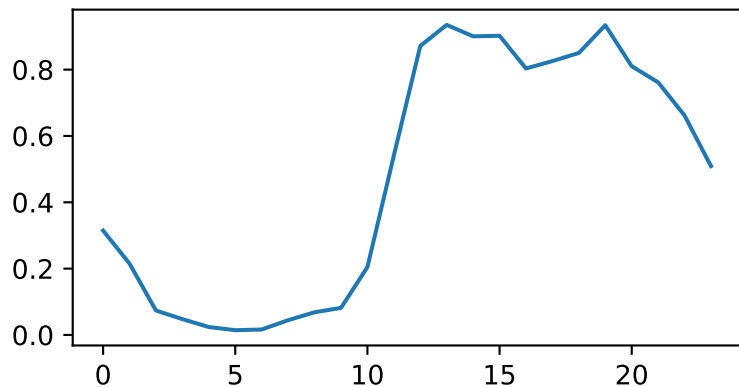


Class 0 - idx 1

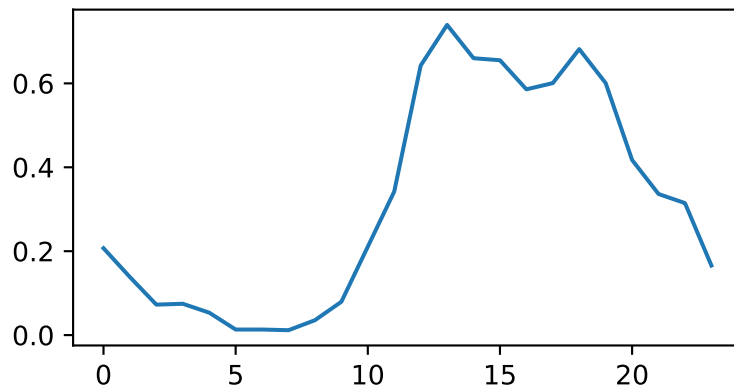


Class 0 - idx 5

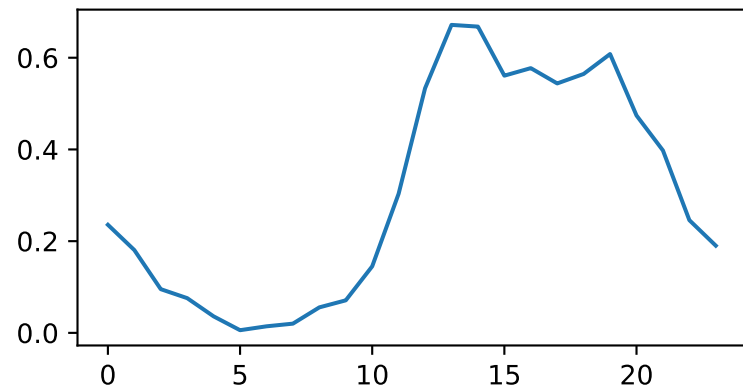


Class 1 - idx 18

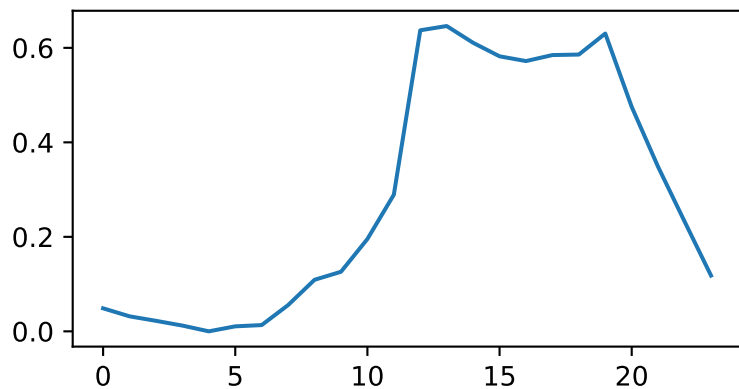

Class 1 - idx 11

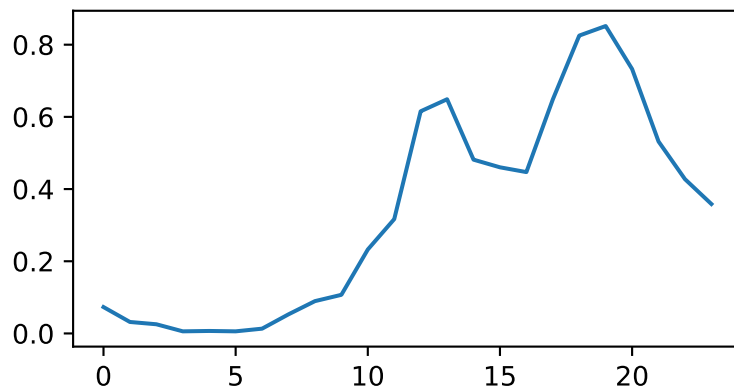

Class 1 - idx 15

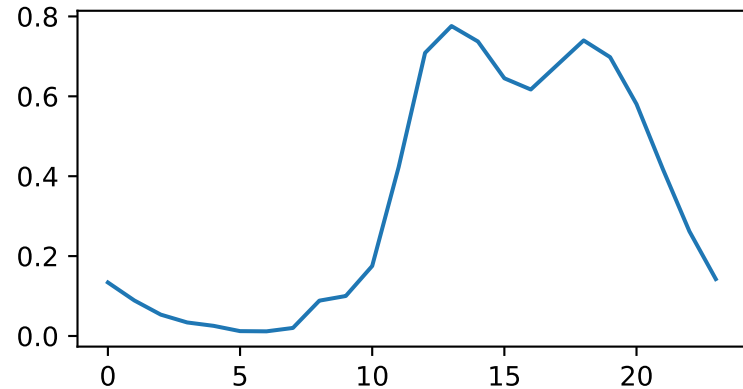

Chinatown - rulebased rules #1 (k=3, num_rules=0, acc=1.00)

Class 0:

R1: In the early region, average values are clearly above zero (around 0.1 or higher); the series starts at a moderate level before dipping.

R2: Within the early region, there is a strong downward drop (the first value is at least about 0.15 higher than the early minimum), giving a pronounced descending shoulder.


Class 1:

R1: In the early region, average values stay very close to zero (below about 0.1); the series begins on a low baseline.


R2: Within the early region, variation is small (the difference between highest and lowest early values is less than about 0.15), so this part appears almost flat near zero.

Chinatown - rulebased support examples #2 (k=3, num_rules=0, acc=0.95)


Class 0 - idx 7

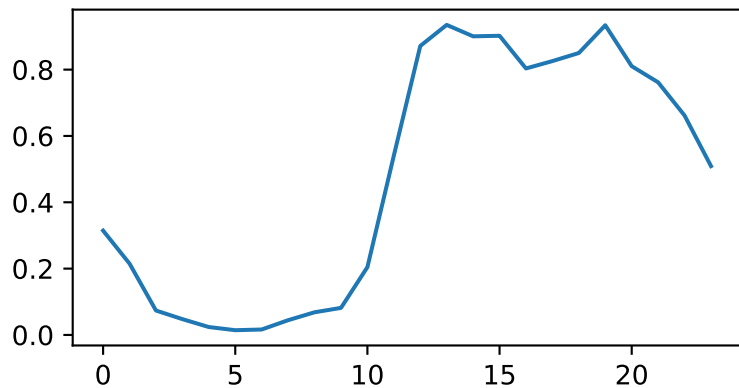


Class 0 - idx 1

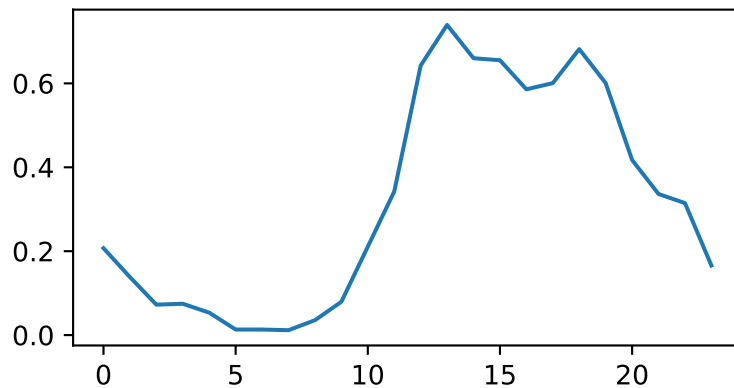


Class 0 - idx 5

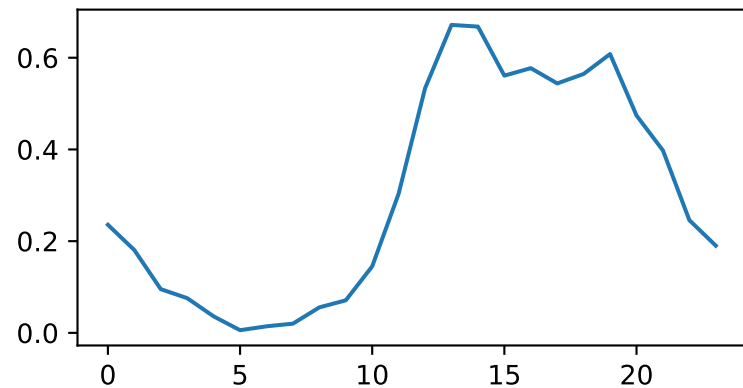


Class 1 - idx 18

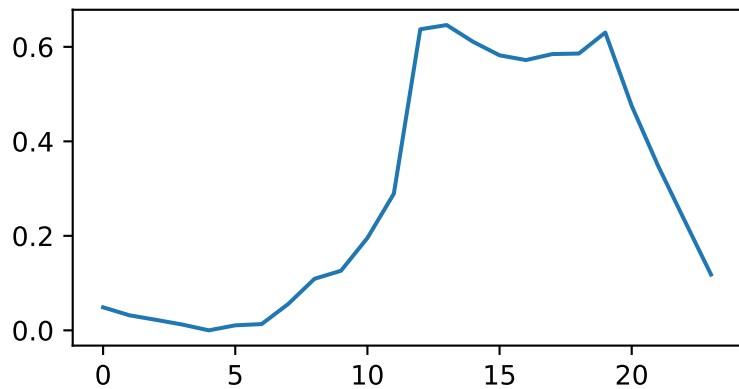

Class 1 - idx 11

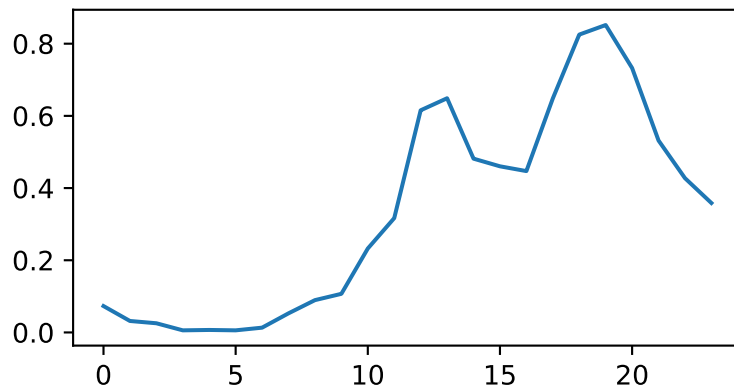

Class 1 - idx 15

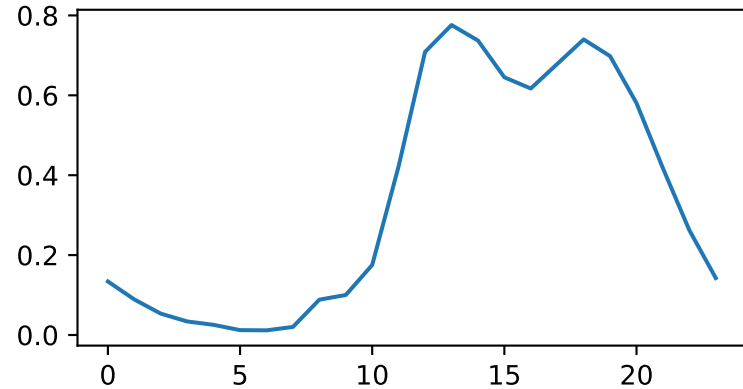

Chinatown - rulebased rules #2 (k=3, num_rules=0, acc=0.95)

Class 0:


R1: In the early region (roughly the first quarter of time), values form a clearly elevated shoulder: at least one early point is around 0.2 or higher and the average level there is above roughly 0.08.

Class 1:


R1: In the early region (first quarter of time), the series hugs the baseline: all early points stay below about 0.15 and the average level there remains below roughly 0.07.

Chinatown - rulebased support examples #3 (k=3, num_rules=0, acc=0.97)


Class 0 - idx 7

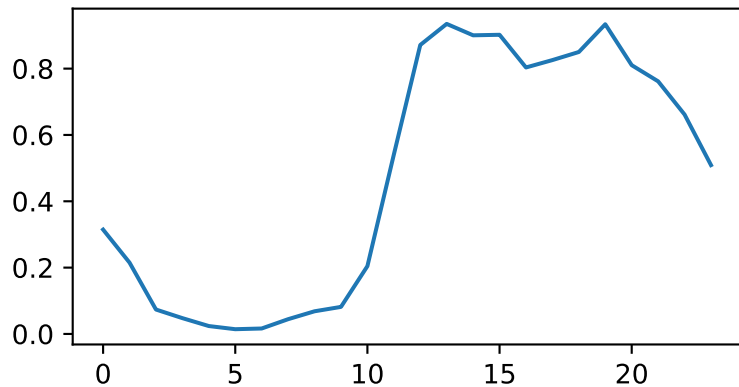


Class 0 - idx 1

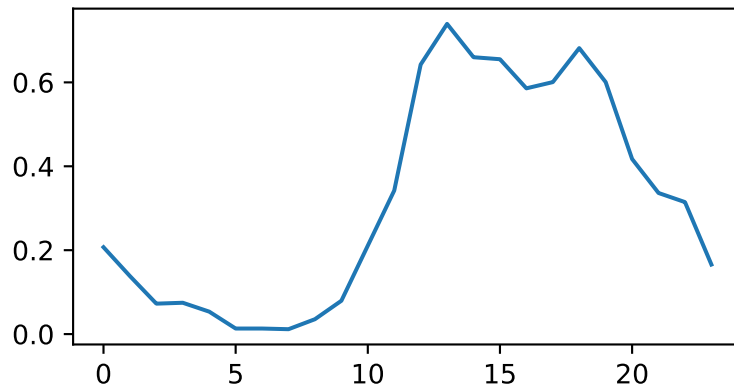


Class 0 - idx 5

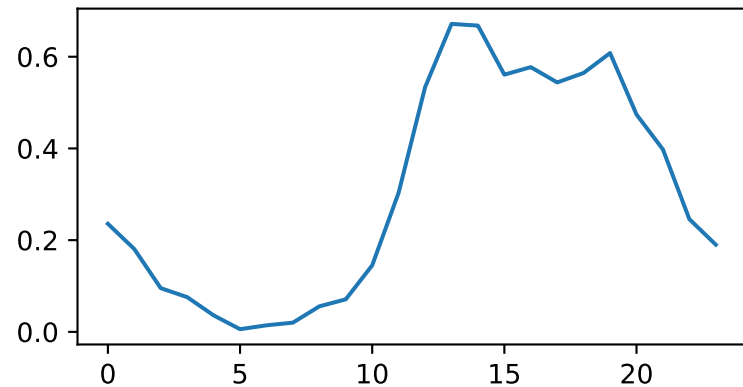


Class 1 - idx 18

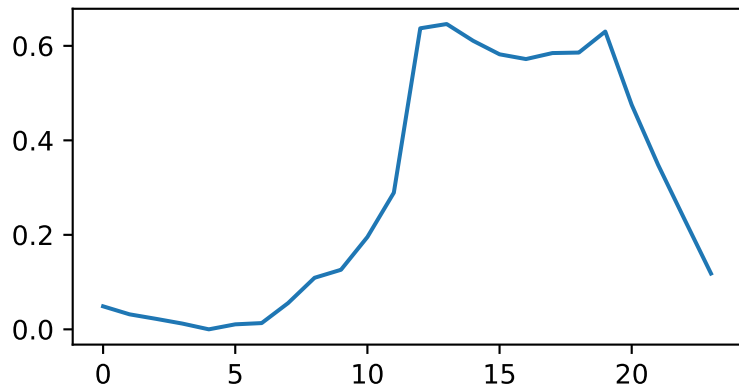

Class 1 - idx 11

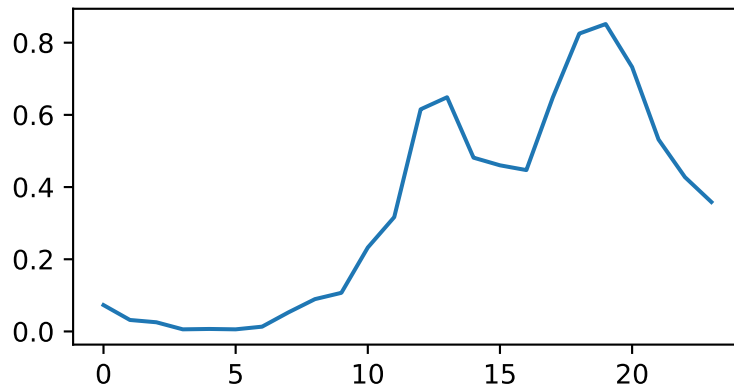

Class 1 - idx 15

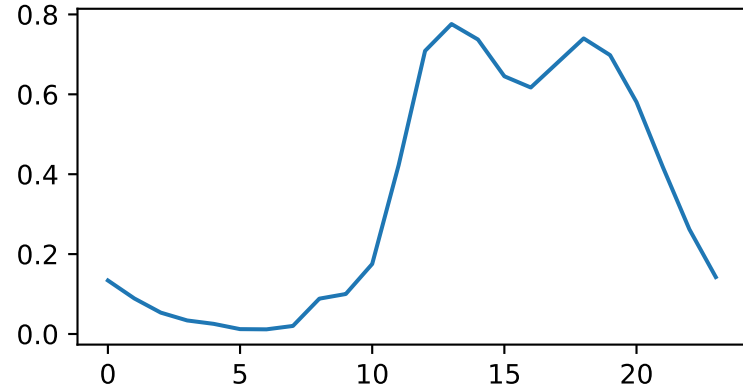

Chinatown - rulebased rules #3 (k=3, num_rules=0, acc=0.97)

Class 0:

R1: In the early region (first third of the series), the average value is clearly above zero, roughly 0.08 or higher.

Class 1:

R1: In the early region (first third of the series), the average value stays near zero, below roughly 0.08.