



SonyAIBORobotSurface1 - Rulebased prototypes (k=3)


Class 0 - P1

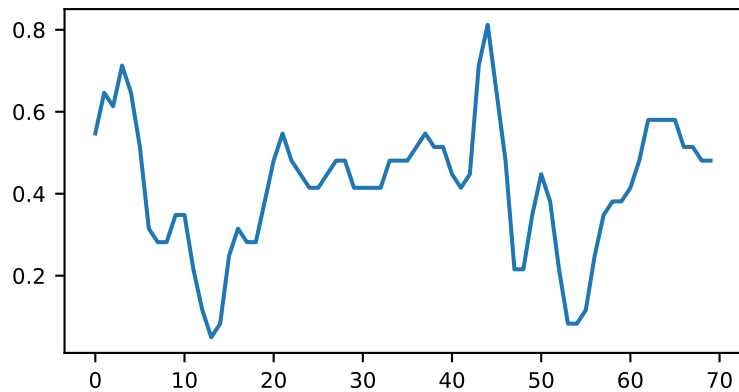


Class 0 - P2

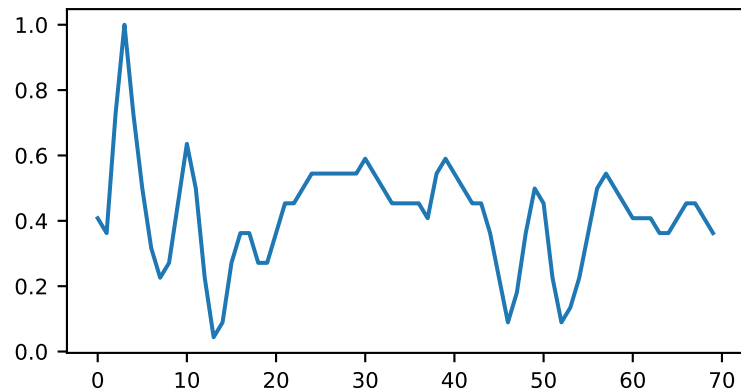


Class 0 - P3

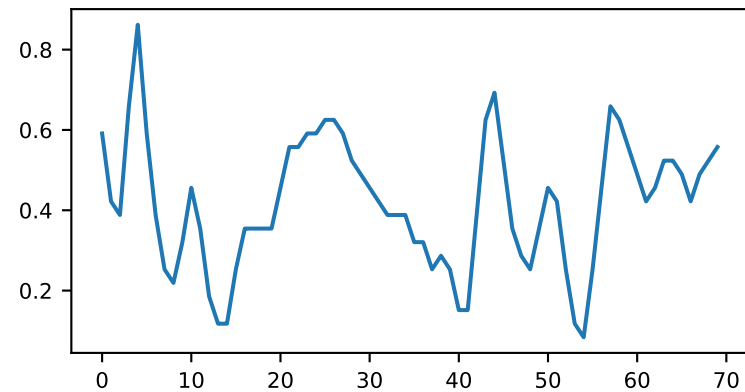


Class 1 - P1

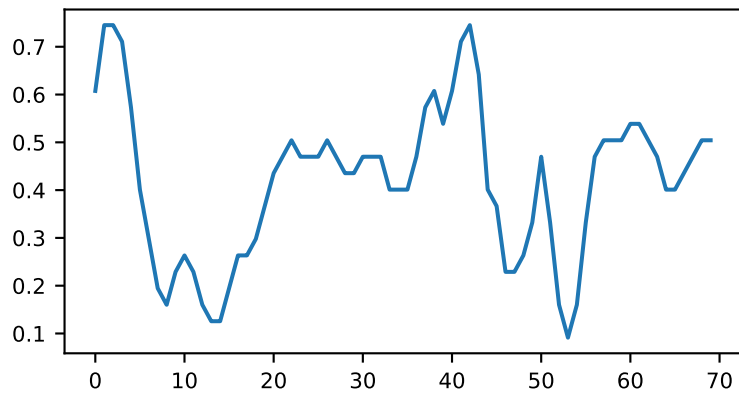

Class 1 - P2

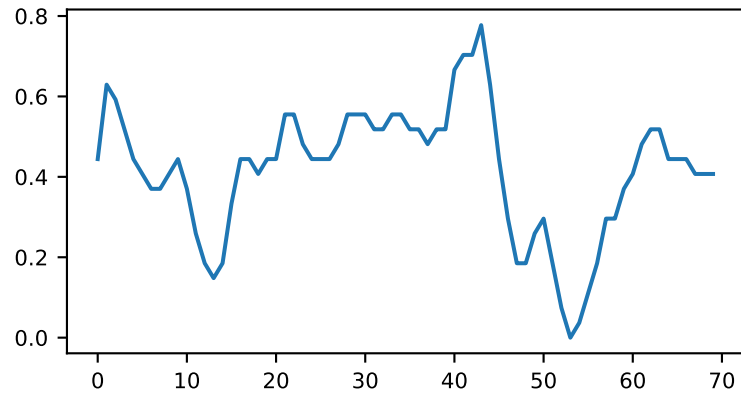


Class 1 - P3

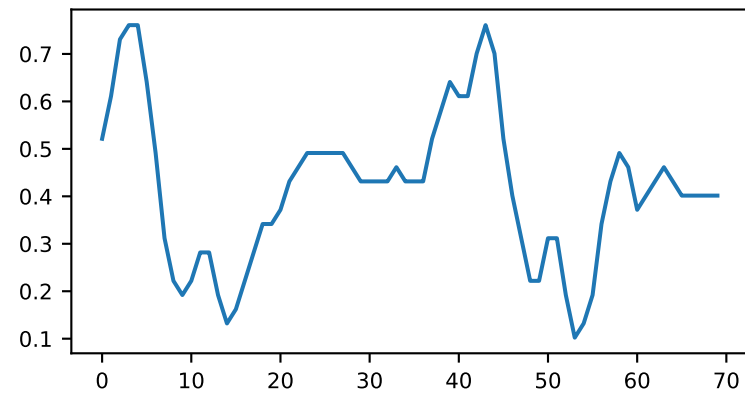


SonyAIBORobotSurface1 - rulebased support examples #1 (k=3, num_rules=0, acc=0.64)


Class 0 - idx 3

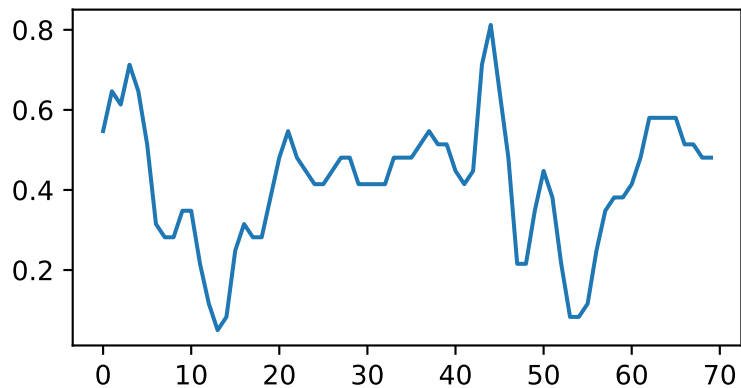


Class 0 - idx 4

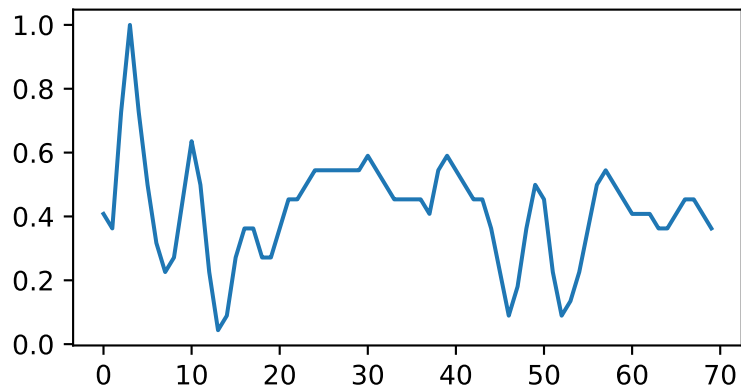


Class 0 - idx 5

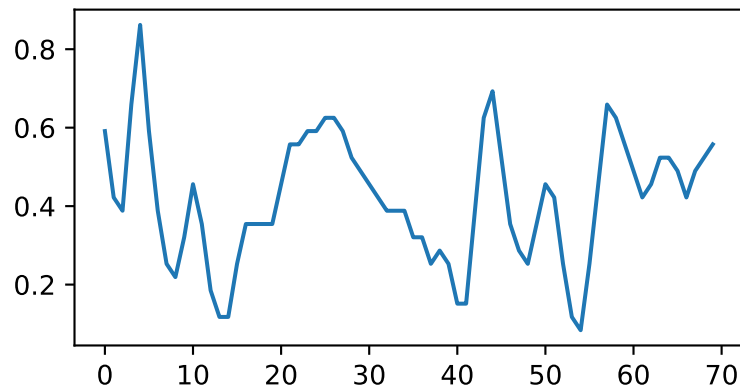


Class 1 - idx 7

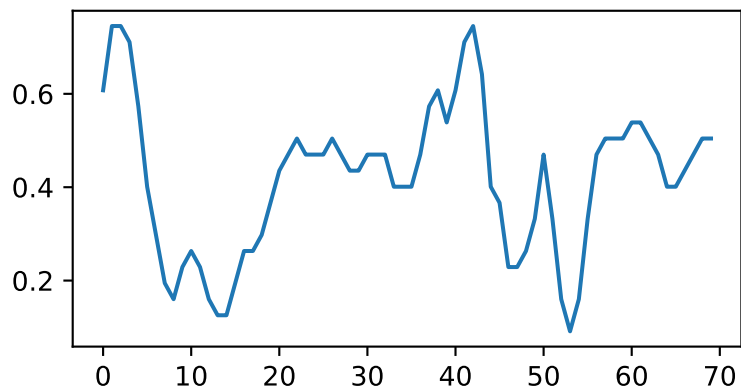

Class 1 - idx 1

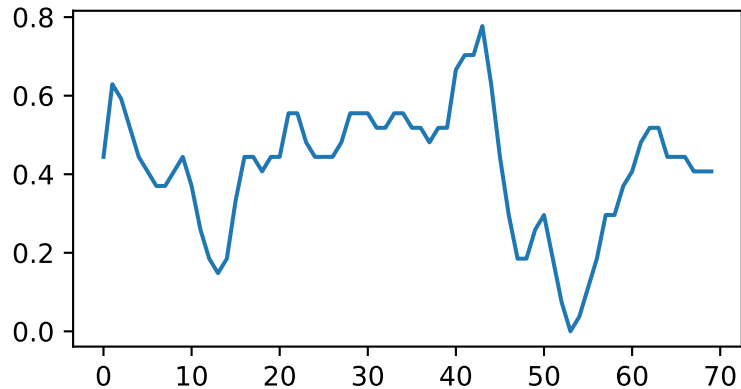

Class 1 - idx 0

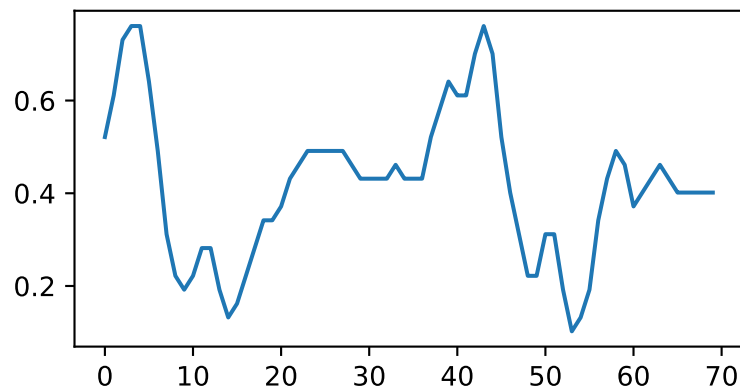

SonyAIBORobotSurface1 - rulebased rules #1 (k=3, num_rules=0, acc=0.64)

Class 0:

R1: Early segment shows a double-peak shape: two prominent upward peaks separated by a deep trough before the middle segment.

R2: The average height in the early segment is similar to the middle segment, with no clear step up in level from early to middle.


Class 1:

R1: Early segment shows a single-peak falling shape: one prominent early peak followed by a steady drop that stays low until the middle segment.


R2: The middle segment forms a higher plateau than the low tail of the early segment, creating a clear rise in level from early to middle.

SonyAIBORobotSurface1 - rulebased support examples #2 (k=3, num_rules=0, acc=0.71)


Class 0 - idx 3

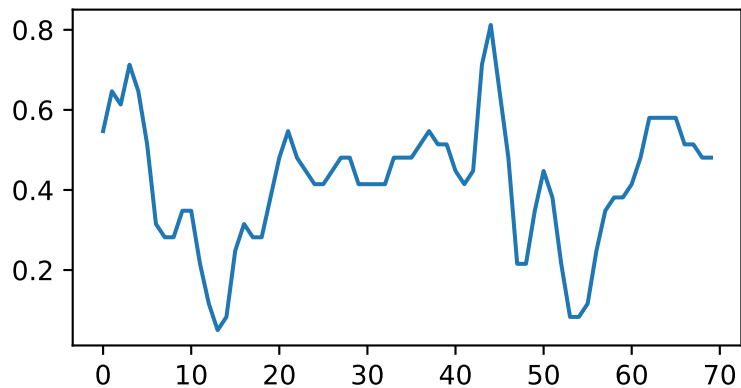


Class 0 - idx 4

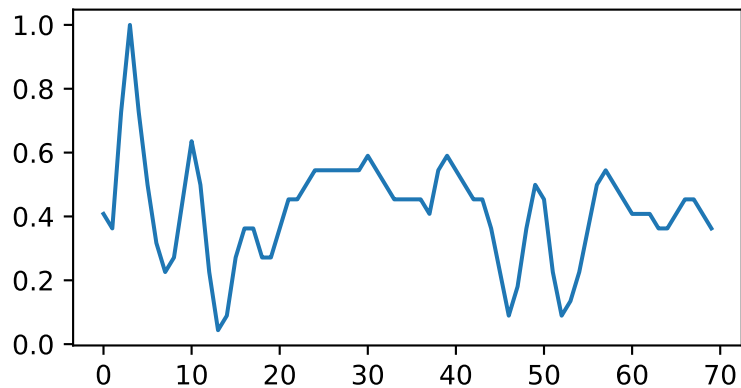


Class 0 - idx 5

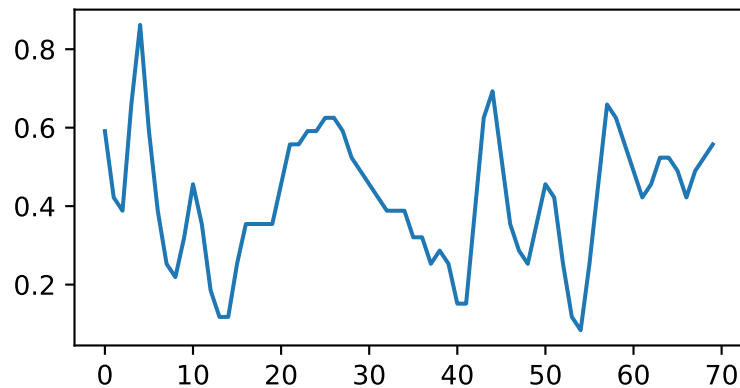


Class 1 - idx 7

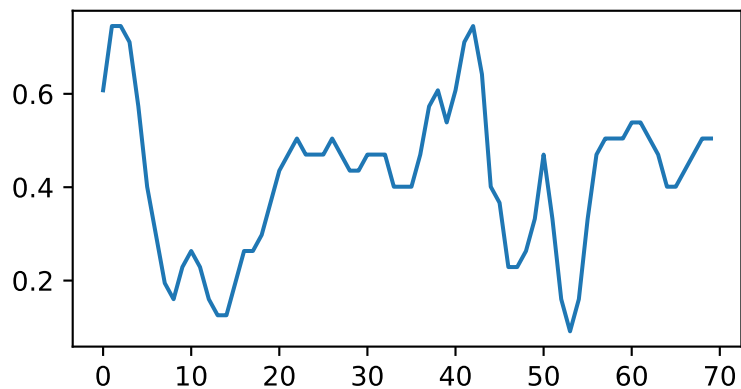

Class 1 - idx 1

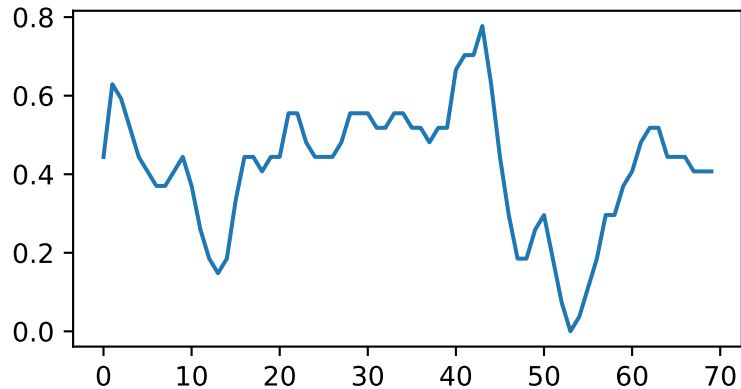

Class 1 - idx 0

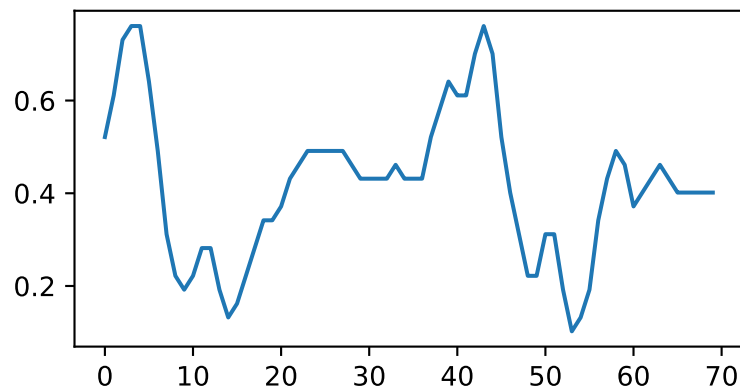

SonyAIBORobotSurface1 - rulebased rules #2 (k=3, num_rules=0, acc=0.71)

Class 0:

R1: In the early region, values oscillate strongly, forming a peak–trough–peak pattern rather than a single smooth fall from high to low.

R2: In the late region, after a high peak, there are two or more sharp drops to very low values separated by strong rebound peaks, giving a wavy tail with multiple deep troughs.


Class 1:

R1: In the early region, values mainly trace one broad downward sweep from a high start to a single low point, without rebounding close to the initial high before the middle.


R2: In the late region, there is one dominant deep V-shaped trough after the large late peak, followed by a steady rise into a fairly flat medium-high ending, without another equally deep trough.

SonyAIBORobotSurface1 - rulebased support examples #3 (k=3, num_rules=0, acc=0.58)


Class 0 - idx 3

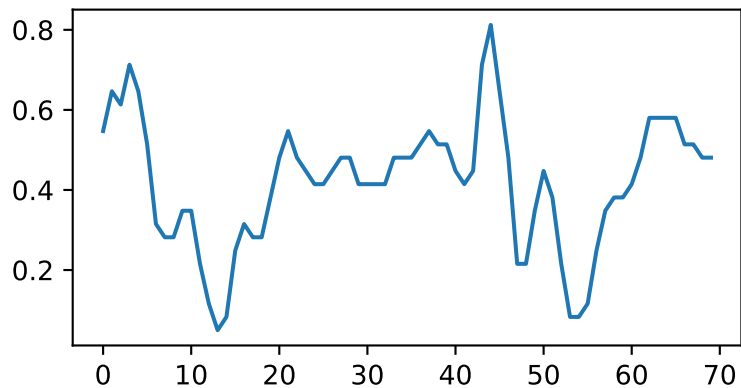


Class 0 - idx 4

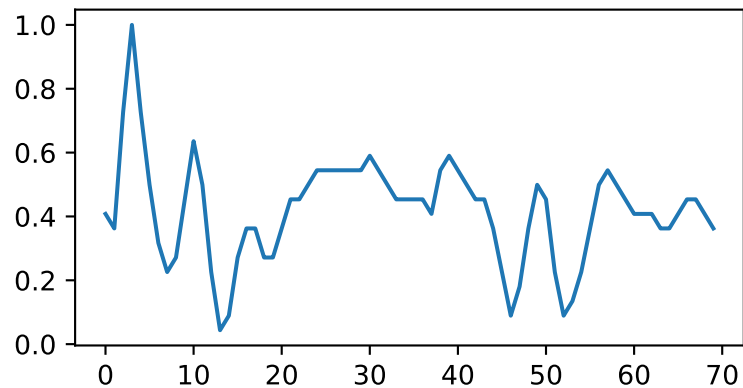


Class 0 - idx 5

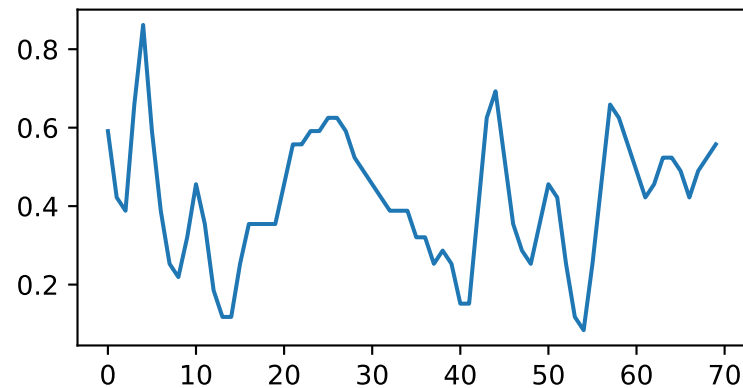


Class 1 - idx 7

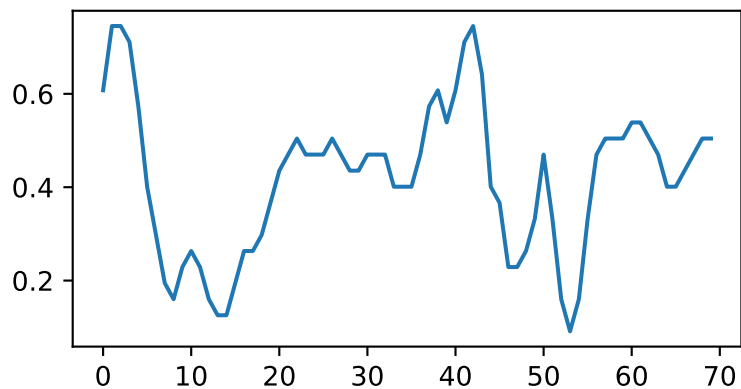

Class 1 - idx 1

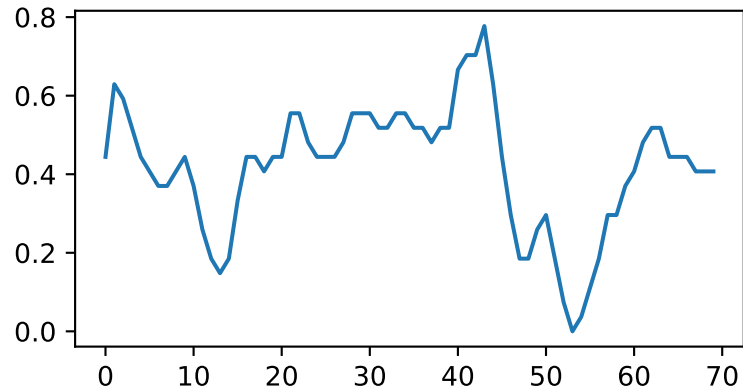

Class 1 - idx 0

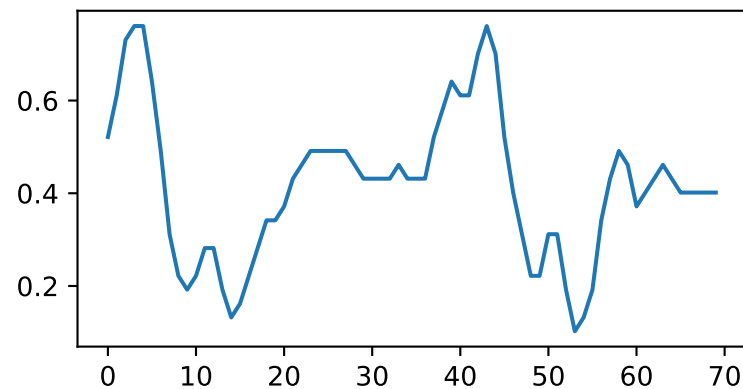

SonyAIBORobotSurface1 - rulebased rules #3 (k=3, num_rules=0, acc=0.58)

Class 0:

R1: In the middle-to-late portion, the series shows a jagged W-shape with at least two deep dips separated by strong rebounds.

R2: Around this region, several sharp, narrow peaks and troughs occur close together instead of one smooth down-up swing.

Class 1:

R1: In the middle-to-late portion, the series shows a single broad V-shape: it falls from a mid-series peak into one main deep trough and then rises steadily.

R2: After this central trough, the series climbs smoothly toward the end and does not return close to the trough level.