







Using the Selfie Compiler

disassemble binary code



-s example.s

compile to binary code



./selfie **-c** example.c

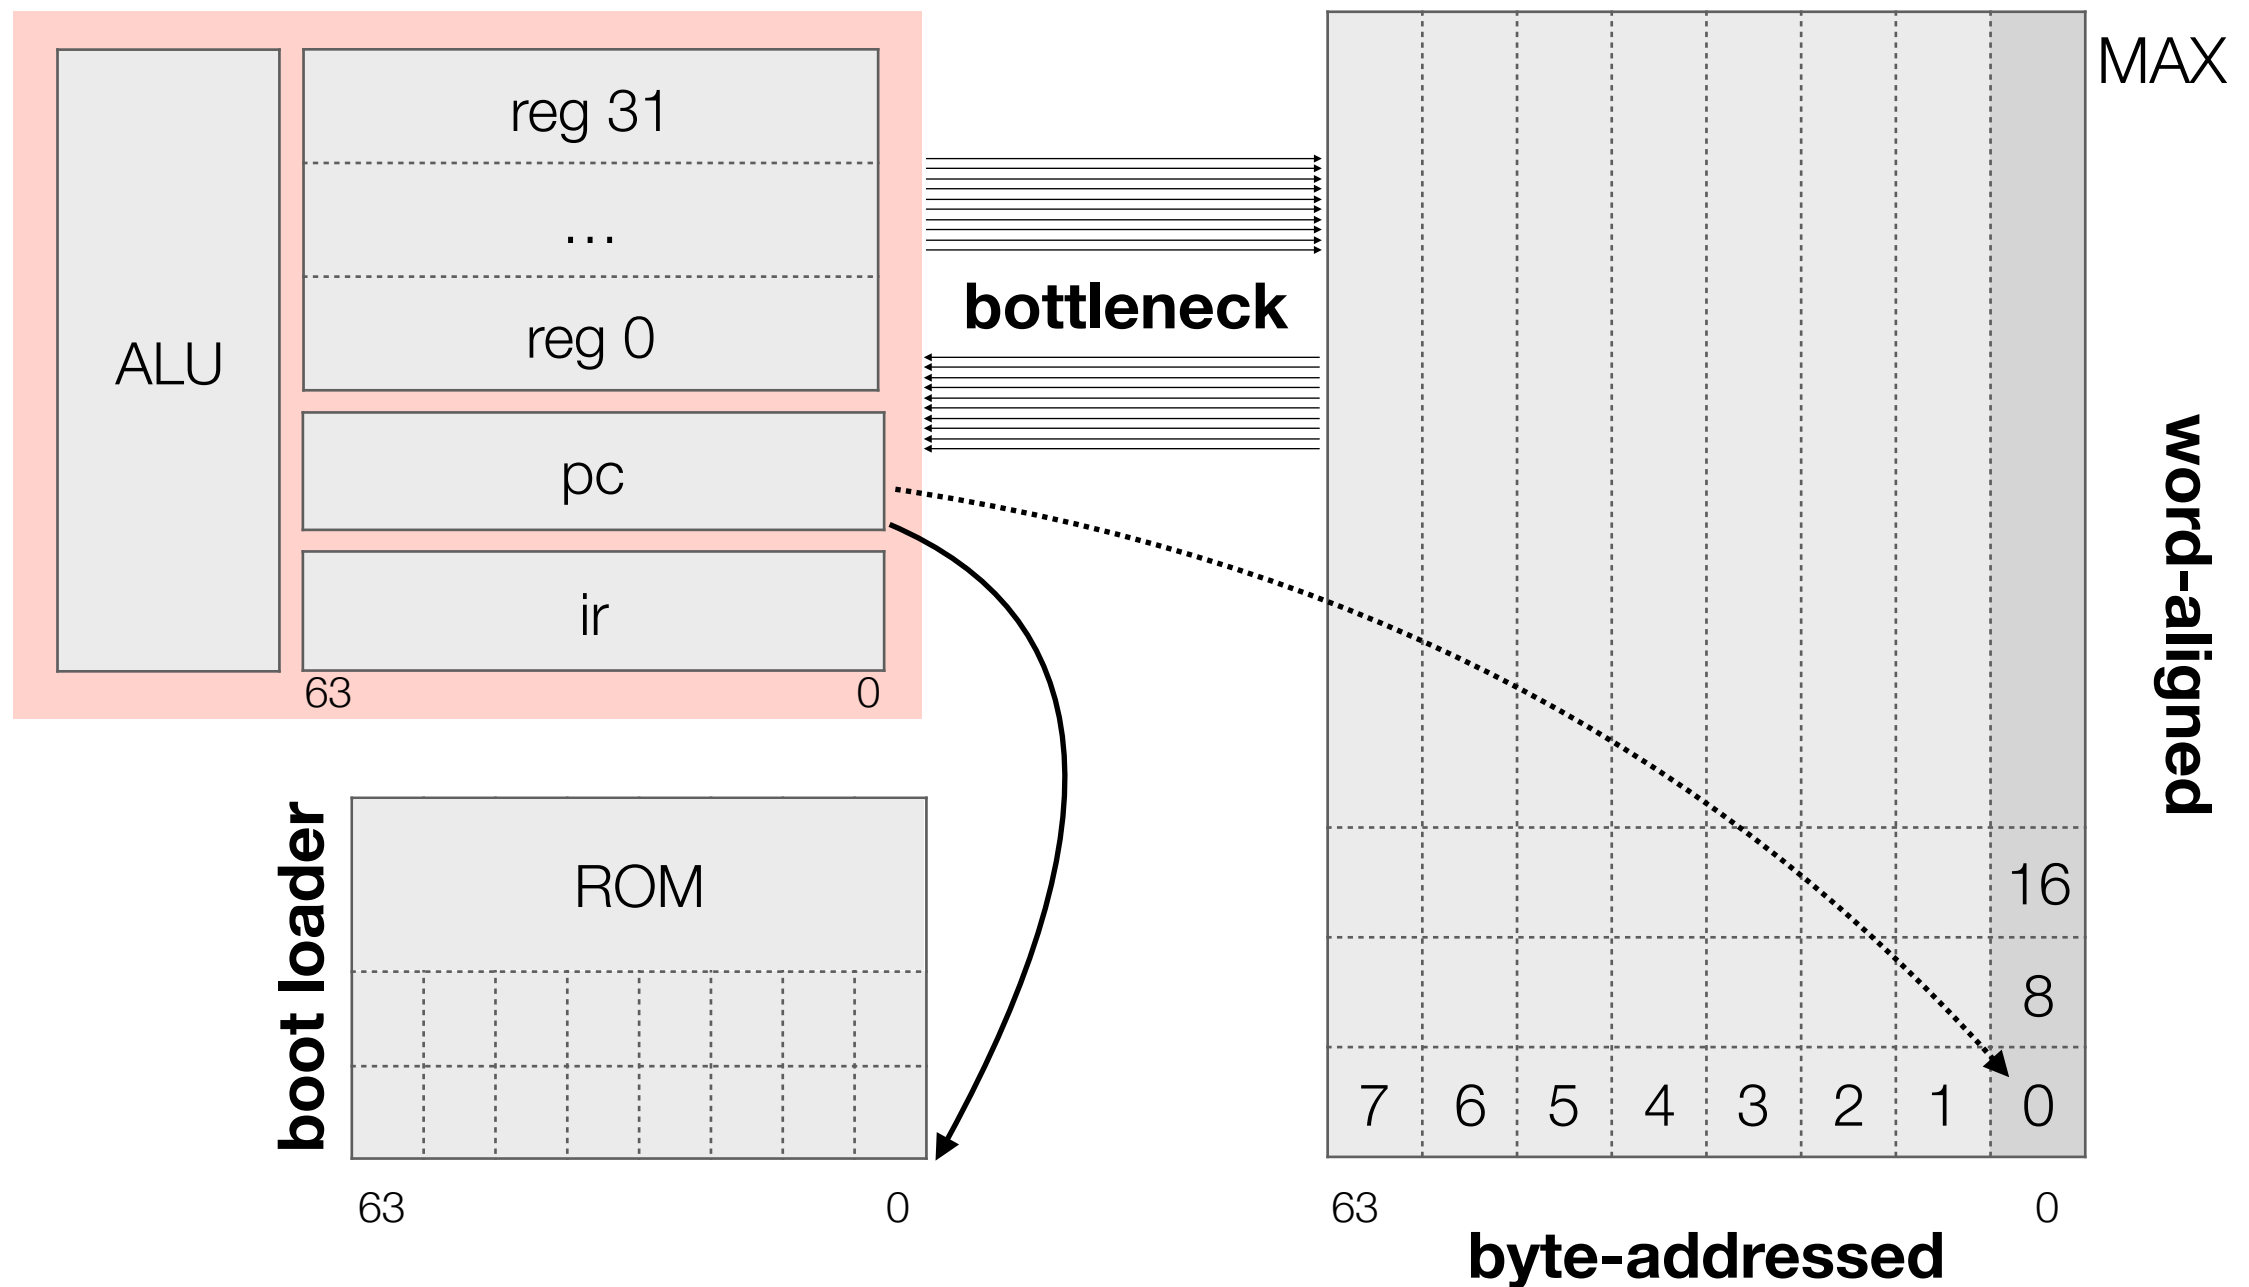

-o example.m


output binary code



Von Neumann Machine

CPU



More about the [Von Neumann architecture](#)

Using the Selfie Compiler

