



Using the Selfie Compiler

disassemble binary code

↓  
-s example.s

compile to binary code

↓  
./selfie -c example.c


↓  
-o example.m

output binary code



# Von Neumann Machine

## CPU

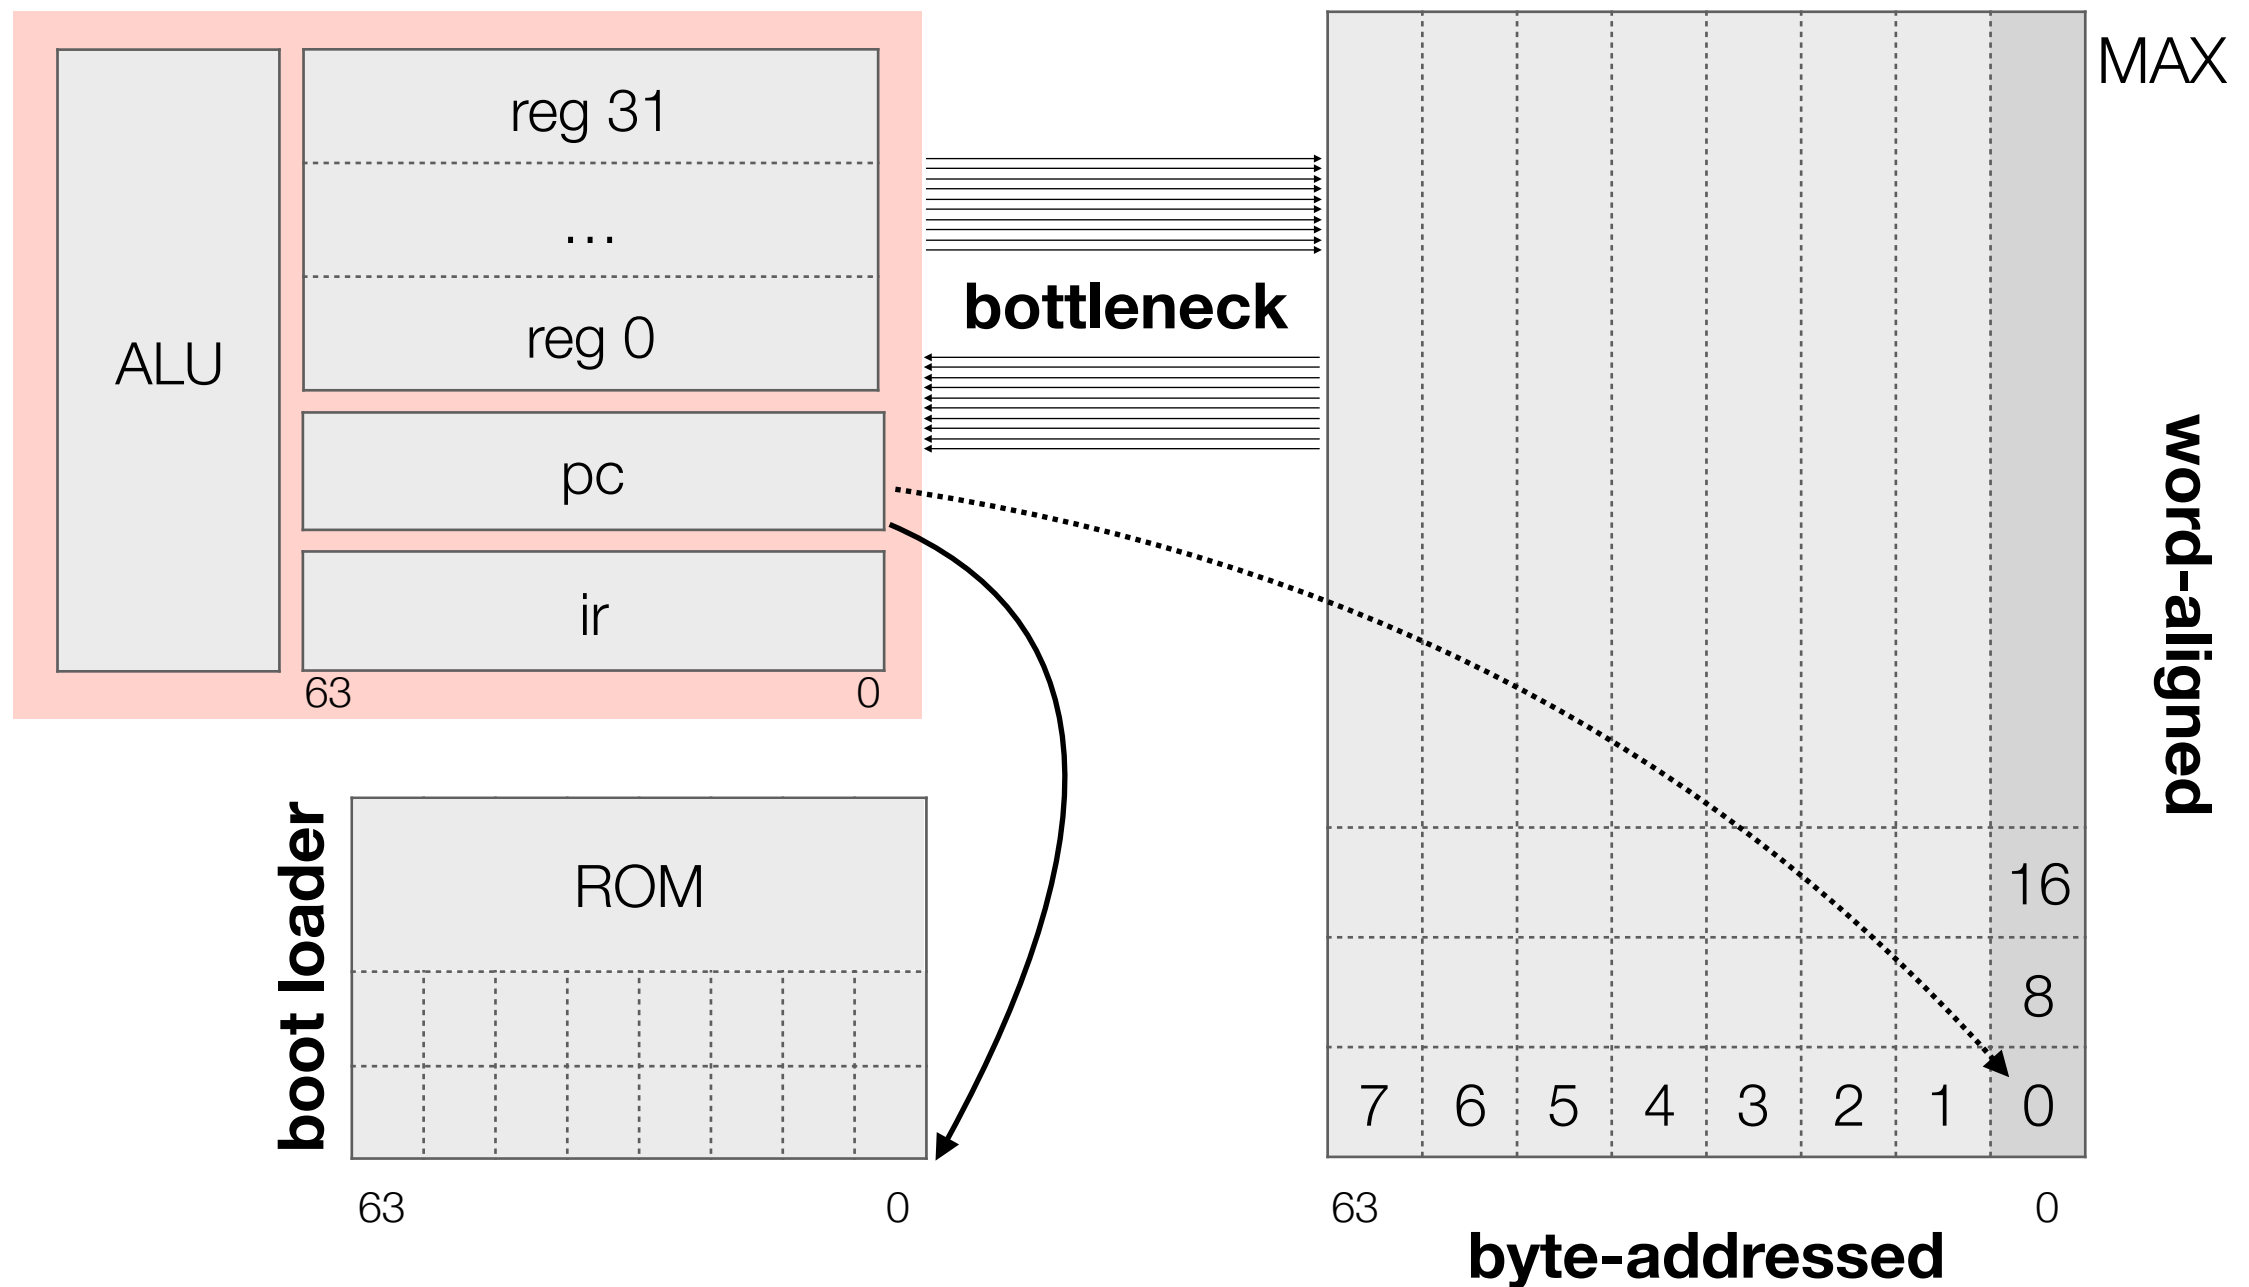

More about the [Von Neumann architecture](#)

# Using the Selfie Compiler

