

Compiler

- The starc compiler written in C* translates C* code (self-referential).
- High-level languages have a structure that defines the control flow.
- Machine code has no structure, it is just bits.
- The compiler reads a sequence of characters (ASCII, UTF-8-encoding).


high-level programming
language A

machine code B


transistation

input


output

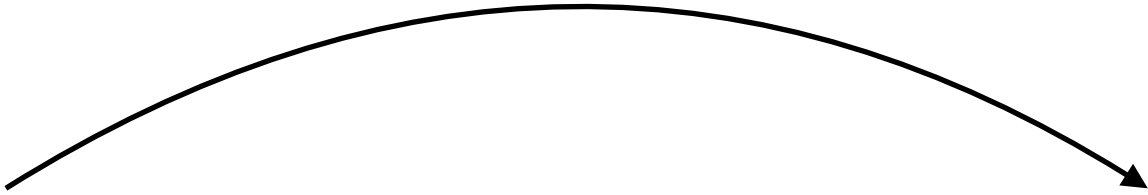

Using the selfie compiler

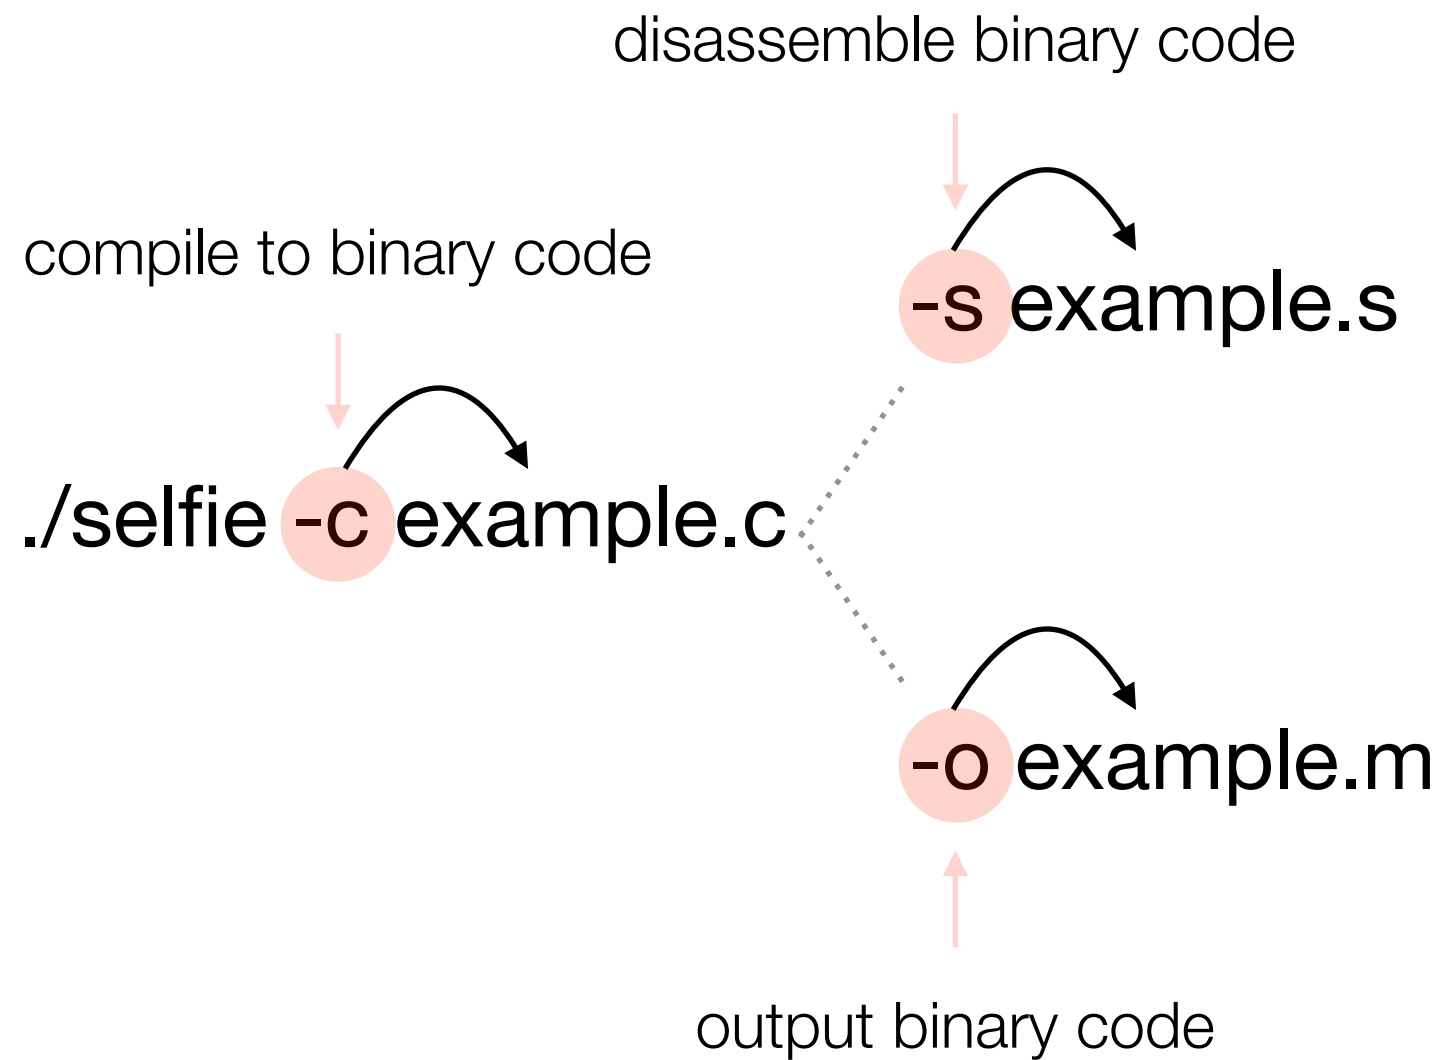

Compiler

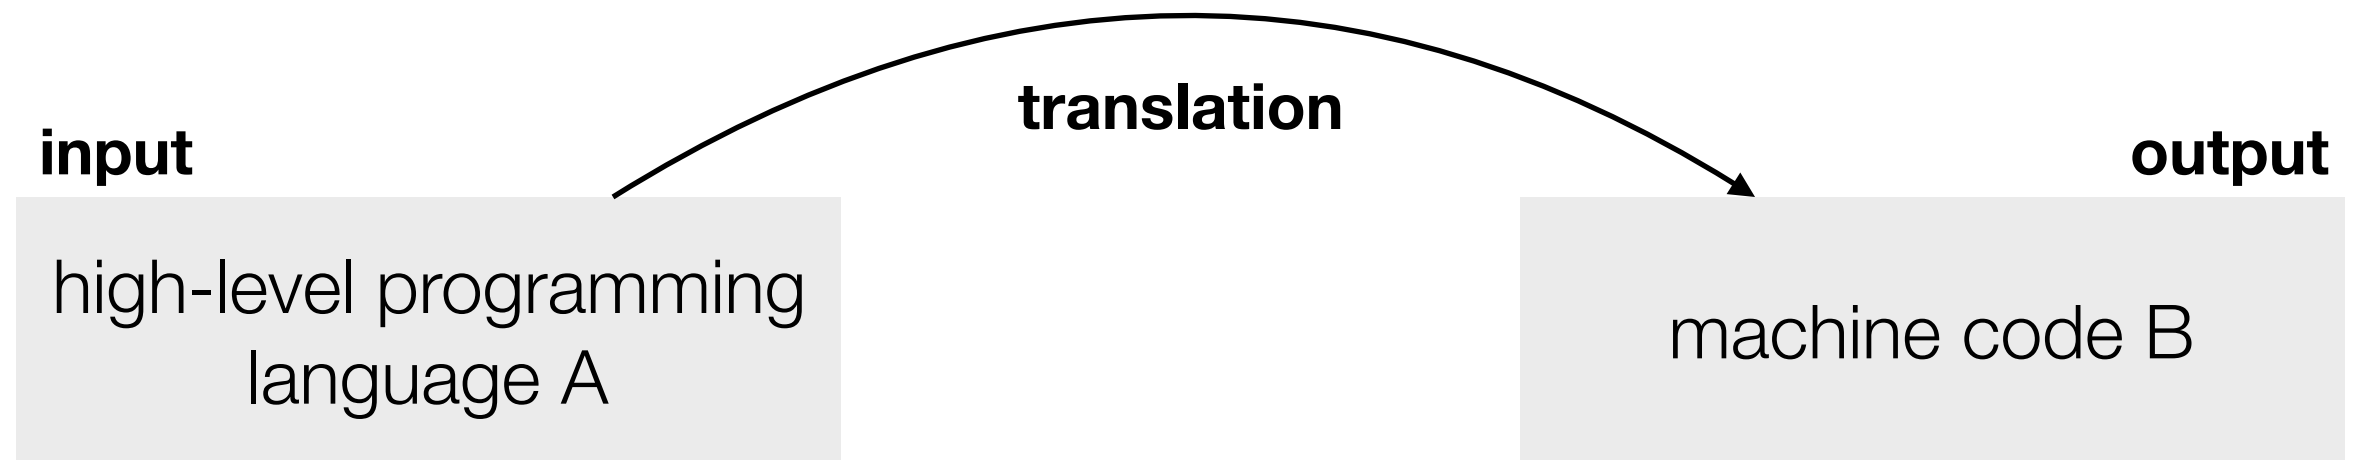

- The starc compiler written in C* translates C* code (self-referential).
- High-level languages have a structure that defines the control flow.
- Machine code has no structure, it is just bits.
- The compiler reads a sequence of characters (ASCII, UTF-8-encoding).