Module 2:R Markdown Document 1

Christian Ruiz

1/5/2022

This is a level 1 header

R Markdown

This is a level 3 header

Here is a link to GOOGLE

Here is word in **bold** and another word in **bold**

Here is a word in *italics* and another word in *italics*

When we compile documents, we use the rmarkdown package

To higlight r code (that is not executable) but the put 3 back ticks at the beginning and end of text.

mean()

Here is an example of a non numbered list: (NOTE: always indent 4 spaces between points)

- Breakfast
 - food
 - * eggs
 - * toast
 - * bacon
 - drink
 - * apple juice

Here is an example of a numbered list

- 1. Breakfast
 - a. food
 - i. eggs
 - ii. toast
 - iii. bacon
 - b. drink
 - i. apple juice

This is an example of a block quote This is a list inside a block quote

- 1. item 1
- 2. item 2

#use this idea for footnotes or caveats to protocols

This is an example of a nested block quote

This line is nested

To put code in block quotes, add 5 spaces after the greater than symbol followed by r code

```
mean(x)
```

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

summary(cars)

```
speed
                         dist
           : 4.0
                           : 2.00
##
                   Min.
##
    1st Qu.:12.0
                    1st Qu.: 26.00
    Median:15.0
##
                   Median : 36.00
           :15.4
                           : 42.98
    Mean
                    Mean
    3rd Qu.:19.0
                    3rd Qu.: 56.00
    Max.
           :25.0
                    Max.
                           :120.00
```


Including Plots

You can also embed plots, for example:

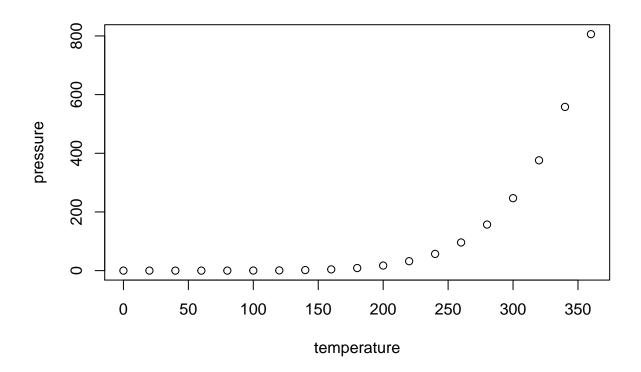

Note that the \mbox{echo} = FALSE parameter was added to the code chunk to prevent printing of the R code that generated the plot.

plot(pressure)

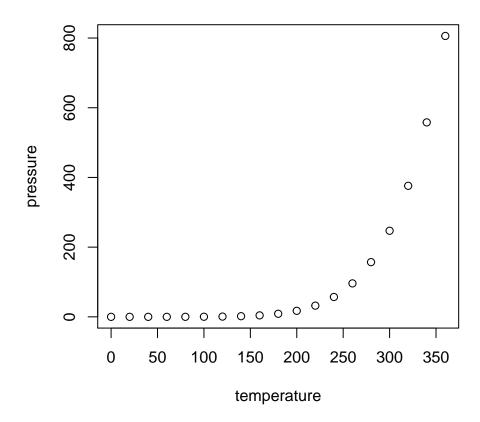

Insert tables

knitr::kable(head(cars))

lis
:
1
4
2
1
10