

29/09:

__/__/

→ docker network ls

↳ list all networks available in system.

→ docker network create sjc-demonet

↳ Default a bridge

→ docker system prune → delete the remove argument

↳ Removes containers, unused networks, dangling images, unused build cache.

↳ Anagorai images.

→ docker run -d --name demo -p 8081:80

--network = sjc-demonet

↳ network.

↳ container name.

↳ image name.

→ docker inspect demo

↳ Gives metadata (data about data)

→ docker ~~network~~ inspect sjc-demonet

↳ Info abt the networks & what containers are using it.

Docker Volumes

* Bind Mount → Saves to local system.

* General Volume → Created in docker area.

* tmpfs Volume → Default.

↓


Temporary file save.

→ Easy to attach to containers.

Docker Compose:-

→ It makes it easier to configure & run applications made up of multiple containers.

→ You can run multiple containers with a single container.

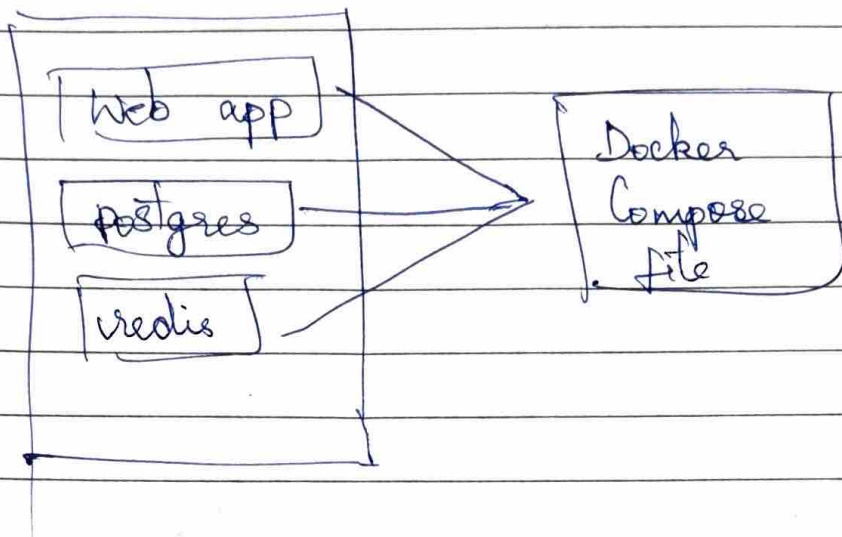

→ docker notepad docker-compose

→ docker compose version

→ docker compose up

↳ To compose the docker-compose.yaml

→ docker compose down.

↳ Stops all containers in compose.

→ docker compose ps

↳ To view containers created via compose

→ docker compose images

↳ To view images created through docker-compose

→ docker compose up -d

↳ To run containers w/o showing metadata.