

O analiză experimentală a algoritmilor de sortare uzuali. Când Sleep Sort câștigă.

Cristian Meriacri^{*,a,1}

^a Universitatea de Vest din Timișoara, Facultatea de Informatică, Str. Pârvan 4, Timișoara 300223, Romania - cristian.meriacrioo@e-uvt.ro

Acest articol a fost redactat în perioada Februarie-Mai 2026.

Abstract

Această lucrare prezintă o analiză experimentală a performanței algoritmilor de sortare, comparând soluții clasice precum Bubble Sort, Insertion Sort, Quick Sort și Merge Sort cu implementarea de referință din biblioteca standard C++, std::sort. Un element central și neconvențional al studiului este includerea algoritmului Sleep Sort, testat pentru a identifica limitele practice ale eficienței bazate pe multi-threading.

Metodologia a presupus implementarea în C++ folosind compilatorul GCC și testarea pe diverse seturi de date, cu dimensiuni cuprinse între 10 și 2.000.000 de elemente și cinci distribuții de valori diferite. Principalul parametru monitorizat a fost timpul de execuție, măsurat în timpul real de pe ceasul de perete folosind librăria standard inclusă chrono, pentru a evalua scalabilitatea și performanța fiecărui algoritm.

Rezultatele obținute au evidențiat diferențe semnificative în performanță, cu algoritmi precum Quick Sort și Merge Sort demonstrând o eficiență superioară în comparație cu soluțiile mai simple. Totuși, deși majoritatea rezultatelor au fost pe măsura așteptărilor, bazat pe ce știm despre algoritmii de sortare, Sleep Sort a prezentat un comportament neașteptat, depășind performanța algoritmului std::sort din librăria C++ în anumite condiții.

Lucrarea demonstrează astfel că eficiența unui algoritm este strâns legată de natura distribuției datelor și de dimensiunea acestora, evidențiind importanța alegerii algoritmului potrivit pentru fiecare situație specifică.

Keywords: Algoritmi, Sortare, Bubble Sort, Insertion Sort, Quick Sort, Merge Sort, Sleep Sort, std::sort, C++, Performanță, multi-threading, chrono

CONTENTS

1	Introducere	2
1.1	License	2
2	Document Styling	2
2.1	Document Type	2
2.2	Abstract and Keywords	2
2.3	Lettrine	2
2.4	Table of Contents	2
3	Cross-Reference Commands*	2
4	Figures	2
5	Tables	2
6	Document Data	2
6.1	Front-Matter Footer Block*	2
6.2	Headers and Footers*	3
	Headers • Footers	
7	Rho Custom Packages	3
7.1	Rhobabel.sty	3
7.2	Rhoenvs.sty	3
8	Equations	3
9	Codes	3
9.1	Coding with Minted*	3
9.2	Coding with Listings	3
9.3	Inline Code*	4
	Numberless section	4
10	Bibliography	4

FAQ	4
How do I manage my references?	4
What should I do with the example files?	4
How do I place equations easily?	4
How do I change the paper size?	4
Contact me	4
Github Repository	4
Supporting	4
Any contributions are welcome!	5

1. INTRODUCERE

Rho-class is specially designed for research articles, technical/lab reports, and academic documentation. This guide will help you understand the features and proper use of the template, enabling you to efficiently structure and format your documents with clarity and precision.

This class includes the following files in the rho-class folder:

- `rho.cls` — The main class file.
- `rhoenvs.sty` — A package containing custom environments.
- `rhobabel.sty` — A support package for multilingual.
- `README.md` — With essential information.

Additionally, this template includes a sample document `main.tex`, a bibliography file `rho.bib`, as well as figures, tables and code examples to help you get started quickly.

1.1. License

This template was developed by Guillermo Jimenez, licensed under Creative Commons CC BY 4.0. You are free to adapt, share, and distribute it, provided that proper credit is given to the original author.

2. DOCUMENT STYLING

2.1. Document Type

Before the main title, a brief descriptor indicates the type of document (e.g., Lab Report, Research Article, etc). This is controlled by the `\doctype{}` command.

If no such label is needed, omit the command and the title will automatically reposition itself to maintain proper vertical spacing and visual alignment.

2.2. Abstract and Keywords

The abstract and keywords are declared in the preamble of the document with `\begin{abstract}...\end{abstract}` environment alongside the dedicated `\keywords{}` command to allow the class file to automatically handle their formatting and positioning during the title creation process.

2.3. Lettrine

The `\rhostart{}` command, provides a personalized lettrine for the beginning of the first paragraph as shown in this example.

2.4. Table of Contents

This class includes a customized design for the table of contents, which is disabled by default. To enable it, insert the `\tableofcontents` command before your first section.

3. CROSS-REFERENCE COMMANDS*

Rho-class provides shorthand commands for cross-referencing figures, tables, code listings, and equations. To customize the label format, edit the `rhobabel.sty` file. Label translations for Spanish are handled automatically.

- `\figref{}` — Uses the label style defined by `\figlabel`.
- `\figsref{}` — Uses the label style defined by `\figslabel`.
- `\tabref{}` — Uses the label style defined by `\tablabel`.
- `\coderef{}` — Uses the label style defined by `\captionlabelcode`.
- `\equref{}` — Uses the label style defined by `\eqlabel`.

These commands generate fully hyperlinked references, both the label and the number, ensuring navigation to the referenced element when clicked in the PDF.

4. FIGURES

Fig. 1 shows a 3D surface visualization of a bivariate function.

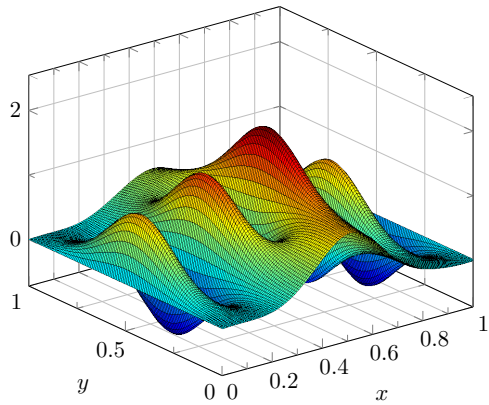


Figure 1. 3D surface obtained from PGFPlots [3].

5. TABLES

Table 1 shows an example table of some astronomical objects.

Table 1. Astronomical Object Data		
Object	Type	Distance (Light Years)
Alpha Centauri	Star system	4.37
Betelgeuse	Red supergiant star	642.5
Andromeda	Spiral galaxy	2.537 million
Earth	Planet	0
Sirius	Binary star system	8.6

Note: The table contains data of some famous celestial objects.

The `\tabletext{}` command is used to add notes to tables easily.

6. DOCUMENT DATA

6.1. Front-Matter Footer Block*

A new block called `\docinfo{}`, has been added to the bottom right of the first page, acting as a floating element which stays fixed in place. This replaces the corresponding author block previously located above the abstract in earlier versions.

The `\docinfo{}` block was created to give you greater control over supplementary document data, such as publication dates, licensing information, extended author details, and other front-matter notes. You can fully customize its content to suit your needs.

Additionally, the new `\corres{}` command serves as a flexible alternative to `\thanks{}`. Since modifying the standard `\thanks{}` command can be complex and its positioning is often rigid, `\corres{}` was introduced to offer a more adaptable solution without sacrificing functionality.

Note

You can use `\corres{}` as many times as needed since it automatically ensures that each entry remains correctly associated. For best results, I recommend using text symbols rather than mathematical ones (e.g., `\textasteriskcentered`, `\textdagger`, etc.).

If `\corres{}` is not used, `\docinfo{}` will automatically adjust its position. The implementation was designed to handle any combination of front-matter elements you might need when starting your document. In this example template, you'll find a minimal demonstration that combines both to illustrate their interaction.

6.2. Headers and Footers*

6.2.1. Headers

On all pages except the first, the document title and journal appear in the header. Since twoside layout is enabled, its position alternates depending on whether the page is odd or even.

6.2.2. Footers

In the first page, six elements display supplementary information for your document:

- `\journalname{}` — Displays the journal name, university, institute, company, or any institutional affiliation.
- `\theday{}` — Displays the current date.
- `\vol{}` — Specifies the volume number of the publication.
- `\no{}` — Specifies the issue number within the volume.
- `\journal{}` — Defines the full journal title.
- `\thepage` — Shows the current page number and the total count.

In all cases, you can freely rearrange or customize the order of these elements by modifying the class file to suit your needs. If any of them are not required, simply omit the corresponding command — the remaining elements will automatically adjust their spacing to remain evenly distributed.

7. RHO CUSTOM PACKAGES

7.1. Rhobabel.sty

This package have all the commands that automatically translate from English to Spanish when this custom package is defined.

By default, this document has its content in English. However, at the beginning of the document you will find a recommendation when writing in Spanish.

You may modify this package if you want to use other language than English or Spanish. This will make easier to translate your document without having to modify the class document.

7.2. Rhoenvs.sty

This package provides custom environments designed to enhance the visual presentation and structure of your document. Key examples include rhoenv, info, and note.

Their style is defined by `rhoenvstyle` — allowing you to customize their appearance according to your document's requirements.

An example using the `rhoenv` environment is shown below.

Custom Title

This is an example of the custom title environment. To add a title type this command `[frametitle=Custom Title]` next to the beginning of this environment (as shown in this example).

The `info` and `note` are environments which have a predefined title and translate their title to Spanish automatically when this language is defined.

8. EQUATIONS

Equation 1 shows the Schrödinger equation as an example.

$$i\hbar \frac{\partial}{\partial t} \Psi(\mathbf{r}, t) = \left[\frac{-\hbar^2}{2m} \nabla^2 + V(\mathbf{r}, t) \right] \Psi(\mathbf{r}, t) \quad (1)$$

The `amssymb` and `amsmath` packages were not required, as STIX2 font incorporates mathematical symbols for writing quality equations.

Note

If you would like to change the values that adjust the spacing above and below the equations, change the `\eqskip` value until the preferred spacing is set. The default value is set to 9pt.

9. CODES

9.1. Coding with Minted*

The `minted` package offers customized features for adding codes. In addition, the template is designed to work seamlessly with Fira Code, a monospaced font specially crafted for programming environments.

If your are using a desktop app as TeXstudio, try these steps to make this package work on Windows:

1. Install Python — A stable version (e.g., v.3.11)
2. Open the terminal and type `pip install Pygments`.
3. Update if a newer version is available.
4. Go to TeXStudio settings and change the default compiler to `pdflatex -shell-escape -interaction=nonstopmode \%.tex`.
5. Compile and wait for the result.

Caution

Ensure that `pygments` is properly installed and added to your system's PATH. Otherwise, you may encounter compilation errors. Additionally, enable shell escape when compiling, as it is required for minted to process and highlight code.

In Overleaf, this package is easier to use since it does not require any additional installations or modifications — just add the code as shown in the example. Code 1 shows a Python example.

```
# Fira Code Demo - Python
def main():
    # Common operators
    a = 10
    b = 20
    if a < b and a != 0:
        print("a is less than b")

    # Comparisons
    x = (a >= 5) and (b <= 30)

    # Walrus operator
    if (value := get_data()) is not None:
        process(value)

    # Lambda with arrow
    scale = lambda z: z * 2

    # Bitwise operations
    flag = a & b | (a ^ b)
    shift = a << 2 >> 1

    return flag, shift

def get_data():
    return "Simulated data"

def process(data):
    print(f"Processing: {data}")

if __name__ == "__main__":
    main()
```

Code 1. Python code example with minted.

You can customize its design changing `\usemintedstyle` command. The different styles offered by the minted package can be preview through this link — <https://pygments.org/styles/>.

9.2. Coding with Listings

Since `minted` requires additional installations and can be complex in some desktop TeX editors, you can use the `listings` package instead, which provides a simpler way to include code.

```
# Fira Code Demo - Python
def main():
    # Common operators
    a = 10
    b = 20
    if a < b and a != 0:
        print("a is less than b")

    # Comparisons
    x = (a >= 5) and (b <= 30)

    # Walrus operator
    if (value := get_data()) is not None:
        process(value)

    # Lambda with arrow
    scale = lambda z: z * 2

    # Bitwise operations
    flag = a & b | (a ^ b)
    shift = a << 2 >> 1

    return flag, shift

def get_data():
    return "Simulated data"

def process(data):
    print(f"Processing: {data}")

if __name__ == "__main__":
    main()
```

Code 2. Python code example with listings.

While `listings` is a simpler and widely supported package for code formatting, `minted` offers a more modern and powerful approach. It leverages the Pygments syntax highlighter to deliver superior coloring, language support, and styling options. One of its key advantages is the ability to easily switch between built-in color styles.

In contrast, `listings` requires manual setup for colors, fonts, and formatting rules. For users who prefer fine-tuned customization, the styling options for `listings` are organized in `rho.cls` file and can be modified at any time to suit individual preferences.

9.3. Inline Code*

As shown in this template, inline code has a custom style for improved visual appeal. To use it, simply add `\inlinecode{}` command and place your code inside the braces.

■ NUMBERLESS SECTION

Declaring a numberless section automatically inserts a square symbol before the title. This unique feature is specific to first-level sections within this class.

As this symbol also affects the table of contents and references titles, users who prefer to disable it may edit the section styling parameters in `rho.cls`.

10. BIBLIOGRAPHY

Bibliography management is handled by `bibtex`, with the default citation and reference style set to IEEE. The `citestyle=numeric-comp` option is enabled, allowing multiple citations to be grouped within a single bracket (e.g., [1, 2]). The citation format can be customized directly in `rho.cls` to suit any preferred style.

■ FAQ

How do I manage my references?

To manage your references, I recommend using the tool `scribbr`. You can simply enter the URL or create your own citation, and then export

it to $\LaTeX$ using the options in the three-dot menu.

The generated citation can be copied and pasted into `rho.bib`, the file designated for bibliography management. You may rename this file, but if you do, remember to update the `\addbibresource` command in `rho.cls` under the `biblatex` section.

Note

Some platforms, such as Google Scholar or scientific journals, provide citations directly in BibTeX format. Therefore, check if there is a “how to cite this document” section to streamline the citation process even further.

If you have any further questions, you can refer to the following page — Bibliography management with `biblatex`.

What should I do with the example files?

The template includes sample content — such as an example figure, bibliography entries, and the `example.py` script — to demonstrate how the layout and features work. Once you start customizing the document for your own use, feel free to delete all example files and entries you don’t need.

How do I place equations easily?

For equations, we have two options: inline or on its own line. For inline equations, simply place a dollar sign (\$) at the beginning and end of the equation. However, if you want the equation to be displayed on its own line, you need to use the equation environment.

If you find it challenging to write formulas directly in $\LaTeX$, you can use text editors like Word. In the equations menu, you can select $\LaTeX$ in the conversion section and copy and paste the equation you wrote into one of these two environments.

How do I change the paper size?

By default, this class was adapted for `a4paper` and test it with `letterpaper`. The following paper sizes are available in $\LaTeX$:

- letterpaper (11 × 8.5 in)
- legalpaper (14 × 8.5 in)
- executivepaper (10.5 × 7.25 in)
- a4paper (21 × 29.7 cm)
- a5paper (21 × 14.8 cm)
- b5paper (25 × 17.6 cm)

■ CONTACT ME

Have questions, suggestions, or an idea for a new feature? Found a bug or working on a project you’d like to invite me to?

Feel free to reach out — I’d be happy to help, collaborate, or fix the issue. Your feedback helps me improve my templates!

✉ memo.notess1@gmail.com

🌐 memonotess.com

📷 [@memo.notess](https://www.instagram.com/memo.notess)

■ GITHUB REPOSITORY

Visit the repository to access the source code, track ongoing development, report issues, and stay up to date with the latest changes.

🔗 <https://github.com/MemoJimenez/Rho-class>

■ SUPPORTING

Enjoyed this document class? Check out `tau-class`, my very first $\LaTeX$ template.

🔗 <https://es.overleaf.com/latex/templates/tau-class>

Any contributions are welcome!

Coffee keeps me awake and helps me create better $\text{\LaTeX}$ templates. If you wish to support my work, you can do so through PayPal:

 <https://www.paypal.me/GuillermoJimeenez>

Enjoy writing with rho-class!

■ REFERENCES

- [1] E. Bell, C. Moss, and D. Yu, “The impact of monospaced font ligatures on code readability in scientific documentation”, *Journal of Technical Typography*, vol. 7, no. 1, pp. 33–47, 2022. DOI: 10.8888/jtt.2022.00701
- [2] L. Davis and N. Kim, “Signalflow: A modular framework for real-time physiological data visualization”, *International Journal of Biomedical Computing*, vol. 15, no. 4, pp. 78–92, 2023. DOI: 10.9999/ijbc.2023.01504
- [3] PGFPlots, *A latex package to create plots*. [Online]. Available: <https://pgfplots.sourceforge.net/>