

Responsible Agentic AI Requires Explicit Provenance

Jinwei Hu¹, Xinmiao Huang¹, Qisong He¹, Youcheng Sun², Yi Dong¹, Xiaowei Huang¹

¹School of Computer Science and Informatics, University of Liverpool, UK

²Department of Computer Science, Mohamed bin Zayed University of Artificial Intelligence, UAE

Abstract

Agentic AI is rapidly proliferating across diverse real-world domains such as software engineering, yet public trust has not kept pace. The central reason is that responsibility, despite being widely discussed, remains a subjective and unenforced concept, as no current agentic framework produces the quantifiable, traceable, and interventionable provenance needed to assign it when harm emerges from compositions no single party designed. We position that what is missing is not better benchmark-level evaluation but **explicit provenance** across the full agentic lifecycle, which is the only viable basis for making responsibility computable and actionable. We advance this agenda along four axes: establishing *why* such provenance is a structural necessity by identifying responsibility gaps across sociotechnical dimensions, formalizing *what* it must encode through a causal attribution function and responsibility tensor, discussing *how* it can be made computable across four lifecycle layers with preliminary experiments showing that provenance is estimable and interveneable online before irreversible harm accumulates, and examining *who* bears responsibility through a concrete agentic incident. Explicit provenance is not a discretionary refinement but the necessary condition for responsible agentic AI, and no stakeholder across its ecosystem can afford to treat it as optional.

1 Introduction

Artificial intelligence (AI) has recently undergone three transitions in the scope of its action. Early AI systems were largely reactive: inputs in, outputs out. A second generation, grounded in large language models (LLMs) [9, 1, 61], shifted the focus from prediction to open-ended text generation. A third transition is now underway: *agentic AI*, in which models are embedded in autonomous action loops, equipped with tools and persistent memory, integrated into multi-agent pipelines, and granted authority to plan, execute, and revise decisions over extended horizons [65, 70, 31]. This transition changes the object of concern: an agentic system does not merely answer questions, but acts in the real world by booking flights, executing code, sending emails, and coordinating with other autonomous systems, often with little or no human intervention [51, 25, 69, 28, 35].

Yet despite this rapid proliferation, enterprise surveys report that real-world adoption remains far below the pace of development and organizations scale capability faster than they are willing to delegate authority [41, 15]. The practical consequence is an adoption bottleneck rooted in a trust deficit. Users, organizations, and regulators hesitate to grant consequential authority to systems whose actions leave no traceable record of how decisions were reached, by whom, and through which causal chain. This is not irrational caution but a predictable response to structural unaccountability: when harm occurs, each party points to another and responsibility dissolves before it can be assigned. Responsibility has been widely discussed in the trustworthy AI literature [37, 34], yet it has never been made computable or actionable across the full agentic lifecycle, not for lack of normative vocabulary but for lack of the explicit provenance. Consider a case where individually audited skills each pass safety review, yet their composition within an LLM-based agent produces regulatory violations that no per-skill audit could have detected: no party can be held accountable precisely

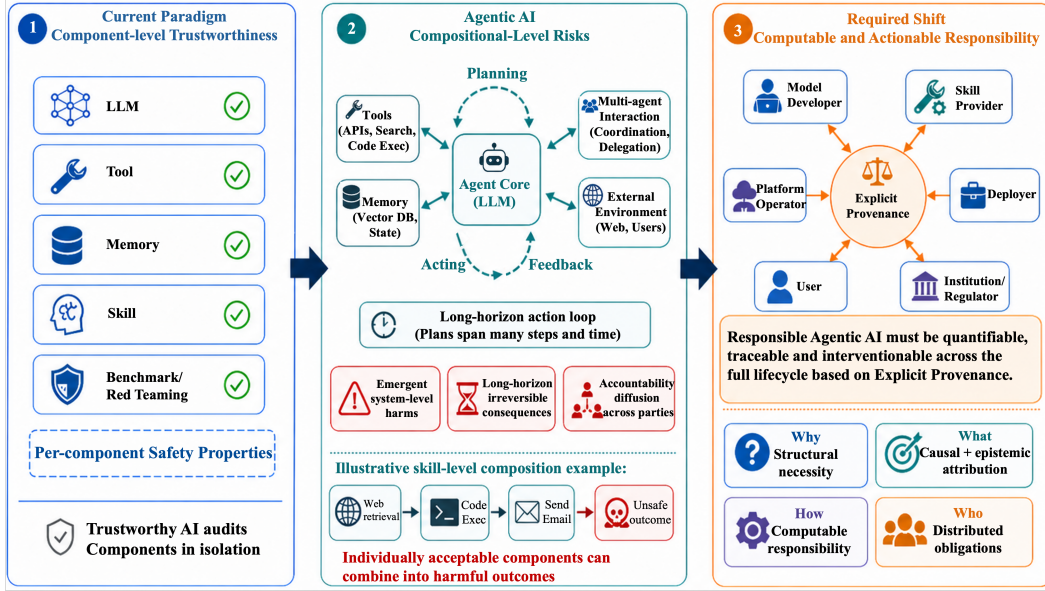


Figure 1: Per-component trustworthy AI audits components in isolation (1), but agentic AI embeds them in long-horizon action loops that produce emergent harms, unanticipated compositional consequences, and diffused responsibility (2). Closing this gap requires explicit provenance across the full lifecycle of responsible agentic AI and we demonstrate it via four axes (3).

because no responsibility envelope was specified before deployment to bound each party’s obligations, and no record exists of how the harmful trajectory was jointly produced.

This failure is not incidental but structural, as harm in agentic systems does not reside in any single component but emerges from system-level trajectories, compositions, and distributed causal chains that no individual audit can inspect [10]. Existing records are designed around per-component failures and therefore remain too coarse to support causal responsibility attribution or its traceability across parties, and their post-hoc nature means that intervention cannot be mounted until after harm has already occurred [45]. *We therefore position that responsible agentic AI must be quantifiable, traceable and interventionable across the full lifecycle, and that explicit provenance is the necessary infrastructure for making the responsibility computable and actionable.* Without it, responsibility remains an subjective concept that cannot be assigned, or enforced, and benchmark-driven evaluation, while necessary for component-level capability, neither reaches compositional behavior nor produces the causal attribution that the responsibility requires.

This paper therefore advances a provenance-grounded agenda for computable and actionable responsibility in agentic AI along four axes. We first establish **why** explicit provenance is a structural necessity rather than a discretionary refinement, identifying socio-technical responsibility gaps (Section 3). We then formalize **what** provenance must encode in agentic contexts through a causal attribution function and an responsibility tensor (Section 4). We address **how** responsibility can be made computable across four lifecycle layers, validated through preliminary experiments showing that causal contribution is estimable online before irreversible harm accumulates (Section 5). Finally, we examine **who** bears responsibility by applying the responsibility tensor to a concrete agentic incident, demonstrating how provenance distributes obligations (Section 6).

2 Background

Agentic AI now appears across diverse domains, from software automation to professional decision support [72, 58, 78, 27, 71]. Thus, we adopt a general functional definition centered on the capabilities that make these systems consequential.

Definition 2.1 (Agentic AI System). An agentic AI system situates one or more LLM-based agents within a perception-action loop with (i) *tool access*, (ii) *persistent memory*, (iii) *multi-step planning*, and (iv) *self-correction*, optionally coordinating with other agents.

Agentic adoption is outpacing responsibility structures. Frontier providers are productizing agents that use tools, operate computers, and complete multi-step tasks, while open ecosystems such as OpenClaw and ClawHub illustrate the emergence of third-party skill marketplaces where agents can be extended with externally authored capabilities [47, 48, 5, 50, 49]. Enterprise surveys confirm that adoption is already at scale: McKinsey reports that 23% of respondents are scaling agentic AI systems and another 39% experimenting, and PwC reports that 79% of senior executives say AI agents are already being adopted in their companies [40, 54]. Yet responsibility structures remain less mature, with McKinsey identifying persistent gaps in governance and risk management and Deloitte characterizing agentic AI as scaling faster than its guardrails [41, 15]. Agentic AI is therefore not merely a capability frontier but a responsibility frontier.

Relation to trustworthy AI and adjacent work. The trustworthy AI paradigm has organized safety around model-level properties, benchmark evaluation, and red-teaming [36, 20, 60], but agentic deployment exposes three structural limitations. Risks is *compositional*: properties verified for individual components need not survive their interaction [35]. Evaluation is *fragile*: task completion can diverge from safety, policy compliance, and harmfulness control [3, 32, 29]. Accountability is *diffuse*: harmful outcomes arise from multi-step trajectories distributed across developers, platforms, and deployers that no per-component audit can reconstruct [59]. Existing accountability work provides foundations for auditing and institutional oversight [17, 68], but assumes bounded decisions and inspectable systems that agentic AI renders obsolete: harm may emerge from long-horizon trajectories, persistent memory, and third-party skills that no single actor designed or controlled end-to-end. Responsibility discourse in moral philosophy, legal theory, and AI governance is extensive [63, 53, 44], yet none of these bodies of work produces the explicit provenance that makes responsibility computable when harm emerges from compositional agentic behavior rather than from any identifiable single decision.

3 Why Responsible Agentic AI Requires Explicit Provenance

Across the limitations identified in Section 2, responsibility remains uncomputable due to no party produces the explicit provenance needed to assign responsibility when harm emerges from individually compliant components. We therefore characterize what any responsible agentic system must satisfy.

Proposition 3.1 (Structural Requirement of Responsible Agentic AI). *A responsible agentic system requires explicit provenance satisfying three properties. First, quantifiability, meaning it produces measurable causal attribution for each component and corresponding party. Second, traceability, meaning it grounds responsibility assignments in causally verified execution records and epistemic position. Third, interventionability, meaning it is produced continuously so that agentic systems remain open to interception and recovery across the lifecycle.*

The following analysis demonstrates, for each property, why its absence leaves the corresponding sociotechnical dimensions unresolvable. These eight dimensions are representative rather than exhaustive, synthesized from the adjacent literature on responsible AI [63, 39, 64, 12, 14, 26, 53].

3.1 Sociotechnical Demonstration of Responsibility Gaps

Quantifiability. **Law** and **Morality** both require an identifiable causal agent whose contribution to a harm can be established. No party manufactures an agentic composition, so the EU AI Liability Directive’s presumption of fault cannot attach when harm is a property of component interaction rather than any individual component [64, 13, 6, 46, 12]. Morally, agentic causation is distributed across developers, skill maintainers, and platform operators in proportions no party designed or anticipated, so no party clears the culpability threshold and victims have no one to hold accountable [39, 62, 11]. At the technical level, **Standards** can make responsibility actionable only if they specify what causal attribution a system must produce to demonstrate responsible deployment; without this, every party defines responsible deployment on its own terms and no objective criterion exists to determine whether any obligation was met or breached [26, 55]. **Regulation** faces the same dependency. Mandatory requirements can close the accountability gap only if they specify what quantifiable attribution parties must produce as a precondition for market participation, since in open agentic marketplaces compositional safety testing generates collective benefits but imposes private costs, making zero investment the individually rational outcome absent such requirements [14, 41, 15]. Without quantifiability, no legal, moral, standards-based, or regulatory framework can identify which

party contributed what influence, leaving all four dimensions permanently unresolvable regardless of how well individual components are audited.

Traceability. **Ethics** and **Values** frameworks are designed to prevent harms that accumulate gradually across interactions rather than materializing at any single step. Agentic systems accumulate effects across weeks or months that no per-interaction audit detects [19]: autonomy erodes as delegation narrows users’ effective choices [43], and compositional bias amplification compounds small discriminatory signals into population-scale outcomes invisible at any single step [18, 73, 8, 33]. Without traceability that grounds cumulative causal attribution across interactions and populations, these harms remain structurally invisible to any responsibility framework. At the technical level, **Practice** failures are invisible to per-component auditing for the same reason: no traceable causal attribution of the joint trajectory is available. Indirect prompt injection succeeds with attack rates reaching 47% against GPT-4 across 17 tool-integrated systems [75]; over 68% of sandbox scenarios exhibit potential real-world agent failures [56]; individually valid skills introduce composition risks that reduce task performance [35]; and over 90% of high-popularity skills in ClawHub fail security review [23]. In every case, the failure is a system-level property that only trajectory-level traceability can reconstruct and attribute.

Interventionability. **Professionalism** concerns the boundary beyond which delegating consequential decisions to an agentic system is not legitimate. In regulated domains such as medicine [24], professional obligations cannot be transferred to an automated system on benchmark accuracy alone: benchmarks cover in-distribution tasks while deployment exposes systems to rare events and novel authority-boundary situations that benchmarks do not represent [74, 38]. Without interventionability that continuously monitors whether automated authority remains within validated boundaries and intercepts execution when it does not, no mechanism can prevent irreversible harm from accumulating in the uncovered region. The same requirement applies to the gradual harms identified under **Ethics** and **Values**: harms that build across interactions without crossing any single detectable threshold can only be interrupted by a system that produces provenance continuously and acts on it in real time. Without interventionability, explicit provenance reduces to a forensic instrument and responsible operation across the lifecycle cannot be guaranteed.

Explicit Provenance as Necessary Infrastructure. The socio-technical analysis above shows the three properties are jointly necessary rather than independently sufficient. Quantifiability without traceability leaves contested assignments unresolvable, traceability without interventionability confines attribution to post-hoc reconstruction, and interventionability without quantifiability produces continuous monitoring with no basis for assigning what was detected to any responsible party. Since real deployments routinely instantiate gaps across all three classes simultaneously, Proposition 3.1 cannot be satisfied without explicit provenance as the underlying infrastructure that makes all three properties simultaneously operational.

4 What Explicit Provenance Must Encode

This section formalizes what explicit provenance must capture to make sociotechnical responsibility computable in agentic AI. The central question is not only which parties bear responsibility when harm emerges from an agentic trajectory, but what causal and epistemic evidence must be produced and maintained to make that assignment possible. The formalization is guided by three requirements established in Proposition 3.1 and the definitions below instantiate these requirements and provide the formal basis for computable responsibility assignment.

4.1 Causal and Epistemic Grounding of Explicit Provenance

Let $\mathcal{A} = \{a_1, \dots, a_n\}$ be the set of agents, $\mathcal{S} = \{s_1, \dots, s_m\}$ the set of skills or tools and $\mathcal{E}$ the environment state space. An *agentic trajectory* is a finite sequence $\tau = (e_0, \alpha_0, e_1, \alpha_1, \dots, e_T)$, where $e_t \in \mathcal{E}$ is the environment state and $\alpha_t = (\alpha_t^1, \dots, \alpha_t^n)$ is the joint agent action at step t . Actions may include model outputs, tool calls, skill invocations, inter-agent messages, or external operations. A *harm event* $\omega \in \Omega$ is a measurable consequence of τ that negatively affects stakeholders. Let $\mathcal{P} = \{p_i \rightarrow M_i\}_{i=1}^r$ denote the deployment-chain accountability dictionary over r parties, where p_i is a human party and M_i is the set of technical components (e.g., foundation models, skills and

tools) developed, deployed, or maintained by p_i . Since harm in agentic systems can emerge from an extended trajectory rather than a single decision, responsibility assignment first requires a measure of each deployment-chain party’s causal contribution to the harmful outcome. Hence, producing and maintaining this measure is the first class of evidence that explicit provenance must encode.

Definition 4.1 (Causal Contribution). Let $\Pr[\omega \mid \tau]$ denote the probability that harm event ω occurs under trajectory τ . The causal contribution of party p is

$$\kappa(p, \omega, \tau) = \Pr[\omega \mid \tau] - \Pr[\omega \mid \tau_{-p}],$$

where τ_{-p} denotes a counterfactual trajectory under a role-preserving intervention that removes or neutralizes p ’s relevant decisions while holding other conditions fixed where meaningful. $\kappa(p, \omega, \tau) > 0$ iff p has nonzero causal contribution.

Remark 4.1. κ is a theoretical anchor rather than a directly observed quantity. Recent work on auditable and traceable LLM agents suggests that causal evidence can be approximated from execution traces, tool-activation records, permission boundaries, counterfactual replay, and controlled ablations [45, 77, 3, 76]. The role of κ is therefore not to assume perfect attribution, but to specify the kind of evidence that responsibility analysis should seek when attribution is contested. We provide preliminary evidence in Section 5.5 that causal signal is estimable online from execution prefixes across heterogeneous agent environments, establishing the tractability of κ at runtime. Attribution to human parties follows directly from the mapping in $\mathcal{P}$, in which each component is assigned to the party that developed, deployed, or maintained it.

Moreover, causal contribution alone is insufficient for responsibility assignment, as a party’s responsibility also depends on what it knew, or should reasonably have known, before the harm occurred. Each party’s epistemic position therefore constitutes the second class of evidence that explicit provenance must encode, and we define it using an objective standard so that parties cannot evade responsibility by manufacturing ignorance through incomplete documentation or inadequate safety assessment.

Definition 4.2 (Epistemic Position). $\varepsilon_p^t = (\mathcal{I}_p^t, \mathcal{C}_p^t)$, where $\mathcal{I}_p^t$ is the information available or reasonably expected to be available to party p at time t , and $\mathcal{C}_p^t \subseteq \Omega$ is the set of harm events p could have reasonably foreseen given $\mathcal{I}_p^t$, assessed against the *objective standard* of what a reasonably informed actor in p ’s role should have anticipated. Party p is *epistemically culpable* for ω if $\omega \in \mathcal{C}_p^t$ for some t prior to the harm.

4.2 From Explicit Provenance to Computable Responsibility

The preceding definitions establish the causal and epistemic evidence that explicit provenance must encode, separating two conditions for responsibility into a universal function over responsible parties.

Definition 4.3 (Computable Responsibility in Agentic System). The responsibility assignment function $\rho : \mathcal{P} \times \Omega \rightarrow [0, 1]$ assigns an individual responsibility weight to each deployment-chain party p for each harm event ω . It satisfies:

1. **Proportionality.** $\rho(p, \omega) \propto \kappa(p, \omega, \tau) \cdot \mathbf{1}[\omega \in \mathcal{C}_p^t]$, where $\mathbf{1}[\omega \in \mathcal{C}_p^t]$ is an indicator function that equals 1 if ω belongs to the set of harms reasonably foreseeable to party p at time t .
2. **Completeness.** For every harm event ω , $\sum_{p \in \mathcal{P}} \rho(p, \omega) + \rho_{\text{inst}}(\omega) = 1$, where $\rho_{\text{inst}}(\omega)$ denotes residual institutional responsibility. When individual assignment is incomplete, the residual should be assigned to the institutional layer (Definition 4.4).
3. **Non-evasion.** $\rho(p, \omega) > 0$ whenever $\kappa(p, \omega, \tau) > 0$ and $\omega \in \mathcal{C}_p^t$ for some t prior to the harm. Thus, real and foreseeable contribution cannot be erased by system complexity.

Remark 4.3. Proportionality ties responsibility to causal contribution under reasonable foreseeability. Completeness assigns residual responsibility institutionally rather than leaving it unaccounted and serves as the normalization constraint that makes the proportionality relation precise. Non-evasion prevents foreseeable contributors from escaping responsibility through system complexity [39]. Together, these conditions make responsibility an allocative structure.

Finally, the institutional layer captures residual responsibility that cannot be exhausted by individual causal contribution and foreseeability. We define residual institutional responsibility as below:

Definition 4.4 (Residual Institutional Responsibility). Residual institutional responsibility is the portion of responsibility not assigned to individual deployment-chain parties: $\rho_{\text{inst}}(\omega) = 1 -$

$\sum_{p \in \mathcal{P}} \rho(p, \omega) \geq 0$. It is borne by the institutional layer when that layer had the authority and capacity to close or absorb the accountability gap through standards, certification, monitoring, incident response, or compensation mechanisms, but failed to do so.

4.3 Distributing Responsibility Across Deployment-Chain Parties

Responsibility assignment requires decomposing an observed harm event ω into component-level causal contributions and mapping them back to the parties that bear them. We use the scalar $\rho(p, \omega)$ to quantify each component’s individual contribution, and the deployment-chain dictionary $\mathcal{P} = \{p_i \rightarrow M_i\}_{i=1}^r$ to map each contributing component to its responsible party. Since agentic harm typically implicates multiple parties across multiple socio-technical dimensions simultaneously, we define the responsibility tensor to make this full allocation structure explicit and computable.

Definition 4.5 (Responsibility Tensor). Let $\mathcal{D} = \{d_1, \dots, d_k\}$ be the set of socio-technical responsibility dimensions specified for the deployment context. The responsibility tensor $\mathbf{R} \in [0, 1]^{|\mathcal{P}| \times |\mathcal{Q}| \times |\mathcal{D}|}$ encodes dimension-specific responsibility, where $\mathbf{R}[p, \omega, d_k]$ denotes party p ’s responsibility for harm event ω along dimension d_k . The scalar assignment is recovered as $\rho(p, \omega) = \sum_{k=1}^{|\mathcal{D}|} w_k \mathbf{R}[p, \omega, d_k]$, where $w_k > 0$ reflects the relative significance of dimension d_k in the deployment context, with $\sum_{k=1}^{|\mathcal{D}|} w_k = 1$.

The weights w_k reflect the relative significance of each responsibility dimension and should be explicitly recorded in the agentic context. A key advantage of this formalization is that the tensor remains computable from $\mathcal{P}$ even without full provenance by reducing to party identification alone, ensuring responsible parties can always be identified; with explicit provenance, each entry is causally grounded, making responsibility attribution actionable across the lifecycle.

5 How Explicit Provenance Makes Responsibility Computable

This section addresses how explicit provenance can be produced across the full agentic lifecycle. The central obstacle is that $\kappa(p, \omega, \tau)$ requires estimating $\Pr[\omega \mid \tau]$, a quantity not directly recoverable from raw execution logs without structured, failure-aligned provenance records. Making explicit provenance operational therefore requires progress across four sequentially dependent layers: L1 establishes the causal structure that L2 must instrument, L2 produces the execution records that L3 translates into normative judgments, and L3 establishes the accountability structure that L4 must extend to population scale. Without progress on all four layers, responsibility will remain a theoretical construct rather than an operational instrument.

5.1 L1: Design

Quantifiability requires the causal structure of an agentic system be known before harm occurs [52, 22]. The explicit provenance needed to approximate causal signal from execution must be designed into the system, not merely relying on reconstructed post-hoc logs. We represent this structure as a multilevel dependency graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$, where $\mathcal{V}$ spans parties, models, skills, and their underlying components, and $\mathcal{E}$ encodes causal influence across levels. Current practice does not meet this requirement: skills, tools, agents, and parties are composed without documenting causal dependencies [35, 23]. The result is that $\Pr[\omega \mid \tau]$ is unestimable not because the mathematics fails but because the system was never designed to produce the provenance that quantifiability requires. The research agenda this motivates is **causal decomposition of compositional agentic systems**, representing multilevel dependency structure in a form that supports provenance production at any granularity, and establishing what constitutes a meaningful component boundary through interdisciplinary engagement with law, ethics, and domain expertise [16].

5.2 L2: Engineering

Even with a well-defined causal structure at design time, explicit provenance remains unproduced if the execution record does not capture the evidence required to evaluate κ and ε_p^t . This engineering barrier has two dimensions corresponding to traceability and interventionability respectively. Traceability requires *retrospective coverage*: without structured, failure-aligned representations of each

execution step, the causal signal required to estimate $\Pr[\omega \mid \tau]$ cannot be recovered from raw logs, and the epistemic records needed to establish ε_p^t are lost [45]. Interventionability requires *prospective coverage*: agentic systems routinely take irreversible actions, meaning that provenance available only after harm has materialized cannot support interception or recovery. Responsible agentic AI must therefore be equipped with the capacity to estimate trajectory risk in real time and interrupt execution before irreversible consequences accumulate. Both gaps map directly into unresolvable ρ_{inst} .

The research agenda this layer motivates has two components that together address traceability and interventionability. First, **online trajectory monitoring and risk estimation**: agentic systems require monitors that produce structured, inspectable causal representations from execution traces in real time and estimate $\Pr[\omega \mid e_t, \alpha_{t:T}]$ before irreversible consequences accumulate, where $e_t \in \mathcal{E}$ is the current environment state and $\alpha_{t:T} = (\alpha_t, \dots, \alpha_T)$ is the planned action sequence to deployment-specified horizon T . Such monitors must be both flexible enough to handle heterogeneous traces and inspectable enough to serve as evidence in attribution [57]. Neuro-symbolic approaches are a promising direction precisely because they combine representational flexibility with auditable intermediate reasoning states [21, 77, 76]. Second, **compositional verification of responsibility attribution**: whenever a new component x_{new} enters the system, the shift in causal attribution $\Delta\kappa(p, \omega, \tau, x_{\text{new}}) = \kappa(p, \omega, \tau \mid \mathcal{G} \oplus x_{\text{new}}) - \kappa(p, \omega, \tau \mid \mathcal{G})$, where $\mathcal{G} \oplus x_{\text{new}}$ must be tested before co-activation is permitted, ensuring that quantifiability is maintained as the system grows [35].

5.3 L3: Deployment

L1 and L2 establish the technical infrastructure for explicit provenance, making $\kappa(p, \omega, \tau)$ computable from execution records and ε_p^t reconstructable from structured logs, but translating provenance into a fully populated responsibility tensor $\mathbf{R}[p, \omega, d_k]$ requires human judgment that technical systems cannot produce on their own. Each normative dimension of $\mathbf{R}$ depends on decisions about foreseeability, authority, and obligation that must be made and documented by human actors before deployment. The deployment layer is therefore where quantifiability and traceability are translated into actionable responsibility assignments, and where the institutional conditions for interventionability are established so that agentic systems have the authority and procedures to intercept and recover from harmful trajectories [44]. How dimension weights w_k should be specified and adapted as harm evidence accumulates remains an open research direction; precedents from safety-critical domains [66, 4] suggest that data-driven weight updating is both feasible and necessary for contextually grounded responsibility allocation across diverse deployment contexts.

Definition 5.1 (Deployment Readiness Condition). A responsible agentic system satisfies the deployment readiness condition iff: (i) the causal dependency structure is documented at all component levels; (ii) compositional verification covers all component combinations with nonzero co-activation probability; (iii) all parties have established a responsibility envelope documenting their obligations and intervention boundaries to downstream parties, with dimension weights w_k specified for the deployment context; (iv) incident response plans have been exercised with human participants; (v) informed consent mechanisms have been validated with users.

5.4 L4: Experience

The preceding layers make κ computable for harm events at identifiable trajectory points, but do not address harm that builds up gradually across interactions without any single event crossing a detectable threshold, the mechanism identified as autonomy erosion and compositional bias amplification [19]. The relevant counterfactual is not what would have happened in this trajectory without p , but how the user’s beliefs and choices would have differed without the system’s persistent influence, which requires tracking divergence across trajectories at population scale and cannot be answered by per-interaction audit alone [8]. This gap extends all three provenance properties beyond what L1 through L3 reach, as quantifiability must cover cumulative causal contributions across interactions, traceability must ground assignments in population-level execution records, and interventionability must support recovery before gradual harms become irreversible at scale. This motivates two complementary research directions. The first is population-scale monitoring of how much the system narrows users’ actual choice sets relative to a counterfactual baseline, aggregated in ways sensitive to distributional harm, with thresholds for triggering ρ_{inst} jointly specified by technical and social science communities [8]. The second is populating the user-relevant dimension of $\mathbf{R}$ on evidential rather than assumed grounds, since $\mathcal{C}_{\text{user}}^t$ is non-empty only when meaningful risk information was

disclosed before interaction, and responsibility regimes should not require technical literacy beyond what a reasonable user can be expected to have [17]. The first captures cumulative harm that falls outside individual κ assignments, while the second ensures that user-side entries in $\mathbf{R}$ reflect what users were actually in a position to foresee.

5.5 Neuro-Symbolic Trial for Explicit Provenance

We report preliminary experiments targeting the L2 with detailed implementation details in Appendix A, where online provenance signal is attributed from execution prefix traces to support responsible decision making across multi-component agentic systems. We study this through a plugin neuro-symbolic (NeSy) monitoring architecture that attaches to agentic systems without modifying their internals. Raw agent traces are converted into a canonical step-level representation via a one-time offline adapter induction, compressed into learned failure-aligned event abstractions, and scored by monitors ranging from neural sequence models to auditable finite-state variants without deployment-time LLM judging. This design means that any agentic system producing execution logs can be equipped with provenance-based monitoring capacity, instantiating the computable responsibility.

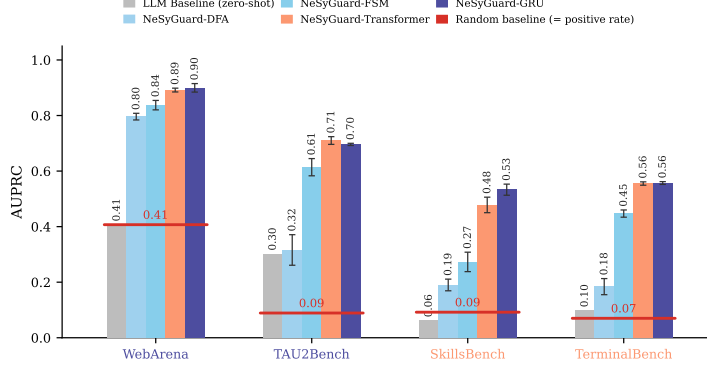


Figure 2: **Online causal signal is estimable from agent execution prefixes, supporting required properties for responsible agent.** AUPRC measures how well a monitor identifies failing trajectories before harm materializes. NeSy monitors substantially outperform random and zero-shot LLM baselines.

Figure 2 shows AUPRC results across WebArena [78], TAU2Bench [7], SkillsBench [35], and TerminalBench [42], where the red baseline reflects each benchmark’s positive-prefix rate under random scoring. Three findings bear directly on the provenance agenda. All learned monitors exceed the random baseline by substantial margins, establishing that $\Pr[\omega \mid e_t, \alpha_{t:T}]$ is estimable online and that the quantifiability requirement is tractable at runtime. Finite-state variants compress warning behavior into symbolic states legible to human auditors, providing the inspectable causal evidence that traceability requires and that the epistemic position ε_p^t in Definition 4.2 depends on. Monitors further identify high-risk prefixes early enough to support intervention before irreversible consequences accumulate, satisfying the interventionability requirement that provenance be produced continuously.

6 Who Bears Responsibility in Agentic System

Section 5 establishes that explicit provenance makes causal signal estimable online, but that answers only how much causal contribution a party made. Populating the full responsibility tensor $\mathbf{R}[p, \omega, d_k]$ requires mapping provenance signals to specific parties, answering not only how much but who bears responsibility. We illustrate how provenance-grounded symbolic states can structure this mapping through interpretable examples using a Deterministic Finite Automaton (DFA) monitor in Table 1 and Appendix B.

Example 1 (Responsibility Assignment from Provenance in WebArena). An agent tasked with multi-step web navigation is monitored online by the DFA from Sec-

Table 1: WebArena DFA prefixes decomposed into interpretable states as explicit provenance. Each state reports failure-risk evidence (Risk), supporting-prefix count (Eval), normalized timing $\bar{t}/T$, and representative states for responsibility interpretation, support responsibility assignment or intervention.

State	Behavioral Phase	Risk	Eval	$\bar{t}/T$	Representative State
<i>Warning states (risk ≥ 0.34)</i>					
q0	Early navigation reset	0.857	544	0.25	click; goto homepage
q28	Explicit error message	0.548	40	0.81	type [out of stock...]
q22	Repetitive click loop	0.518	595	0.40	click $\times 6$ (no type)
q12	Misaligned search query	0.510	643	0.25	type [CMU]
q24	External-search redirect	0.434	276	0.40	new_tab; goto google.com;
q1	Early scroll-and-click	0.342	379	0.25	click; scroll [down]
<i>Representative normal states (risk < 0.25)</i>					
q17	Productive backtracking	0.085	56	0.83	go_back $\times 5$
q4	Credential entry	0.099	139	0.67	type [username]; click
q26	Task-specific search	0.038	90	0.50	type [color utility]; click
q8	Long-form text entry	0.122	80	0.74	type [multi-sentence msg]
q7	Short-label selection	0.119	111	0.75	type [feature]; click

tion 5.5. As shown in Table 1, the provenance states identify warning states q_{12} (misaligned search query, risk 0.510) and q_{24} (external-search redirect, risk 0.434) at $\bar{t}/T = 0.25$ and 0.40 respectively, well before the task concludes. Both states surface early boundary violations and their representative trace evidence directly maps responsible components back to accountable parties through $\mathcal{P}$.

Taking these states as provenance evidence, $\mathbf{R}$ can be partially populated as follows. State q_{12} points to the skill developer’s failure to specify retrieval boundaries, contributing to $\mathbf{R}[\text{skill developer}, \omega, d_{\text{Standards}}]$ and $\mathbf{R}[\text{skill developer}, \omega, d_{\text{Practice}}]$. State q_{24} points to the platform operator’s failure to enforce navigation constraints, contributing to $\mathbf{R}[\text{platform operator}, \omega, d_{\text{Regulation}}]$ and $\mathbf{R}[\text{platform operator}, \omega, d_{\text{Professionalism}}]$. The agent developer bears weight on $d_{\text{Standards}}$ for deploying without compositional verification. The end user’s entries remain negligible absent prior authorization or risk disclosure [67], and residual responsibility falls to ρ_{inst} under Definition 4.4. If dimension weights w_k have been established as part of the responsibility envelope at L3, responsibility shares become further computable and precisely allocated across parties.

This example demonstrates that provenance-grounded states make responsibility assignment across deployment-chain parties tractable, transforming the question of who bears responsibility from an unanswerable subjective concept into a actionable and computable allocation.

7 Alternative Views

Provenance requirements impose overhead that constrains capability and slows deployment.

Requiring explicit provenance records across the full deployment chain adds instrumentation and verification costs that favor well-resourced actors and may slow deployment of beneficial systems [2]. Our position is that this objection misidentifies the bottleneck. The constraint on agentic AI deployment is not the absence of provenance infrastructure but the absence of trust [41, 15]. Research on autonomous vehicles shows that public trust, not technical capability, is the binding constraint on adoption, as cities that prioritize safety and transparency accelerate deployment while those that do not face sustained public resistance regardless of how capable the underlying technology becomes [30]. Provenance infrastructure does not cap what agentic systems can do; it builds the institutional trust that makes large-scale delegation of authority viable.

Distributed responsibility produces irresolvable conflict between parties with incompatible interests and values. Different actors in the deployment chain hold different commercial, cultural, and epistemic positions, and any responsibility assignment will be contested. The deeper concern is that no single weighting of normative dimensions in $\mathbf{R}$ can claim universal legitimacy across communities with genuinely different values. However, we posit that value pluralism is not a reason to abandon structured accountability but a reason to build accountability structures that are explicit about where value choices are made [44, 68]. The responsibility tensor $\mathbf{R}$ is designed precisely for this, as the dimension weights w_k are not fixed by the framework but determined by domain-specific governance, making value disagreements legible and contestable rather than hidden inside opaque attribution decisions. Conflict over w_k is the mechanism through which pluralistic norms are negotiated and actionable, not evidence that the framework cannot work [26].

8 Conclusion

Agentic AI is already acting in the world, yet the responsibility structures needed to govern it remain absent. This paper has positioned explicit provenance as the necessary infrastructure for making responsibility computable and actionable across the full agentic lifecycle. Through formal analysis, a four-layer agenda, and preliminary experiments, we have demonstrated that responsibility satisfying quantifiability, traceability, and interventionability is both necessary and tractable. The work ahead spans design, engineering, deployment, and population-scale experience, and requires sustained engagement with law, ethics, and the social sciences not as adjacent disciplines but as co-designers of the accountability infrastructure that agentic AI demands. Only by making responsibility computable and actionable can the field earn the public trust that large-scale delegation of authority requires. The technology is already moving faster than the responsibility structures that should govern it, and closing that gap before it becomes irreversible is a shared obligation across the agentic AI ecosystem.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [2] Markus Anderljung, Joslyn Barnhart, Anton Korinek, Jade Leung, Cullen O’Keefe, Jess Whittlestone, Shahar Avin, Miles Brundage, Justin Bullock, Duncan Cass-Beggs, Ben Chang, Tatum Collins, Tim Fisk, Gillian Hadfield, Alan Hayes, Lewis Ho, Sara Hooker, Eric Horvitz, Noam Kolt, Jonas Schuett, Yonadav Shavit, Divya Siddarth, Robert Trager, and Kevin Wolf. Frontier ai regulation: Managing emerging risks to public safety, 2023.
- [3] Maksym Andriushchenko, Alexandra Souly, Mateusz Dziemian, Derek Duenas, Maxwell Lin, Justin Wang, Dan Hendrycks, Andy Zou, J Zico Kolter, Matt Fredrikson, et al. Agentharm: A benchmark for measuring harmfulness of llm agents. In *The Thirteenth International Conference on Learning Representations*.
- [4] Anastasios Nikolas Angelopoulos, Stephen Bates, Adam Fisch, Lihua Lei, and Tal Schuster. Conformal risk control. In *The Twelfth International Conference on Learning Representations*, 2024.
- [5] Anthropic. Tool use with claude, 2026. Claude API documentation.
- [6] Tina Balke and Torsten Eymann. The conclusion of contracts by software agents in the eyes of the law. In *Proceedings of the 7th international joint conference on Autonomous agents and multiagent systems-Volume 2*, pages 771–778, 2008.
- [7] Victor Barres, Honghua Dong, Soham Ray, Xujie Si, and Karthik Narasimhan. τ^2 -Bench: Evaluating conversational agents in a dual-control environment. *arXiv:2506.07982*, 2025.
- [8] Rishi Bommasani, Kathleen A Creel, Ananya Kumar, Dan Jurafsky, and Percy S Liang. Picking on the same person: Does algorithmic monoculture lead to outcome homogenization? *Advances in neural information processing systems*, 35:3663–3678, 2022.
- [9] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [10] Alan Chan, Rebecca Salganik, Alva Markelius, Chris Pang, Nitarshan Rajkumar, Dmitrii Krasheninnikov, Lauro Langosco, Zhonghao He, Yawen Duan, Micah Carroll, et al. Harms from increasingly agentic algorithmic systems. In *Proceedings of the 2023 ACM conference on fairness, accountability, and transparency*, pages 651–666, 2023.
- [11] Jin-Hee Cho, Kevin Chan, and Sibel Adali. A survey on trust modeling. *ACM Computing Surveys (CSUR)*, 48(2):1–40, 2015.
- [12] Jennifer Cobbe, Michael Veale, and Jatinder Singh. Understanding accountability in algorithmic supply chains. In *Proceedings of the 2023 ACM Conference on Fairness, Accountability, and Transparency*, pages 1186–1197, 2023.
- [13] EU Commission et al. Proposal for a directive of the european parliament and of the council on adapting noncontractual civil liability rules to artificial intelligence (ai liability directive). *European Commission*, 2022.
- [14] Allan Dafoe. Ai governance: a research agenda. *Governance of AI Program, Future of Humanity Institute, University of Oxford: Oxford, UK*, 1442:1443, 2018.
- [15] Deloitte. Business and it leaders report ai agents are scaling faster than their guardrails, 2026.
- [16] Yi Dong, Ronghui Mu, Yanghao Zhang, Siqi Sun, Tianle Zhang, Changshun Wu, Gaojie Jin, Yi Qi, Jinwei Hu, Jie Meng, et al. Safeguarding large language models: A survey. *Artificial intelligence review*, 58(12):382, 2025.

- [17] Finale Doshi-Velez, Mason Kortz, Ryan Budish, Chris Bavitz, Sam Gershman, David O'Brien, Kate Scott, Stuart Schieber, James Waldo, David Weinberger, et al. Accountability of ai under the law: The role of explanation. *arXiv preprint arXiv:1711.01134*, 2017.
- [18] Emilio Ferrara. Genai against humanity: Nefarious applications of generative artificial intelligence and large language models. *Journal of Computational Social Science*, 7(1):549–569, 2024.
- [19] Iason Gabriel, Arianna Manzini, Geoff Keeling, Lisa Anne Hendricks, Verena Rieser, Hasan Iqbal, Nenad Tomašev, Ira Ktena, Zachary Kenton, Mikel Rodriguez, et al. The ethics of advanced ai assistants. *arXiv preprint arXiv:2404.16244*, 2024.
- [20] Deep Ganguli, Liane Lovitt, Jackson Kernion, Amanda Askell, Yuntao Bai, Saurav Kadavath, Ben Mann, Ethan Perez, Nicholas Schiefer, Kamal Ndousse, et al. Red teaming language models to reduce harms: Methods, scaling behaviors, and lessons learned. *arXiv preprint arXiv:2209.07858*, 2022.
- [21] Artur d'Avila Garcez and Luis C Lamb. Neurosymbolic ai: The 3 rd wave. *Artificial Intelligence Review*, 56(11):12387–12406, 2023.
- [22] Atticus Geiger, Hanson Lu, Thomas Icard, and Christopher Potts. Causal abstractions of neural networks. *Advances in neural information processing systems*, 34:9574–9586, 2021.
- [23] Zihan Guo, Zhiyu Chen, Xiaohang Nie, Jianghao Lin, Yuanjian Zhou, and Weinan Zhang. Skillprobe: Security auditing for emerging agent skill marketplaces via multi-agent collaboration. *arXiv preprint arXiv:2603.21019*, 2026.
- [24] Ibrahim Habli, Tom Lawton, and Zoe Porter. Artificial intelligence in health care: accountability and safety. *Bulletin of the World Health Organization*, 98(4):251, 2020.
- [25] Sirui Hong, Mingchen Zhuge, Jonathan Chen, Xiawu Zheng, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Zili Wang, Steven Ka Shing Yau, Zijuan Lin, et al. Metagpt: Meta programming for a multi-agent collaborative framework. In *The twelfth international conference on learning representations*, 2023.
- [26] Jinwei Hu, Yi Dong, Shuang Ao, Zhuoyun Li, Boxuan Wang, Lokesh Singh, Guangliang Cheng, Sarvapali D. Ramchurn, and Xiaowei Huang. Stop reducing responsibility in llm-powered multi-agent systems to local alignment, 2025.
- [27] Jinwei HU, Yi DONG, Zhengtao DING, and Xiaowei HUANG. Enhancing robustness of llm-driven multi-agent systems through randomized smoothing. *Chinese Journal of Aeronautics*, page 103779, 2025.
- [28] Jinwei Hu, Yi Dong, Youcheng Sun, and Xiaowei Huang. Tapas are free! training-free adaptation of programmatic agents via llm-guided program synthesis in dynamic environments. *Proceedings of the AAAI Conference on Artificial Intelligence*, 40(35):29477–29485, Mar. 2026.
- [29] Jinwei Hu, Xinmiao Huang, Youcheng Sun, Yi Dong, and Xiaowei Huang. Lying with truths: Open-channel multi-agent collusion for belief manipulation via generative montage, 2026.
- [30] Kristin F. Hurst and Nicole D. Sintov. Trusting autonomous vehicles as moral agents improves related policy support. *Frontiers in Psychology*, Volume 13 - 2022, 2022.
- [31] Yanna Jiang, Delong Li, Haiyu Deng, Baihe Ma, Xu Wang, Qin Wang, and Guangsheng Yu. Sok: Agentic skills—beyond tool use in llm agents. *arXiv preprint arXiv:2602.20867*, 2026.
- [32] Thomas Kuntz, Agatha Duzan, Hao Zhao, Francesco Croce, J Zico Kolter, Nicolas Flammarion, and Maksym Andriushchenko. Os-harm: A benchmark for measuring safety of computer use agents. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems Datasets and Benchmarks Track*.
- [33] Messi HJ Lee, Jacob M Montgomery, and Calvin K Lai. Large language models portray socially subordinate groups as more homogeneous, consistent with a bias observed in humans. In *Proceedings of the 2024 ACM Conference on Fairness, Accountability, and Transparency*, pages 1321–1340, 2024.

- [34] Bo Li, Peng Qi, Bo Liu, Shuai Di, Jingen Liu, Jiquan Pei, Jinfeng Yi, and Bowen Zhou. Trustworthy ai: From principles to practices. *ACM Computing Surveys*, 55(9):1–46, 2023.
- [35] Xiangyi Li, Wenbo Chen, Yimin Liu, Shenghan Zheng, Xiaokun Chen, Yifeng He, Yubo Li, Bingran You, Haotian Shen, Jiankai Sun, et al. Skillsbench: Benchmarking how well agent skills work across diverse tasks. *arXiv preprint arXiv:2602.12670*, 2026.
- [36] Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, Michihiro Yasunaga, Yian Zhang, Deepak Narayanan, Yuhuai Wu, Ananya Kumar, et al. Holistic evaluation of language models. *Transactions on Machine Learning Research*.
- [37] Haochen Liu, Yiqi Wang, Wenqi Fan, Xiaorui Liu, Yaxin Li, Shaili Jain, Yunhao Liu, Anil Jain, and Jiliang Tang. Trustworthy ai: A computational perspective. *ACM Transactions on Intelligent Systems and Technology*, 14(1):1–59, 2022.
- [38] Shuo Lu, Yingsheng Wang, Lijun Sheng, Lingxiao He, Aihua Zheng, and Jian Liang. Out-of-distribution detection: A task-oriented survey of recent advances. *ACM Computing Surveys*, 58(2):1–39, 2025.
- [39] Andreas Matthias. The responsibility gap: Ascribing responsibility for the actions of learning automata. *Ethics and information technology*, 6(3):175–183, 2004.
- [40] McKinsey & Company. The state of ai in 2025: Agents, innovation, and transformation, 2025.
- [41] McKinsey & Company. State of ai trust in 2026: Shifting to the agentic era, 2026.
- [42] Mike A Merrill, Alexander G Shaw, Nicholas Carlini, Boxuan Li, Harsh Raj, Ivan Bercovich, Lin Shi, Jeong Yeon Shin, Thomas Walshe, E Kelly Buchanan, et al. Terminal-bench: Benchmarking agents on hard, realistic tasks in command line interfaces. *arXiv preprint arXiv:2601.11868*, 2026.
- [43] Jisoo Mok, Ik-hwan Kim, Sangkwon Park, and Sungroh Yoon. Exploring the potential of llms as personalized assistants: Dataset, evaluation, and analysis. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 10212–10239, 2025.
- [44] Claudio Novelli, Mariarosaria Taddeo, and Luciano Floridi. Accountability in artificial intelligence: what it is and how it works. *Ai & Society*, 39(4):1871–1882, 2024.
- [45] Victor Ojewale, Harini Suresh, and Suresh Venkatasubramanian. Audit trails for accountability in large language models. *arXiv preprint arXiv:2601.20727*, 2026.
- [46] Matthew Oliver. Contracting by artificial intelligence: Open offers, unilateral mistakes, and why algorithms are not agents. *ANU Journal of Law and Technology*, 2(1):45–87, 2021.
- [47] OpenAI. Introducing operator, 2025.
- [48] OpenAI. New tools for building agents, 2025.
- [49] OpenClaw. Clawhub: Skill directory for openclaw, 2026.
- [50] OpenClaw. Openclaw: Personal ai assistant, 2026.
- [51] Joon Sung Park, Joseph O’Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S Bernstein. Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th annual acm symposium on user interface software and technology*, pages 1–22, 2023.
- [52] Jonas Peters, Dominik Janzing, and Bernhard Schölkopf. *Elements of causal inference: foundations and learning algorithms*. MIT press, 2017.
- [53] Zoe Porter, Philippa Ryan, Phillip Morgan, Joanna Al-Qaddoumi, Bernard Twomey, Paul Noordhof, John McDermid, and Ibrahim Habli. Unravelling responsibility for ai. *Journal of Responsible Technology*, page 100124, 2025.

- [54] PwC. Pwc’s ai agent survey, 2025.
- [55] Inioluwa Deborah Raji, Andrew Smart, Rebecca N White, Margaret Mitchell, Timnit Gebru, Ben Hutchinson, Jamila Smith-Loud, Daniel Theron, and Parker Barnes. Closing the ai accountability gap: Defining an end-to-end framework for internal algorithmic auditing. In *Proceedings of the 2020 conference on fairness, accountability, and transparency*, pages 33–44, 2020.
- [56] Yangjun Ruan, Honghua Dong, Andrew Wang, Silviu Pitis, Yongchao Zhou, Jimmy Ba, Yann Dubois, Chris J Maddison, and Tatsunori Hashimoto. Identifying the risks of lm agents with an lm-emulated sandbox. In *The Twelfth International Conference on Learning Representations*.
- [57] Cynthia Rudin. Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead. *Nature machine intelligence*, 1(5):206–215, 2019.
- [58] Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. *Advances in neural information processing systems*, 36:68539–68551, 2023.
- [59] Leon Staufer, Kevin Feng, Kevin Wei, Luke Bailey, Yawen Duan, Mick Yang, A Pinar Ozisik, Stephen Casper, and Noam Kolt. The 2025 ai agent index: Documenting technical and safety features of deployed agentic ai systems. *arXiv preprint arXiv:2602.17753*, 2026.
- [60] Hao Sun, Alihan Hüyük, Daniel Jarrett, and Mihaela van der Schaar. Accountability in offline reinforcement learning: Explaining decisions with a corpus of examples. *Advances in Neural Information Processing Systems*, 36:3143–3172, 2023.
- [61] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [62] Shannon Vallor and Tillmann Vierkant. Find the gap: Ai, responsible agency and vulnerability. *Minds and Machines*, 34(3):20, 2024.
- [63] Nicole A Vincent, Ibo Van de Poel, and Jeroen Van Den Hoven. *Moral responsibility: Beyond free will and determinism*. Springer Science & Business Media, 2011.
- [64] David C Vladeck. Machines without principals: liability rules and artificial intelligence. *Wash. L. Rev.*, 89:117, 2014.
- [65] Lei Wang, Chen Ma, Xueyang Feng, Zeyu Zhang, Hao Yang, Jingsen Zhang, Zhiyuan Chen, Jiakai Tang, Xu Chen, Yankai Lin, et al. A survey on large language model based autonomous agents. *Frontiers of Computer Science*, 18(6):186345, 2024.
- [66] Yidong Wang, Hao Chen, Qiang Heng, Wenxin Hou, Yue Fan, Zhen Wu, Jindong Wang, Marios Savvides, Takahiro Shinozaki, Bhiksha Raj, Bernt Schiele, and Xing Xie. Freematch: Self-adaptive thresholding for semi-supervised learning. In *The Eleventh International Conference on Learning Representations*, 2023.
- [67] Laura Weidinger, Jonathan Uesato, Maribeth Rauh, Conor Griffin, Po-Sen Huang, John Mellor, Amelia Glaese, Myra Cheng, Borja Balle, Atoosa Kasirzadeh, et al. Taxonomy of risks posed by language models. *Proceedings of the ACM Conference on Fairness, Accountability, and Transparency*, pages 214–229, 2022.
- [68] Maranke Wieringa. What to account for when accounting for algorithms: a systematic literature review on algorithmic accountability. In *Proceedings of the 2020 conference on fairness, accountability, and transparency*, pages 1–18, 2020.
- [69] Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, et al. Autogen: Enabling next-gen llm applications via multi-agent conversations. In *First conference on language modeling*, 2024.

- [70] Zhiheng Xi, Wenxiang Chen, Xin Guo, Wei He, Yiwen Ding, Boyang Hong, Ming Zhang, Junzhe Wang, Senjie Jin, Enyu Zhou, et al. The rise and potential of large language model based agents: A survey. *Science China Information Sciences*, 68(2):121101, 2025.
- [71] Frank F. Xu, Yufan Song, Boxuan Li, Yuxuan Tang, Kritanjali Jain, Mengxue Bao, Zora Zhiruo Wang, Xuhui Zhou, Zhitong Guo, Murong Cao, Mingyang Yang, Hao Yang Lu, Amaad Martin, Zhe Su, Leander Melroy Maben, Raj Mehta, Wayne Chi, Lawrence Keunho Jang, Yiqing Xie, Shuyan Zhou, and Graham Neubig. Theagentcompany: Benchmarking LLM agents on consequential real world tasks. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2026.
- [72] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations (ICLR)*, 2023.
- [73] Tongxin Yin, Reilly Raab, Mingyan Liu, and Yang Liu. Long-term fairness with unknown dynamics. *Advances in Neural Information Processing Systems*, 36:55110–55139, 2023.
- [74] Tongxin Yuan, Zhiwei He, Lingzhong Dong, Yiming Wang, Ruijie Zhao, Tian Xia, Lizhen Xu, Binglin Zhou, Fangqi Li, Zhuosheng Zhang, Rui Wang, and Gongshen Liu. R-judge: Benchmarking safety risk awareness for LLM agents. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 1467–1490, Miami, Florida, USA, November 2024. Association for Computational Linguistics.
- [75] Qiusi Zhan, Zhixiang Liang, Zifan Ying, and Daniel Kang. InjecAgent: Benchmarking indirect prompt injections in tool-integrated large language model agents. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Findings of the Association for Computational Linguistics: ACL 2024*, pages 10471–10506, Bangkok, Thailand, August 2024. Association for Computational Linguistics.
- [76] Guibin Zhang, Junhao Wang, Junjie Chen, Wangchunshu Zhou, Kun Wang, and Shuicheng YAN. Agentracer: Who is inducing failure in the LLM agentic systems? In *The Fourteenth International Conference on Learning Representations*, 2026.
- [77] Shaokun Zhang, Ming Yin, Jieyu Zhang, Jiale Liu, Zhiguang Han, Jingyang Zhang, Beibin Li, Chi Wang, Huazheng Wang, Yiran Chen, and Qingyun Wu. Which agent causes task failures and when? On automated failure attribution of LLM multi-agent systems. In Aarti Singh, Maryam Fazel, Daniel Hsu, Simon Lacoste-Julien, Felix Berkenkamp, Tegan Maharaj, Kiri Wagstaff, and Jerry Zhu, editors, *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 76583–76599. PMLR, 13–19 Jul 2025.
- [78] Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, Uri Alon, and Graham Neubig. Webarena: A realistic web environment for building autonomous agents. In *The Twelfth International Conference on Learning Representations*, 2024.

A Implementation Details of Neuro-Symbolic Trial

This appendix describes the implementation of the neuro-symbolic monitoring trial reported in Section 5.5. The trial is a preliminary instantiation of the L2 engineering agenda designed to demonstrate the feasibility of the research directions for responsible agentic system proposed in this paper. It is not intended as a standalone system contribution; its purpose is to establish that online provenance signals satisfying quantifiability, traceability, and interventionability are producible from heterogeneous agent execution traces.

Prefix and Warning Label. A trajectory is an ordered sequence of execution steps recorded during an agent’s task attempt. A prefix is the partial observation available to the monitor up to a given step during online execution, representing what has been observed so far without access to future steps. Each trajectory is associated with a binary outcome indicating task success or failure as determined by a task-specific verifier. Given a fixed warning horizon, a prefix is labeled a positive warning target if and only if the trajectory fails and fewer than a fixed number of steps remain before termination; all other prefixes are labeled negative. This labeling captures the steps immediately preceding failure, where failure-relevant provenance signals are most concentrated.

Trace view. The monitor does not consume raw logs directly. Each benchmark trace is first mapped into a fixed StepView record with fields for metadata, observation, action, tool, arguments, result, and status. The adapter is induced once from training traces and then frozen, so validation and test traces are processed by deterministic code rather than by deployment-time LLM calls. Validation and test traces are not used during adapter induction; the LLM acts only as a design-time parser proposer, not as a runtime evaluator.

Event abstraction. Each StepView record is serialized in a fixed field order and encoded with a training-only TF-IDF vocabulary. A small differentiable projection maps the encoded step into a learned event alphabet. This alphabet is optimized for the prefix-warning objective, so the symbols are intended to capture recurring failure-relevant evidence rather than manually named task states.

Monitor variants. The same learned event stream is used by four online monitor variants that span different points on the neural–symbolic tradeoff. The Gated Recurrent Unit (GRU) and Transformer variants act as flexible neural prefix scorers. The soft Finite State Machine (FSM) variant keeps a distribution over latent finite states during neural deployment, exposing a structured intermediate representation. The Deterministic Finite Automaton (DFA) variant is extracted post-hoc from hard event assignments and serves as an audit diagnostic, testing whether the learned behavior can be compressed into compact, risk-separating symbolic states that are legible to human auditors and suitable as causal evidence in responsibility attribution.

Evaluation metric. For every partial trajectory prefix, the monitor emits a risk score for near-term failure under a fixed warning horizon H . Prefixes from failed trajectories inside the final H steps are labeled positive; successful prefixes and earlier failed-trajectory prefixes are labeled negative. Area Under the Precision-Recall Curve (AUPRC) is used as the primary ranking metric because warning targets are sparse and positive-prefix rates vary substantially across benchmarks. AUPRC measures how well a monitor ranks high-risk prefixes above low-risk ones using continuous risk scores, with the random baseline equal to each benchmark’s positive-prefix rate. A monitor that substantially exceeds this baseline demonstrates that causal signal is recoverable from execution prefixes online, directly supporting the requirement of Proposition 3.1.

Baselines. Three comparison conditions are included. The random baseline reflects the positive-prefix rate of each benchmark and represents the performance of a monitor with no predictive signal. The zero-shot Large Language Model (LLM) baseline applies a frontier language model as a full-prefix judge without any task-specific training, representing the upper bound of deployment-time LLM judging under matched evaluation conditions. The supervised neural controls use the same StepView representations and prefix labels as the learned monitors but without the discrete event abstraction layer, isolating the contribution of failure-aligned symbol learning. All conditions share the same prefix-labeling protocol and held-out evaluation splits to ensure comparability. The finite-state results should be read as an interpretability diagnostic rather than as the only deployable form of the method.

Table 2: TAU2Bench DFA prefixes decomposed into interpretable states as explicit provenance. Each state reports failure-risk evidence (Risk), supporting-prefix count (Eval), normalized timing $\bar{t}/T$, and representative trace evidence for responsibility interpretation. Trusted warning states are listed first to support responsibility assignment or intervention.

State	Phase	Risk	Eval	$\bar{t}/T$	Representative Step
<i>Trusted warning states</i>					
q1	Grounded lookup fan-out	0.357	3949	0.57	get_details / reservation
q19	Out-of-policy handoff	0.337	31	0.59	respond [insurance not allowed]
q15	Late unresolved troubleshooting	0.218	456	0.78	respond [refund/MMS fails]
<i>Representative trusted normal states</i>					
q0	Greeting / identity lookup	0.031	16754	0.25	respond; customer lookup
q11	Policy summary / confirmation	0.137	2992	0.72	respond [summary]
q12	Info collection / guidance	0.116	1471	0.72	get_order; respond
q16	Billing remediation	0.082	607	0.68	check/make payment
q14	Transactional update	0.060	411	0.81	send_certificate; check_sim
q5	Mid-course telecom diagnosis	0.018	42	0.38	toggle_airplane_mode

B Extended Provenance Example on Dialogue Agent Responsibility Attribution

To demonstrate that provenance-grounded symbolic states are not specific to web navigation environments, Table 2 reports DFA state behavioral provenance on TAU2Bench, a tool-using dialogue benchmark involving customer service agents. The extracted automaton yields 20 states; Table 2 reports the three trusted warning states and six representative normal states, with the remaining states excluded due to insufficient calibration support. Each trusted state is characterized by its risk score, the number of prefixes routed to it, its normalized timing $\bar{t}/T$, and a representative execution step that anchors its behavioral interpretation.

Three trusted warning states surface coherent failure-precursor patterns. State q_1 (risk 0.357, $\bar{t}/T = 0.57$) captures mid-dialogue grounded lookup fan-out, where repeated `get_details` or reservation queries after the task is underway indicate difficulty resolving the customer request. State q_{19} (risk 0.337, $\bar{t}/T = 0.59$) captures out-of-policy handoff, where a special-case request such as post-booking insurance is refused or transferred as indicated by `respond [insurance not allowed]`. State q_{15} (risk 0.218, $\bar{t}/T = 0.78$) captures late unresolved troubleshooting, where refund-policy or service failures such as `respond [refund/MMS fails]` remain open near trajectory end. Normal states correspond to routine task phases such as initial greeting and identity lookup (q_0 , risk 0.031), billing remediation (q_{16} , risk 0.082), and transactional updates (q_{14} , risk 0.060). Compared to WebArena, the TAU2Bench automaton is more concentrated, with q_0 alone routing 16,754 prefixes, reflecting the more structured nature of dialogue-based task execution. These results show that the neuro-symbolic monitoring architecture surfaces interpretable provenance states across heterogeneous agentic environments, and that the representative trace evidence within each state directly supports mapping responsible components back to accountable parties through $\mathcal{P}$, satisfying the traceability requirement that explicit provenance must provide inspectable causal evidence legible to human auditors.