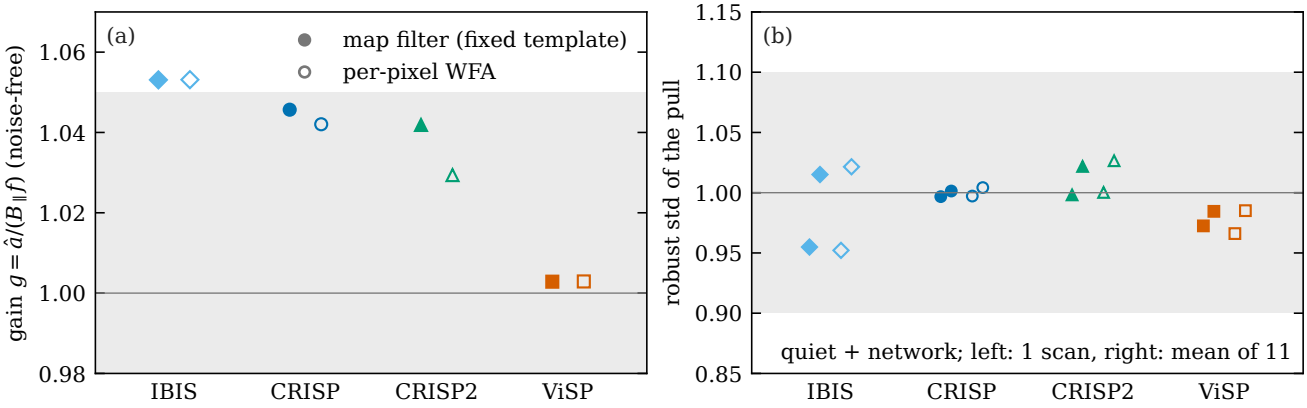
(a)
map filter (fixed template)
per-pixel WFA
gain $g = \hat{a}/(B_{\parallel} f)$ (noise-free)
1.06
1.04
1.02
1.00
0.98
IBIS
CRISP
CRISP2
ViSP
(b)
robust std of the pull
1.15
1.10
1.05
1.00
0.95
0.90
0.85
quiet + network; left: 1 scan, right: mean of 11
IBIS
CRISP
CRISP2
ViSP