



# Data Handling: Import, Cleaning and Visualisation

Lecture 11:

Visualisation and Dynamic Documents

Prof. Dr. Ulrich Matter

12/12/2019

# Mock exam answer sheet

- Example of scan in Studynet/Canvas
- Questions?

# Mock exam answer sheet: student ID (matr.-nr.)

N#	0	1	2	3	4	5	6	7	8	9
1	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
6	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
3	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
3	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
4	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
4	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
8	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
8	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>

# Data Display

# Data display

- Formatting data values for publication.
- Typical: String operations to make numbers and text look nicer.
  - Before creating a table or figure...

# Data display

```
# load packages and data
library(tidyverse)
data("swiss")
# compute summary statistics
swiss_summary <-
  summarise(swiss,
    avg_education = mean(Education, na.rm = TRUE),
    avg_fertility = mean(Fertility, na.rm = TRUE),
    N = n()
  )
swiss_summary

##   avg_education avg_fertility  N
## 1      10.97872      70.14255 47
```

## Problems?

## Data display: round numeric values

```
swiss_summary_rounded <- round(swiss_summary, 2)  
swiss_summary_rounded
```

```
##   avg_education avg_fertility  N  
## 1          10.98          70.14 47
```

# Data display: detailed formatting of numbers

- Coerce to text.
- String operations.
- Decimal marks, units (e.g., currencies), other special characters for special formats (e.g. coordinates).
- **format()**-function



## Data display: format() example

```
swiss_form <- format(swiss_summary_rounded,  
                     decimal.mark=","")  
swiss_form
```

```
##   avg_education avg_fertility  N  
## 1           10,98          70,14 47
```

# Data Visualisation with R (ggplot2)

# Data visualisation

- Final step of data pipeline/data science procedure!
  - Convincingly communicating insights from data.
- **R** is a very powerful tool to do this!
  - (Very powerful graphics engine)

# Data visualisation in R

Three main approaches:

1. The original `graphics` package ((R Core Team 2018); shipped with the base R installation).

# Data visualisation in R

Three main approaches:

1. The original `graphics` package ((R Core Team 2018); shipped with the base R installation).
2. The `lattice` package (Sarkar 2008), an implementation of the original Bell Labs 'Trellis' system.

# Data visualisation in R

Three main approaches:

1. The original `graphics` package ((R Core Team 2018); shipped with the base R installation).
2. The `lattice` package (Sarkar 2008), an implementation of the original Bell Labs 'Trellis' system.
3. The `ggplot2` package (Wickham 2016), an implementation of Leland Wilkinson's 'Grammar of Graphics'.

# ggplot2



## ggplot2 basics

Using `ggplot2` to generate a basic plot in R is quite simple. Basically, it involves three key points:

1. The data must be stored in a `data.frame/tibble` (in tidy format!).



## ggplot2 basics

Using `ggplot2` to generate a basic plot in R is quite simple. Basically, it involves three key points:

1. The data must be stored in a `data.frame/tibble` (in tidy format!).
2. The starting point of a plot is always the function `ggplot()`.

## ggplot2 basics

Using `ggplot2` to generate a basic plot in R is quite simple. Basically, it involves three key points:

1. The data must be stored in a `data.frame/tibble` (in tidy format!).
2. The starting point of a plot is always the function `ggplot()`.
3. The first line of plot code declares the data and the 'aesthetics' (e.g., which variables are mapped to the x-/y-axes):

## ggplot2 basics

Using `ggplot2` to generate a basic plot in R is quite simple. Basically, it involves three key points:

1. The data must be stored in a `data.frame/tibble` (in tidy format!).
2. The starting point of a plot is always the function `ggplot()`.
3. The first line of plot code declares the data and the 'aesthetics' (e.g., which variables are mapped to the x-/y-axes):

```
ggplot(data = my_dataframe, aes(x= xvar, y= yvar))
```

## Example data set: swiss

```
# load the R package
library(tidyverse) # automatically loads ggplot2
# load the data
data(swiss)
# get details about the data set
# ?swiss
# inspect the data
head(swiss)
```

##	Fertility	Agriculture	Examination	Education	Catholic	Infant.Mortality
## Courtelary	80.2	17.0	15	12	9.96	22
## Delemont	83.1	45.1	6	9	84.84	22
## Franches-Mnt	92.5	39.7	5	5	93.40	20
## Moutier	85.8	36.5	12	7	33.77	20
## Neuveville	76.9	43.5	17	15	5.16	20
## Porrentruy	76.1	35.3	9	7	90.57	26

## Add indicator variable

Code a province as 'Catholic' if more than 50% of the inhabitants are catholic:


```
# via tidyverse/mutate  
swiss <- mutate(swiss,  
                Religion =  
                  ifelse(50 < Catholic, 'Catholic', 'Protestant'))
```

```
# 'old school' alternative  
swiss$Religion <- 'Protestant'  
swiss$Religion[50 < swiss$Catholic] <- 'Catholic'
```

```
# set to factor  
swiss$Religion <- as.factor(swiss$Religion)
```


# Data and aesthetics

```
ggplot(data = swiss, aes(x = Education, y = Examination))
```

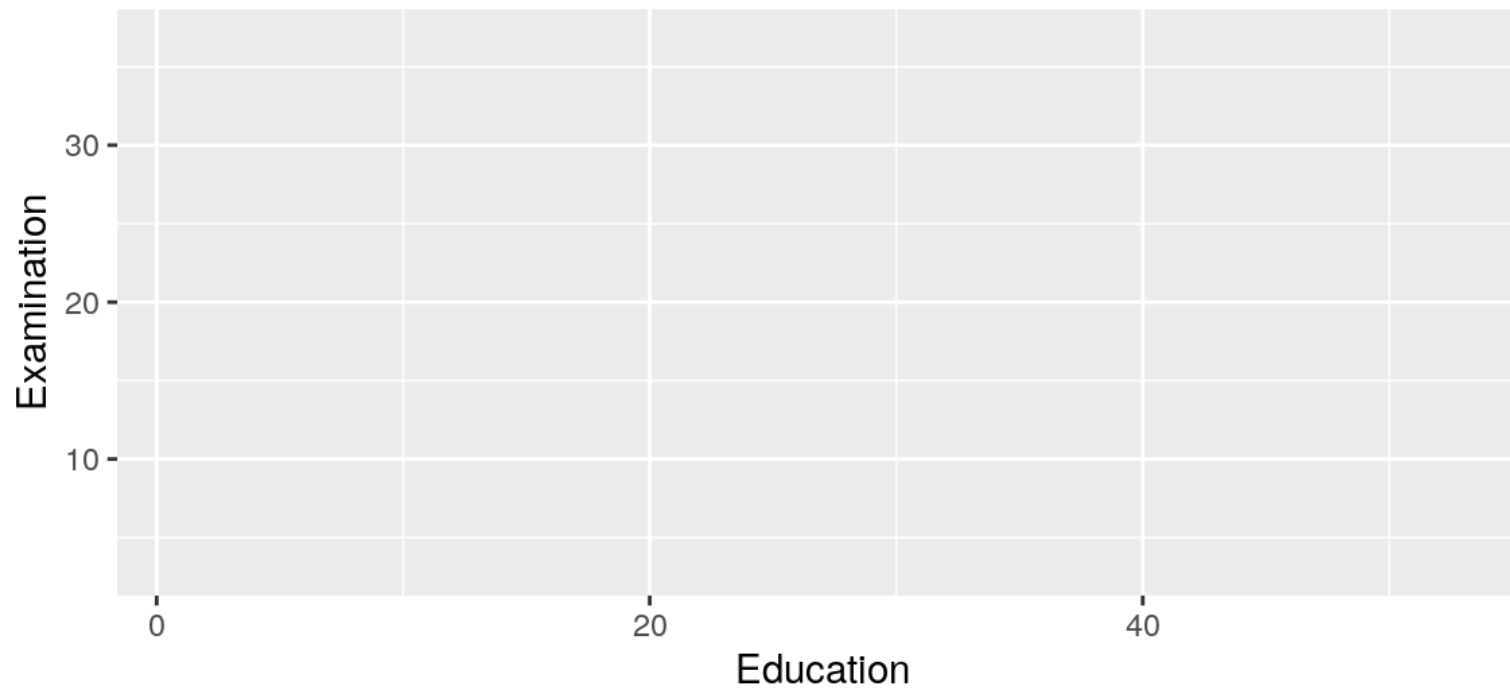


# Geometries (~the type of plot)

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point()
```

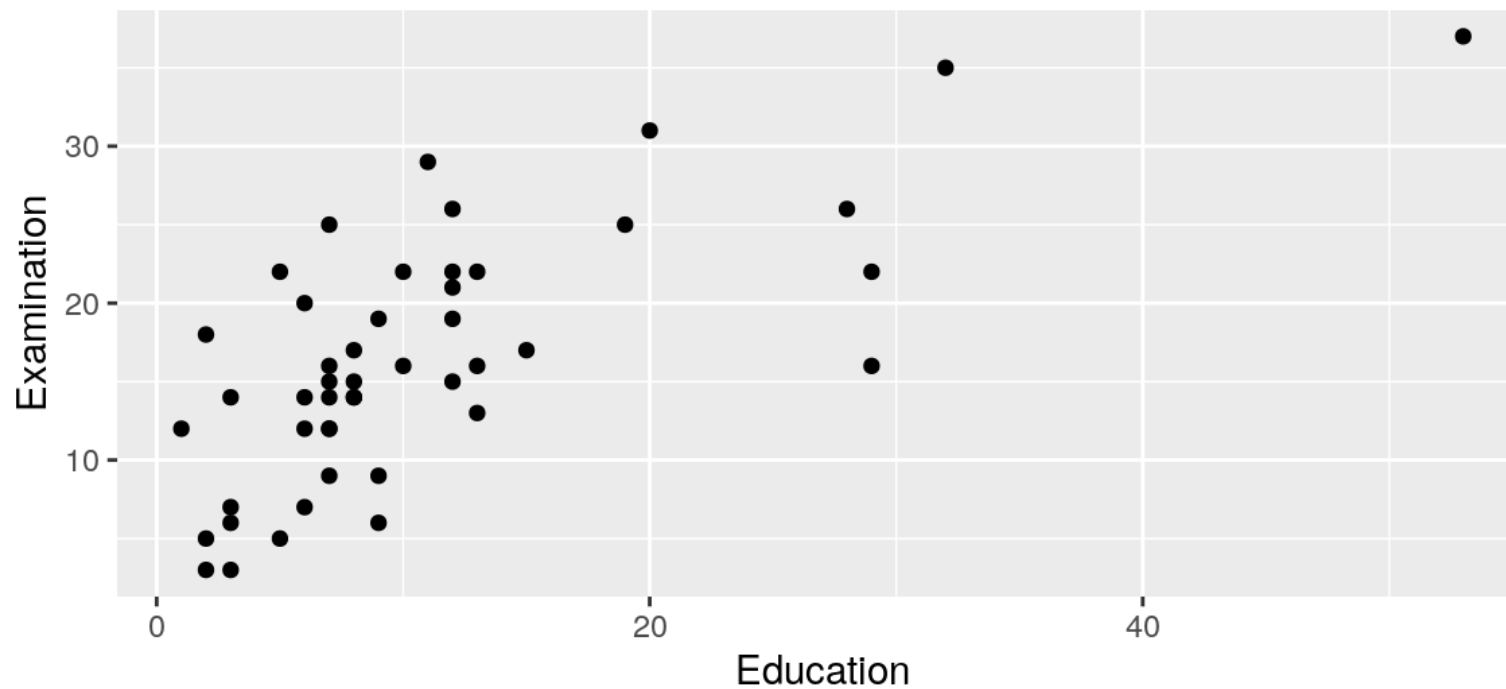

# Facets


```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point() +  
  facet_wrap(~Religion)
```

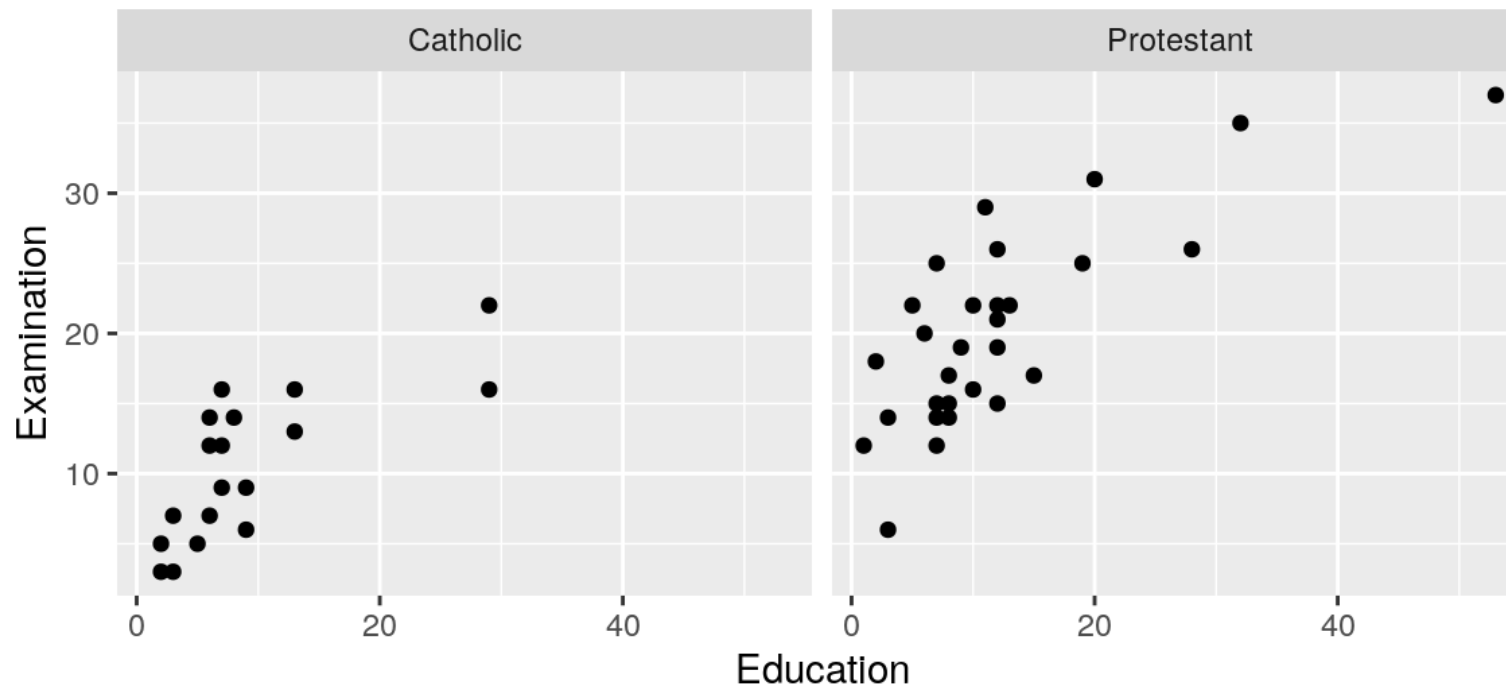




# Additional layers and statistics

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point() +  
  geom_smooth(method = 'loess') +  
  facet_wrap(~Religion)
```

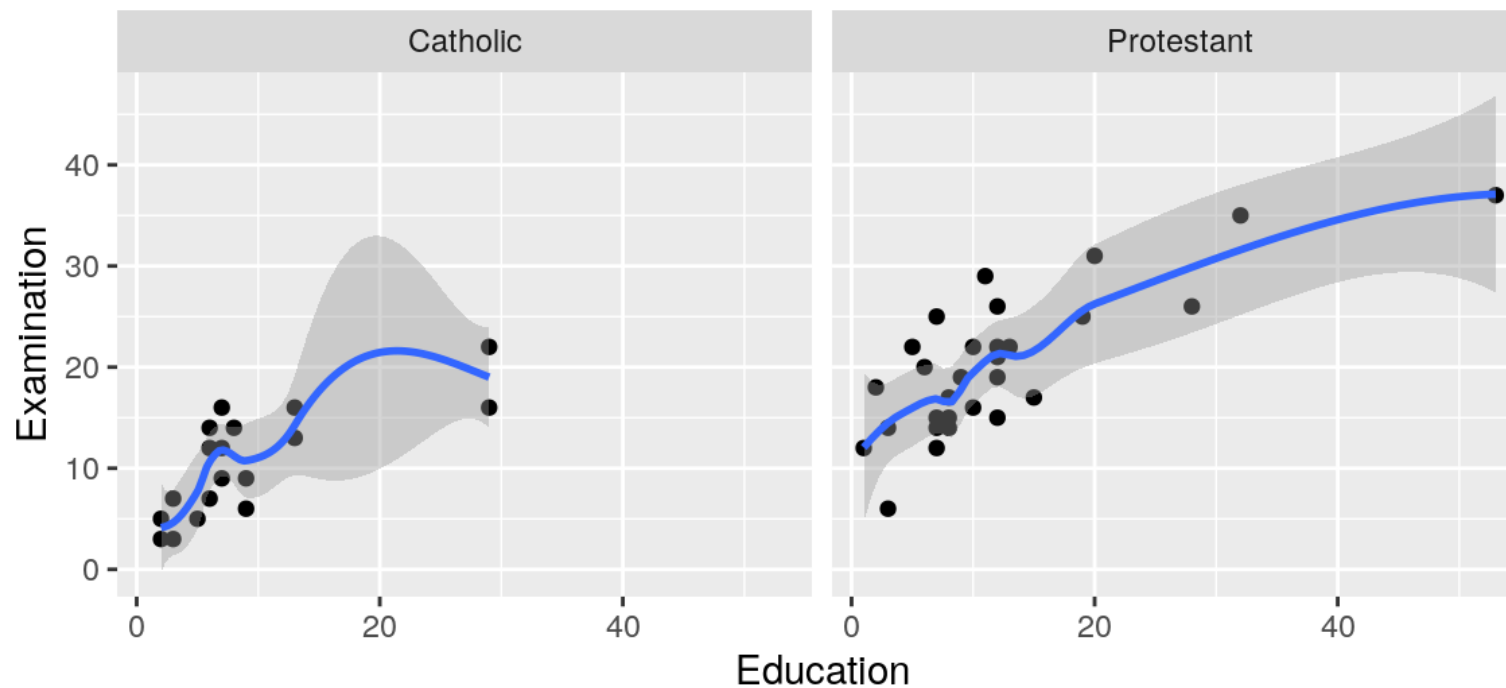


# Additional layers and statistics

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point() +  
  geom_smooth(method = 'lm') +  
  facet_wrap(~Religion)
```

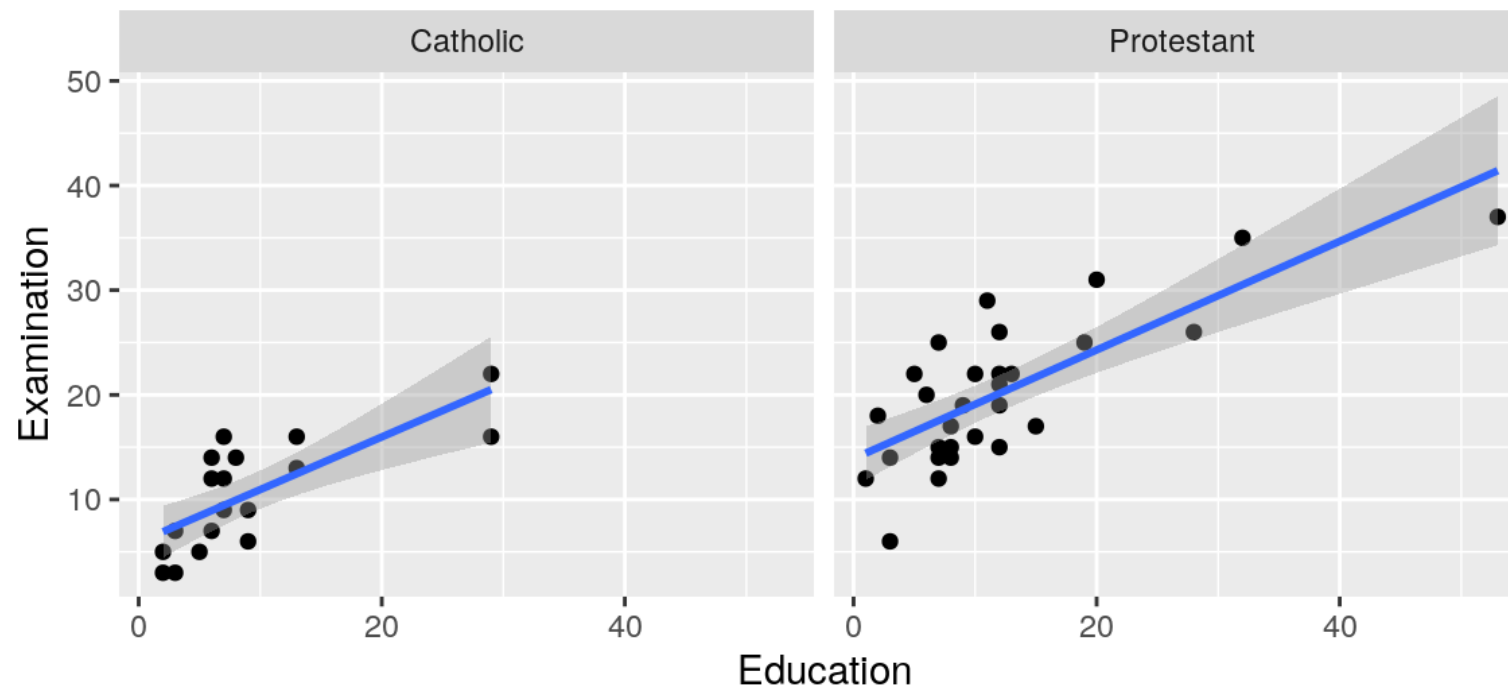


# Additional aesthetics

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point(aes(color = Agriculture)) +  
  geom_smooth(method = 'lm') +  
  facet_wrap(~Religion)
```

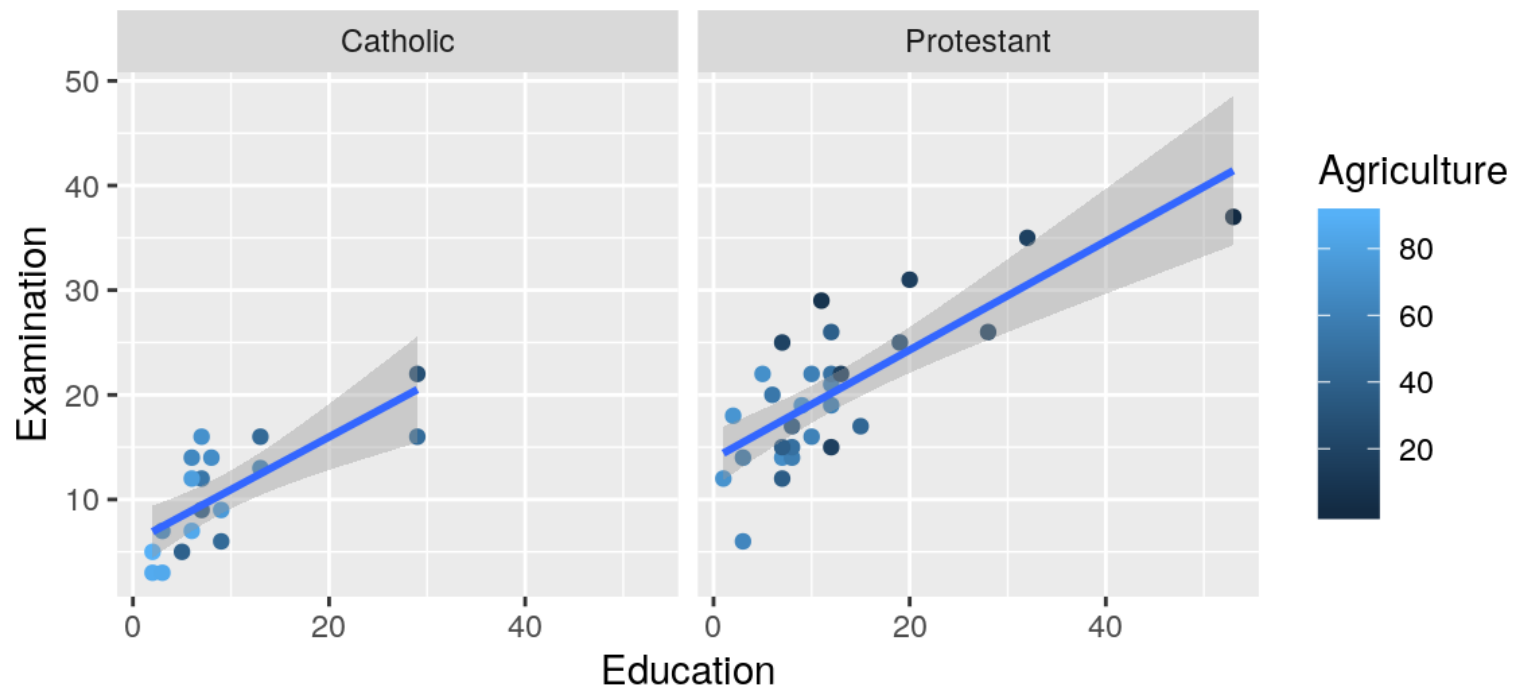


# Change coordinates

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point(aes(color = Agriculture)) +  
  geom_smooth(method = 'lm') +  
  facet_wrap(~Religion) +  
  coord_flip()
```

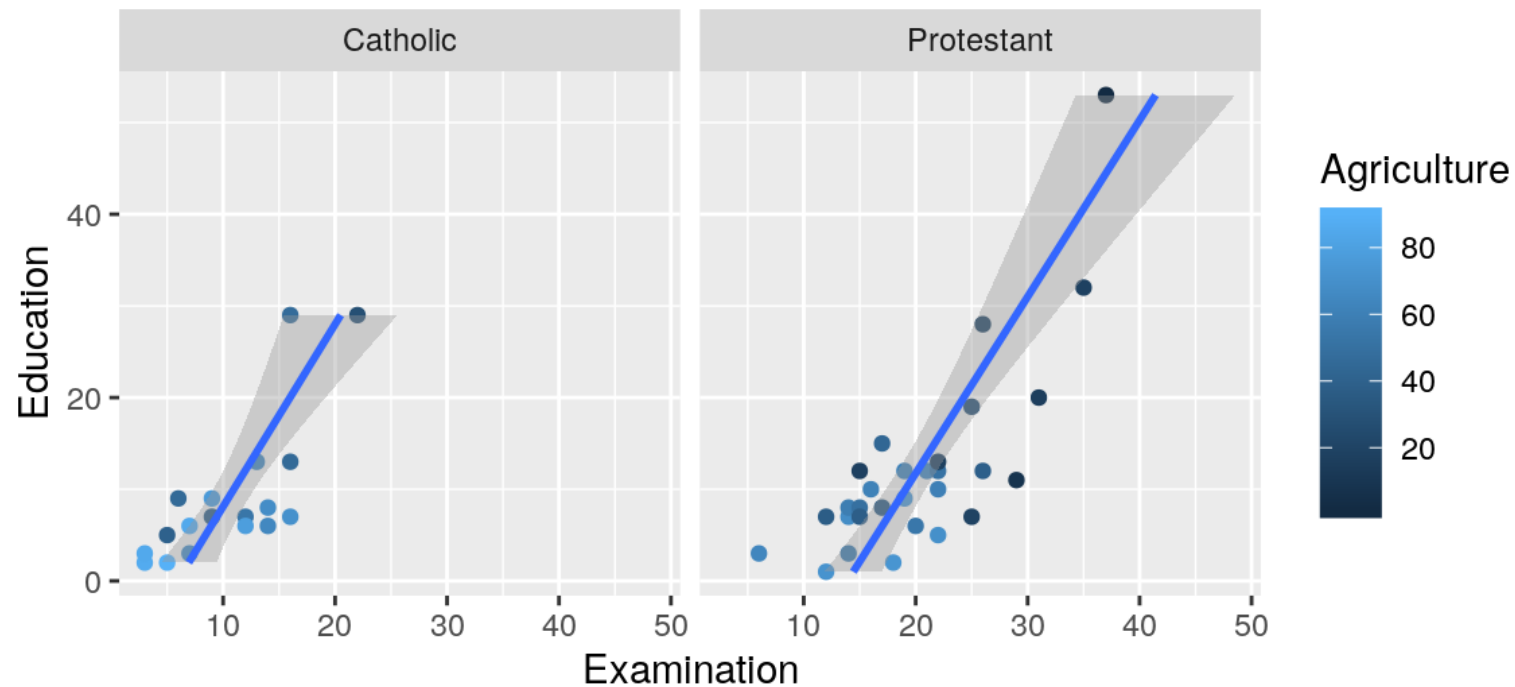


# Themes

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point(aes(color = Agriculture)) +  
  geom_smooth(method = 'lm') +  
  facet_wrap(~Religion) +  
  theme(legend.position = "bottom", axis.text=element_text(size=12) )
```

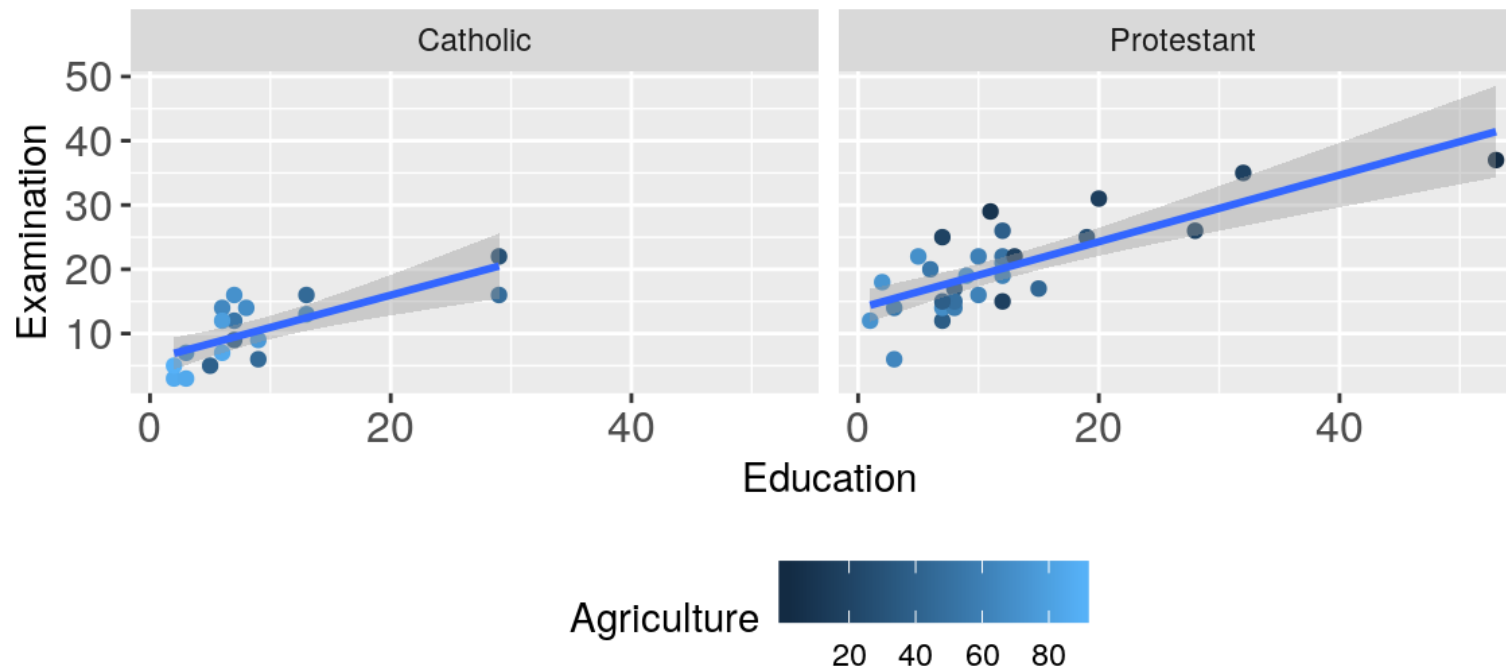


# Themes

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point(aes(color = Agriculture)) +  
  geom_smooth(method = 'lm') +  
  facet_wrap(~Religion) +  
  theme_minimal()
```

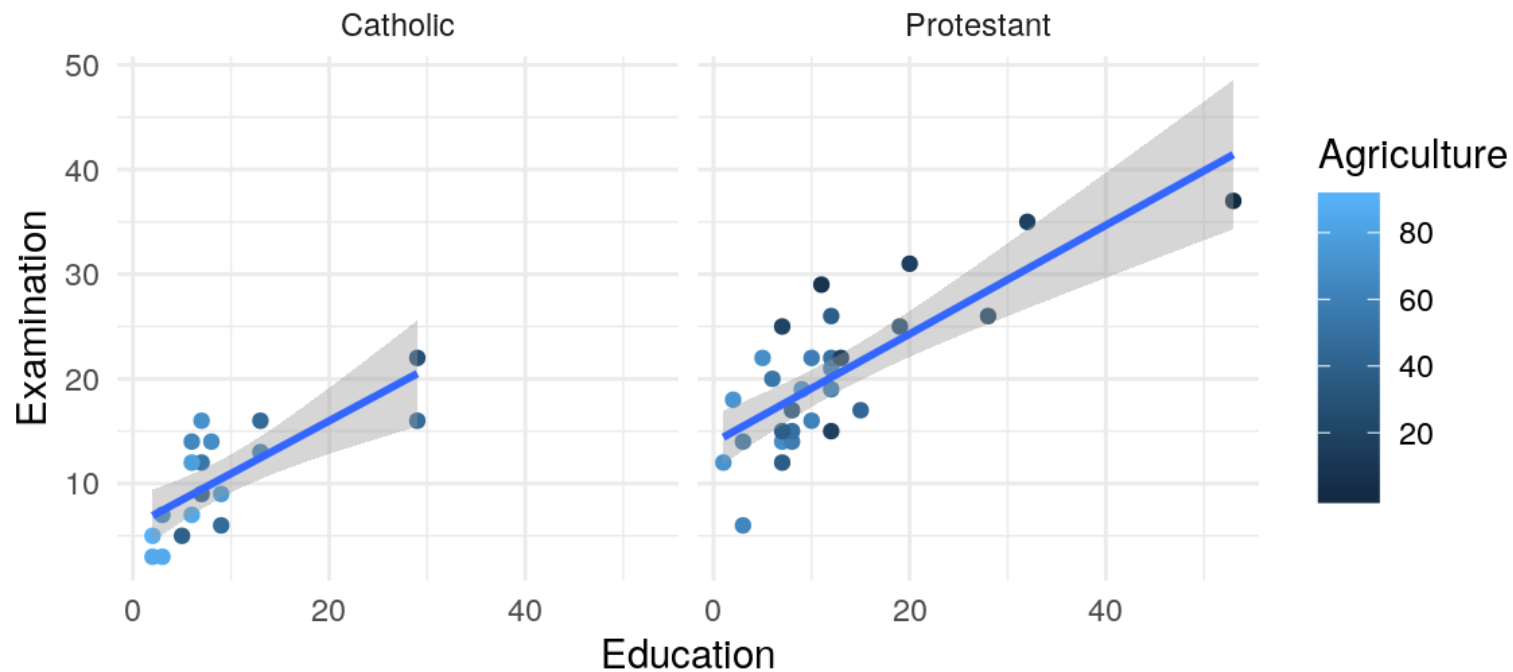

# Themes

```
ggplot(data = swiss, aes(x = Education, y = Examination)) +  
  geom_point(aes(color = Agriculture)) +  
  geom_smooth(method = 'lm') +  
  facet_wrap(~Religion) +  
  theme_dark()
```

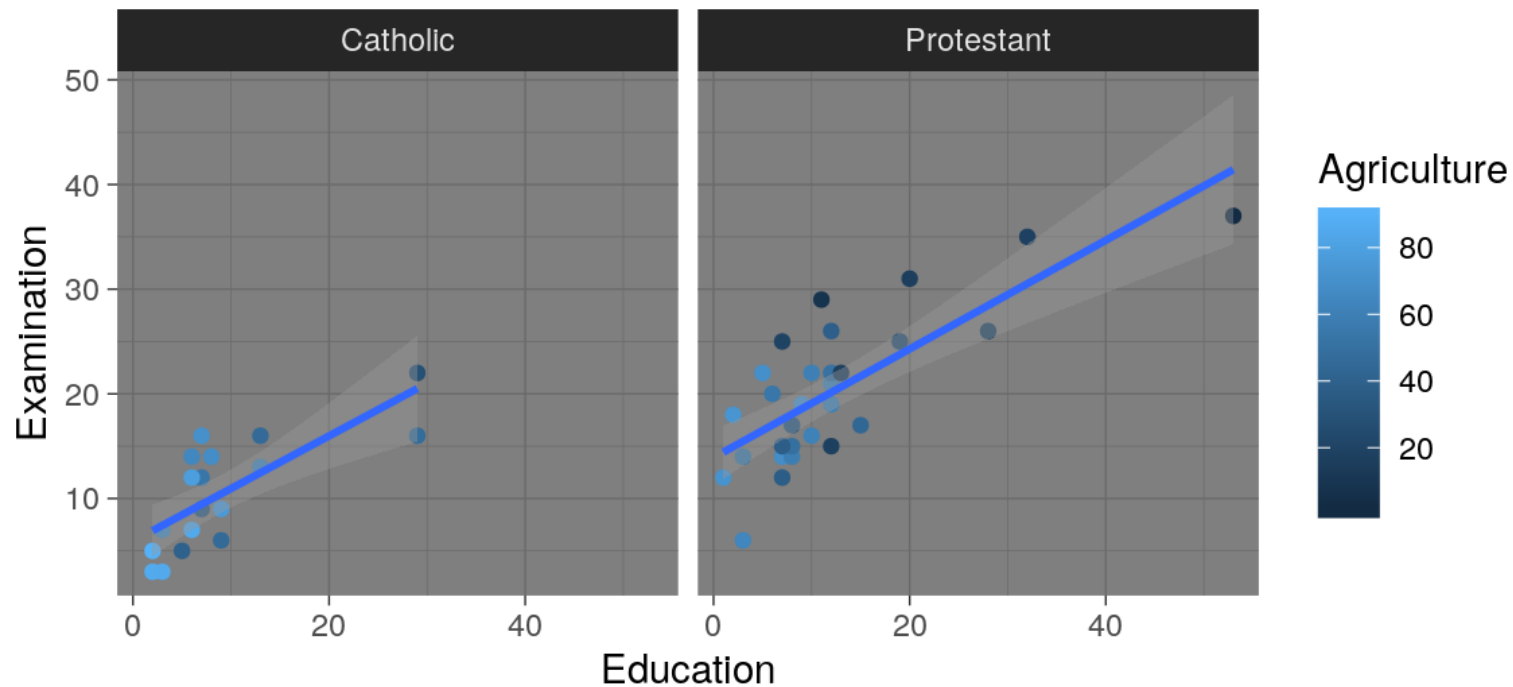

# Dynamic Documents



Q&A

# References

R Core Team. 2018. **R: A Language and Environment for Statistical Computing**. Vienna, Austria: R Foundation for Statistical Computing. <https://www.R-project.org/>.

Sarkar, Deepayan. 2008. **Lattice: Multivariate Data Visualization with R**. New York: Springer. <http://lmdvr.r-forge.r-project.org>.

Wickham, Hadley. 2016. **Ggplot2: Elegant Graphics for Data Analysis**. Springer-Verlag New York. <http://ggplot2.org>.