TP-PriseEnMain-notes

Notes

• Attribution d'une ip à un vlan

```
Switch(config) #int Vlan 20
Switch(config-if) #ip address 172.16.1.2 255.255.0.0
Switch(config-if) #no shut
Switch(config-if) #exit
Switch(config) #
```

• Attribution ip à une vlan

```
Router*
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.


Router(config) #interface GigabitEthernet0/0/0


Router(config-if) #ip address 192.168.3.1 255.255.255.0

Router(config-if) #ip address 192.168.3.1 255.255.255.0

Router(config-if) #no shutdown

Router(config-if) #
```

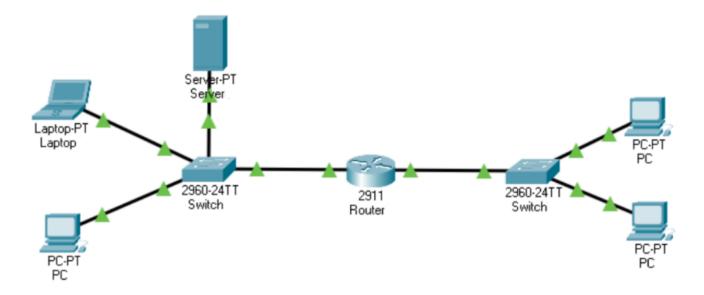

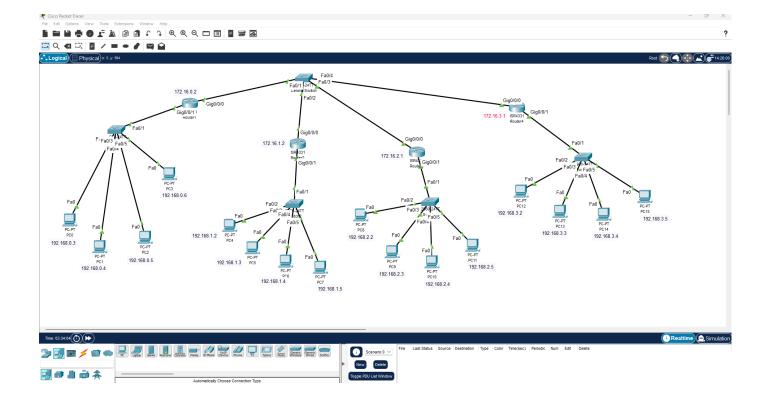

Router>en

Router#conf t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config) #

• Exemple schema mermaid

