

Make a Node.js Package for Easy App Making

by

Christopher Andrew Topalian

All Rights Reserved
Copyright 2000-2024

Dedicated to God the Father

How to Make a Node.js Package

Let's make a **package** of functions for us to use in all of our projects, which we will install system wide on our computer. Later, we can even choose to upload our **package** to the internet and share it with the world.

By making a **package** of functions we can update our **package** anytime that we want and all of our projects will utilize the same updated **package of functions!**

This makes programming much easier, because we only have to make the package one time, instead of over and over again.

This allows us to be much more productive, because the **package** can easily be imported into any folder using **npm link nameOfPackage**


Let's make a **package** named **cos**

On the next pages we walk through creating the **package** that we name **cos**


cos stands for College of Scripting :-)

How to Create a Node.js Package

* We make a folder, named **project1**

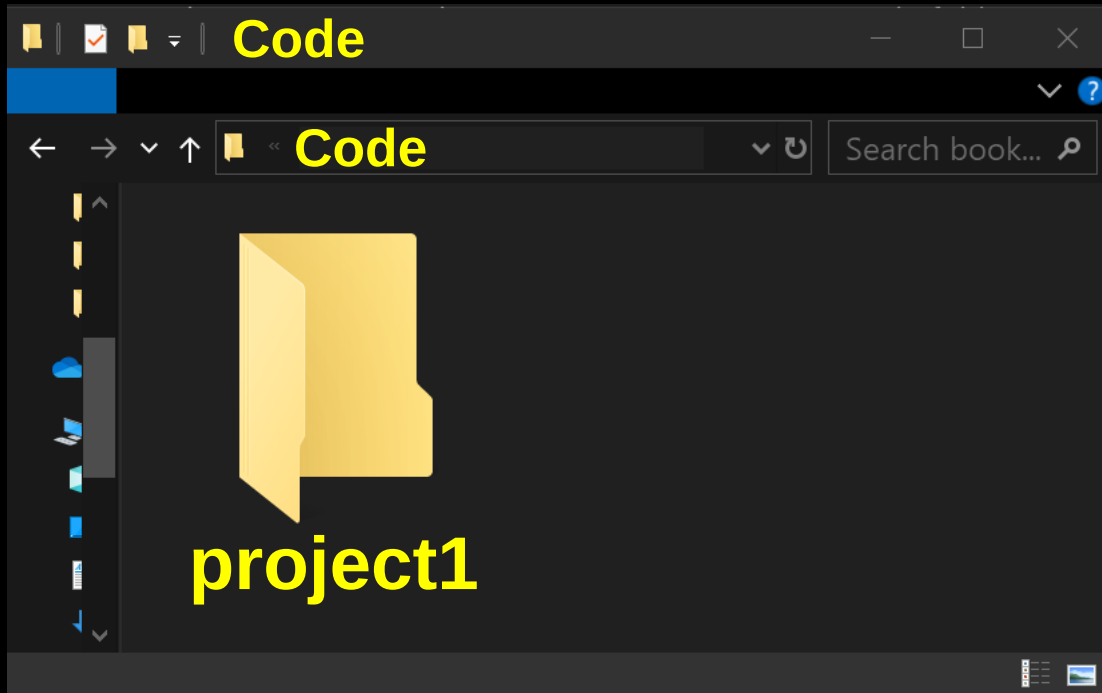

* In **project1** folder we make a folder named **cos**

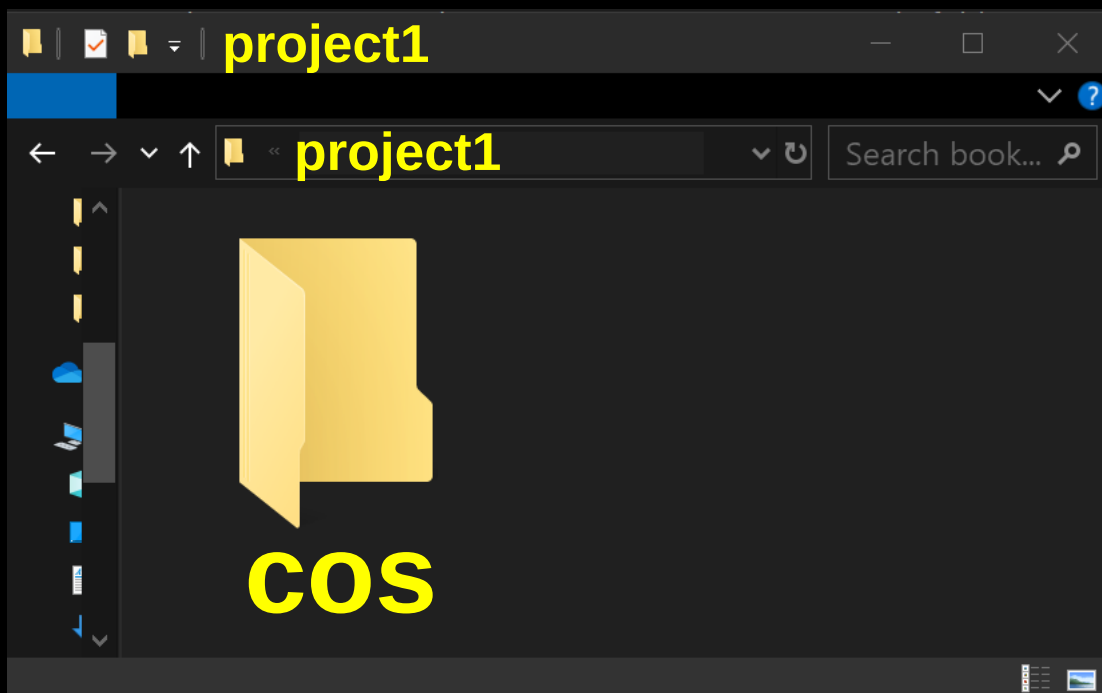

Naming Our Package

When naming packages, we never use:

- * uppercase letters
- * underscores
- * commas
- * special chars (!@#\$%^&*())

Instead, we use

- * lowercase only
- * hyphens or dots

So, we can choose to name it,


our-package or **ourpackage**

but NOT **ourPackage** or **our_package**

We can choose to use dots, such as:

our.package or **ourpackage.001**

In the **cos** folder, we **make a folder** named **src**

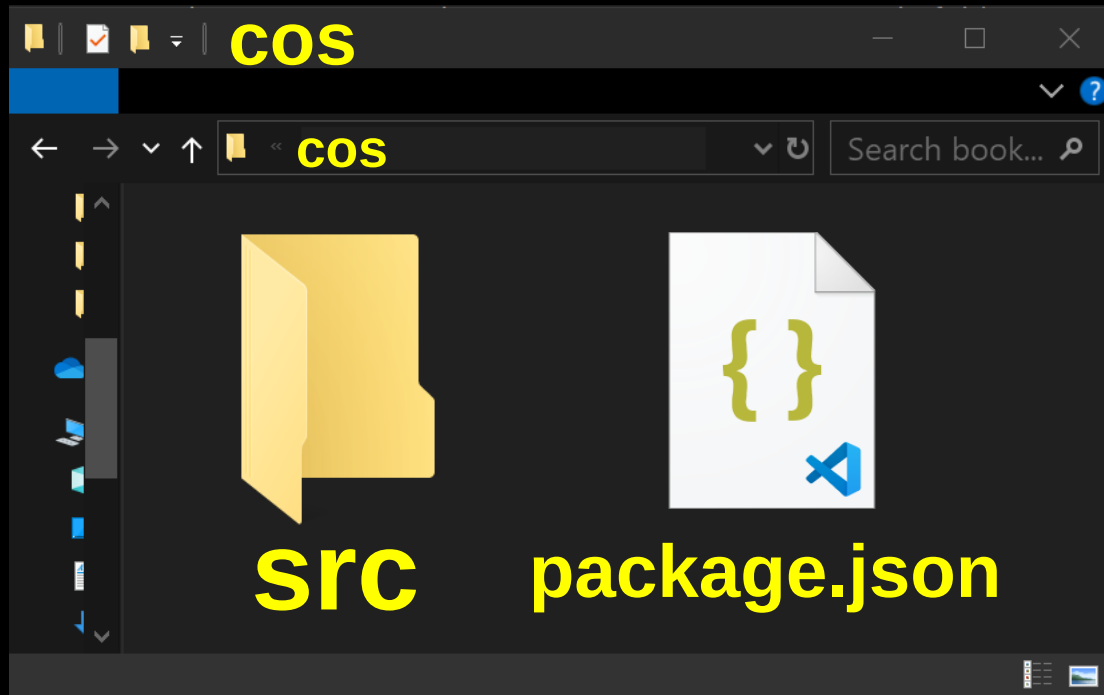

In the **cos** folder, we also **make a file** named **package.json**

We have multiple ways to make the **package.json** file.

But, instead of using the npm method of making a package.json file using npm init let us create the file manually, without using the npm way, as shown on the next page.

package.json has meta data that is used to Install and Distribute Our Package

We create a **package.json** file, which defines our **package** and its metadata. This file is essential for distributing and installing our **package** across projects.


First, we make a **new text file** in **VSCode Editor** and **type** the script that we see on the next page and **save it as package.json**

We make sure to save the **package.json** file inside of the **cos** folder.

NEXT PAGE SHOWS package.json

```
{  
  "name": "cos",  
  "version": "1.0.0",  
  "description": "Our Package",  
  "main": "src/index.js",  
  "scripts": {  
    "test": "echo \"Error: no test  
specified\" && exit 1"  
  },  
  "author": "Christopher Andrew  
Topalian",  
  "license": "ISC",  
  "files": [  
    "src"  
  ]  
}
```


We have a **src** folder and a **package.json** file inside of our **cos** folder as shown here:

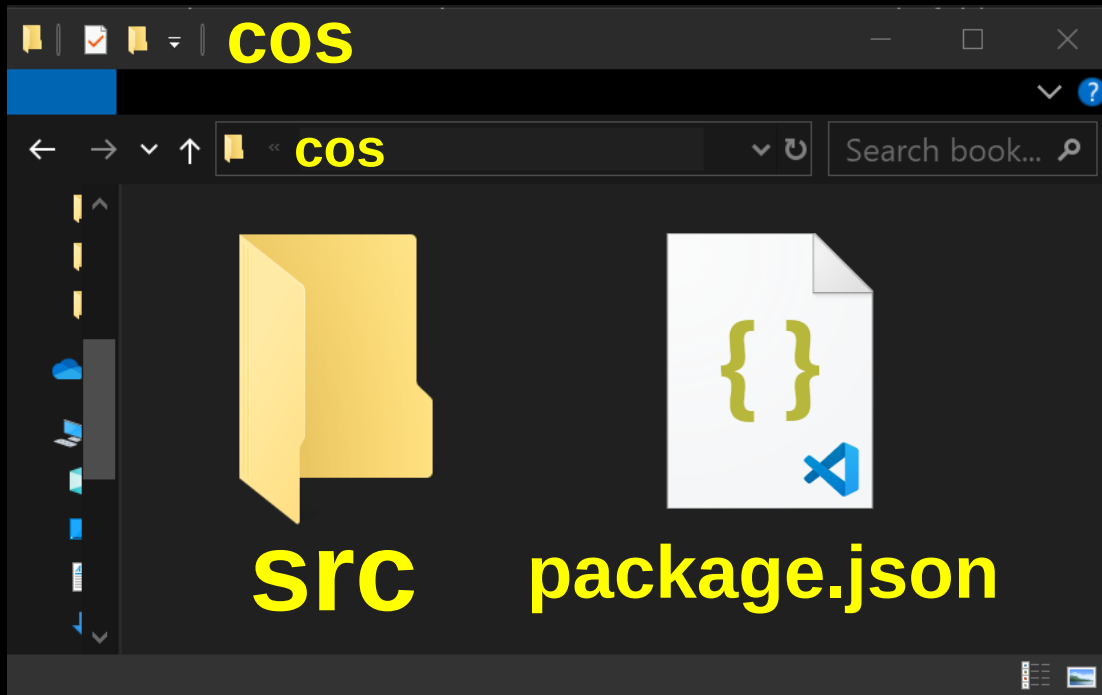

Inside of our **src** folder, we **make a folder** named **math** and we **make** an **index.js** file



On the next page, we show the **index.js** file code.

We **Type the Code** as we see it on the next page, and save it as **index.js**

We make sure that this **index.js** file is **inside** of the **src** folder.

This **index.js** file will reference the **functions** that we **place** in the **math** folder.

SEE NEXT PAGE for: index.js

```
// index.js
```


```
const divide = require('./math/divide');  
const multiply = require('./math/multiply');
```

```
module.exports = {  
  divide,  
  multiply,  
};
```

```
//----//
```

```
// Dedicated to God the Father  
// All Rights Reserved Christopher Andrew Topalian  
Copyright 2000-2024  
// https://github.com/ChristopherTopalian  
// https://github.com/ChristopherAndrewTopalian  
//  
https://sites.google.com/view/CollegeOfScripting
```

Inside of our **math** folder, we **make two .js files** named **divide.js** and **multiply.js**

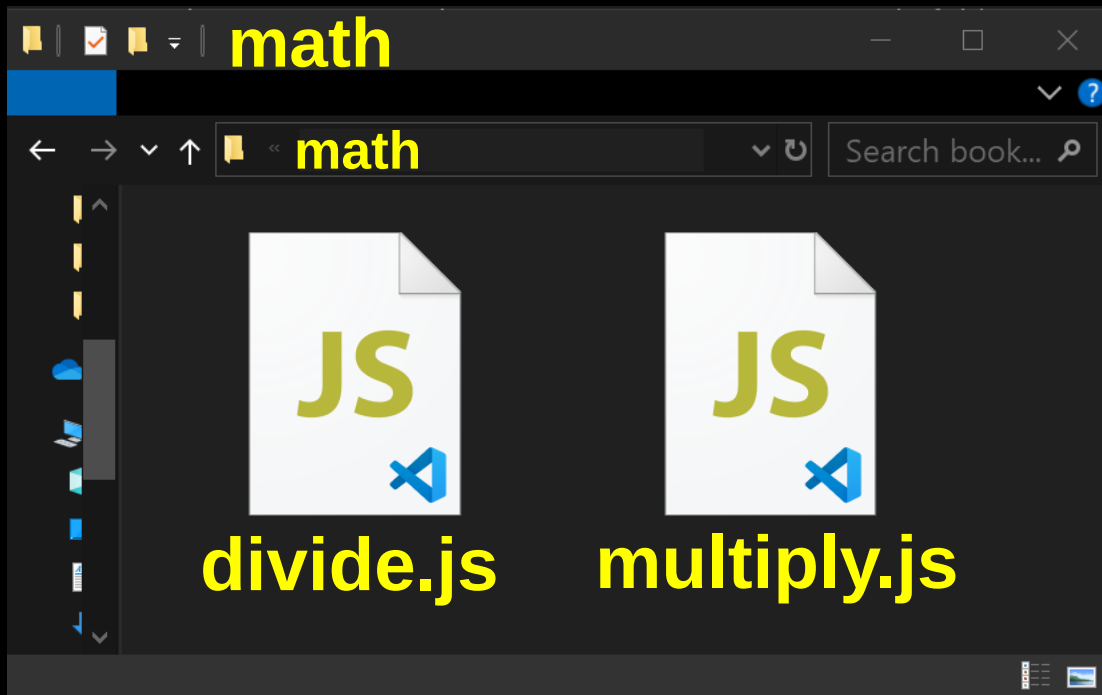

Thus, the **two function files** we are **adding to our package** are: **divide.js** and **multiply.js**

On the next page, we see the function script that we save as **multiply.js**

NEXT PAGE SHOWS: multiply.js

```
// multiply.js
```

```
function multiply(a, b)
{
    return a * b;
}
```

```
module.exports = multiply;
```

```
//----//
```

```
// Dedicated to God the Father
```

```
// All Rights Reserved Christopher Andrew Topalian
```

```
Copyright 2000-2024
```

```
// https://github.com/ChristopherTopalian
```

```
// https://github.com/ChristopherAndrewTopalian
```

```
// https://sites.google.com/view/CollegeOfScripting
```

On the next page, we see the function script that we save as **divide.js**

NEXT PAGE SHOWS: `divide.js`

```
// divide.js
```

```
function divide(a, b)
{
    return a / b;
}
```

```
module.exports = divide;
```

```
//----//
```

```
// Dedicated to God the Father
// All Rights Reserved Christopher Andrew
// Topalian Copyright 2000-2024
// https://github.com/ChristopherTopalian
// https://github.com/ChristopherAndrewTopalian
// https://sites.google.com/view/CollegeOfScripting
```

How to Install Our Package Computer Wide

We Type **cmd** into the **cos** folder address bar and press **Enter**



This opens our **cos** folder in the **command prompt**

```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.5011]
(c) Microsoft Corporation. All rights reserved.

D:\Code\project1\cos> npm link
```

We type in the Command prompt:

npm link

press **Enter**

We have Installed Our Package System Wide!

Now, that we have used

npm link

which made our package available system wide, we can now easily link to our **package** from any of our Node.js project folders by using

npm link cos

This makes creating and updating our applications very easy :-)


The next page shows how to use our custom package.

To use our package in another folder, we first **make a new folder** anywhere else on our computer and name our folder **project2**



In the address bar of **project2** folder,
we type
cmd
press **Enter**

This opens the command prompt.

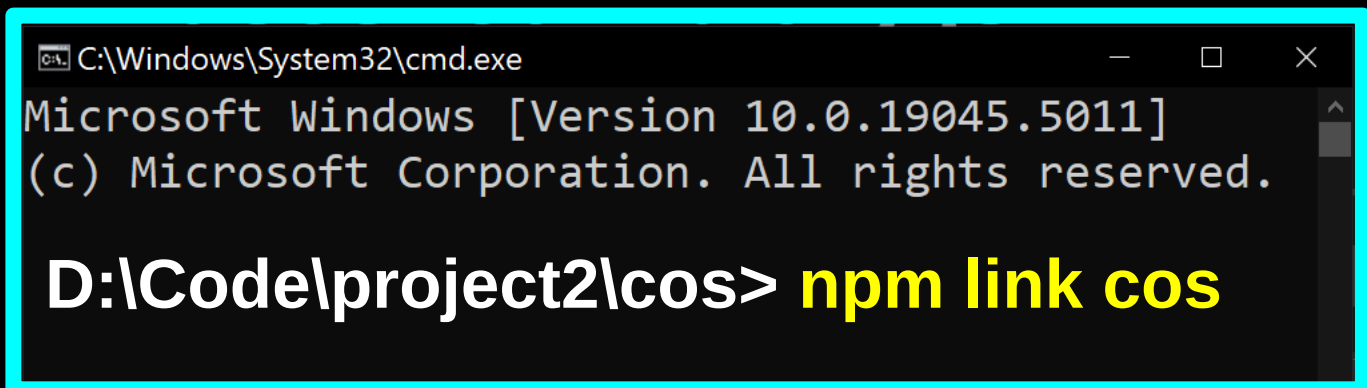

We type in the command prompt
npm link cos
press **Enter**

This will install the **node_modules** link folder of our package named **cos** into our **project2** folder.

This way we can use the functions from our package in our **project2** folder project.

Any time that we change a function in our **cos** package or add a function, those changes will now be useable in our **project2** folder too.

This saves a lot of work, since now we only have to change the package of functions one time, but it allows us to use the package in as many projects as we want with the updated changes, just by typing in the address bar of any folder:

npm link cos
and pressing **Enter**

We **make a new script** in **VSCode** and save it as, **usesOurPackage.js**

We save **usesOurPackage.js** in a folder that we make any where on our computer. We named this new folder **project2** to make things easy.

Thus, inside of **project2** folder, we have the **usesOurPackage.js** file.

The code to the **usesOurPackage.js** file is on the next page.

Of course, we remember to first **npm link cos** in **project2** folder if we want to be able to use the functions from our package named **cos**

NEXT PAGE SHOWS usesOurPackage.js

```
// usesOurPackage.js
```

```
const { divide, multiply } = require('cos');
```

```
console.log(divide(10, 2));
```

```
console.log(multiply(3, 3));
```

```
//----//
```

```
// Dedicated to God the Father
```

```
// All Rights Reserved Christopher Andrew Topalian
```

```
Copyright 2000-2024
```


```
// https://github.com/ChristopherTopalian
```

```
// https://github.com/ChristopherAndrewTopalian
```


```
// https://sites.google.com/view/CollegeOfScripting
```

Updating Our Package is Easy

We type **cmd** into the **cos** folder address bar and press **Enter**

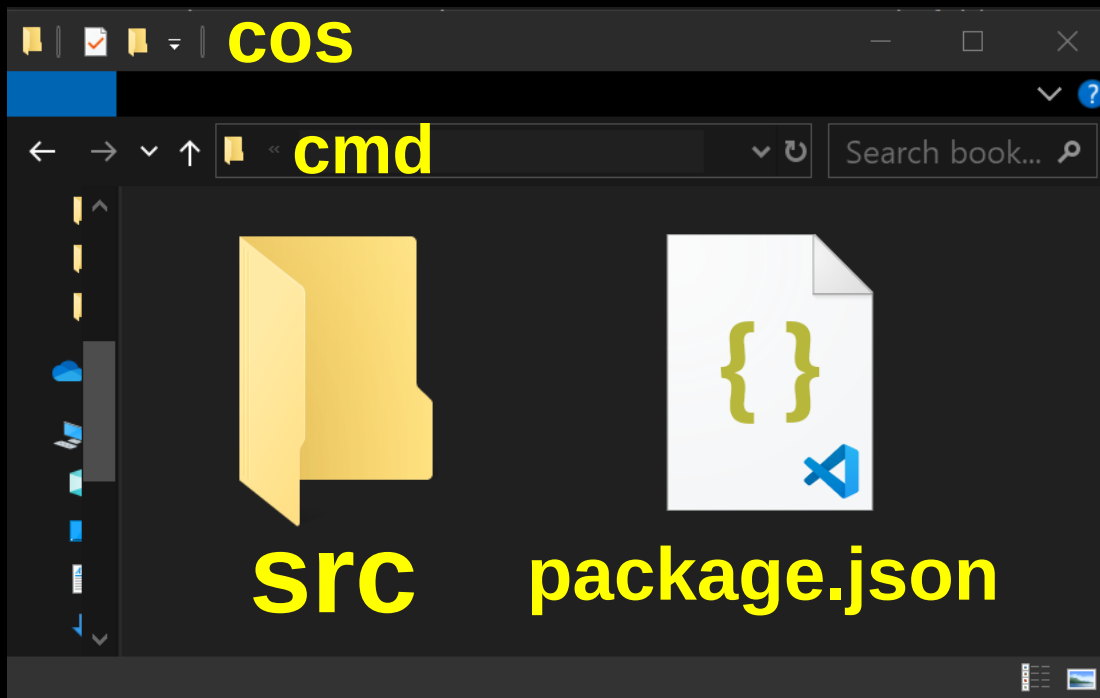

This opens our **cos** folder in the **command prompt**

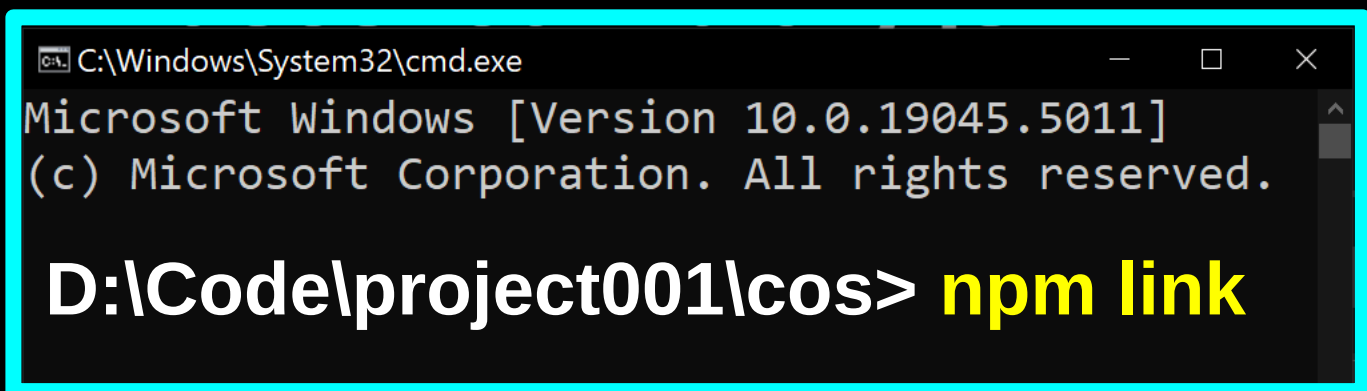

We type in the Command prompt:

npm link

press Enter

We can show what package links are present on our computer system using:

npm list -g --link

We can unlink a package system wide using:

npm unlink -g cos

To unlink the package locally from a project folder, we can use:

npm unlink cos

How to Paste Code from a PDF that has Junk Characters.

How to Paste Code from a PDF that has Junk Characters.

When we paste from a pdf into VSCode, it might look like this:

```
function combineJSFiles(directory,  
scriptFilename)  
{  
  let outputPath = path.join  
(directory, 'main.js');  
  
  let fileContents = [];
```

We can't leave those junk characters in the code, so we remove them with find/replace.

We Find 1 of the spaces.

We Replace All with the 1 space that we typed.
This gets rid of the junk characters in the code.

We highlight 1 space with our mouse arrow:

```
function combineJSFiles(directory,
scriptFilename)
```

```
{
```

```
  let outputFilePath = path.join
(directory, 'main.js');
```

```
  let fileContents = [];
```


We press Control + H to open the Find/Replace feature and Replace All with our own Space

```
function comb
scriptFilename)
```

```
{
```

```
  let outputFilePath = path.join
(directory, 'main.js');
```

```
  let fileContents = [];
```

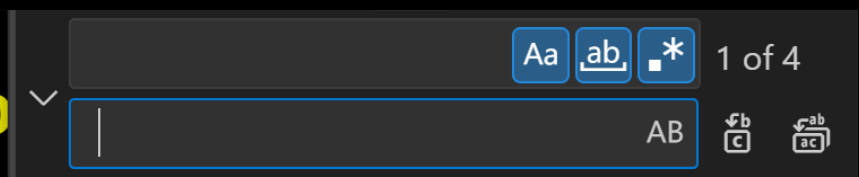


Here we see that the Find/Replace All has replaced the junk characters with our working spaces instead:

```
function combineJSFiles(directory,
scriptFilename)
{
    let outputFilePath = path.join
    (directory, 'main.js');

    let fileContents = [];
```

Now that the code
has no junk characters,
it can run.

True Artificial Intelligence System

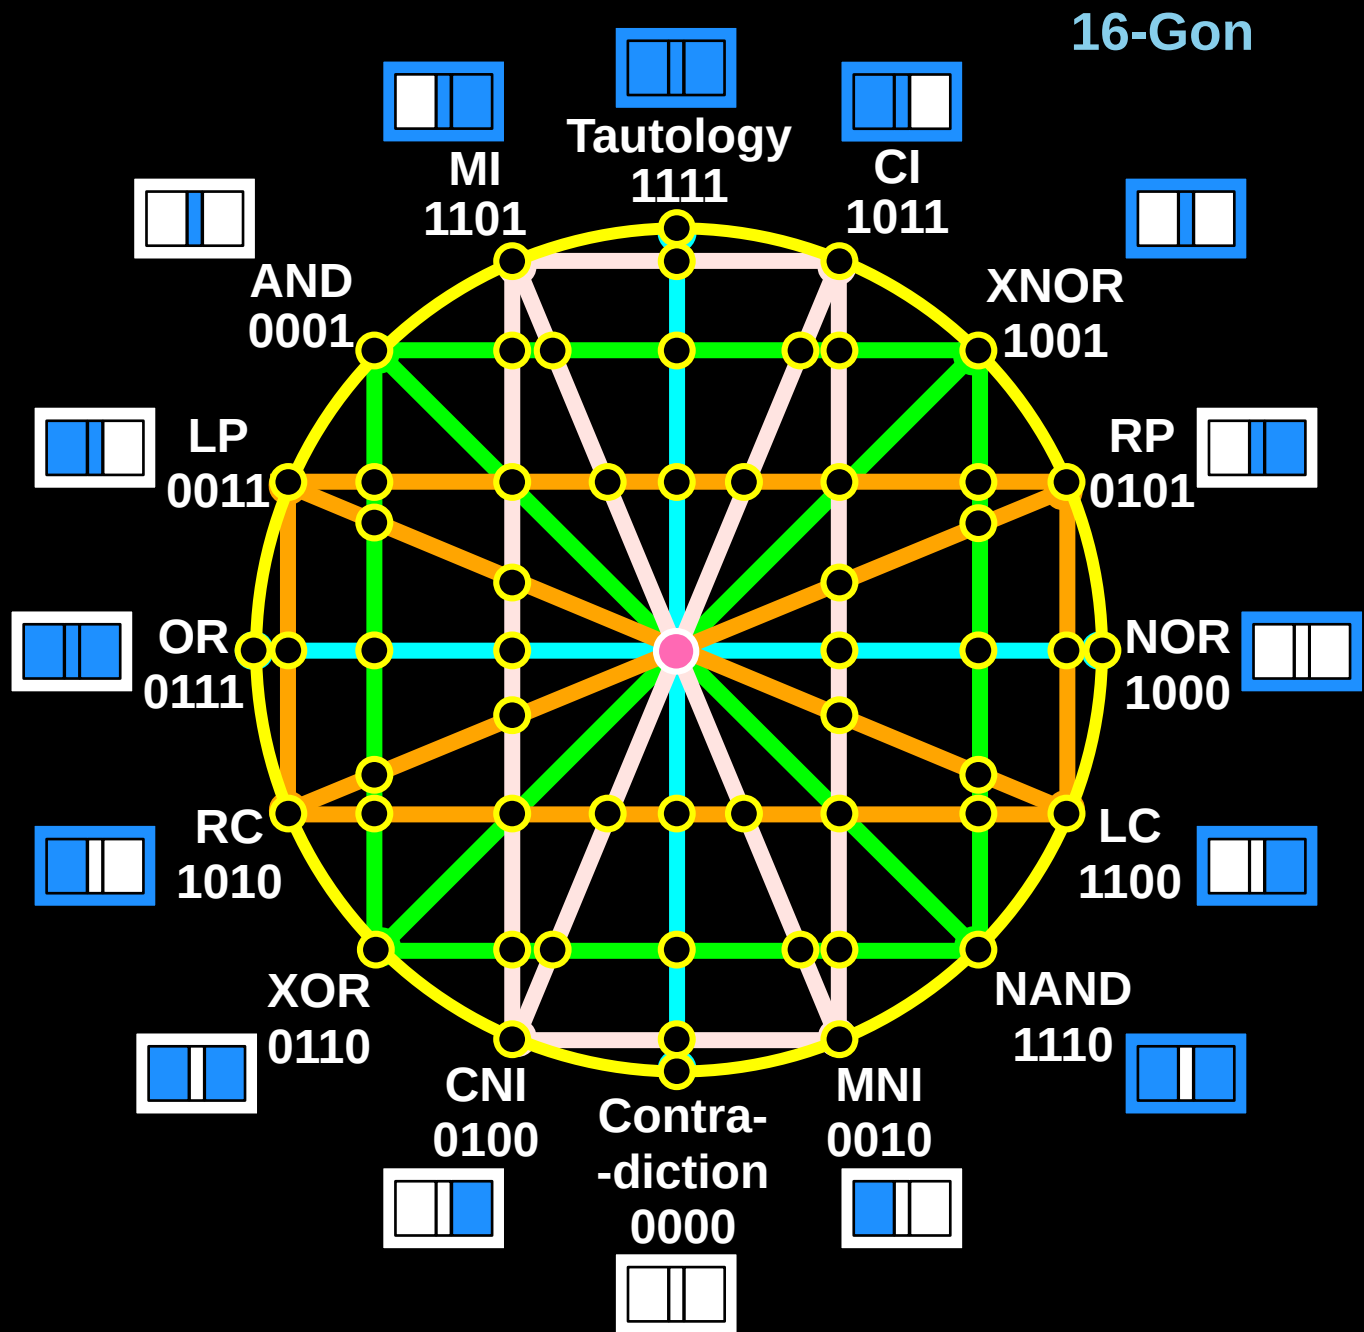

For More Tutorials:

CollegeOfScripting.weebly.com

CollegeOfScripting.wordpress.com

GitHub.com/ChristopherTopalian

GitHub.com/ChristopherAndrewTopalian

Youtube.com/ScriptingCollege

Twitter.com/CollegeOfScript

Rumble.com/user/CollegeOfScripting

Sites.google.com/view/CollegeOfScripting

Dedicated to God the Father

This book is created by the
College of Scripting Music & Science.

Always remember, that each time you write a script with a pencil and paper, it becomes imprinted so deeply in memory that the material and methods are learned extremely well. When you Type the scripts, the same is true.

The more you type and write out the scripts by keyboard or pencil and paper, the more you will learn programming!

Write & Type EVERY example that you find. Keep all of your scripts organized. Every script that you create increases your programming abilities.

SEEING CODE, is one thing,
but WRITING CODE is another.
Write it, Type it, Speak it, See it, Dream it.

www.CollegeOfScripting.weebly.com