

# Analysis Report

## Global dataset report

This report is the output of the Amazon SageMaker Clarify analysis. The report is split into following parts:


1. Analysis configuration
2. Pretraining bias metrics

## Analysis Configuration

Bias analysis requires you to configure the outcome label column, the facet and optionally a group variable. Generating explanations requires you to configure the outcome label. You configured the analysis with the following variables. The complete analysis configuration is appended at the end.


**Outcome label:** You chose the column `sentiment` in the input data as the outcome label. Bias metric computation requires designating the positive outcome. You chose `sentiment = 1` as the positive outcome. `sentiment` consisted of values `[-1, 0, 1]`.

The figure below shows the distribution of values of `sentiment`.

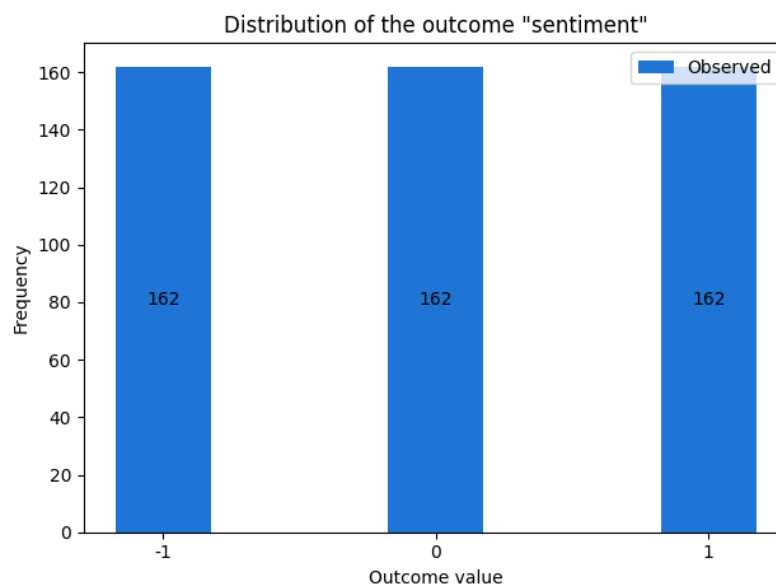


**Facet:** You chose the column `product_category` in the input data as the facet. `product_category` consisted of values `['Blouses', 'Dresses', 'Fine gauge', 'Intimates', 'Jackets', 'Jeans', 'Knits', 'Layering', 'Legwear', 'Lounge', 'Outerwear', 'Pants', 'Shorts', 'Skirts', 'Sleep', 'Sweaters', 'Swim', 'Trend']`. Bias metrics were computed by comparing the inputs `product_category = Blouses` with all other inputs, then by comparing inputs `product_category = Dresses` with all other inputs, then by comparing inputs `product_category = Fine gauge` with all other inputs, then by comparing inputs `product_category = Intimates` with all other inputs, then by comparing inputs `product_category = Jackets` with all other inputs, then by comparing inputs `product_category = Jeans` with all other inputs, then by comparing inputs `product_category = Knits` with all other inputs, then by comparing inputs `product_category = Layering` with all other inputs, then by comparing inputs `product_category = Legwear` with all other inputs, then by comparing inputs `product_category = Lounge` with all other inputs, then by comparing inputs `product_category = Outerwear` with all other inputs, then by comparing inputs `product_category = Pants` with all other inputs, then by comparing inputs `product_category = Shorts` with all other inputs, then by comparing inputs `product_category = Skirts` with all other inputs, then by comparing inputs `product_category = Sleep` with all other inputs, then by comparing inputs `product_category = Sweaters` with all other inputs, then by comparing inputs `product_category = Swim` with all other inputs, then by comparing inputs `product_category = Trend` with all other inputs.

The figure below shows the distribution of values of `product_category` .

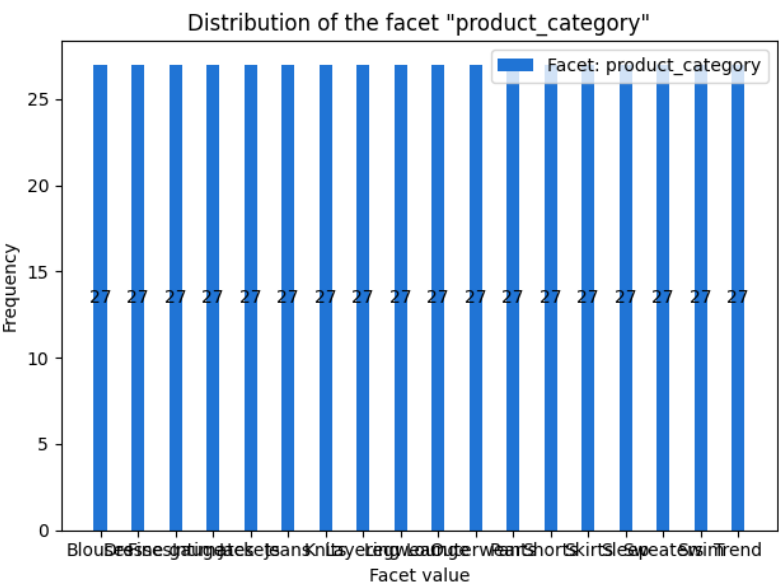

### Pre-training Bias Metrics


Pretraining bias metrics measure imbalances in facet value representation in the training data. Imbalances can be measured across different dimensions. For instance, you could focus imbalances within the inputs with positive observed label only. The figure below shows how different pretraining bias metrics focus on different dimensions. For a detailed description of these dimensions, see [Learn How Amazon SageMaker Clarify Helps Detect Bias](#).

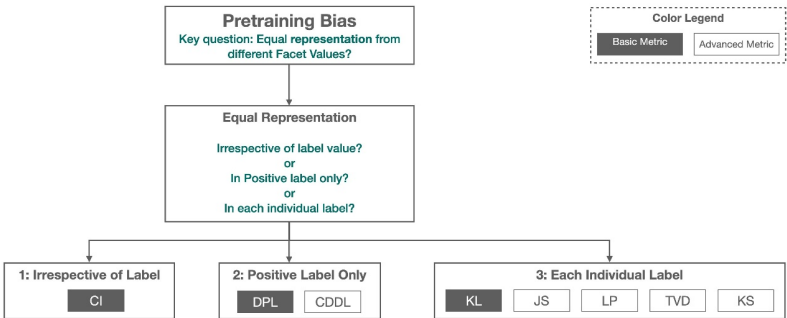




The metric values along with an informal description of what they mean are shown below. For mathematical formulas and examples, see the [Measure Pretraining Bias](#) section of the AWS documentation.





We computed the bias metrics for the label `sentiment` using label value(s)/threshold `sentiment = 1` for the following facets:





- Facet column: **product\_category**  
The pie chart shows the distribution of facet column `product_category` in your data.




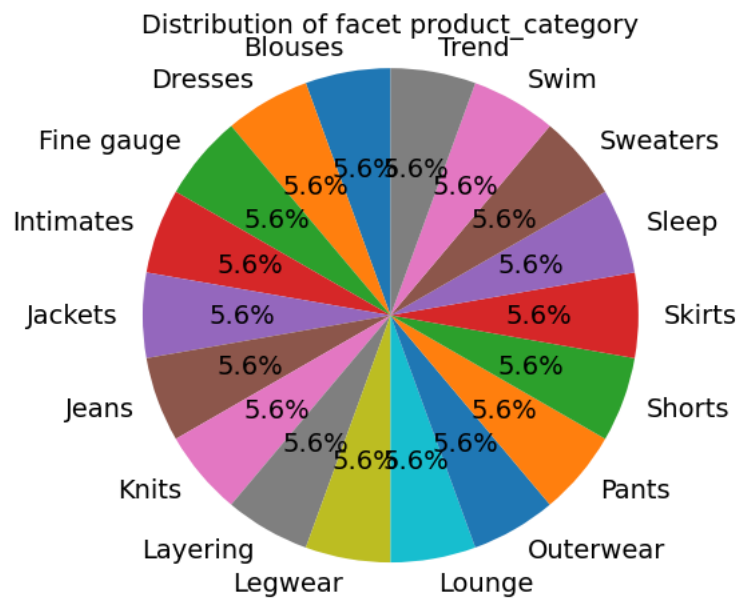





The bar plot(s) below show the distribution of facet column `product_category` in your data.

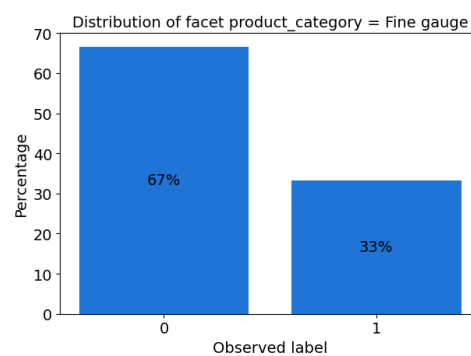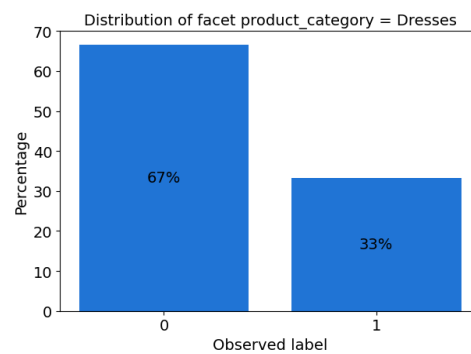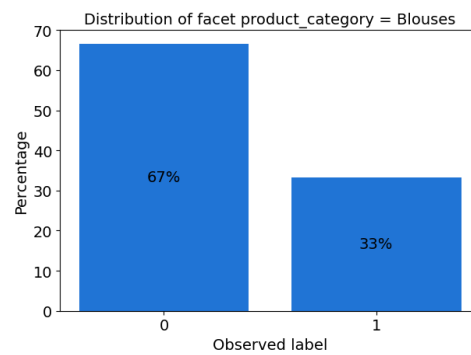

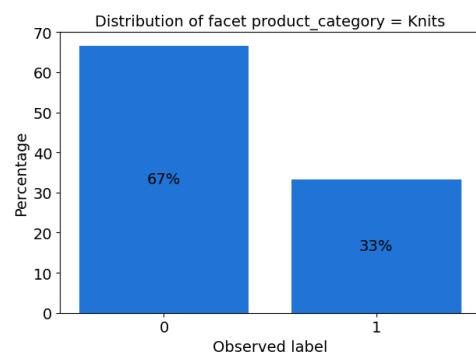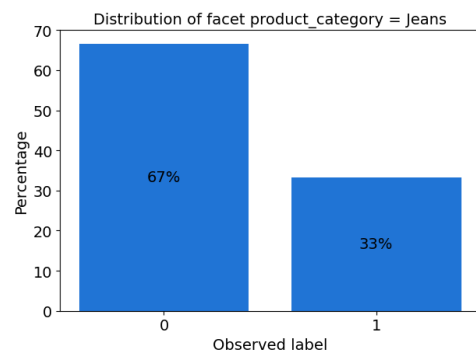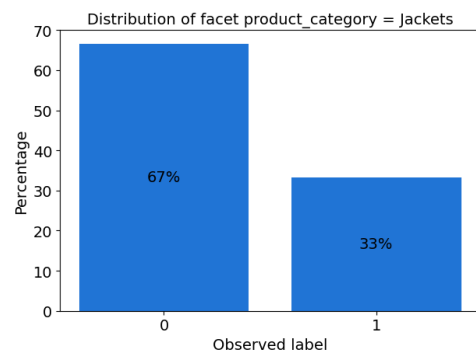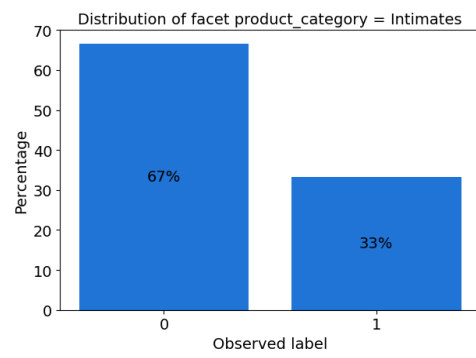

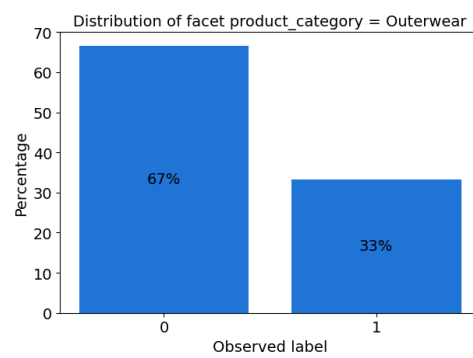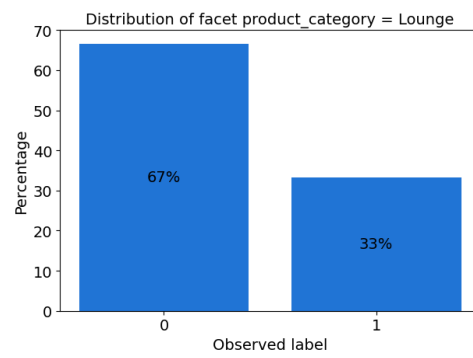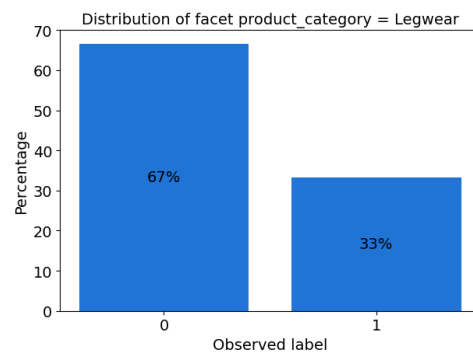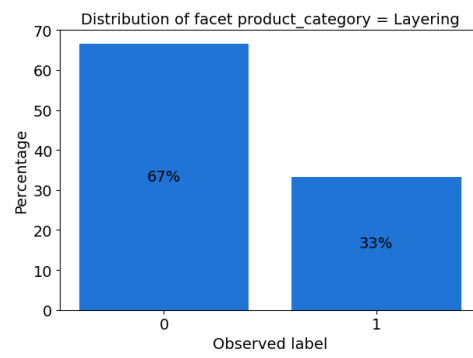

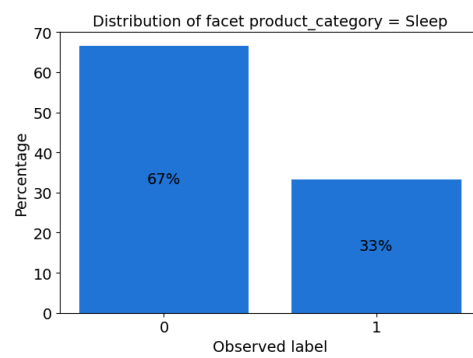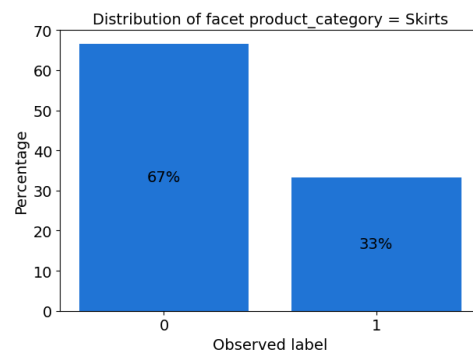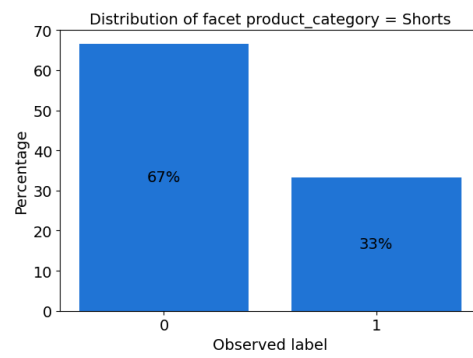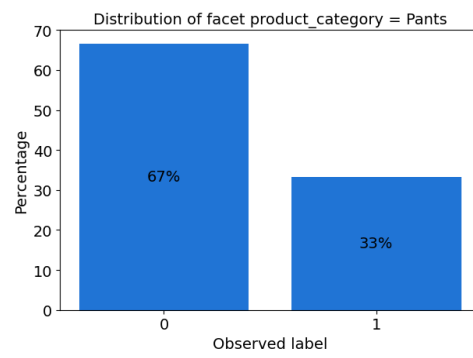

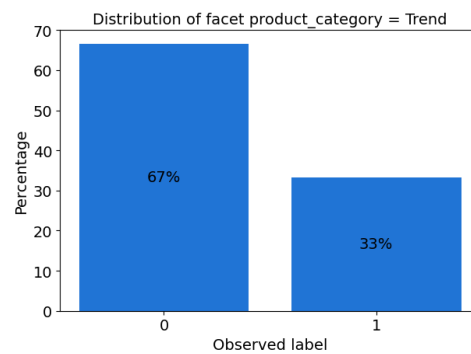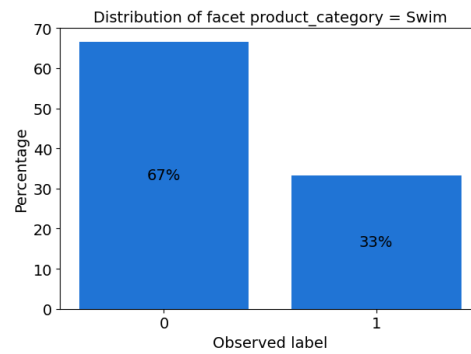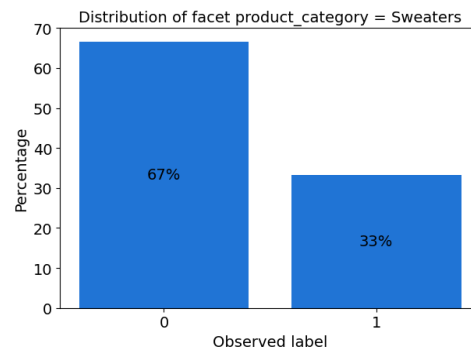

Facet Value(s)/Threshold: product\_category = Blouses

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Dresses

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Fine gauge

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Intimates

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Jackets



Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Jeans

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Knits

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Layering

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Legwear

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Lounge

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Outerwear

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Pants

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Shorts

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Skirts

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Sleep

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Sweaters

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Swim

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

Facet Value(s)/Threshold: product\_category = Trend

Metric	Description	Value
<a href="#">Class Imbalance (CI)</a>	Measures the imbalance in the number of inputs with facet values Sex=0 and rest of the inputs.	0.889
<a href="#">Difference in Proportions of Labels (DPL)</a>	Measures the imbalance of positive observed labels between facet values Sex=0 and rest of the inputs.	0.000
<a href="#">Jensen-Shannon Divergence (JS)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kullback-Leibler Divergence (KL)</a>	Measures how much the observed label distributions of facet values Sex=0 and rest of the inputs diverge from each other entropically.	0.000
<a href="#">Kolmogorov-Smirnov (KS)</a>	Measures maximum divergence between the observed label distributions for facet values Sex=0 and rest of the inputs in the dataset.	0.000
<a href="#">Lp-norm (LP)</a>	Measures a p-norm difference between the observed label distributions associated with facet values Sex=0 rest of the inputs in the dataset.	0.000
<a href="#">Total Variation Distance (TVD)</a>	Measures half of the L1-norm difference between the observed label distributions associated with facet values Sex=0 and rest of the inputs in the dataset.	0.000

## Appendix: Analysis Configuration Parameters

```
{
  "dataset_type": "text/csv",
  "headers": [
    "sentiment",
    "review_body",
    "product_category"
  ],
  "label": "sentiment",
  "label_values_or_threshold": [
    1
  ],
  "facet": [
    {
      "name_or_index": "product_category"
    }
  ],
  "methods": {
    "pre_training_bias": {
      "methods": [
        "CI",
        "DPL",
        "KL",
        "JS",
        "LP",
        "TVD",
        "KS"
      ]
    }
  }
}
```

```
    ]
  },
  "report": {
    "name": "report",
    "title": "Analysis Report"
  }
}
```