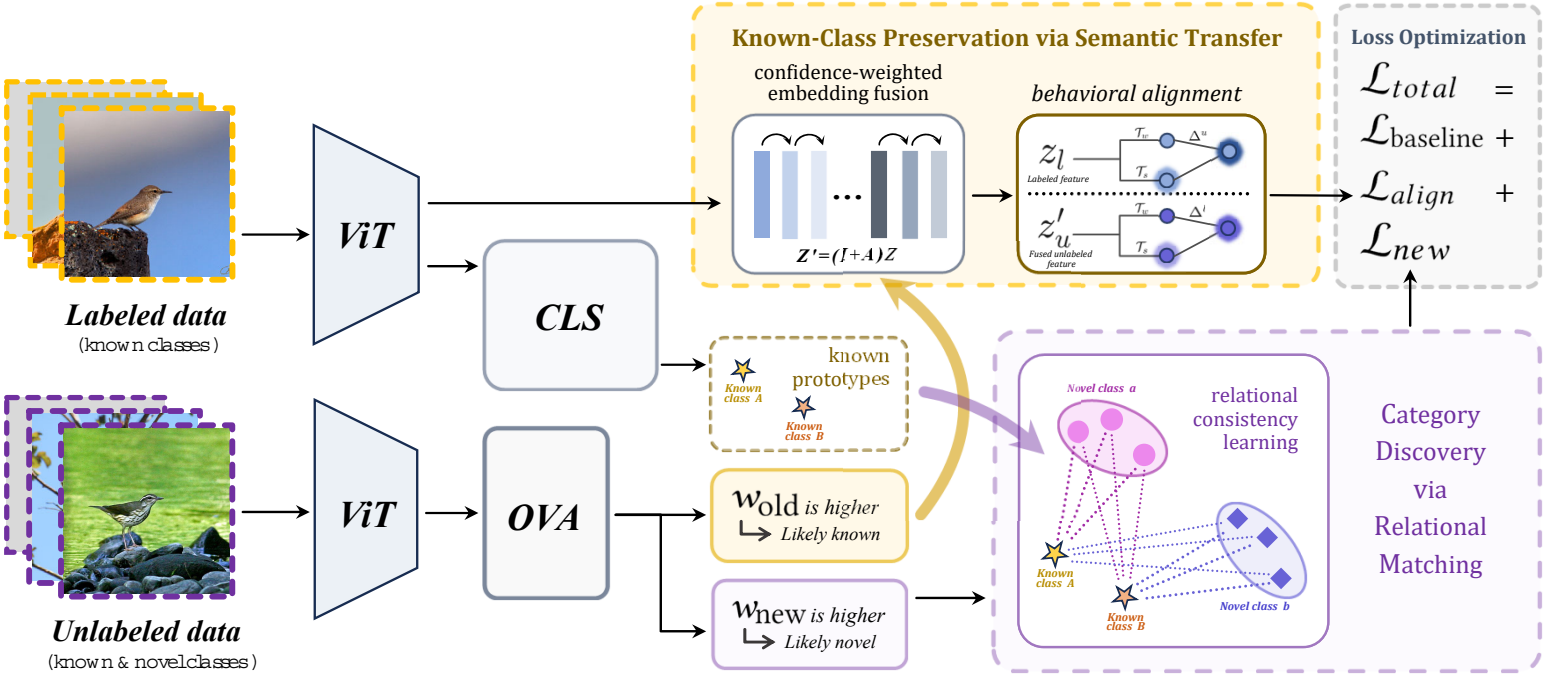
Known-Class Preservation via Semantic Transfer
confidence-weighted embedding fusion
behavioral alignment
Z'=(I+A)Z
Labeled feature
Fused unlabeled feature
Loss Optimization
Labeled data
(known classes)
Unlabeled data
(known & novel classes)
ViT
ViT
CLS
OVA
known prototypes
Known class A
Known class B
w_old is higher
Likely known
w_new is higher
Likely novel
Novel class a
Novel class b
relational consistency learning
Category Discovery via Relational Matching