

```
total_sum = 0
count = 0

while True:
    # INPUT
    user_input = input("Enter grade (or 'done' to finish): ")

    # PROCESS
    if user_input.lower() == 'done':
        break

    grade = float(user_input)
    total_sum += grade
    count += 1

# OUTPUT
if count == 0:
    print("No grades entered. Please enter at least one grade.")
else:
    average = total_sum / count
    if average >= 7.0:
        status = "Passed"
    else:
        status = "Failed"
    print(f"Average: {average:.2f} - {status}")
```

```
while True:
    # INPUT
    weight_input = input("Enter weight in kg (or 'exit' to stop): ")

    # PROCESS
    if weight_input.lower() == 'exit':
        break

    weight = float(weight_input)
    height = float(input("Enter height in m: "))

    bmi = weight / (height ** 2)

    if bmi < 18.5:
        category = "Underweight"
    elif 18.5 <= bmi <= 24.9:
        category = "Normal"
    elif 25.0 <= bmi <= 29.9:
        category = "Overweight"
    else:
        category = "Obese"

    # OUTPUT
    print(f"BMI: {bmi:.2f} – {category}")
```

```
total_accumulated = 0.0

while True:
    # INPUT
    m3_input = input("Enter m³ consumed (or 'exit' to stop): ")

    # PROCESS
    if m3_input.lower() == 'exit':
        # OUTPUT
        if total_accumulated > 0:
            print(f"Total: ${total_accumulated:.2f} MXN")
            break

    m3 = float(m3_input)

    if m3 <= 10:
        charge = m3 * 8.00
    elif m3 <= 20:
        charge = m3 * 12.00
    else:
        charge = m3 * 18.00

    total_accumulated += charge

    # OUTPUT
    print(f"Month charge: ${charge:.2f} MXN")
```

```
while True:
    # INPUT
    month_input = input("Enter month number (or 'exit' to stop): ")

    # PROCESS
    if month_input.lower() == 'exit':
        break

    month = int(month_input)

    if month in [12, 1, 2]:
        season = "Winter"
    elif month in [3, 4, 5]:
        season = "Spring"
    elif month in [6, 7, 8]:
        season = "Summer"
    elif month in [9, 10, 11]:
        season = "Fall"
    else:
        season = "Invalid month. Please enter a number between 1 and 12."

    # OUTPUT
    print(season)
```

```
total_shipping_cost = 0.0

while True:
    # INPUT
    weight_input = input("Enter weight in kg (or 'exit' to stop): ")


    # PROCESS
    if weight_input.lower() == 'exit':
        # OUTPUT
        if total_shipping_cost > 0:
            print(f"Total: ${total_shipping_cost:.2f} MXN")
            break

    weight = float(weight_input)
    distance = float(input("Enter distance in km: "))

    if distance <= 100:
        if weight <= 5:
            cost = 50.00
        else:
            cost = 80.00
    else:
        if weight <= 5:
            cost = 120.00
        else:
            cost = 200.00

    total_shipping_cost += cost

    # OUTPUT
    print(f"Shipping cost: ${cost:.2f} MXN")
```

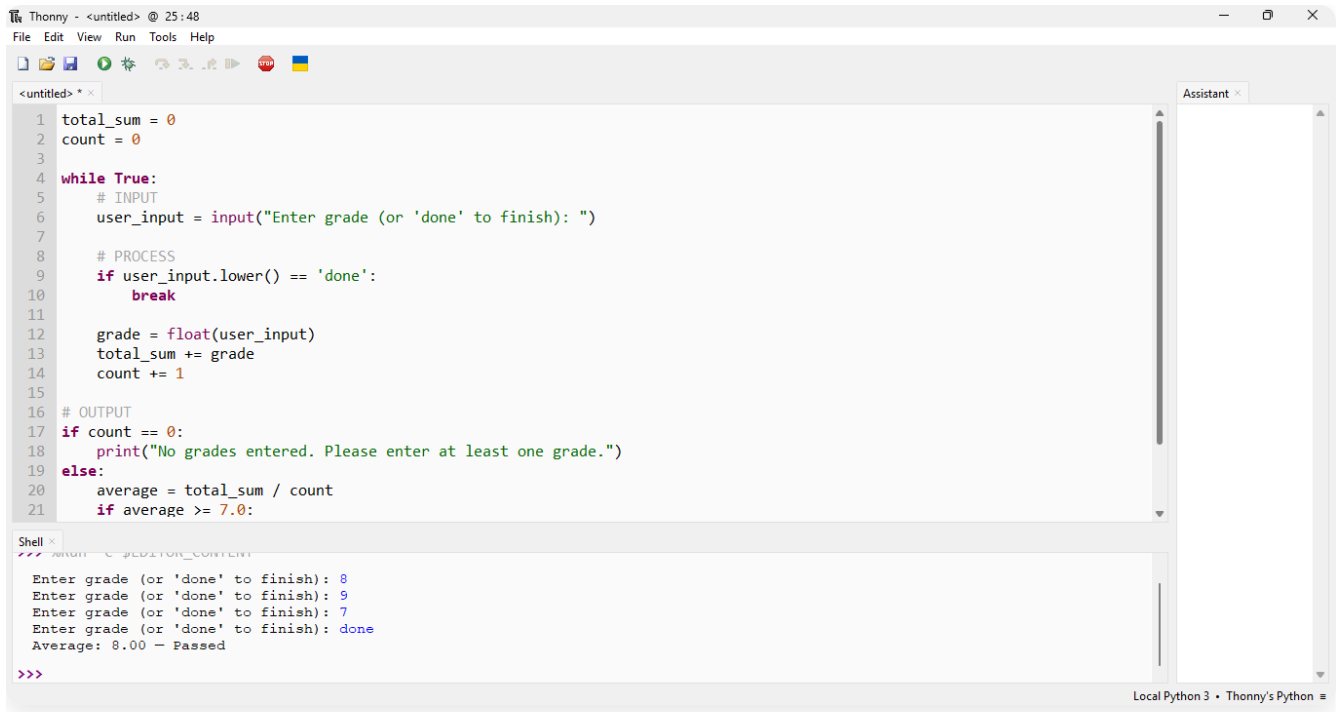

```
1 total_sum = 0
2 count = 0
3
4 while True:
5     # INPUT
6     user_input = input("Enter grade (or 'done' to finish): ")
7
8     # PROCESS
9     if user_input.lower() == 'done':
10        break
11
12    grade = float(user_input)
13    total_sum += grade
14    count += 1
15
16 # OUTPUT
17 if count == 0:
18     print("No grades entered. Please enter at least one grade.")
19 else:
20     average = total_sum / count
21     if average >= 7.0:
```


```
Enter grade (or 'done' to finish): 8
Enter grade (or 'done' to finish): 9
Enter grade (or 'done' to finish): 7
Enter grade (or 'done' to finish): done
Average: 8.00 - Passed
>>>
```

Figura 1:

```
1 total_sum = 0
2 count = 0
3
4 while True:
5     # INPUT
6     user_input = input("Enter grade (or 'done' to finish): ")
7
8     # PROCESS
9     if user_input.lower() == 'done':
10        break
11
12    grade = float(user_input)
13    total_sum += grade
14    count += 1
15
16 # OUTPUT
17 if count == 0:
18     print("No grades entered. Please enter at least one grade.")
19 else:
20     average = total_sum / count
21     if average >= 7.0:
```

```
Enter grade (or 'done' to finish): 5
Enter grade (or 'done' to finish): 4
Enter grade (or 'done' to finish): 6
Enter grade (or 'done' to finish): done
Average: 5.00 - Failed
>>>
```

Figura 2:

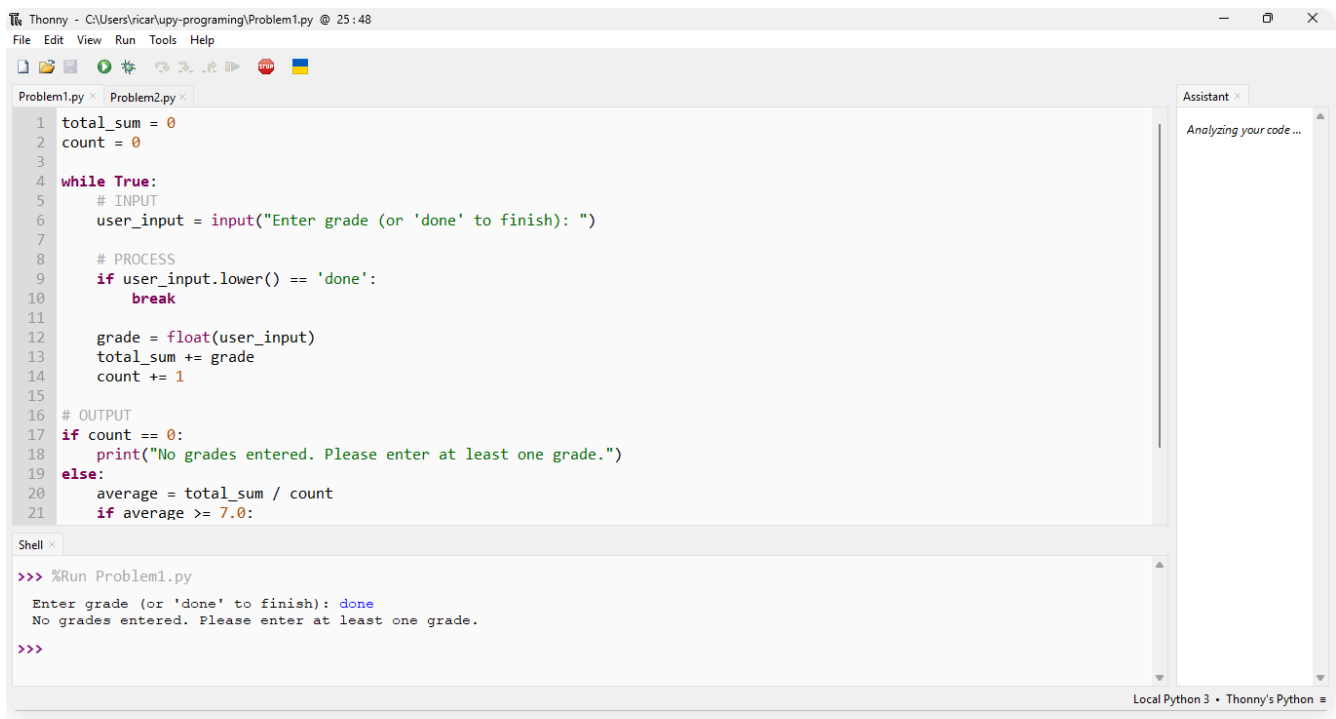

The screenshot shows the Thonny IDE interface. The top menu bar includes File, Edit, View, Run, Tools, and Help. The main editor window displays the code for Problem1.py. The code is a Python script that calculates the average of grades entered by the user. It uses a while loop to repeatedly prompt the user for a grade until they enter 'done'. It then calculates the average and prints it if it is greater than or equal to 7.0. The Shell window at the bottom shows the execution of the script, with the user entering 'done' and the program outputting 'No grades entered. Please enter at least one grade.' The Assistant window on the right is open, showing 'Analyzing your code ...'.

```
1 total_sum = 0
2 count = 0
3
4 while True:
5     # INPUT
6     user_input = input("Enter grade (or 'done' to finish): ")
7
8     # PROCESS
9     if user_input.lower() == 'done':
10         break
11
12     grade = float(user_input)
13     total_sum += grade
14     count += 1
15
16 # OUTPUT
17 if count == 0:
18     print("No grades entered. Please enter at least one grade.")
19 else:
20     average = total_sum / count
21     if average >= 7.0:
```

```
>>> %Run Problem1.py
Enter grade (or 'done' to finish): done
No grades entered. Please enter at least one grade.
>>>
```

Figura 3:

The screenshot shows the Thonny IDE interface. The top menu bar includes File, Edit, View, Run, Tools, and Help. The main editor window displays the code for Problem2.py. The code is a Python script that calculates the BMI of a person based on their weight and height. It uses a while loop to repeatedly prompt the user for weight and height until they enter 'exit'. It then calculates the BMI and prints the category (Underweight, Normal, Overweight, or Obese) based on the BMI value. The Shell window at the bottom shows the execution of the script, with the user entering weight and height values and the program outputting the BMI and category. The Assistant window on the right is open, showing a message about the code quality.

```
1 while True:
2     # INPUT
3     weight_input = input("Enter weight in kg (or 'exit' to stop): ")
4
5     # PROCESS
6     if weight_input.lower() == 'exit':
7         break
8
9     weight = float(weight_input)
10    height = float(input("Enter height in m: "))
11
12    bmi = weight / (height ** 2)
13
14    if bmi < 18.5:
15        category = "Underweight"
16    elif 18.5 <= bmi <= 24.9:
17        category = "Normal"
18    elif 25.0 <= bmi <= 29.9:
19        category = "Overweight"
20    else:
21        category = "Obese"
```

```
>>> %Run Problem2.py
Enter weight in kg (or 'exit' to stop): 70
Enter height in m: 1.75
BMI: 22.86 - Normal
Enter weight in kg (or 'exit' to stop): 90
Enter height in m: 1.60
BMI: 35.16 - Obese
```

Figura 4:

Thonny - C:\Users\vicar\lupy-programing\Problem2.py @ 24:42

File Edit View Run Tools Help

Problem1.py Problem2.py

```

1 while True:
2     # INPUT
3     weight_input = input("Enter weight in kg (or 'exit' to stop): ")
4
5     # PROCESS
6     if weight_input.lower() == 'exit':
7         break
8
9     weight = float(weight_input)
10    height = float(input("Enter height in m: "))
11
12    bmi = weight / (height ** 2)
13
14    if bmi < 18.5:
15        category = "Underweight"
16    elif 18.5 <= bmi <= 24.9:
17        category = "Normal"
18    elif 25.0 <= bmi <= 29.9:
19        category = "Overweight"
20    else:
21        category = "Obese"

```

Shell

```

Enter height in m: 1.60
BMI: 35.16 - Obese
Enter weight in kg (or 'exit' to stop): 55
Enter height in m: 1.68
BMI: 19.49 - Normal
Enter weight in kg (or 'exit' to stop): exit
>>>

```

Assistant

The code in [Problem2.py](#) looks good.

If it is not working as it should, then consider using some general debugging techniques.

[Was it helpful or confusing?](#)

Local Python 3 • Thonny's Python

Figura 5:

```

1 total_accumulated = 0.0
2
3 while True:
4     # INPUT
5     m3_input = input("Enter m³ consumed (or 'exit' to stop): ")
6
7     # PROCESS
8     if m3_input.lower() == 'exit':
9         # OUTPUT
10        if total_accumulated > 0:
11            print(f"Total: ${total_accumulated:.2f} MXN")
12        break
13
14    m3 = float(m3_input)
15
16    if m3 <= 10:
17        charge = 8.00
18    elif m3 <= 20:
19        charge = 12.00
20    else:
21        charge = 18.00

```

Shell

```

Enter m³ consumed (or 'exit' to stop): 8
Month charge: $8.00 MXN
Enter m³ consumed (or 'exit' to stop): 15
Month charge: $12.00 MXN
Enter m³ consumed (or 'exit' to stop): 25
Month charge: $18.00 MXN
Enter m³ consumed (or 'exit' to stop):

```

Assistant

The code in [Problem2.py](#) looks good.

If it is not working as it should, then consider using some general debugging techniques.

[Was it helpful or confusing?](#)

Local Python 3 • Thonny's Python

Figura 6:


```

1 total_accumulated = 0.0
2
3 while True:
4     # INPUT
5     m3_input = input("Enter m³ consumed (or 'exit' to stop): ")
6
7     # PROCESS
8     if m3_input.lower() == 'exit':
9         # OUTPUT
10        if total_accumulated > 0:
11            print(f"Total: ${total_accumulated:.2f} MXN")
12        break
13
14    m3 = float(m3_input)
15
16    if m3 <= 10:
17        charge = 8.00
18    elif m3 <= 20:
19        charge = 12.00
20    else:
21        charge = 18.00

```

Shell

```

Enter m³ consumed (or 'exit' to stop): 15
Month charge: $12.00 MXN
Enter m³ consumed (or 'exit' to stop): 25
Month charge: $18.00 MXN
Enter m³ consumed (or 'exit' to stop): exit
Total: $38.00 MXN
>>>

```

Local Python 3 • Thonny's Python

Figura 7:

Thonny - C:\Users\vicar\upy-programing\Problem3.py @ 26:46

File Edit View Run Tools Help

Problem1.py Problem2.py Problem3.py Assistant

```

1 total_accumulated = 0.0
2
3 while True:
4     # INPUT
5     m3_input = input("Enter m³ consumed (or 'exit' to stop): ")
6
7     # PROCESS
8     if m3_input.lower() == 'exit':
9         # OUTPUT
10        if total_accumulated > 0:
11            print(f"Total: ${total_accumulated:.2f} MXN")
12        break
13
14    m3 = float(m3_input)
15
16    if m3 <= 10:
17        charge = m3 * 8.00
18    elif m3 <= 20:
19        charge = m3 * 12.00
20    else:
21        charge = m3 * 18.00

```

Shell

```

>>> %Run -c $EDITOR_CONTENT
Enter m³ consumed (or 'exit' to stop): 8
Month charge: $64.00 MXN
Enter m³ consumed (or 'exit' to stop): 15
Month charge: $180.00 MXN
Enter m³ consumed (or 'exit' to stop): 25
Month charge: $450.00 MXN

```

Local Python 3 • Thonny's Python

Figura 8:

Thonny - C:\Users\vicar\lupy-programing\Problem3.py @ 26:46

File Edit View Run Tools Help

Problem1.py Problem2.py Problem3.py Assistant

```

1 total_accumulated = 0.0
2
3 while True:
4     # INPUT
5     m3_input = input("Enter m³ consumed (or 'exit' to stop): ")
6
7     # PROCESS
8     if m3_input.lower() == 'exit':
9         # OUTPUT
10        if total_accumulated > 0:
11            print(f"Total: ${total_accumulated:.2f} MXN")
12        break
13
14    m3 = float(m3_input)
15
16    if m3 <= 10:
17        charge = m3 * 8.00
18    elif m3 <= 20:
19        charge = m3 * 12.00
20    else:
21        charge = m3 * 18.00

```

Shell

```

Enter m³ consumed (or 'exit' to stop): 15
Month charge: $180.00 MXN
Enter m³ consumed (or 'exit' to stop): 25
Month charge: $450.00 MXN
Enter m³ consumed (or 'exit' to stop): exit
Total: $694.00 MXN
>>>

```

Local Python 3 • Thonny's Python

Figura 9:

```

1 total_accumulated = 0.0
2
3 while True:
4     # INPUT
5     m3_input = input("Enter m³ consumed (or 'exit' to stop): ")
6
7     # PROCESS
8     if m3_input.lower() == 'exit':
9         # OUTPUT
10        if total_accumulated > 0:
11            print(f"Total: ${total_accumulated:.2f} MXN")
12        break
13
14    m3 = float(m3_input)
15
16    if m3 <= 10:
17        charge = 8.00
18    elif m3 <= 20:
19        charge = 12.00
20    else:
21        charge = 18.00

```

Shell

```

Enter m³ consumed (or 'exit' to stop): 8
Month charge: $8.00 MXN
Enter m³ consumed (or 'exit' to stop): 15
Month charge: $12.00 MXN
Enter m³ consumed (or 'exit' to stop): 25
Month charge: $18.00 MXN
Enter m³ consumed (or 'exit' to stop): |

```

The code in [Problem2.py](#) looks good.
If it is not working as it should, then consider using some general debugging techniques.
[Was it helpful or confusing?](#)

Local Python 3 • Thonny's Python

Figura 10:



```
Thonny - C:\Users\vicar\lupy-programing\Problem5.py @ 31:45
File Edit View Run Tools Help


Problem1.py x Problem2.py x Problem3.py x Problem4.py x Problem5.py x Assistant x

1 total_shipping_cost = 0.0
2
3 while True:
4     # INPUT
5     weight_input = input("Enter weight in kg (or 'exit' to stop): ")
6
7     # PROCESS
8     if weight_input.lower() == 'exit':
9         # OUTPUT
10         if total_shipping_cost > 0:
11             print(f"Total: ${total_shipping_cost:.2f} MXN")
12             break
13
14     weight = float(weight_input)
15     distance = float(input("Enter distance in km: "))
16
17     if distance <= 100:
18         if weight <= 5:
19             cost = 50.00
20         else:
21             cost = 80.00

Shell x

Enter weight in kg (or 'exit' to stop): 3
Enter distance in km: 80
Shipping cost: $50.00 MXN
Enter weight in kg (or 'exit' to stop): 7
Enter distance in km: 50
Shipping cost: $80.00 MXN
Enter weight in kg (or 'exit' to stop): 4
Enter distance in km: 250

Local Python 3 • Thonny's Python
```

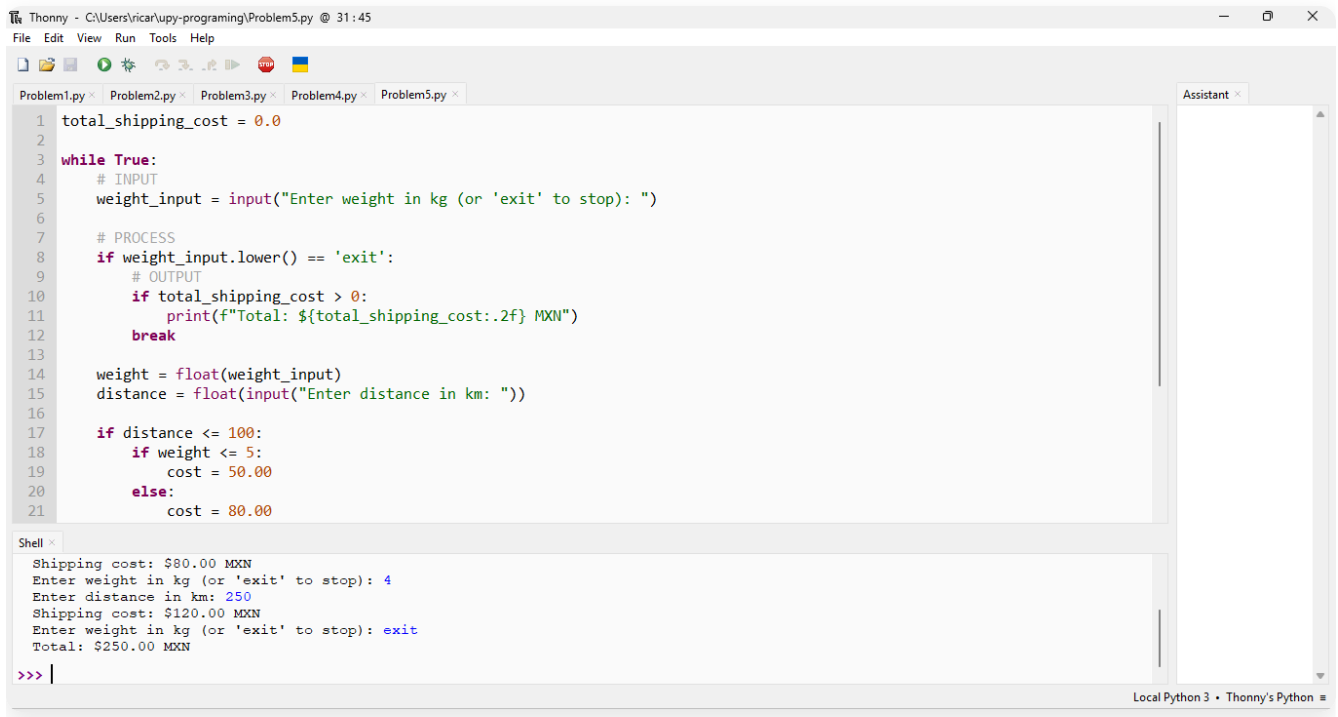Figura 11:

```
Thonny - C:\Users\vicar\lupy-programing\Problem5.py @ 31:45
File Edit View Run Tools Help

Problem1.py x Problem2.py x Problem3.py x Problem4.py x Problem5.py x Assistant x

1 total_shipping_cost = 0.0
2
3 while True:
4     # INPUT
5     weight_input = input("Enter weight in kg (or 'exit' to stop): ")
6
7     # PROCESS
8     if weight_input.lower() == 'exit':
9         # OUTPUT
10         if total_shipping_cost > 0:
11             print(f"Total: ${total_shipping_cost:.2f} MXN")
12             break
13
14     weight = float(weight_input)
15     distance = float(input("Enter distance in km: "))
16
17     if distance <= 100:
18         if weight <= 5:
19             cost = 50.00
20         else:
21             cost = 80.00

Shell x

Shipping cost: $80.00 MXN
Enter weight in kg (or 'exit' to stop): 4
Enter distance in km: 250
Shipping cost: $120.00 MXN
Enter weight in kg (or 'exit' to stop): exit
Total: $250.00 MXN

>>> |

Local Python 3 • Thonny's Python
```

Figura 12:

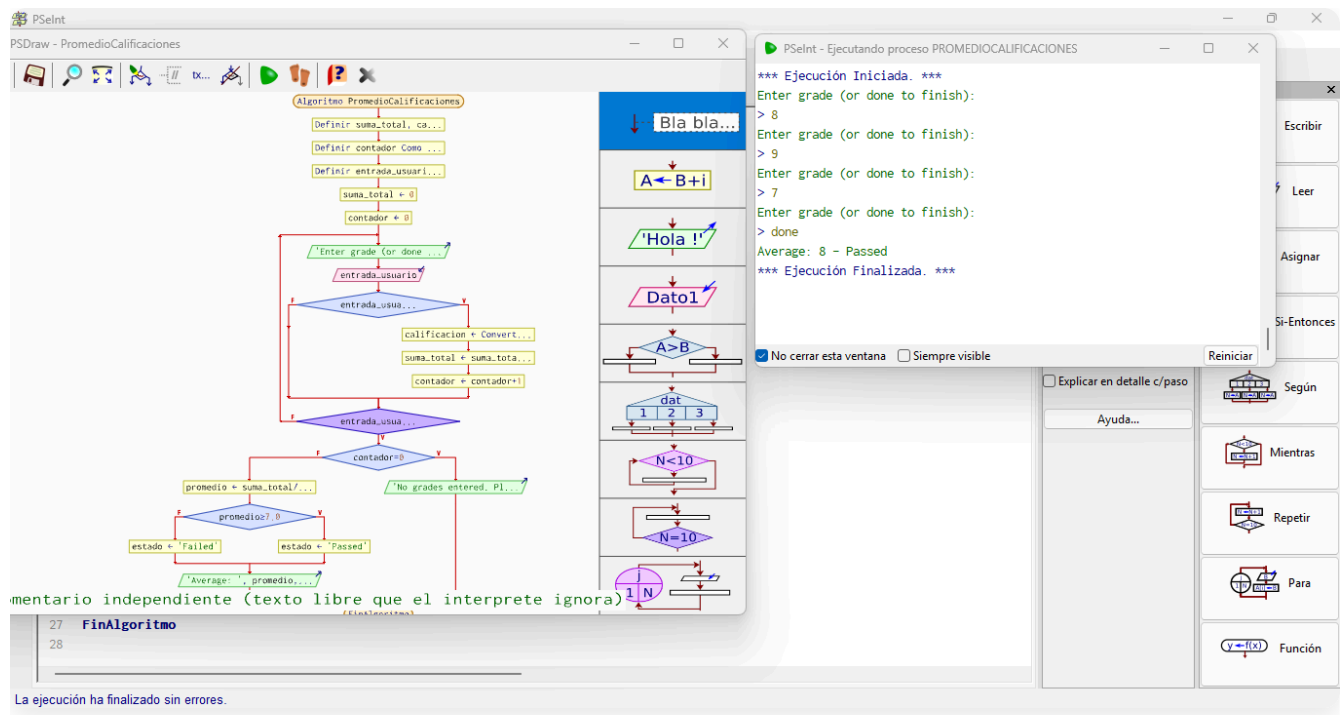


Figura 13:

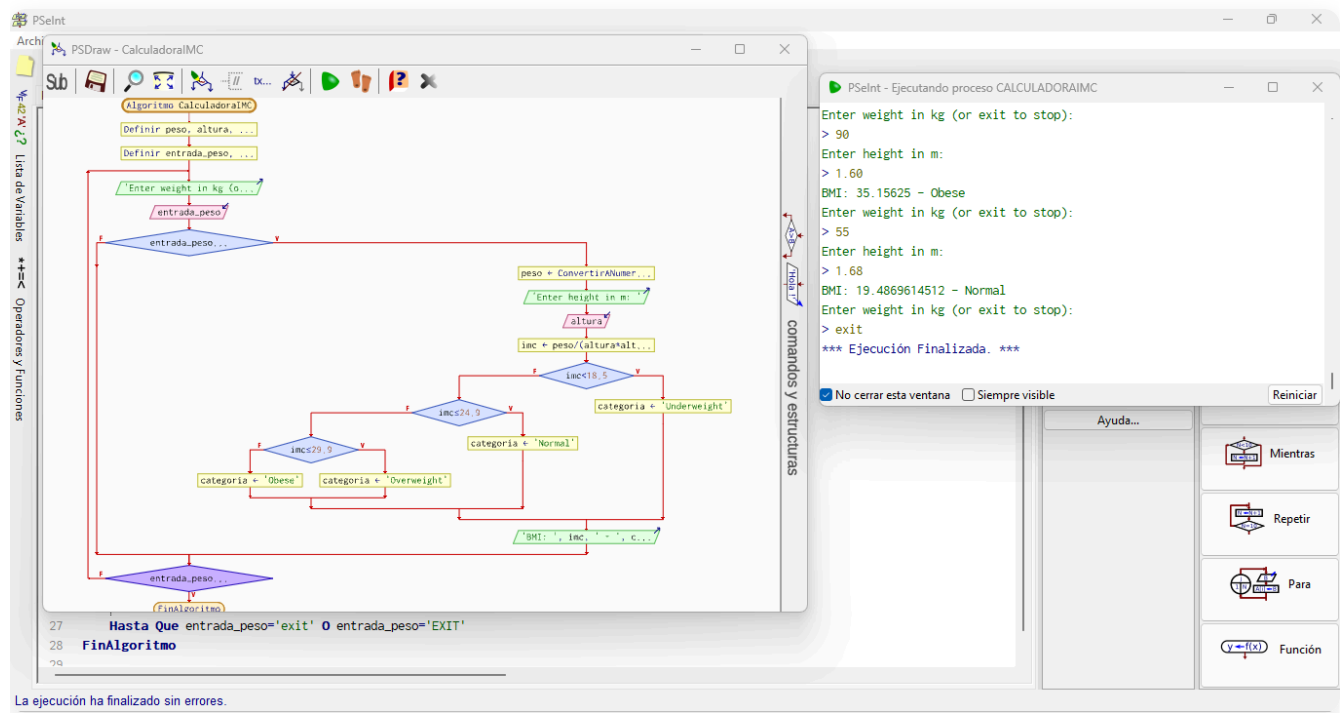


Figura 14:

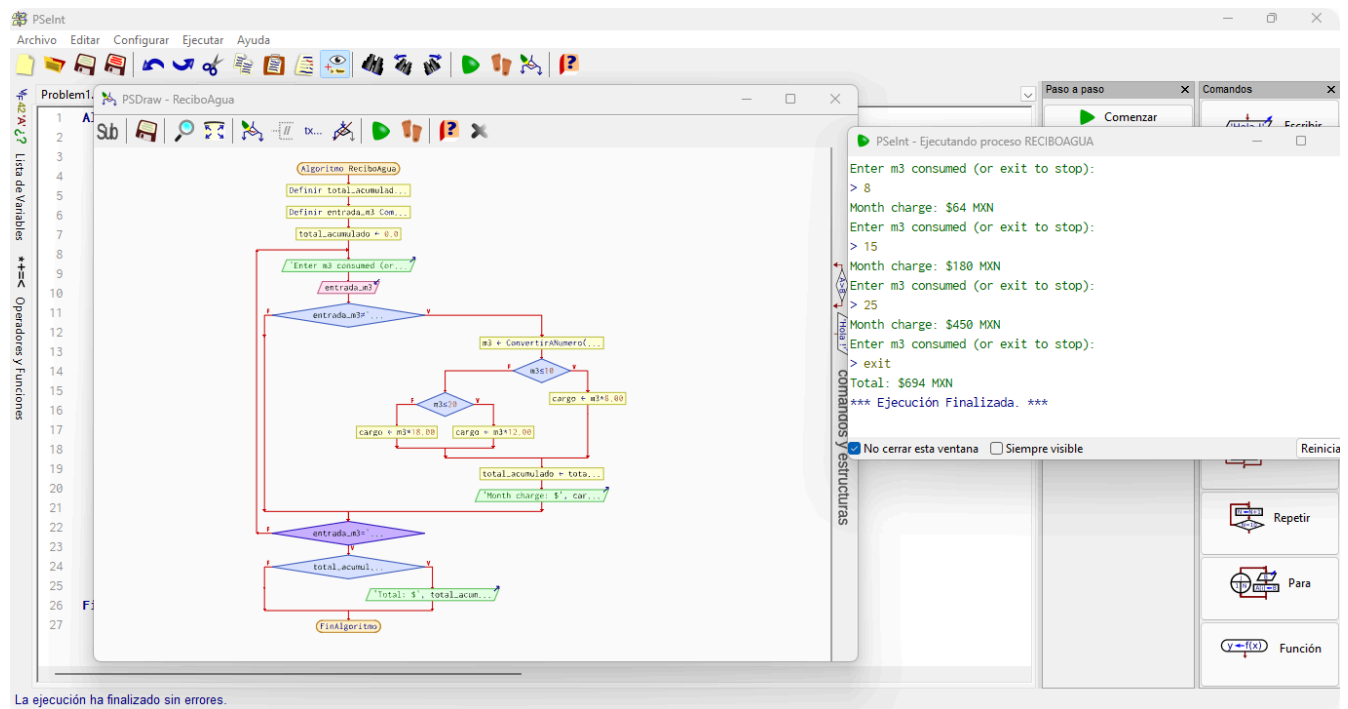


Figura 15:

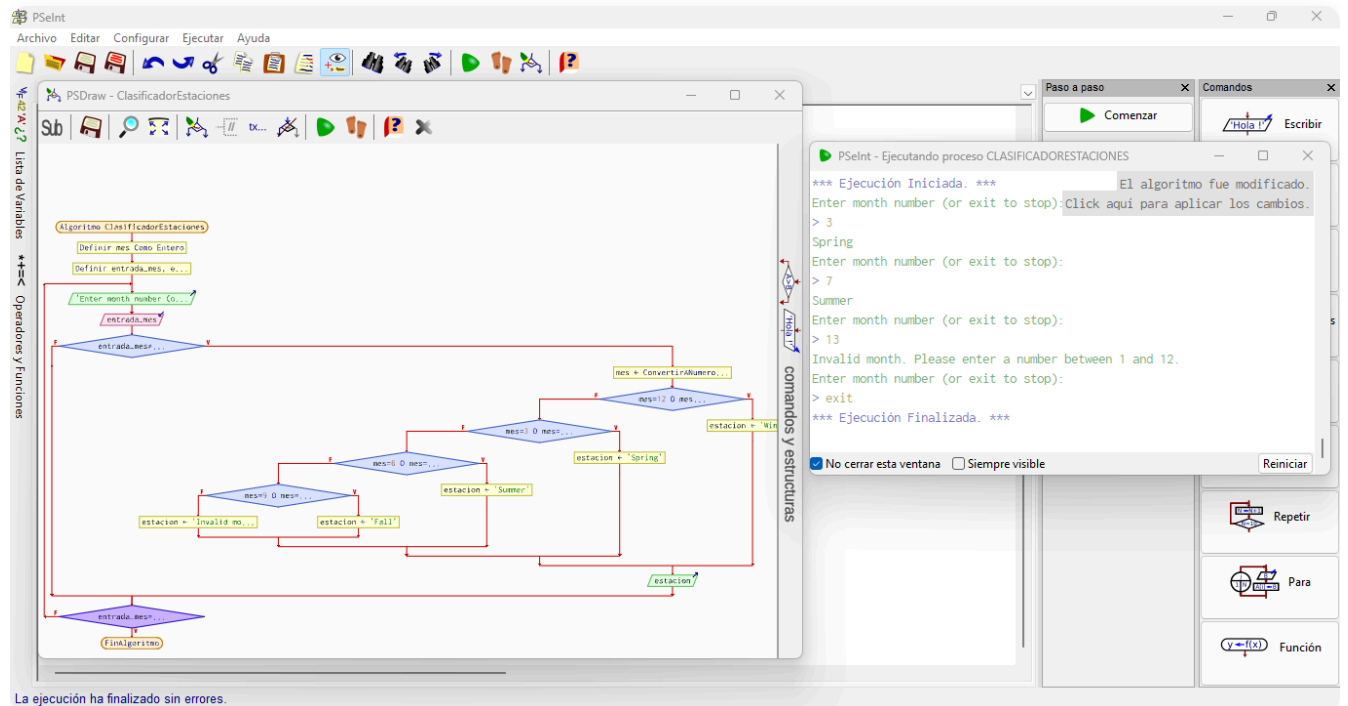


Figura 16:

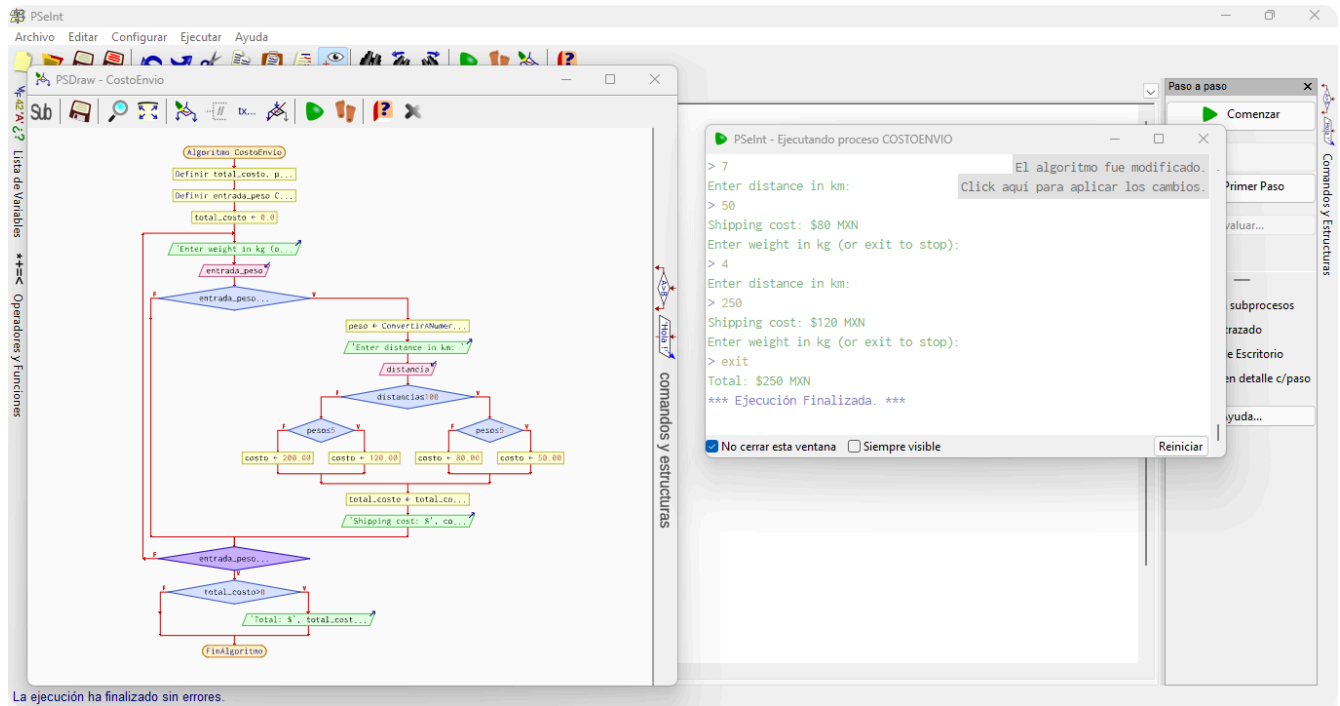


Figura 17:

Nombre del estudiante: Cindy Estefanny Aguilar Perera

IA utilizada: Gemini

Fecha de uso: 2026-07-11

Propósito: corrección

Prompt utilizado:

ayudame no se porque marca error mi Código

Archivos suministrados: captura de pantalla

Respuesta en crudo (raw):

"El error se debe a un problema de sintaxis: PSeInt no reconoce el tipo de comillas utilizadas para definir el texto. Se debe reemplazar por comillas dobles estándar."