

# Cryptographic Primitives of the Swiss Post Voting System

Pseudo-code Specification

Swiss Post

Version 0.9.3

## Abstract

Cryptographic algorithms play a pivotal role in the Swiss Post Voting System: ensuring their faithful implementation is crucially important. This document provides a mathematically precise and unambiguous specification of some cryptographic primitives underpinning the Swiss Post Voting System. It focuses on the elements common to the system and its verifier, such as the verifiable mix net. We provide technical details about encoding methods between basic data types and describe each algorithm in pseudo-code format.

## Disclaimer

E-Voting Community Program Material - please follow our [Code of Conduct](#) describing what you can expect from us, the Coordinated Vulnerability Disclosure Policy, and the contributing guidelines.

## Revision chart

Version	Description	Author	Reviewer	Date
0.9	First version for external review	TH, OE	CK, HR, BS, KN	2021-02-05
0.9.1	Minor corrections in existing algorithms	TH, OE	CK, HR, BS, KN	2021-02-12
0.9.2	Completed mix net specification	TH, OE	CK, HR, BS, KN	2021-02-19
0.9.3	Version with reviewers' feedback for publication	TH, OE	CK, HR, BS, KN	2021-03-18

## Contents

<b>Symbols</b>	<b>4</b>
<b>1 Introduction</b>	<b>5</b>
1.1 The Specification of Cryptographic Primitives . . . . .	5
1.2 Validating the Cryptographic Algorithm's Correctness . . . . .	6
<b>2 Basic Data Types</b>	<b>6</b>
2.1 Byte Arrays . . . . .	6
2.2 Integers . . . . .	8
2.3 Strings . . . . .	10
<b>3 Basic Algorithms</b>	<b>11</b>
3.1 Randomness . . . . .	11
3.2 Recursive Hash . . . . .	14
<b>4 ElGamal Cryptosystem</b>	<b>16</b>
4.1 Key Pair Generation . . . . .	16
4.2 Encryption . . . . .	18
4.3 Ciphertext Operations . . . . .	19
4.4 Decryption . . . . .	20
<b>5 Mix Net</b>	<b>22</b>
5.1 Pre-Requisites . . . . .	23
5.1.1 Shuffle . . . . .	23
5.1.2 Matrix Dimensions . . . . .	26
5.2 Commitments . . . . .	27
5.3 Arguments . . . . .	30
5.3.1 Shuffle Argument . . . . .	32
5.3.2 Multi-Exponentiation Argument . . . . .	36
5.3.3 Product Argument . . . . .	40
5.3.4 Hadamard Argument . . . . .	43
5.3.5 Zero Argument . . . . .	46
5.3.6 Single Value Product Argument . . . . .	49
<b>Bibliography</b>	<b>53</b>

## Symbols

$\mathbb{A}_{Base16}$	Base16 (Hex) alphabet [12]
$\mathbb{A}_{Base32}$	Base32 alphabet [12]
$\mathbb{A}_{Base64}$	Base64 alphabet [12]
$\mathbb{A}_{UCS}$	Alphabet of the Universal Coded Character Set (UCS) according to ISO/IEC10646
$\mathcal{B}$	Set of possible values for a byte
$\mathcal{B}^*$	Set of byte arrays of arbitrary length
$\mathbb{B}^n$	Set of bit arrays of length $n$
$g$	Generator of the encryption group
$\mathbb{G}_q$	Set of quadratic residues modulo $p$ of size $q$ . The computational proof refers to this set as $\mathbb{Q}_p$
$\mathbb{H}_l$	Ciphertext domain $(= \underbrace{\mathbb{G}_q \times \cdots \times \mathbb{G}_q}_{l+1 \text{ times}})$
$l$	Number of elements of a multi-recipient ElGamal message
$\mathbb{N}$	Set of positive integer numbers including 0
$\mathbb{N}^*$	Set of strictly positive integer numbers
$\mathbb{P}$	Set of prime numbers
$p$	Encryption group modulus
$q$	Encryption group cardinality s.t. $p = 2q + 1$
$ x $	Bit length of the number $x$
$\mathbb{Z}_q$	Set of integers modulo $q$

# 1 Introduction

Switzerland has a longstanding tradition of direct democracy, allowing Swiss citizens to vote approximately four times a year on elections and referendums. In recent years, voter turnout hovered below 40 percent [4].

The vast majority of voters in Switzerland fill out their paper ballots at home and send them back to the municipality by postal mail, usually days or weeks ahead of the actual election date. Remote online voting (referred to as e-voting in this document) would provide voters with some advantages. First, it would guarantee the timely arrival of return envelopes at the municipality (especially for Swiss citizens living abroad). Second, it would improve accessibility for people with disabilities. Third, it would eliminate the possibility of an invalid ballot when inadvertently filling out the ballot incorrectly.

In the past, multiple cantons offered e-voting to a part of their electorate. Many voters would welcome the option to vote online - provided the e-voting system protects the integrity and privacy of their vote [5].

State-of-the-art e-voting systems alleviate the practical concerns of mail-in voting and, at the same time, provide a high level of security. Above all, they must display three properties [17]:

- Vote secrecy: do not reveal a voter's vote to anyone
- Individual verifiability: allow a voter to convince herself that the system correctly registered her vote
- Universal verifiability: allow an auditor to check that the election outcome corresponds to the registered votes

Following these principles, the Federal Chancellery defined stringent requirements for e-voting systems. The Ordinance on Electronic Voting (VEleS - Verordnung über die elektronische Stimmabgabe)[2] and its technical annex (VEleS annex)[3] describes these requirements.

Swiss democracy deserves an e-voting system with excellent security properties. In response to the release of an earlier version of the documentation and the source code of the e-voting system, multiple researchers published attacks, highlighted vulnerabilities, and suggested improvements[7, 11, 14, 18]. Swiss Post is thankful to all security researchers for their contributions and the opportunity to improve the system's security guarantees. We look forward to actively engaging with academic experts and the hacker community to maximize public scrutiny of the Swiss Post Voting System.

## 1.1 The Specification of Cryptographic Primitives

A vital element of a trustworthy and robust e-voting system is the description of the cryptographic algorithms in a form that leaves no room for interpretation and minimizes implementation errors [8].

Our pseudo-code description of the cryptographic algorithms—inspired by [9]—follows a consistent pattern:

- we prefix deterministic algorithms with **Get\*** and probabilistic algorithms with **Gen\***;
- we designate values that do not change between runs as **Context** and variable values as **Input**;
- we ensure that each algorithm does only one thing (single responsibility principle);
- we explicit domains and ranges of input and output values;
- and we use 0-based indexing to close the representational gap between mathematics and code.

Furthermore, we believe that a specification encompassing the common elements between the Swiss Post Voting System and its verifier (an open-source software verifying the correct establishment of the election result) benefits both systems.

## 1.2 Validating the Cryptographic Algorithm’s Correctness

We augment our specification with test values obtained from an independent implementation of the pseudo-code algorithms: our code validates against these test values to increase our confidence in the implementation’s correctness. The specification embeds the test values as JSON files within the document.

# 2 Basic Data Types

We build upon basic data types such as bytes, integers, strings, and arrays. Moreover, we require algorithms to concatenate and truncate strings and byte arrays, to test primality and to sort arrays.

## 2.1 Byte Arrays

We denote a byte array  $B$  of length  $n$  as  $\langle b_0, b_1, \dots, b_{n-1} \rangle$  where  $b_i$  denotes the  $i + 1$ -th byte of the array. Byte arrays can be encoded as strings, and, conversely, decoded from strings using Base16, Base32, and Base64 encodings according to RFC4648 [12]. Table 2 shows different examples of byte arrays.

Byte Array	Byte Array (binary form)	Base64	Base32
$\langle 0xF3, 0x01, 0xA3 \rangle$	11110011 00000001 10100011	"8wGj"	"6MA2G==="
$\langle 0xAC \rangle$	10101100	"rA=="	"VQ=====
$\langle 0x1F, 0x7F, 0x9D, 0x15, 0x12 \rangle$	00011111 01111111 10011101 00010101 00010010	"H3+dFRI="	"D57Z2FIS"

Table 2: Example representations of different byte arrays

We indicate concatenation with the  $\parallel$  operator.  
 $\langle 0xF3, 0x01, 0xA3 \rangle \parallel \langle 0xAC \rangle = \langle 0xF3, 0x01, 0xA3, 0xAC \rangle$

Algorithms 2.1, 2.2, 2.3, 2.4, 2.5 and 2.6 encode and decode byte arrays to and from Base16, Base32 and Base64 encodings. Potentially, decoding Base32 and Base64 may fail since the encoding is not bijective (only injective). For instance, one cannot decode the string "==TEOD8=" even though it is within the required alphabet.

---

**Algorithm 2.1** Base16Encode

---

**Input:**

Byte array  $B \in \mathcal{B}^*$

---

**Operation:**

1:  $S \leftarrow \text{Base16}(B)$

---

**Output:**

String  $S \in \mathbb{A}_{\text{Base16}}$

▷ According to RFC4648 [12]

---

---

**Algorithm 2.2** Base16Decode

---

**Input:**

String  $S \in \mathbb{A}_{\text{Base16}}$

▷ According to RFC4648 [12]

---

**Operation:**

1:  $B \leftarrow \text{Base16}^{-1}(S)$

---

**Output:**

Byte array  $B \in \mathcal{B}^*$

---

---

**Algorithm 2.3** Base32Encode

---

**Input:**

Byte array  $B \in \mathcal{B}^*$

---

**Operation:**

1:  $S \leftarrow \text{Base32}(B)$

---

**Output:**

String  $S \in \mathbb{A}_{\text{Base32}}$

▷ According to RFC4648 [12]

---

---

**Algorithm 2.4** Base32Decode

---

**Input:**

String  $S \in \mathbb{A}_{Base32}$  ▷ According to RFC4648 [12]

---

**Operation:**

- 1: **if**  $S$  is not valid Base32 **then**
  - 2:     **return**  $\perp$
  - 3: **end if**
  - 4:  $B \leftarrow \text{Base32}^{-1}(S)$
- 

**Output:**

Byte array  $B \in \mathcal{B}^*$

---

---

**Algorithm 2.5** Base64Encode

---

**Input:**

Byte array  $B \in \mathcal{B}^*$

---

**Operation:**

- 1:  $S \leftarrow \text{Base64}(B)$
- 

**Output:**

String  $S \in \mathbb{A}_{Base64}$  ▷ According to RFC4648 [12]

---

---

**Algorithm 2.6** Base64Decode

---

**Input:**

String  $S \in \mathbb{A}_{Base64}$

---

**Operation:**

- 1: **if**  $S$  is not valid Base64 **then**
  - 2:     **return**  $\perp$
  - 3: **end if**
  - 4:  $B \leftarrow \text{Base64}^{-1}(S)$
- 

**Output:**

Byte array  $B \in \mathcal{B}^*$

---

## 2.2 Integers

When converting integers to byte array, we represent them in big-endian byte order. Since we only work with non-negative integers, we treat them as unsigned integers. Table 3 provides some example integers.



Integer	Byte Array (Hex)
3	<0x03>
128	<0x80>
23'591	<0x5C, 0x27>
23'592	<0x5C, 0x28>
4'294'967'295	<0xFF, 0xFF, 0xFF, 0xFF>
4'294'967'296	<0x01, 0x00, 0x00, 0x00, 0x00>

Table 3: Example representations of different integers

Therefore, we ignore leading zeros and define algorithm 2.7 to convert byte arrays to integers and algorithm 2.8 to convert integers to byte arrays.  
 $|x|$  derives the minimal bit length of an integer, e.g.  $|4'294'967'295| = 32$  and  $|4'294'967'296| = 33$ .

---

**Algorithm 2.7** ByteArrayToInteger

---

**Input:**

Byte array  $B = \langle b_0, b_1, \dots, b_{n-1} \rangle$  of length  $n \in \mathbb{N}$

---

**Operation:**

- 1:  $x \leftarrow 0$
  - 2: **for**  $i \in [0, n)$  **do**
  - 3:      $x \leftarrow 256 \cdot x + b_i$
  - 4: **end for**
- 

**Output:**

$x \in \mathbb{N}$

---



---

**Algorithm 2.8** IntegerToByteArray

---

**Input:**

Positive integer  $x \in \mathbb{N}$

---

**Operation:**

- 1:  $n \leftarrow \lceil \frac{|x|}{8} \rceil$  ▷ Derive minimal length  $n$  of byte array
  - 2: **for**  $i \in [0, n)$  **do**
  - 3:      $b_{n-i-1} \leftarrow x \bmod 256$
  - 4:      $x \leftarrow \lfloor \frac{x}{256} \rfloor$
  - 5: **end for**
  - 6:  $B \leftarrow \langle b_0, b_1, \dots, b_{n-1} \rangle$
- 

**Output:**

Byte array  $B \in \mathcal{B}^n$

---

## 2.3 Strings

We encode strings in the universal coded character set (UCS) as defined in ISO/IEC10646, which is used by the encoding format UTF-8 (see RFC3629 [20]). Table 4 highlights some examples.

String	Byte Array (UCS)
"ABC"	<0x41, 0x42, 0x43>
"Ä"	<0xC3, 0x84>
"1001"	<0x31, 0x30, 0x30, 0x31>
"1A"	<0x31, 0x41>

Table 4: Example representations of different strings

Algorithms 2.9 and 2.10 convert byte arrays to strings and vice versa.

---

### Algorithm 2.9 StringToByteArray

---

**Input:**

String  $S \in \mathbb{A}_{UCS}^*$

---

**Operation:**

1:  $B \leftarrow \text{UCS}(S)$  ▷ Convert  $S$  to its UCS representation

---

**Output:**

Byte array  $B \in \mathcal{B}^*$

---



---

### Algorithm 2.10 ByteArrayToString

---

**Input:**

Byte array  $B \in \mathcal{B}^*$

---

**Operation:**

1:  $S \leftarrow \text{UCS}^{-1}(B)$

---

**Output:**

String  $S \in \mathbb{A}_{UCS}^*$

---

## 3 Basic Algorithms

### 3.1 Randomness

Several algorithms draw a value at random from a given domain and rely on a primitive providing the requested number of independent random bytes. Standard implementations for generating cryptographically secure random bytes are available in most programming languages; therefore, we omit the pseudo-code for this primitive and call it `randomBytes(length)`, where `length` is the required number of bytes.

---

**Algorithm 3.1** `GenRandomInteger`: provide a random integer between 0 (incl.) and  $m$  (excl.)

---

**Input:**

Upper bound  $m \in \mathbb{N}^*$

---

**Operation:**

- 1:  $\text{length} \leftarrow \text{byteLength}(m)$
  - 2:  $r \leftarrow \text{ToInteger}(\text{randomBytes}(\text{length}))$
  - 3: **if**  $r \geq m$  **then**
  - 4:   go back to step 2
  - 5: **end if**
- 

**Output:**

Random number  $r \in [0, m)$

---

---

**Algorithm 3.2** `GenRandomIntegerWithinBounds`: provide a random integer between  $a$  (incl.) and  $b$  (excl.)

---

**Input:**

Lower bound  $a \in \mathbb{Z}$   
Upper bound  $b \in \mathbb{Z}$  s.t.  $b > a$

---

**Operation:**

- 1:  $r \leftarrow \text{GenRandomInteger}(b - a)$  ▷ See algorithm 3.1
  - 2:  $r' \leftarrow a + r$
- 

**Output:**

Random number  $r'$  s.t.  $a \leq r' < b$

---

---

**Algorithm 3.3 GenRandomExponent:** provide a valid exponent, i.e. a value between 2 (incl.) and  $q$  (excl.). We exclude the value 1 for the secret exponent since the resulting bias is negligible and it avoids borderline cases where an exponent of 1 is maliciously or accidentally chosen to weaken security.

---

**Context:**

Group modulus  $p \in \mathbb{P}$

Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$

**Input:**

No input needed here.

---

**Operation:**

1:  $r \leftarrow \text{GenRandomIntegerWithinBounds}(2, q)$  ▷ See algorithm 3.2

---

**Output:**

$r$  s.t.  $2 \leq r < q$

---

---

**Algorithm 3.4 GenRandomVector:** generate a random vector from  $\mathbb{Z}_q^n$

---

**Input:**

Exclusive upperbound  $q \in \mathbb{N}^*$

Length  $n \in \mathbb{N}^*$

---

**Operation:**

1: **for**  $i \in [0, n)$  **do**  
2:    $r_i \leftarrow \text{GenRandomInteger}(q)$  ▷ See algorithm 3.1  
3: **end for**

---

**Output:**

Random vector  $(r_0, \dots, r_{n-1}) \in \mathbb{Z}_q^n$

---

---

**Algorithm 3.5 GenRandomBase16String**

---

**Input:**

Desired length of string:  $l \in \mathbb{N}$

---

**Operation:**

1:  $l_{bytes} = \lceil \frac{4 \cdot l}{8} \rceil$   
2:  $b = \text{RandomBytes}(l_{bytes})$   
3:  $S = \text{Truncate}(\text{Base16Encode}(b), l)$  ▷ See algorithm 2.1

---

**Output:**

$S \in \{\mathbb{A}_{Base16}\}^l$  ▷ According to RFC4648 [12]

---

---

**Algorithm 3.6** GenRandomBase32String

---

**Input:**

Desired length of string:  $l \in \mathbb{N}$

---

**Operation:**

- 1:  $l_{bytes} = \lceil \frac{5 \cdot l}{8} \rceil$
  - 2:  $b = \text{RandomBytes}(l_{bytes})$
  - 3:  $S = \text{Truncate}(\text{Base32Encode}(b), l)$  ▷ See algorithm 2.3
- 

**Output:**

$S \in \{\mathbb{A}_{Base32}\}^l$  ▷ According to RFC4648 [12]

---

---

**Algorithm 3.7** GenRandomBase64String

---

**Input:**

Desired length of string:  $l \in \mathbb{N}$

---

**Operation:**

- $l_{bytes} = \lceil \frac{6 \cdot l}{8} \rceil$
  - $b = \text{RandomBytes}(l_{bytes})$
  - $S = \text{Truncate}(\text{Base64Encode}(b), l)$  ▷ See algorithm 2.5
- 

**Output:**

$S \in \{\mathbb{A}_{Base64}\}^l$  ▷ According to RFC4648 [12]

---

## 3.2 Recursive Hash

Our recursive hash function—inspired by CHVote[9]—ensures that different inputs (of the same type) to the hash function result in different outputs. In particular, the recursive hash function provides domain-separation: hashing ("A", "B") does not yield the same result as hashing ("AB").

There is a caveat regarding the edge case of hashing empty values; the recursive hash algorithm implies that both the empty string and the empty byte array result in the same hash-value, which is, strictly speaking, a collision. Callers of this function must therefore ensure that the domains of each element are clearly defined, thus avoiding collisions. Further, the recursive definition of the domain implies that infinite inputs are possible in theory, in which case the algorithm does not terminate. It is also the callers' responsibility to ensure only finite inputs are provided in practice.

---

**Algorithm 3.8** RecursiveHash: Computes the hash value of multiple inputs

---

**Context:**

Pseudo-random hash function  $\text{Hash} : \mathcal{B}^* \mapsto \mathcal{B}^L$ ,  $L \in \mathbb{N}^*$     ▷ Outputs a byte array of length  $L$

**Input:**

Values  $(v_0, \dots, v_{k-1})$ . Each value  $v_i$  is in domain  $\mathcal{V}$ , recursively defined as the union of:

- the set of byte arrays  $\mathcal{B}^*$
- the set of valid UCS strings  $\mathbb{A}_{UCS}$
- the set of non-negative integers  $\mathbb{N}$
- the set of vectors  $\mathcal{V}^*$

**Require:**  $k > 0$ ,  $L > 0$

---

**Operation:**

```

1: if  $k > 1$  then                                ▷ Avoid computing  $\text{Hash}(\text{Hash}(v_0))$  when  $k = 1$ 
2:    $\mathbf{v} \leftarrow (v_0, \dots, v_{k-1})$ 
3:    $d \leftarrow \text{RecursiveHash}(\mathbf{v})$ 
4: else
5:    $w \leftarrow v_0$ 
6:   if  $w \in \mathcal{B}^*$  then
7:      $d \leftarrow \text{Hash}(w)$ 
8:   else if  $w \in \mathbb{A}_{UCS}$  then
9:      $d \leftarrow \text{Hash}(\text{StringToByteArray}(w))$            ▷ See algorithm 2.9
10:  else if  $w \in \mathbb{N}$  then
11:     $d \leftarrow \text{Hash}(\text{IntegerToByteArray}(w))$            ▷ See algorithm 2.8
12:  else if  $w = (w_0, \dots, w_j)$  then
13:    if  $j = 0$  then
14:       $d \leftarrow \text{RecursiveHash}(w_0)$ 
15:    else
16:       $d \leftarrow \text{Hash}(\text{RecursiveHash}(w_0) || \dots || \text{RecursiveHash}(w_j))$ 
17:    end if
18:  else
19:    return  $\perp$ 
20: end if

```

---

**Output:**

The digest  $d \in \mathcal{B}^L$

Test values for algorithm 3.8 are provided in the attached [recursive-hash-sha256.json](#) file.

---

## 4 ElGamal Cryptosystem

The computational proof [16] describes the security properties of the ElGamal encryption scheme. Moreover, it explains that we can share the randomness when encrypting multiple messages (using different public keys). Optimizing the encryption scheme in this way is called multi-recipient ElGamal encryption and prevents us from repeatedly computing the left-hand side of the ciphertext.

### 4.1 Key Pair Generation

---

**Algorithm 4.1** GenKeyPair: Generate a multi-recipient key pair

---

**Input:**

- Group modulus  $p \in \mathbb{P}$
  - Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
  - Group generator  $g \in \mathbb{G}_q$
  - Number of key elements  $N \in \mathbb{N}$
- 

**Operation:**

- 1: **for**  $i \in [0, N)$  **do**
  - 2:      $sk_i \leftarrow \text{GenRandomExponent}()$  ▷ See algorithm 3.3
  - 3:      $pk_i \leftarrow g^{sk_i} \bmod p$
  - 4: **end for**
- 

**Output:**

A pair of secret and public keys  $\{(sk_i, pk_i)\}_{i=0}^{N-1}, sk_i \in (\mathbb{Z}_q \setminus \{0, 1\})^k, pk_i \in (\mathbb{G}_q \setminus \{1, g\})^k$

---

In the Swiss Post Voting System, a ciphertext (i.e. an encrypted voter ballot) comprises the following elements:

- $g^r$ , the left-hand side part of a standard ElGamal encryption,
- $pk_0^r \cdot m_0$ , the encryption of the main message, under the first part of the system's public key. The message is the product of the choices of the voter,
- $pk_j^r \cdot m_j$  for all  $1 \leq j < l$ , where  $m_j$  is the encoding of a write-in chosen by the voter, or 1.
- When the number of write-ins a voter is eligible to vote for is smaller than the election configuration allows, the remaining keys are compressed by multiplication, so that all keys are used in every case.

The algorithms for handling the key-compression mentioned in the last point are provided below.



---

**Algorithm 4.2** CompressPublicKey: compress a public key to the requested length

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
Group generator  $g \in \mathbb{G}_q$

**Input:**

A multi-recipient public key  $\mathbf{pk} = (\mathbf{pk}_0, \dots, \mathbf{pk}_{k-1}) \in (\mathbb{G}_q \setminus \{1, g\})^k$   
The requested length  $l$  s.t.  $0 < l \leq k$

---

**Operation:**

1:  $\mathbf{pk}' = \prod_{i=l-1}^{k-1} \mathbf{pk}_i \mod p$

---

**Output:**

$(\mathbf{pk}_0, \dots, \mathbf{pk}_{l-2}, \mathbf{pk}')$   $\in \mathbb{G}_q^l$   $\triangleright$  If  $l = 1$ , then the output vector contains only  $\mathbf{pk}'$

---



---

**Algorithm 4.3** CompressSecretKey: compress a secret key to the requested length

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
Group generator  $g \in \mathbb{G}_q$

**Input:**

A multi-recipient secret key  $\mathbf{sk} = (\mathbf{sk}_0, \dots, \mathbf{sk}_{k-1}) \in (\mathbb{Z}_q \setminus \{0, 1\})^k$   
The requested length  $l$  s.t.  $0 < l \leq k$

---

**Operation:**

1:  $\mathbf{sk}' = \sum_{i=l-1}^{k-1} \mathbf{sk}_i \mod q$

---

**Output:**

$(\mathbf{sk}_0, \dots, \mathbf{sk}_{l-2}, \mathbf{sk}')$   $\in \mathbb{Z}_q^l$   $\triangleright$  If  $l = 1$ , then the output vector contains only  $\mathbf{sk}'$

---

## 4.2 Encryption

A ballot can be considered as a "multi-recipient message", in which each part will be encrypted under a different key.

---

**Algorithm 4.4 GetCiphertext:** Compute a ciphertext with provided randomness

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$

**Input:**

- A multi-recipient message  $\mathbf{m} \in \mathbb{G}_q^l$
- The random exponent to use  $r \in \mathbb{Z}_q$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$

**Require:**  $0 < l \leq k$

---

**Operation:**

- 1:  $\gamma \leftarrow g^r \bmod p$
- 2:  $(\mathbf{pk}'_0, \dots, \mathbf{pk}'_{l-1}) \leftarrow \text{CompressPublicKey}(\mathbf{pk}, l)$
- 3: **for**  $i \in [0, l)$  **do**
- 4:      $\phi_i \leftarrow \mathbf{pk}'_i \cdot m_i \bmod p$
- 5: **end for**

▷ See algorithm 4.2

---

**Output:**

The ciphertext  $(\gamma, \phi_0, \dots, \phi_{l-1}) \in \mathbb{H}_l$

Test values for the algorithm 4.4 are provided in [get-ciphertext.json](#).

---

### 4.3 Ciphertext Operations

---

#### Algorithm 4.5 GetCiphertextExponentiation: Exponentiate the ciphertext

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
Group generator  $g \in \mathbb{G}_q$

**Input:**

A multi-recipient ciphertext  $C_a = (\gamma, \phi_0, \dots, \phi_{l-1}) \in \mathbb{H}_l$   
An exponent  $a \in \mathbb{Z}_q$

---

**Operation:**

```

1:  $\gamma \leftarrow \gamma^a \bmod p$ 
2: for  $i \in [0, l)$  do
3:    $\phi_i \leftarrow \phi_i^a \bmod p$ 
4: end for

```

---

**Output:**

$(\gamma, \phi_0, \dots, \phi_{l-1}) \in \mathbb{H}_l$

---



---

#### Algorithm 4.6 GetCiphertextVectorExponentiation: Exponentiate a vector of ciphertexts and take the product

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
Group generator  $g \in \mathbb{G}_q$

**Input:**

A vector of ciphertexts  $\vec{C} = (C_0, \dots, C_{n-1}) \in (\mathbb{H}_l)^n$   
A vector of exponents  $\vec{a} = (a_0, \dots, a_{n-1}) \in \mathbb{Z}_q^n$

---

**Operation:**

```

1: product  $\leftarrow$  GetCiphertext( $\vec{1}, 0, \mathbf{pk}$ )     $\triangleright$  Neutral element of ciphertext multiplication
2: for  $i \in [0, n)$  do
3:   product  $\leftarrow$  GetCiphertextProduct(product, GetCiphertextExponentiation( $C_i, a_i$ ))
                                      $\triangleright$  See algorithm 4.7 and algorithm 4.5
4: end for

```

---

**Output:**

The resulting **product**  $\in \mathbb{H}_l$

---

---

**Algorithm 4.7** GetCiphertextProduct: Multiply two ciphertexts

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
Group generator  $g \in \mathbb{G}_q$

**Input:**

A multi-recipient ciphertext  $C_a = (\gamma_a, \phi_{a,0}, \dots, \phi_{a,l-1}) \in \mathbb{H}_l$   
Another multi-recipient ciphertext  $C_b = (\gamma_b, \phi_{b,0}, \dots, \phi_{b,l-1}) \in \mathbb{H}_l$

---

**Operation:**

```

1:  $\gamma \leftarrow \gamma_a \cdot \gamma_b \mod p$ 
2: for  $i \in [0, l)$  do
3:    $\phi_i \leftarrow \phi_{a,i} \cdot \phi_{b,i} \mod p$ 
4: end for

```

---

**Output:**

$(\gamma, \phi_0, \dots, \phi_{l-1}) \in \mathbb{H}_l$

Test values for the algorithm 4.7 are provided in [get-ciphertext-product.json](#).

---

## 4.4 Decryption

---

**Algorithm 4.8** GetMessage: Retrieve the message from a ciphertext

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
Group generator  $g \in \mathbb{G}_q$

**Input:**

A multi-recipient ciphertext  $\mathbf{c} \in \mathbb{H}_l$   
A multi-recipient secret key  $\mathbf{sk} \in (\mathbb{Z}_q \setminus \{0, 1\})^k, 0 < l \leq k$

---

**Operation:**

```

1:  $(\mathbf{sk}'_0, \dots, \mathbf{sk}'_{l-1}) \leftarrow \text{CompressSecretKey}(\mathbf{sk}, l)$ 

```

▷ See algorithm 4.3

```

2: for  $i \in [0, l)$  do
3:    $m_i \leftarrow \phi_i \cdot \gamma^{-\mathbf{sk}'_i} \mod p$ 
4: end for

```

---

**Output:**

The multi-recipient message  $(m_0, \dots, m_{l-1}) \in \mathbb{G}_q^l$

---

Since the system uses a multi-party re-encryption/decryption mixnet, in which the combined public key of the parties is used for encryption, each party actually performs a partial decryption. This entails that the actual output of the decryption phase for each party is actually still a ciphertext and the value for  $\gamma$  needs to be preserved to allow decryption by the following parties. This gives us the partial decryption algorithm in algorithm 4.9.

---

**Algorithm 4.9** GetPartialDecryption: Partially decrypt a provided ciphertext

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$

**Input:**

- A multi-recipient ciphertext  $\mathbf{c} = (\gamma, \phi_0, \dots, \phi_{l-1}) \in \mathbb{H}_l$
  - A multi-recipient secret key  $\mathbf{sk} \in (\mathbb{Z}_q \setminus \{0, 1\})^k, 0 < l \leq k$
- 

**Operation:**

- 1:  $(m_0, \dots, m_{l-1}) \leftarrow \text{GetMessage}(\mathbf{c}, \mathbf{sk})$  ▷ See algorithm 4.8
  - 2: **return**  $(\gamma, m_0, \dots, m_{l-1})$
- 

**Output:**

- The multi-recipient ciphertext  $(\gamma, m_0, \dots, m_{l-1}) \in \mathbb{H}_l$
-

## 5 Mix Net

Verifiable mix nets underpin most modern e-voting schemes since they hide the relationship between encrypted votes (potentially linked to the voter's identifier) and decrypted votes [10]. A re-encryption mix net consists of a sequence of mixers, each of which shuffles and re-encrypts an input ciphertext list and returns a different ciphertext list containing the same plaintexts. Each mixer proves knowledge of the permutation and the randomness (without revealing them to the verifier). Verifying these proofs guarantees that no mixer added, deleted, or modified a vote. The most widely used verifiable mix nets are the ones from Telerius-Wikström [19] and Bayer-Groth [1]. The Swiss Post Voting System uses the Bayer-Groth mix net, which we describe in this section. The computational proof [16] discusses the security properties of the non-interactive version of the Bayer-Groth mix net. Please note that each control component in the Swiss Post Voting System combines a verifiable shuffle with a subsequent, verifiable decryption step. This section details only the verifiable shuffle.

Our implementation exposes the following two public methods:

---

**Algorithm 5.1** `GenVerifiableShuffle`: Shuffle (including re-encryption), and provide a Bayer-Groth proof of the shuffle

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$

**Input:**

- A vector of ciphertexts  $\mathbf{C} \in (\mathbb{H}_l)^N$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$

**Require:**  $0 < l \leq k$

**Require:**  $N \geq 2$

---

**Operation:**

- 1:  $(\mathbf{C}', \pi, \mathbf{r}) \leftarrow \text{GenShuffle}(\mathbf{C}, \mathbf{pk})$  ▷ See algorithm 5.3
  - 2:  $(m, n) \leftarrow \text{GetMatrixDimensions}(N)$  ▷ See algorithm 5.5
  - 3:  $\mathbf{ck} \leftarrow \text{GetVerifiableCommitmentKey}(n)$  ▷ See algorithm 5.6
  - 4:  $\text{shuffleStatement} \leftarrow (\mathbf{C}, \mathbf{C}')$
  - 5:  $\text{shuffleWitness} \leftarrow (\pi, \mathbf{r})$
  - 6:  $\text{shuffleArgument} \leftarrow \text{GetShuffleArgument}(\text{shuffleStatement}, \text{shuffleWitness}, m, n)$  ▷ See algorithm 5.11
- 

**Output:**

- $\mathbf{C}' \in (\mathbb{H}_l)^N$
  - $\text{shuffleArgument}$
-

---

**Algorithm 5.2 VerifyShuffle:** Verify the output of a previously generated verifiable shuffle

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$

**Input:**

- A vector of unshuffled ciphertexts  $\mathbf{C} \in (\mathbb{H}_l)^N$
- A vector of shuffled, re-encrypted ciphertexts  $\mathbf{C}' \in (\mathbb{H}_l)^N$
- A Bayer-Groth `shuffleArgument` ▷ See algorithm 5.11 for the domain
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$

**Require:**  $0 < l \leq k$

**Require:**  $N \geq 2$

---

**Operation:**

- 1:  $(m, n) \leftarrow \text{GetMatrixDimensions}(N)$  ▷ See algorithm 5.5
  - 2:  $\mathbf{ck} \leftarrow \text{GetVerifiableCommitmentKey}(n)$  ▷ See algorithm 5.6
  - 3:  $\text{shuffleStatement} \leftarrow (\mathbf{C}, \mathbf{C}')$
  - 4: **return** `VerifyShuffleArgument`(`shuffleStatement`, `shuffleArgument`,  $m, n$ ) ▷ See algorithm 5.12
- 

**Output:**

The result of the verification:  $\top$  if the verification is successful,  $\perp$  otherwise.

---

## 5.1 Pre-Requisites

### 5.1.1 Shuffle

Algorithm 5.3 shuffles a list of ciphertexts. We require the shuffled list of ciphertexts, the permutation, and the list of random exponents to prove the shuffle's correctness.

---

**Algorithm 5.3** GenShuffle: Re-encrypting shuffle

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$

**Input:**

A vector of ciphertexts  $\mathbf{C} \in (\mathbb{H}_l)^N$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$

**Require:**  $0 < l \leq k$

---

**Operation:**

```

1:  $(\pi_0, \dots, \pi_{N-1}) \leftarrow \text{GenPermutation}(N)$  ▷ See algorithm 5.4
2: for  $i \in [0, N)$  do
3:    $r_i \leftarrow \text{GenRandomExponent}()$  ▷ See algorithm 3.3
4:    $e \leftarrow \text{GetCiphertext}(\vec{1}, r_i, \mathbf{pk})$  ▷ Ciphertext for a vector of  $l$  1s. See algorithm 4.4
5:    $\mathbf{C}'_i \leftarrow e \cdot \mathbf{C}_{\pi_i}$  ▷ See algorithm 4.7 for ciphertext multiplication
6: end for
    
```

---

**Output:**

$\mathbf{C}' = (\mathbf{C}'_0, \dots, \mathbf{C}'_{N-1}) \in (\mathbb{H}_l)^N$  ▷ The result of the shuffle  
 $\pi \in \Sigma_N$  ▷ The permutation used  
 $\mathbf{r} = (r_0, \dots, r_{l-1}) \in \mathbb{Z}_q^N$  ▷ The exponents used for re-encryption

---



Algorithm 5.4 provides a way to generate a random permutation of indices for a list of size  $N$ . It uses the algorithm formalized by Knuth in [13]. The pseudo-code below assumes 0-based indexing, and as such deviates from standard mathematical notation in favor of closer proximity to the implementation.

---

**Algorithm 5.4 GenPermutation:** Permutation of indices up to  $N$

---

**Input:**

Permutation size  $N \in \mathbb{N}^*$

---

**Operation:**

```

1:  $\pi \leftarrow (0, \dots, N - 1)$ 
2: for  $i \in [0, N)$  do
3:    $\text{offset} \leftarrow \text{GenRandomInteger}(N - i)$  ▷ See algorithm 3.1
4:    $\text{tmp} \leftarrow \pi_i$ 
5:    $\pi_i \leftarrow \pi_{i+\text{offset}}$ 
6:    $\pi_{i+\text{offset}} \leftarrow \text{tmp}$ 
7: end for
```

---

**Output:**

$\pi$  ▷ A permutation of the values between 0 and  $N - 1$

**Ensure:**  $\forall j \in [0, N) \rightarrow j \in \pi$

**Ensure:**  $\pi \in \mathbb{Z}_{N-1}^N$  ▷ Those two elements combined ensure that  $\pi \in \Sigma_N$

---

### 5.1.2 Matrix Dimensions

The Bayer-Groth mix net is memory optimal, when the ciphertexts can be arranged into matrices with an equal number of rows and columns. In the worst case, when the number of ciphertexts is prime, the resulting matrix has dimensions  $1 \times N$ . The below algorithm yields the optimal matrix size for a given number of ciphertexts. As an example,  $N = 12$  results in  $m = 3, n = 4$ ,  $N = 18$  results in  $m = 3, n = 6$ , and  $N = 23$  results in  $m = 1, n = 23$ ,

---

**Algorithm 5.5** GetMatrixDimensions: Return the optimal dimensions for the ciphertext matrix

---

**Input:**

Number of ciphertexts  $N \in \mathbb{N}^*$

**Require:**  $N \geq 2$

---

**Operation:**

```
1:  $m \leftarrow 1$ 
2:  $n \leftarrow N$ 
3: for  $i \in [\lfloor \sqrt{N} \rfloor, 1)$  do
4:   if  $i \mid N$  then
5:      $m \leftarrow i$ 
6:      $n \leftarrow \frac{N}{i}$ 
7:     return  $m, n$ 
8:   end if
9: end for
```

---

**Output:**

$m \in \mathbb{N}^*$   
 $n \in \mathbb{N}^*$

---

## 5.2 Commitments

A cryptographic commitment allows a party to commit to a value (the opening), to keep the opening hidden from others, and to reveal it later [6].

We use the Pedersen commitment scheme[15] with a commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k)$  that was generated in a verifiable manner.

The Pedersen commitment scheme satisfies three properties that the Bayer-Groth mix net requires [1].

- *Perfectly hiding*: The commitment is uniformly distributed in  $\mathbb{G}_q$ .
- *Computationally binding*: It is computationally infeasible to find two different values producing the same commitment.
- *Homomorphic*: It holds that  $\text{GetCommitment}(a + b; r + s) = \text{GetCommitment}(a; r) \text{GetCommitment}(b; s)$  for messages  $a, b$ , a commitment key  $\mathbf{ck}$  and random values  $r, s$ .

The Pedersen commitment scheme is *computationally binding* only if the commitment keys are generated independently and verifiably at random:

---

**Algorithm 5.6** `GetVerifiableCommitmentKey`: Generates a verifiable commitment key

---

**Context:**

Group modulus  $p \in \mathbb{P}$

Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$

**Input:**

The desired number of elements of the commitment key  $k \in \mathbb{N}^*$

---

**Operation:**

```

1: count = 0
2: i = 0
3: v ← {}
4: while count ≤ k do
5:   u ← ByteArrayToInteger(RecursiveHash(q, "commitmentKey", i, count))
6:   w ← u2 mod p
7:   if w ∉ {0, 1, g} ∪ v then
8:     gi ← w
9:     v ← v ∪ gi
10:    count = count + 1
11:   end if
12:   i = i + 1
13: end while
14: h ← g0

```

▷ By convention, we designate  $g_0$  as  $h$

---

**Output:**

A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

---

---

**Algorithm 5.7** GetCommitment: Computes a commitment to a value

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$

**Input:**

The values to commit to  $\mathbf{a} \in \mathbb{Z}_q^l$   
A random value  $r \in \mathbb{Z}_q$   
A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$  s.t.  $k \geq l$

---

**Operation:**

1:  $c \leftarrow h^r \prod_{i=1}^l g_i^{a_{i-1}} \mod p$

---

**Output:**

The commitment  $c \in \mathbb{G}_q$

---



---

**Algorithm 5.8** GetCommitmentMatrix: Computes the commitment for a matrix

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$

**Input:**

The values to be committed  $A \in \mathbb{Z}_q^{n \times m}$  ▷ We note the columns of  $A$  as  $\vec{a}_0, \dots, \vec{a}_{m-1}$   
The random values to use  $\mathbf{r} \in \mathbb{Z}_q^m$   
A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^k$  s.t.  $k \geq n$

---

**Operation:**

1: **for**  $i \in [0, m)$  **do**  
2:      $c_i \leftarrow \text{GetCommitment}(\vec{a}_i, r_i, \mathbf{ck})$  ▷ See algorithm 5.7  
3: **end for**

---

**Output:**

The commitments  $(c_0, \dots, c_{m-1}) \in \mathbb{G}_q^m$

This algorithm is consistent with the notation defined in [1], in section 2.3 Homomorphic Encryption:

For a matrix  $A \in \mathbb{Z}_q^{n \times m}$  with columns  $\vec{a}_1, \dots, \vec{a}_m$  we shorten notation by defining  $\text{com}_{ck}(A; \vec{r}) = (\text{com}_{ck}(\vec{a}_1; r_1), \dots, \text{com}_{ck}(\vec{a}_m; r_m))$

---

---

**Algorithm 5.9** GetCommitmentVector: Compute the commitment for a transposed vector. This is only used in the algorithm 5.22, hence the specific indices

---

**Context:**

Group modulus  $p \in \mathbb{P}$

Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$

**Input:**

The values to be committed  $\mathbf{d} = (d_0, \dots, d_{2m}) \in \mathbb{Z}_q^{2m+1}$

The random values to use  $\mathbf{t} = (t_0, \dots, t_{2m}) \in \mathbb{Z}_q^{2m+1}$

A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^k$  s.t.  $k \geq 1$

---

**Operation:**

- 1: **for**  $i \in [0, 2m]$  **do**
  - 2:      $c_i \leftarrow \text{GetCommitment}((d_i), t_i, \mathbf{ck})$    ▷ See algorithm 5.7, this treats each entry of the input as a vector of length 1
  - 3: **end for**
- 

**Output:**

The commitments  $(c_0, \dots, c_{2m}) \in \mathbb{G}_q^{2m+1}$

---

### 5.3 Arguments

Conceptually, the Bayer-Groth proof of a shuffle consists of six arguments. Figure 1 highlights the hierarchy of these arguments.

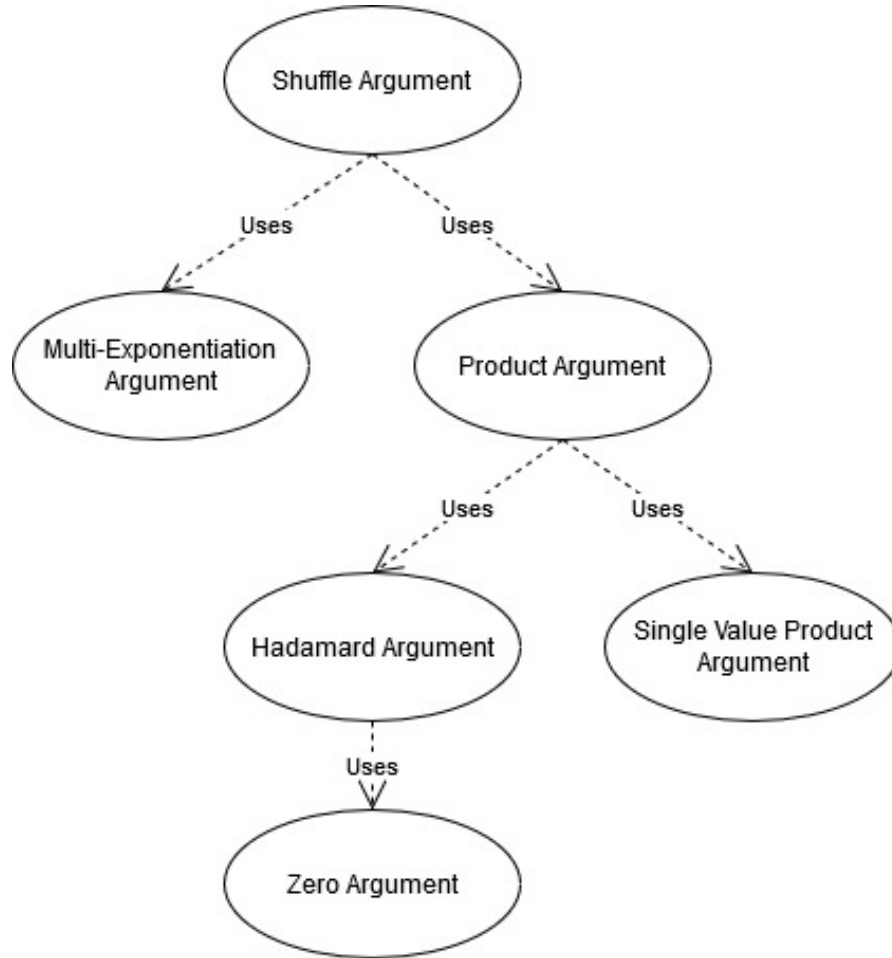


Figure 1: Bayer-Groth Argument for the Correctness of a Shuffle

The shuffle argument invokes a multi-exponentiation and a product argument. The product argument, in turn, uses a Hadamard and a single value product argument. Finally, the Hadamard argument calls a zero argument.

In all knowledge arguments, we will use the following terminology:

**statement** the public information for which we assert that a property holds

**witness** the private information we use to make arguments on the validity of the statement

**argument** the information we provide to a third party which allows them to verify the validity of our statement

We prove and verify the Bayer-Groth mix net in the *non-interactive* setting: the prover and the verifier recursively hash various elements to generate the argument's challenge messages. Since the mathematical group's rank  $q$  is much larger than the output domain, converting the hash function's output to an integer of byte size  $L$  is sound ( $\text{byteLength}(q) \gg L$ ).

In some algorithms, we will use the bilinear algorithm  $\star : \mathbb{Z}_q^n \times \mathbb{Z}_q^n \mapsto \mathbb{Z}_q$  defined by the value  $y$  as:

$$(a_0, \dots, a_{n-1}) \star (b_0, \dots, b_{n-1}) = \sum_{j=0}^{n-1} a_j \cdot b_j \cdot y^{j+1}$$

Where all multiplications are performed modulo  $q$ .

Let us formalize it with the following pseudocode algorithm.

---

**Algorithm 5.10** StarMap: Defines the  $\star$  bilinear map

---

**Context:**

Group modulus  $p \in \mathbb{P}$

Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$

**Input:**

Value  $y \in \mathbb{Z}_q$

First vector  $\mathbf{a} = (a_0, \dots, a_{n-1}) \in \mathbb{Z}_q^n$

Second vector  $\mathbf{b} = (b_0, \dots, b_{n-1}) \in \mathbb{Z}_q^n$

---

**Operation:**

1:  $s \leftarrow 0$

2: **for**  $j \in [0, n)$  **do**

3:      $s \leftarrow s + a_j \cdot b_j \cdot y^{j+1}$

▷ All operations are performed modulo  $q$

4: **end for**

---

**Output:**

$s \in \mathbb{Z}_q$

Test values for the algorithm 5.10 are provided in the attached [bilinearMap.json](#) file.

---

### 5.3.1 Shuffle Argument

In the following pseudo-code algorithm, we will generate an argument of knowledge of a permutation  $\pi \in \Sigma_N$  and randomness  $\rho \in \mathbb{Z}_q^N$  such that for given ciphertexts  $\vec{C} \in (\mathbb{H}_l)^N$  and  $\vec{C}' \in (\mathbb{H}_l)^N$  it holds that for all  $i \in [0, N)$ :

$$\vec{C}'_i = \text{GetCiphertextProduct}(\text{GetCiphertext}(\vec{1}, \rho_i, \mathbf{pk}), \vec{C}_{\pi(i)})$$



---

**Algorithm 5.11** GetShuffleArgument: compute a cryptographic argument for the validity of the shuffle

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$   
 A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

The statement composed of  
 - The incoming list of ciphertexts  $\vec{C} \in (\mathbb{H}_t)^N$   
 - The shuffled and re-encrypted list of ciphertexts  $\vec{C}' \in (\mathbb{H}_t)^N$   
 The witness composed of  
 - permutation  $\pi \in \Sigma_N$   
 - randomness  $\vec{\rho} \in \mathbb{Z}_q^N$   
 The number of rows to use for ciphertext matrices  $m \in \mathbb{N}^*$   
 The number of columns to use for ciphertext matrices  $n \in \mathbb{N}^*$

**Ensure:**  $\forall i \in [0, N) : \vec{C}'_i = \text{GetCiphertextProduct}(\text{GetCiphertext}(\vec{1}, \rho_i, \mathbf{pk}), \vec{C}_{\pi(i)})$

**Ensure:**  $N = mn$

---

**Operation:**

```

1:  $\mathbf{r} \leftarrow \text{GenRandomVector}(q, m)$  ▷ See algorithm 3.4
2:  $A \leftarrow \text{Transpose}(\text{ToMatrix}(\{\pi(i)\}_{i=0}^{N-1}, m, n))$  ▷ Create a  $n \times m$  matrix. See algorithm 5.14 and algorithm 5.13
3:  $\mathbf{c}_A \leftarrow \text{GetCommitmentMatrix}(A, \mathbf{r}, \mathbf{ck})$  ▷ See algorithm 5.8
4:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, \vec{C}, \vec{C}', \mathbf{c}_A))$ 
5:  $\mathbf{s} \leftarrow \text{GenRandomVector}(q, m)$ 
6:  $\mathbf{b} \leftarrow \{x^{\pi(i)}\}_{i=0}^{N-1}$ 
7:  $B \leftarrow \text{Transpose}(\text{ToMatrix}(\mathbf{b}, m, n))$ 
8:  $\mathbf{c}_B \leftarrow \text{GetCommitmentMatrix}(B, \mathbf{s}, \mathbf{ck})$ 
9:  $y \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(\mathbf{c}_B, p, q, \mathbf{pk}, \mathbf{ck}, \vec{C}, \vec{C}', \mathbf{c}_A))$ 
10:  $z \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}("1", \mathbf{c}_B, p, q, \mathbf{pk}, \mathbf{ck}, \vec{C}, \vec{C}', \mathbf{c}_A))$ 
▷ Both  $\vec{C}$  and  $\vec{C}'$  are passed in the vector forms here
11:  $\text{Zneg} \leftarrow \text{Transpose}(\text{ToMatrix}(\{-z\}_{i=1}^N, m, n))$  ▷ Vector of length  $N$ , with all values being  $q - z$ 
12:  $\mathbf{c}_{-z} \leftarrow \text{GetCommitmentMatrix}(\text{Zneg}, \vec{0}, \mathbf{ck})$  ▷ A vector of length  $m$ , with all 0 values
13:  $\mathbf{c}_D \leftarrow \mathbf{c}_A^y \mathbf{c}_B$  ▷ Entry-wise product
14:  $D \leftarrow yA + B$ 
15:  $\mathbf{t} \leftarrow y\mathbf{r} + \mathbf{s}$ 
16:  $b \leftarrow \prod_{i=0}^{N-1} (y_i + x^i - z)$ 
17:  $\mathbf{pStatement} \leftarrow (\mathbf{c}_D \mathbf{c}_{-z}, b)$ 
18:  $\mathbf{pWitness} \leftarrow (D + \text{Zneg}, \mathbf{t})$ 
19:  $\text{productArgument} \leftarrow \text{GetProductArgument}(\mathbf{pStatement}, \mathbf{pWitness})$  ▷ See algorithm 5.18
20:  $\rho \leftarrow q - (\vec{\rho} \cdot \mathbf{b})$  ▷ Standard inner product  $\sum_{i=0}^{N-1} \rho_i b_i$ 
21:  $\vec{x} \leftarrow \{x^i\}_{i=0}^{N-1}$ 
22:  $C \leftarrow \text{GetCiphertextVectorExponentiation}(\vec{C}, \vec{x})$  ▷ See algorithm 4.6
23:  $\mathbf{mStatement} \leftarrow (\text{ToMatrix}(\vec{C}', m, n), C, \mathbf{c}_B)$  ▷ See algorithm 5.13
24:  $\mathbf{mWitness} \leftarrow (B, \mathbf{s}, \rho)$ 
25:  $\text{multiExponentiationArgument} \leftarrow \text{GetMultiExponentiationArgument}(\mathbf{mStatement}, \mathbf{mWitness})$  ▷ See algorithm 5.15

```

---

**Output:**

shuffleArgument  $(\mathbf{c}_A, \mathbf{c}_B, \text{productArgument}, \text{multiExponentiationArgument}) \in \mathbb{G}_q^m \times \mathbb{G}_q^m \times \dots \times \dots$   
▷ See algorithm 5.18 and algorithm 5.15 for their respective domains

---

In the following pseudo-code algorithm, we verify that a provided Shuffle argument adequately supports the corresponding statement.

---

**Algorithm 5.12** VerifyShuffleArgument: Verify a cryptographic argument for the validity of the shuffle

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$
- A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

- The **statement** composed of
  - The incoming list of ciphertexts  $\vec{C} \in (\mathbb{H}_l)^N$
  - The shuffled and re-encrypted list of ciphertexts  $\vec{C}' \in (\mathbb{H}_l)^N$
- The **argument** composed of
  - the commitment vector  $\mathbf{c}_A \in \mathbb{G}_q^m$
  - the commitment vector  $\mathbf{c}_B \in \mathbb{G}_q^m$
  - a **productArgument** ▷ See algorithm 5.18
  - a **multiExponentiationArgument** ▷ See algorithm 5.15
- The number of rows to use for ciphertext matrices  $m \in \mathbb{N}^*$
- The number of columns to use for ciphertext matrices  $n \in \mathbb{N}^*$

**Ensure:**  $N = mn$

---

**Operation:**

- 1:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, \vec{C}, \vec{C}', \mathbf{c}_A))$
  - 2:  $y \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(\mathbf{c}_B, p, q, \mathbf{pk}, \mathbf{ck}, \vec{C}, \vec{C}', \mathbf{c}_A))$
  - 3:  $z \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}("1", \mathbf{c}_B, p, q, \mathbf{pk}, \mathbf{ck}, \vec{C}, \vec{C}', \mathbf{c}_A))$  ▷ Both  $\vec{C}$  and  $\vec{C}'$  are passed as vectors
  - 4:  $\text{Zneg} \leftarrow \text{Transpose}(\text{ToMatrix}(\{-z\}_{i=1}^N, m, n))$  ▷ Vector of length  $N$ , with all values being  $q - z$ , see algorithm 5.14 and algorithm 5.13
  - 5:  $\mathbf{c}_{-z} \leftarrow \text{GetCommitmentMatrix}(\text{Zneg}, \vec{0}, \mathbf{ck})$  ▷ See algorithm 5.8
  - 6:  $\mathbf{c}_D \leftarrow \mathbf{c}_A^y \mathbf{c}_B$
  - 7:  $b \leftarrow \prod_{i=1}^N y^i + x^i - z$
  - 8:  $\mathbf{pStatement} \leftarrow (\mathbf{c}_D \mathbf{c}_{-z}, b)$
  - 9:  $\text{productVerif} \leftarrow \text{VerifyProductArgument}(\mathbf{pStatement}, \text{productArgument})$  ▷ See algorithm 5.19
  - 10:  $\vec{x} \leftarrow \{x^i\}_{i=0}^{N-1}$
  - 11:  $C \leftarrow \text{GetCiphertextVectorExponentiation}(\vec{C}, \vec{x})$  ▷ See algorithm 4.6
  - 12:  $\mathbf{mStatement} \leftarrow (\text{ToMatrix}(\vec{C}', m, n), C, \mathbf{c}_B)$  ▷ See algorithm 5.13
  - 13:  $\text{multiVerif} \leftarrow \text{VerifyMultiExponentiationArgument}(\mathbf{mStatement}, \text{multiExponentiationArgument})$  ▷ See algorithm 5.16
  - 14: **if**  $\text{productVerif} \wedge \text{multiVerif}$  **then**
  - 15:     **return**  $\top$
  - 16: **else**
  - 17:     **return**  $\perp$
  - 18: **end if**
- 

**Output:**

The result of the verification:  $\top$  if the verification is successful,  $\perp$  otherwise.

Test values for the algorithm 5.12 are provided in the attached [verify-shuffle-argument.json](#) file.

---

One of the key features of Bayer-Groth's[1] minimal shuffle argument is the transformation of a vector of ciphertexts into a  $m \times n$  matrix, by means of which a prover's computation can be optimized. Therefore, the ciphertexts, received as a vector, need to be organized into a matrix. This will be achieved by setting  $M_{i,j} = \vec{v}_{i+mj}$ . Similarly, the exponents in the matrices  $A$  and  $B$  need to be arranged into matrices so that the other algorithms get the expected values. However, since exponents' matrices have their dimensions transposed with respect to the ciphertexts, we obtain  $M_{i,j} = \vec{v}_{mi+j}$ .

For completeness, we describe below the operations of organizing the elements of a vector into a matrix and the transposition of a matrix.

---

**Algorithm 5.13 ToMatrix:** convert a vector of elements to a  $m \times n$  matrix

---

**Input:**

- a vector of elements  $\vec{v} \in \mathbb{D}^N$
- the number of requested rows  $m \in \mathbb{N}^*$
- the number of requested columns  $n \in \mathbb{N}^*$

**Ensure:**  $N = mn$

---

**Operation:**

- 1: **for**  $i \in [0, m)$  **do**
  - 2:     **for**  $j \in [0, n)$  **do**
  - 3:          $M_{i,j} \leftarrow \vec{v}_{i+mj}$
  - 4:     **end for**
  - 5: **end for**
- 

**Output:**

The matrix  $M = (M_{i,j})_{i,j=0}^{m,n} \in \mathbb{D}^{m \times n}$

---



---

**Algorithm 5.14 Transpose:** transpose a  $m \times n$  matrix to a  $n \times m$  matrix

---

**Input:**

- a matrix of elements  $M \in \mathbb{D}^{m \times n}$
- 

**Operation:**

- 1: **for**  $i \in [0, n)$  **do**
  - 2:     **for**  $j \in [0, m)$  **do**
  - 3:          $N_{i,j} \leftarrow M_{j,i}$
  - 4:     **end for**
  - 5: **end for**
- 

**Output:**

The matrix  $N = (N_{i,j})_{i,j=0}^{n,m} \in \mathbb{D}^{n \times m}$

---

### 5.3.2 Multi-Exponentiation Argument

Given ciphertexts  $C_{0,0}, \dots, C_{m-1,n-1}$  and  $C$ , each  $\in \mathbb{H}_l$ , the algorithm below generates an argument of knowledge of the openings to the commitments  $\vec{c}_A$  to  $A = \{a_{i,j}\}_{i,j=1}^{n,m}$  such that

$$C = \text{GetCiphertext}(\vec{l}, \rho, \mathbf{pk}) \cdot \prod_{i=0} \vec{C}_i^{\vec{a}_{i+1}}$$

$$\vec{c}_A = \text{GetCommitmentMatrix}(A, \vec{r}, \mathbf{ck})$$

where  $\vec{C}_i = (C_{i,0}, \dots, C_{i,n-1})$  and  $\vec{a}_j = (a_{1,j}, \dots, a_{n,j})^T$ , that is  $\vec{C}_i$  refers to the  $i^{th}$  row of the matrix, whereas  $\vec{a}_j$  refers to the  $j^{th}$  column. Furthermore, we use 0-based indexing for  $C$  here, which is consistent with the rest of this document, but 1-based indexing for  $a$  above, as well as  $\vec{a}$  and  $\mathbf{r}$  below, allowing for the generation of  $\vec{a}_0$  and  $r_0$  within the pseudo-code.

---

**Algorithm 5.15** GetMultiExponentiationArgument: Compute a multi-exponentiation argument

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$   
 A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

The statement composed of  
 - ciphertext matrix  $(\vec{C}_0, \dots, \vec{C}_{m-1}) \in (\mathbb{H}_l)^{m \times n}$  s.t.  $l \leq k$  ▷  $\vec{C}_i$  refers to the  $i^{th}$  row  
 - ciphertext  $C \in \mathbb{H}_l$   
 - commitment vector  $\vec{c}_A \in \mathbb{G}_q^m$   
 The witness composed of  
 - matrix  $A = (\vec{a}_1, \dots, \vec{a}_m) \in \mathbb{Z}_q^{n \times m}$  s.t.  $n \leq k$  ▷  $\vec{a}_j$  refers to the  $j^{th}$  column  
 - exponents  $\mathbf{r} = (r_1, \dots, r_m) \in \mathbb{Z}_q^m$   
 - exponent  $\rho \in \mathbb{Z}_q$

**Ensure:**  $C = \text{GetCiphertext}(\vec{\mathbf{I}}, \rho, \mathbf{pk}) \cdot \prod_{i=0}^{m-1} \vec{C}_i^{\vec{a}_{i+1}}$  ▷ Vector of 1s of length  $l$  ▷ See algorithm 4.4, algorithm 4.6, algorithm 4.7

**Ensure:**  $\vec{c}_A = \text{GetCommitmentMatrix}(A, \vec{\mathbf{r}}, \mathbf{ck})$

---

**Operation:**

- 1:  $\vec{a}_0 \leftarrow \text{GenRandomVector}(q, n)$  ▷ See algorithm 3.4
- 2:  $r_0 \leftarrow \text{GenRandomInteger}(q)$  ▷ See algorithm 3.1
- 3:  $(b_0, \dots, b_{2m-1}) \leftarrow \text{GenRandomVector}(q, 2m)$
- 4:  $(s_0, \dots, s_{2m-1}) \leftarrow \text{GenRandomVector}(q, 2m)$
- 5:  $(\tau_0, \dots, \tau_{2m-1}) \leftarrow \text{GenRandomVector}(q, 2m)$
- 6:  $b_m \leftarrow 0$
- 7:  $s_m \leftarrow 0$
- 8:  $\tau_m \leftarrow \rho$  ▷ Ensuring  $c_{B_m} = \text{GetCommitment}(0, 0, \mathbf{ck})$  and
- $\text{GetCiphertext}(\vec{g}^{b_m}, \tau_m, \mathbf{pk}) = \text{GetCiphertext}(\vec{\mathbf{I}}, \rho, \mathbf{pk})$
- 9:  $c_{A_0} \leftarrow \text{GetCommitment}(\vec{a}_0, r_0, \mathbf{ck})$  ▷ See algorithm 5.7
- 10:  $(D_0, \dots, D_{2m-1}) \leftarrow \text{GetDiagonalProducts}((\vec{C}_0, \dots, \vec{C}_{m-1}), (\vec{a}_0, \dots, \vec{a}_m))$  ▷ See algorithm 5.17
- 11: **for**  $k \in [0, 2m)$  **do**
- 12:    $c_{B_k} \leftarrow \text{GetCommitment}((b_k), s_k, \mathbf{ck})$
- 13:    $E_k \leftarrow \text{GetCiphertext}(\vec{g}^{b_k}, \tau_k, \mathbf{pk}) \cdot D_k$  ▷ See algorithm 4.4, we take a vector of messages of length  $l$  each having value  $g^{b_k}$
- 14: **end for**
- 15:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, (\vec{C}_i)_{i=0}^{m-1}, C, \vec{c}_A, c_{A_0}, (c_{B_k})_{k=0}^{2m-1}, (E_k)_{k=0}^{2m-1}))$  ▷ All operations below are performed modulo  $q$
- 16:  $\vec{a} \leftarrow \vec{a}_0 + \sum_{i=1}^m x^i \vec{a}_i$
- 17:  $r \leftarrow r_0 + \sum_{i=1}^m x^i r_i$
- 18:  $b \leftarrow b_0 + \sum_{k=1}^{2m-1} x^k b_k$
- 19:  $s \leftarrow s_0 + \sum_{k=1}^{2m-1} x^k s_k$
- 20:  $\tau \leftarrow \tau_0 + \sum_{k=1}^{2m-1} x^k \tau_k$

---

**Output:**

The argument  $(c_{A_0}, (c_{B_k})_{k=0}^{2m-1}, (E_k)_{k=0}^{2m-1}, \vec{a}, r, b, s, \tau) \in \mathbb{G}_q \times \mathbb{G}_q^{2m} \times \mathbb{H}_l^{2m} \times \mathbb{Z}_q^n \times \mathbb{Z}_q \times \mathbb{Z}_q \times \mathbb{Z}_q \times \mathbb{Z}_q$

---

In the following pseudo-code algorithm, we verify that a provided Multi-Exponentiation argument adequately supports the corresponding statement.

---

**Algorithm 5.16** VerifyMultiExponentiationArgument: Verify a multi-exponentiation argument

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$
- A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

- The statement composed of
    - ciphertext matrix  $(\vec{C}_0, \dots, \vec{C}_{m-1}) \in (\mathbb{H}_l)^{m \times n}$  ▷  $\vec{C}_i$  refers to the  $i^{th}$  row
    - ciphertext  $C \in \mathbb{H}_l$
    - commitment vector  $\vec{c}_A = (c_{A_1}, \dots, c_{A_m}) \in \mathbb{G}_q^m$
  - The argument composed of
    - the commitment  $c_{A_0} \in \mathbb{G}_q$
    - the commitment vector  $\mathbf{c}_B = (c_{B_0}, \dots, c_{B_{2m-1}}) \in \mathbb{G}_q^{2m}$
    - the ciphertext vector  $\mathbf{E} = (E_0, \dots, E_{2m-1}) \in \mathbb{H}_l^{2m}$
    - the vector of exponents  $\vec{a} = (a_0, \dots, a_{n-1}) \in \mathbb{Z}_q^n$
    - the exponent  $r \in \mathbb{Z}_q$
    - the exponent  $b \in \mathbb{Z}_q$
    - the exponent  $s \in \mathbb{Z}_q$
    - the exponent  $\tau \in \mathbb{Z}_q$
- 

**Operation:**

- 1:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, \{\vec{C}_i\}_{i=0}^{m-1}, C, \vec{c}_A, c_{A_0}, \{c_{B_k}\}_{k=0}^{2m-1}, \{E_k\}_{k=0}^{2m-1}))$
  - 2:  $\text{verifCbm} \leftarrow c_{B_m} = 1$
  - 3:  $\text{verifEm} \leftarrow E_m = C$
  - 4:  $\text{prodCa} \leftarrow c_{A_0} \prod_{i=1}^m c_{A_i}^{x^i}$
  - 5:  $\text{commA} \leftarrow \text{GetCommitment}(\vec{a}, r, \mathbf{ck})$  ▷ See algorithm 5.7
  - 6:  $\text{verifA} \leftarrow \text{prodCa} = \text{commA}$
  - 7:  $\text{prodCb} \leftarrow c_{B_0} \prod_{k=1}^{2m-1} c_{B_k}^{x^k}$
  - 8:  $\text{commB} \leftarrow \text{GetCommitment}((b), s, \mathbf{ck})$
  - 9:  $\text{verifB} \leftarrow \text{prodCb} = \text{commB}$
  - 10:  $\text{prodE} \leftarrow E_0 \prod_{k=1}^{2m-1} E_k^{x^k}$
  - 11:  $\text{encryptedGb} \leftarrow \text{GetCiphertext}(\vec{g}^b, \tau, \mathbf{pk})$  ▷ See algorithm 4.4, we take a vector of messages of length  $l$  each having value  $g^b$
  - 12:  $\text{prodC} \leftarrow \prod_{i=0}^{m-1} \text{GetCiphertextVectorExponentiation}(\vec{C}_i, x^{(m-i)-1} \vec{a})$  ▷ See algorithm 4.6
  - 13:  $\text{verifEC} \leftarrow \text{prodE} = \text{GetCiphertextProduct}(\text{encryptedGb}, \text{prodC})$  ▷ See algorithm 4.7
  - 14: **if**  $\text{verifCbm} \wedge \text{verifEm} \wedge \text{verifA} \wedge \text{verifB} \wedge \text{verifEC}$  **then**
  - 15:     **return**  $\top$
  - 16: **else**
  - 17:     **return**  $\perp$
  - 18: **end if**
- 

**Output:**

The result of the verification:  $\top$  if the verification is successful,  $\perp$  otherwise.

Test values for the algorithm 5.16 are provided in the attached [verify-multiexp-argument.json](#) file.

---

---

**Algorithm 5.17** GetDiagonalProducts: Compute the products of the diagonals of a ciphertext matrix

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$

**Input:**

- Ciphertext matrix  $C = (\vec{C}_0, \dots, \vec{C}_{m-1}) \in (\mathbb{H}_l)^{m \times n}$   $\triangleright \vec{C}_i$  refers to the  $i^{th}$  row
  - Exponent matrix  $A = (\vec{a}_0, \dots, \vec{a}_m) \in \mathbb{Z}_q^{n \times (m+1)}$   $\triangleright \vec{a}_j$  refers to the  $j^{th}$  column
- 

**Operation:**

- 1: **for**  $k \in [0, 2m)$  **do**
  - 2:    $d_k \leftarrow \text{GetCiphertext}(\vec{1}, 0, \mathbf{pk})$   $\triangleright$  Vector of messages of length  $l$ , each with value 1
  - 3:   **if**  $k < m$  **then**
  - 4:     lowerbound  $\leftarrow m - k - 1$
  - 5:     upperbound  $\leftarrow m$
  - 6:   **else**
  - 7:     lowerbound  $\leftarrow 0$
  - 8:     upperbound  $\leftarrow 2m - k$
  - 9:   **end if**
  - 10:   **for**  $i \in [\text{lowerbound}, \text{upperbound})$  **do**
  - 11:      $j \leftarrow k - m + i + 1$
  - 12:      $d_k \leftarrow \text{GetCiphertextProduct}(d_k, \text{GetCiphertextVectorExponentiation}(\vec{C}_i, \vec{a}_j))$   $\triangleright$
  - 13:     See algorithm 4.7 and algorithm 4.6
  - 13:   **end for**
  - 14: **end for**
- 

**Output:**

- Diagonal products  $D = (d_0, \dots, d_{2m-1}) \in \mathbb{H}_l^{2m}$
-

### 5.3.3 Product Argument

The following algorithm provides an argument that a set of committed values have a particular product.

More precisely, given commitments  $\vec{c}_A = (c_{A_0}, \dots, c_{A_m})$  to  $A = \{a_{i,j}\}_{i,j=0}^{n-1,m-1}$  and a value  $b$ , we want to give an argument of knowledge for  $\prod_{i=0}^{n-1} \prod_{j=0}^{m-1} a_{i,j} = b$ .

We will first compute a commitment  $c_b$  as follows:

$$c_b = \text{GetCommitment}\left(\left(\prod_{j=0}^{m-1} a_{0,j}, \dots, \prod_{j=0}^{m-1} a_{n-1,j}\right), s, \mathbf{ck}\right)$$

We will then give an argument that  $c_b$  is correct, using a Hadamard argument (see section 5.3.4), showing that the values committed in  $c_b$  are indeed the result of the Hadamard product of the values committed in  $c_A$ . Additionally, we will show that the value  $b$  is the product of the values committed in  $c_b$ , using a Single Value Product Argument (see section 5.3.6).

If the number of ciphertexts to be shuffled is prime and they cannot be arranged into a matrix,  $m = 1$  and  $n = N$ , the Hadamard Product is trivially equal to the first (and only) column of the matrix and we can omit the Hadamard argument, calling the Single Value Product argument directly.



---

**Algorithm 5.18** GetProductArgument: Computes a Product Argument

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$   
 A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

The statement composed of  
 - commitments  $\vec{c}_A = (c_{A_1}, \dots, c_{A_m}) \in \mathbb{G}_q^m$   
 - the product  $b \in \mathbb{Z}_q$   
 The witness composed of  
 - the matrix  $A \in \mathbb{Z}_q^{n \times m}$   
 - the exponents  $\vec{r} \in \mathbb{Z}_q^m$

**Ensure:**  $\vec{c}_A = \text{GetCommitmentMatrix}(A, \vec{r}, \mathbf{ck})$

▷ See algorithm 5.8

**Ensure:**  $b = \prod_{i=0}^{n-1} \prod_{j=0}^{m-1} a_{i,j} \mod q$

---

**Operation:**

```

1: if  $m > 1$  then
2:    $s \leftarrow \text{GenRandomInteger}(q)$ 
3:   for  $i \in [0, n)$  do
4:      $b_i \leftarrow \prod_{j=0}^{m-1} a_{i,j}$ 
5:   end for
6:    $c_b \leftarrow \text{GetCommitment}((b_0, \dots, b_{n-1}), s, \mathbf{ck})$ 
7:    $\mathbf{hStatement} \leftarrow (\vec{c}_A, c_b)$ 
8:    $\mathbf{hWitness} \leftarrow (A, (b_0, \dots, b_{n-1}), \vec{r}, s)$ 
9:    $\mathbf{hadamardArg} \leftarrow \text{GetHadamardArgument}(\mathbf{hStatement}, \mathbf{hWitness})$  ▷ See algorithm 5.20
10:   $\mathbf{sStatement} \leftarrow (c_b, b)$ 
11:   $\mathbf{sWitness} \leftarrow ((b_0, \dots, b_{n-1}), s)$ 
12:   $\mathbf{singleValueProdArg} \leftarrow \text{GetSingleValueProductArgument}(\mathbf{sStatement}, \mathbf{sWitness})$  ▷ See algorithm 5.25
13: else
14:   $\mathbf{sStatement} \leftarrow (c_{A_1}, b)$ 
15:   $\mathbf{sWitness} \leftarrow (\vec{a}_0, r_0)$ 
16:   $\mathbf{singleValueProdArg} \leftarrow \text{GetSingleValueProductArgument}(\mathbf{sStatement}, \mathbf{sWitness})$  ▷ See algorithm 5.25
17: end if
    
```

---

**Output:**

```

18: if  $m > 1$  then
19:    $(c_b, \mathbf{hadamardArg}, \mathbf{singleValueProdArg}) \in \mathbb{G}_q \times \text{HadamardArgument} \times \text{SingleValueProductArgument}$ 
20:    $\mathbf{singleValueProdArg}$ 
    
```

▷ See algorithm 5.20 and algorithm 5.25 for the domains  
 ▷ See algorithm 5.25 for the domain

---

In the following pseudo-code algorithm, we verify if a provided Product argument supports the corresponding statement.

---

**Algorithm 5.19** VerifyProductArgument: Verify a Product argument

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$
- A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

- The statement composed of
    - commitments  $\vec{c}_A = (c_{A_1}, \dots, c_{A_m}) \in \mathbb{G}_q^m$
    - the product  $b \in \mathbb{Z}_q$
  - The argument composed of
    - the commitment  $c_b \in \mathbb{G}_q$  ▷ omitted if  $m = 1$
    - a hadamardArg  $\in \mathbb{G}_q^{m+1} \times (\mathbb{G}_q \times \mathbb{G}_q \times \mathbb{G}_q^{2m+1} \times \mathbb{Z}_q^n \times \mathbb{Z}_q^n \times \mathbb{Z}_q \times \mathbb{Z}_q \times \mathbb{Z}_q)$  ▷ omitted if  $m = 1$
    - a singleValueProductArg  $\in \mathbb{G}_q \times \mathbb{G}_q \times \mathbb{G}_q \times \mathbb{Z}_q^n \times \mathbb{Z}_q^n \times \mathbb{Z}_q \times \mathbb{Z}_q$
- 

**Operation:**

```

1: if  $m > 1$  then
2:   hStatement  $\leftarrow (\vec{c}_A, c_b)$ 
3:   sStatement  $\leftarrow (c_b, b)$ 
4:   if VerifyHadamardArgument(hStatement, hadamardArg) ∧
5:   VerifySingleValueProductArgument(sStatement, singleValueProductArg) then
6:     return  $\top$ 
7:   else
8:     return  $\perp$ 
9:   end if
10: else
11:   sStatement  $\leftarrow (c_{A_1}, b)$ 
12:   if VerifySingleValueProductArgument(sStatement, singleValueProductArg) then
13:     return  $\top$ 
14:   else
15:     return  $\perp$ 
16:   end if
17: end if

```

---

**Output:**

The result of the verification:  $\top$  if the verification is successful,  $\perp$  otherwise.

Test values for the algorithm 5.19 are provided in the attached [verify-p-argument.json](#) file.

---

### 5.3.4 Hadamard Argument

The operations given in the algorithm below are more readable using vector notation. That is, we note  $\vec{a}$  for the vector  $(a_0, \dots, a_{n-1}) \in \mathbb{Z}_q^n$ . By extension, we denote matrix  $a_{0,0}, \dots, a_{n-1,m-1}$  as  $\vec{a}_0, \dots, \vec{a}_{m-1}$  where each vector corresponds to a column of the matrix.

In the following algorithm, we generate an argument of knowledge of the openings  $\vec{a}_0, \dots, \vec{a}_{m-1}$  and  $\vec{b}$  to the commitments  $\mathbf{c}_A$  and  $c_b$ , such that:

$$\begin{aligned} \mathbf{c}_A &= \text{GetCommitmentMatrix}((\vec{a}_0, \dots, \vec{a}_{m-1}), \mathbf{r}, \mathbf{ck}) \\ c_b &= \text{GetCommitment}((b_0, \dots, b_{n-1}), s, \mathbf{ck}) \\ b_i &= \prod_{j=0}^{m-1} a_{i,j} \text{ for } i = 0, \dots, n-1 \end{aligned}$$

where the product in the last line matches the entry-wise product, also known as Hadamard product.

The subsequent pseudo-code algorithm verifies if a provided Hadamard argument supports the corresponding statement.

---

**Algorithm 5.20** GetHadamardArgument: Computes a Hadamard Argument

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$   
 A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

The statement composed of  
 - commitment  $\mathbf{c}_A = (c_{A_0}, \dots, c_{A_{m-1}}) \in \mathbb{G}_q^m$   
 - commitment  $c_b \in \mathbb{G}_q$   
 The witness composed of  
 - matrix  $A = (\vec{a}_0, \dots, \vec{a}_{m-1}) \in \mathbb{Z}_q^{n \times m}$  s.t.  $n \leq k$   
 - vector  $\mathbf{b} \in \mathbb{Z}_q^n$   
 - exponents  $\mathbf{r} = (r_0, \dots, r_{m-1}) \in \mathbb{Z}_q^m$   
 - exponent  $s \in \mathbb{Z}_q$

**Ensure:**  $m \geq 2$

▷ Hadamard product only makes sense for  $m \geq 2$

**Ensure:**  $\mathbf{c}_A = \text{GetCommitmentMatrix}(\vec{a}_0, \dots, \vec{a}_{m-1}, \mathbf{r}, \mathbf{ck})$

▷ See algorithm 5.8

**Ensure:**  $c_b = \text{GetCommitment}((b_0, \dots, b_{n-1}), s, \mathbf{ck})$

▷ See algorithm 5.7

**Ensure:**  $\vec{b} = \prod_{j=0}^{m-1} \vec{a}_j$

▷ Uses the Hadamard product, ie  $b_i = \prod_{j=0}^{m-1} a_{i,j}$

---

**Operation:**

```

1: for  $j \in [0, m)$  do
2:    $\vec{b}_j \leftarrow \prod_{i=0}^j \vec{a}_i$                                 ▷ Which implies that  $\vec{b}_0 = \vec{a}_0$  and  $\vec{b}_{m-1} = \vec{b}$ 
3: end for
4:  $s_0 \leftarrow r_0$                                        ▷ Thus ensuring that  $\text{GetCommitment}(\vec{b}_0, s_0, \mathbf{ck}) = c_{A_0}$ 
5: if  $m > 2$  then
6:    $(s_1, \dots, s_{m-2}) \leftarrow \text{GenRandomVector}(q, m-2)$ 
7: end if                                                  ▷ See algorithm 3.4
8:  $s_{m-1} \leftarrow s$                                     ▷ Thus ensuring that  $\text{GetCommitment}(\vec{b}_{m-1}, s_{m-1}, \mathbf{ck}) = c_b$ 
9:  $c_{B_0} \leftarrow c_{A_0}$ 
10: for  $j \in [1, m-1)$  do
11:    $c_{B_j} \leftarrow \text{GetCommitment}(\vec{b}_j, s_j, \mathbf{ck})$ 
12: end for
13:  $c_{B_{m-1}} \leftarrow c_b$ 
14:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, \mathbf{c}_A, c_b, (c_{B_0}, \dots, c_{B_{m-1}})))$ 
15:  $y \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}("1", p, q, \mathbf{pk}, \mathbf{ck}, \mathbf{c}_A, c_b, (c_{B_0}, \dots, c_{B_{m-1}})))$ 
    ▷ Use  $y$  to define  $\star : \mathbb{Z}_q^n \times \mathbb{Z}_q^n \mapsto \mathbb{Z}_q$ , see algorithm 5.10
    ▷ All exponentiations of  $x$  below are performed modulo  $q$ 

16: for  $i \in [0, m-1)$  do
17:    $\vec{d}_i = x^{i+1} \vec{b}_i$ 
18:    $c_{D_i} = c_{B_i}^{x^{i+1}}$ 
19:    $t_i = x^{i+1} s_i$ 
20: end for
21:  $\vec{d} \leftarrow \sum_{i=1}^{m-1} x^i \vec{b}_i$ 
22:  $c_D \leftarrow \prod_{i=1}^{m-1} c_{B_i}^{x^i}$ 
23:  $t \leftarrow \sum_{i=1}^{m-1} x^i s_i$ 
24:  $-\vec{1} \leftarrow (q-1, \dots, q-1) \in \mathbb{Z}_q^n$ 
25:  $c_{-1} \leftarrow \text{GetCommitment}(-\vec{1}, 0, \mathbf{ck})$ 
26:  $\text{statement} \leftarrow ((c_{A_1}, \dots, c_{A_{m-1}}, c_{-1}), (c_{D_0}, \dots, c_{D_{m-2}}, c_D), y)$ 
27:  $\text{witness} \leftarrow ((\vec{a}_1, \dots, \vec{a}_{m-1}, -\vec{1}), (\vec{d}_0, \dots, \vec{d}_{m-2}, \vec{d}), (r_1, \dots, r_{m-1}, 0), (t_0, \dots, t_{m-2}, t))$ 
28:  $\text{zeroArg} \leftarrow \text{GetZeroArgument}(\text{statement}, \text{witness})$ 
    ▷ See algorithm 5.22
    ▷ Provide an argument that  $\sum_{i=0}^{m-2} \vec{a}_{i+1} \star \vec{d}_i - \vec{1} \star \vec{d} = 0$ 

```

---

**Output:**

$((c_{B_0}, \dots, c_{B_{m-1}}), \text{zeroArg}) \in \mathbb{G}_q^m \times (\mathbb{G}_q \times \mathbb{G}_q \times \mathbb{G}_q^{2m+1} \times \mathbb{Z}_q^n \times \mathbb{Z}_q^n \times \mathbb{Z}_q \times \mathbb{Z}_q \times \mathbb{Z}_q)$

---

---

**Algorithm 5.21** VerifyHadamardArgument: Verifies a Hadamard Argument

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$
- A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

- The statement composed of
    - commitment  $\mathbf{c}_A = (c_{A_0}, \dots, c_{A_{m-1}}) \in \mathbb{G}_q^m$
    - commitment  $c_b \in \mathbb{G}_q$
  - The argument composed of
    - commitment vector  $\mathbf{c}_B = (c_{B_0}, \dots, c_{B_{m-1}}) \in \mathbb{G}_q^m$
    - a zero argument, composed of
      - commitment  $c_{A_0} \in \mathbb{G}_q$
      - commitment  $c_{B_m} \in \mathbb{G}_q$
      - commitment vector  $\mathbf{c}_d \in \mathbb{G}_q^{2m+1}$
      - exponent vector  $\mathbf{a}' \in \mathbb{Z}_q^n$
      - exponent vector  $\mathbf{b}' \in \mathbb{Z}_q^n$
      - exponent  $r' \in \mathbb{Z}_q$
      - exponent  $s' \in \mathbb{Z}_q$
      - exponent  $t' \in \mathbb{Z}_q$
- 

**Operation:**

- 1:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, \mathbf{c}_A, c_b, (c_{B_0}, \dots, c_{B_{m-1}})))$
  - 2:  $y \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}("1", p, q, \mathbf{pk}, \mathbf{ck}, \mathbf{c}_A, c_b, (c_{B_0}, \dots, c_{B_{m-1}})))$
  - 3: **for**  $i \in [0, m-1)$  **do**
  - 4:      $c_{D_i} \leftarrow c_{B_i}^{x^{i+1}}$
  - 5: **end for**
  - 6:  $c_D \leftarrow \prod_{i=1}^{m-1} c_{B_i}^{x^i}$
  - 7:  $-\vec{1} \leftarrow (q-1, \dots, q-1) \in \mathbb{Z}_q^n$
  - 8:  $c_{-1} \leftarrow \text{GetCommitment}(-\vec{1}, 0, \mathbf{ck})$
  - 9:  $\text{zeroStatement} \leftarrow ((c_{A_1}, \dots, c_{A_{m-1}}, c_{-1}), (c_{D_0}, \dots, c_{D_{m-2}}, c_D), y)$
  - 10:  $\text{zeroArgument} \leftarrow (c_{A_0}, c_{B_m}, \mathbf{c}_d, \mathbf{a}', \mathbf{b}', r', s', t')$
  - 11: **if**  $c_{B_0} = c_{A_0} \wedge c_{B_{m-1}} = c_b \wedge \text{VerifyZeroArgument}(\text{zeroStatement}, \text{zeroArgument})$  **then**  
      $\triangleright$  See algorithm 5.23  
     **return**  $\top$
  - 12: **else**  
     **return**  $\perp$
  - 13: **end if**
- 

**Output:**

The result of the verification:  $\top$  if the verification is successful,  $\perp$  otherwise.

Test values for the algorithm 5.21 are provided in the attached [verify-h-argument.json](#) file.

---

### 5.3.5 Zero Argument

In the following algorithm, we generate an argument of knowledge of the values  $\mathbf{a}_1, \mathbf{b}_0, \dots, \mathbf{a}_m, \mathbf{b}_{m-1}$  such that  $\sum_{i=1}^m \mathbf{a}_i \star \mathbf{b}_{i-1} = 0$ .

---

#### Algorithm 5.22 GetZeroArgument: Computes a Zero Argument

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$   
 A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

The statement composed of  
 - commitments  $\mathbf{c}_A \in \mathbb{G}_q^m$   
 - commitments  $\mathbf{c}_B \in \mathbb{G}_q^m$   
 - the value  $y \in \mathbb{Z}_q$  defining the bilinear mapping  $\star$  ▷ See algorithm 5.10  
 The witness composed of  
 - matrix  $A = (\vec{a}_1, \dots, \vec{a}_m) \in \mathbb{Z}_q^{n \times m}$  ▷ The  $\vec{a}_i$  values correspond to the columns of A  
 - matrix  $B = (\vec{b}_0, \dots, \vec{b}_{m-1}) \in \mathbb{Z}_q^{n \times m}$  ▷ The  $\vec{b}_i$  values correspond to the columns of B  
 - vector of exponents  $\mathbf{r} = (r_1, \dots, r_m) \in \mathbb{Z}_q^m$   
 - vector of exponents  $\mathbf{s} = (s_0, \dots, s_{m-1}) \in \mathbb{Z}_q^m$

**Ensure:**  $\mathbf{c}_A = \text{GetCommitmentMatrix}(A, \mathbf{r}, \mathbf{ck})$  ▷ See algorithm 5.8

**Ensure:**  $\mathbf{c}_B = \text{GetCommitmentMatrix}(B, \mathbf{s}, \mathbf{ck})$  ▷ See algorithm 5.8

**Ensure:**  $\sum_{i=1}^m \mathbf{a}_i \star \mathbf{b}_{i-1} = 0$

---

**Operation:**

```

1:  $\vec{a}_0 \leftarrow \text{GenRandomVector}(q, n)$  ▷ See algorithm 3.4
2:  $\vec{b}_m \leftarrow \text{GenRandomVector}(q, n)$ 
3:  $r_0 \leftarrow \text{GenRandomInteger}(q)$ 
4:  $s_m \leftarrow \text{GenRandomInteger}(q)$ 
5:  $c_{A_0} \leftarrow \text{GetCommitment}(\vec{a}_0, r_0, \mathbf{ck})$ 
6:  $c_{B_m} \leftarrow \text{GetCommitment}(\vec{b}_m, s_m, \mathbf{ck})$ 
7:  $\mathbf{d} = (d_0, \dots, d_{2m}) \leftarrow \text{ComputeDVector}((\vec{a}_0, \dots, \vec{a}_m), (\vec{b}_0, \dots, \vec{b}_m), y)$  ▷ See algorithm 5.24
8:  $\mathbf{t} \leftarrow \text{GenRandomVector}(q, 2m + 1)$ 
9:  $t_{m+1} \leftarrow 0$ 
10:  $\mathbf{c}_d \leftarrow \text{GetCommitmentVector}((d_0, \dots, d_{2m}), \mathbf{t}, \mathbf{ck})$  ▷ See algorithm 5.9
11:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, c_{A_0}, c_{B_m}, \mathbf{c}_d, \mathbf{c}_B, \mathbf{c}_A))$  ▷ See algorithm 2.7 and algorithm 3.8
▷ Below this point, all operations are performed modulo  $q$ 
12: for  $j \in [0, n)$  do
13:    $\mathbf{a}'_j \leftarrow \sum_{i=0}^m x^i \cdot \vec{a}_{j,i}$ 
14:    $\mathbf{b}'_j \leftarrow \sum_{i=0}^m x^{m-i} \cdot \vec{b}_{j,i}$ 
15: end for
16:  $r' \leftarrow \sum_{i=0}^m x^i \cdot r_i$ 
17:  $s' \leftarrow \sum_{i=0}^m x^{m-i} \cdot s_i$ 
18:  $t' \leftarrow \sum_{i=0}^{2m} x^i \cdot t_i$ 
    
```

---

**Output:**

The argument  $(c_{A_0}, c_{B_m}, \mathbf{c}_d, \mathbf{a}', \mathbf{b}', r', s', t') \in \mathbb{G}_q \times \mathbb{G}_q \times \mathbb{G}_q^{2m+1} \times \mathbb{Z}_q^n \times \mathbb{Z}_q^n \times \mathbb{Z}_q \times \mathbb{Z}_q \times \mathbb{Z}_q$

---

In the following algorithm, we verify if a provided zero argument supports the corresponding statement. We conform to the convention of using the symbol  $\top$  for true and  $\perp$  for false.

---

**Algorithm 5.23** VerifyZeroArgument: Verifies a Zero Argument

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$   
 A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

The statement composed of  
 - commitments  $\mathbf{c}_A = (c_{A_1}, \dots, c_{A_m}) \in \mathbb{G}_q^m$   
 - commitments  $\mathbf{c}_B = (c_{B_0}, \dots, c_{B_{m-1}}) \in \mathbb{G}_q^m$   
 - the value  $y \in \mathbb{Z}_q$  defining the bilinear mapping  $\star$  ▷ See algorithm 5.10  
 The argument composed of  
 - the commitment  $c_{A_0} \in \mathbb{G}_q$   
 - the commitment  $c_{B_m} \in \mathbb{G}_q$   
 - the commitment vector  $\mathbf{c}_d = (c_{d_0}, \dots, c_{d_{2m}}) \in \mathbb{G}_q^{2m+1}$   
 - the exponent vector  $\mathbf{a}' \in \mathbb{Z}_q^n$   
 - the exponent vector  $\mathbf{b}' \in \mathbb{Z}_q^n$   
 - the exponent  $r' \in \mathbb{Z}_q$   
 - the exponent  $s' \in \mathbb{Z}_q$   
 - the exponent  $t' \in \mathbb{Z}_q$

---

**Operation:**

```

1:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, c_{A_0}, c_{B_m}, \mathbf{c}_d, \mathbf{c}_B, \mathbf{c}_A))$ 
2:  $\text{verifCd} \leftarrow c_{d_{m+1}} = 1$ 
3:  $\text{prodCa} \leftarrow \prod_{i=0}^m c_{A_i}^{x^i}$  ▷ The exponentiations of  $x$  are computed modulo  $q$ , whereas the product and the
   exponentiations of commitments are computed modulo  $p$ 
4:  $\text{commA} \leftarrow \text{GetCommitment}(\mathbf{a}', r', \mathbf{ck})$ 
5:  $\text{verifA} \leftarrow \text{prodCa} = \text{commA}$ 
6:  $\text{prodCb} \leftarrow \prod_{i=0}^m c_{B_{m-i}}^{x^i}$  ▷ The exponentiations of  $x$  are computed modulo  $q$ , whereas the product and the
   exponentiations of commitments are computed modulo  $p$ 
7:  $\text{commB} \leftarrow \text{GetCommitment}(\mathbf{b}', s', \mathbf{ck})$ 
8:  $\text{verifB} \leftarrow \text{prodCb} = \text{commB}$ 
9:  $\text{prodCd} \leftarrow \prod_{i=0}^{2m} c_{d_i}^{x^i}$  ▷ The exponentiations of  $x$  are computed modulo  $q$ , whereas the product and the
   exponentiations of commitments are computed modulo  $p$ 
10:  $\text{prod} \leftarrow \mathbf{a}' \star \mathbf{b}'$  ▷ Using algorithm 5.10 with value  $y$ 
11:  $\text{commD} \leftarrow \text{GetCommitment}((\text{prod}), t', \mathbf{ck})$ 
12:  $\text{verifD} \leftarrow \text{prodCd} = \text{commD}$ 
13: if  $\text{verifCd} \wedge \text{verifA} \wedge \text{verifB} \wedge \text{verifD}$  then
   return  $\top$ 
14: else
   return  $\perp$ 
15: end if
```

---

**Output:**

The result of the verification:  $\top$  if the verification is successful,  $\perp$  otherwise.

Test values for the algorithm 5.23 are provided in the attached [verify-za-argument.json](#) file.

---

---

**Algorithm 5.24** ComputeDVector: Compute the vector  $\mathbf{d}$  for the algorithm 5.22

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$

**Input:**

First matrix  $A = (\vec{a}_0, \dots, \vec{a}_m) \in \mathbb{Z}_q^{n \times (m+1)}$   
 Second matrix  $B = (\vec{b}_0, \dots, \vec{b}_m) \in \mathbb{Z}_q^{n \times (m+1)}$   
 Value  $y \in \mathbb{Z}_q$

---

**Operation:**

```

1: for  $k \in [0, 2m]$  do
2:    $d_k \leftarrow 0$ 
3:   for  $i \in [\max(0, k - m), m]$  do
4:      $j \leftarrow (m - k) + i$ 
5:     if  $j > m$  then
6:       break from loop and proceed with next  $k$ 
7:     end if
8:      $d_k \leftarrow d_k + \vec{a}_i \star \vec{b}_j$  ▷ See algorithm 5.10, addition is modulo  $q$ 
9:   end for
10: end for
    
```

---

**Output:**

$\mathbf{d} = (d_0, \dots, d_{2m}) \in \mathbb{Z}_q^{2m+1}$

---



### 5.3.6 Single Value Product Argument

In the following algorithm we generate an argument of knowledge of the opening  $(\mathbf{a}, r)$  where  $\mathbf{a} = (a_0, \dots, a_{n-1})$  s.t.  $c_a = \text{GenCommitment}(\mathbf{a}, r)$  and  $b = \prod_{i=0}^{n-1} a_i \mod q$ .

---

**Algorithm 5.25** GetSingleValueProductArgument: Computes a Single Value Product Argument

---

**Context:**

Group modulus  $p \in \mathbb{P}$   
 Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$   
 Group generator  $g \in \mathbb{G}_q$   
 A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$   
 A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

The statement composed of  
 - commitment  $c_a \in \mathbb{G}_q$   
 - the product  $b \in \mathbb{Z}_q$   
 The witness composed of  
 - vector  $\mathbf{a} = (a_0, \dots, a_{n-1}) \in \mathbb{Z}_q^n$   
 - the randomness  $r \in \mathbb{Z}_q$

**Ensure:**  $n \geq 2$

**Ensure:**  $c_a = \text{GetCommitment}(\mathbf{a}, r, \mathbf{ck})$

▷ See algorithm 5.7

**Ensure:**  $b = \prod_{i=0}^{n-1} a_i \mod q$

---

**Operation:**

```

1: for  $k \in [0, n)$  do
2:    $b_k \leftarrow \prod_{i=0}^k a_i \mod q$ 
3: end for
4:  $(d_0, \dots, d_{n-1}) \leftarrow \text{GenRandomVector}(q, n)$ 
5:  $r_d \leftarrow \text{GenRandomInteger}(q)$ 
6:  $\delta_0 \leftarrow d_0$ 
7: if  $n > 2$  then
8:    $(\delta_1, \dots, \delta_{n-2}) \leftarrow \text{GenRandomVector}(q, n-2)$ 
9: end if
10:  $\delta_{n-1} \leftarrow 0$ 
11:  $s_0 \leftarrow \text{GenRandomInteger}(q)$ 
12:  $s_x \leftarrow \text{GenRandomInteger}(q)$ 
13: for  $k \in [0, n-1)$  do
14:    $\delta'_k \leftarrow -\delta_k d_{k+1} \mod q$ 
15:    $\Delta_k \leftarrow \delta_{k+1} - a_{k+1} \delta_k - b_k d_{k+1} \mod q$ 
16: end for
17:  $c_d \leftarrow \text{GetCommitment}((d_0, \dots, d_{n-1}), r_d, \mathbf{ck})$ 
18:  $c_\delta \leftarrow \text{GetCommitment}((\delta'_0, \dots, \delta'_{n-2}), s_0, \mathbf{ck})$ 
19:  $c_\Delta \leftarrow \text{GetCommitment}((\Delta_0, \dots, \Delta_{n-2}), s_x, \mathbf{ck})$ 
20:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, c_\Delta, c_\delta, c_d, b, c_a))$ 
21: for  $k \in [0, n)$  do
22:    $\tilde{a}_k \leftarrow x a_k + d_k \mod q$ 
23:    $\tilde{b}_k \leftarrow x b_k + \delta_k \mod q$ 
24: end for
25:  $\tilde{r} \leftarrow x r + r_d \mod q$ 
26:  $\tilde{s} \leftarrow x s_x + s_0 \mod q$ 

```

▷ See algorithm 5.7

**Output:**

$(c_d, c_\delta, c_\Delta, (\tilde{a}_0, \dots, \tilde{a}_{n-1}), (\tilde{b}_0, \dots, \tilde{b}_{n-1}), \tilde{r}, \tilde{s}) \in \mathbb{G}_q \times \mathbb{G}_q \times \mathbb{G}_q \times \mathbb{Z}_q^n \times \mathbb{Z}_q^n \times \mathbb{Z}_q \times \mathbb{Z}_q$

---

In the following pseudo-code algorithm, we verify if a provided Single Value Product argument supports the corresponding statement.

---

**Algorithm 5.26** VerifySingleValueProductArgument: Verifies a Single Value Product Argument

---

**Context:**

- Group modulus  $p \in \mathbb{P}$
- Group cardinality  $q \in \mathbb{P}$  s.t.  $p = 2q + 1$
- Group generator  $g \in \mathbb{G}_q$
- A multi-recipient public key  $\mathbf{pk} \in (\mathbb{G}_q \setminus \{1, g\})^k$
- A commitment key  $\mathbf{ck} = (h, g_1, \dots, g_k) \in (\mathbb{G}_q \setminus \{1, g\})^{k+1}$

**Input:**

- The **statement** composed of
    - commitment  $c_a \in \mathbb{G}_q$
    - the product  $b \in \mathbb{Z}_q$
  - The **argument** composed of
    - the commitment  $c_d \in \mathbb{G}_q$
    - the commitment  $c_\delta \in \mathbb{G}_q$
    - the commitment  $c_\Delta \in \mathbb{G}_q$
    - the exponent vector  $\tilde{a} = (\tilde{a}_0, \dots, \tilde{a}_{n-1}) \in \mathbb{Z}_q^n, n \geq 2$
    - the exponent vector  $\tilde{b} = (\tilde{b}_0, \dots, \tilde{b}_{n-1}) \in \mathbb{Z}_q^n$
    - the exponent  $\tilde{r} \in \mathbb{Z}_q$
    - the exponent  $\tilde{s} \in \mathbb{Z}_q$
- 

**Operation:**

- 1:  $x \leftarrow \text{ByteArrayToInteger}(\text{RecursiveHash}(p, q, \mathbf{pk}, \mathbf{ck}, c_\Delta, c_\delta, c_d, b, c_a))$
  - 2:  $\text{prodCa} \leftarrow c_a^x c_d$
  - 3:  $\text{commA} \leftarrow \text{GetCommitment}(\tilde{a}, \tilde{r}, \mathbf{ck})$
  - 4:  $\text{verifA} \leftarrow \text{prodCa} = \text{commA}$
  - 5:  $\text{prodDelta} \leftarrow c_\Delta^x c_\delta$
  - 6: **for**  $i \in [0, n-1)$  **do**
  - 7:      $e_i \leftarrow x \tilde{b}_{i+1} - \tilde{b}_i \tilde{a}_{i+1}$
  - 8: **end for**
  - 9:  $\text{commDelta} \leftarrow \text{GetCommitment}((e_0, \dots, e_{n-2}), \tilde{s}, \mathbf{ck})$
  - 10:  $\text{verifDelta} \leftarrow \text{prodDelta} = \text{commDelta}$
  - 11:  $\text{verifB} \leftarrow \tilde{b}_0 = \tilde{a}_0 \wedge \tilde{b}_{n-1} = xb$
  - 12: **if**  $\text{verifA} \wedge \text{verifDelta} \wedge \text{verifB}$  **then**
  - 13:     **return**  $\top$
  - 13: **else**
  - 14:     **return**  $\perp$
  - 14: **end if**
- 

**Output:**

The result of the verification:  $\top$  if the verification is successful,  $\perp$  otherwise.

Test values for the algorithm 5.26 are provided in the attached [verify-svp-argument.json](#) file.

---

## Acknowledgements

We want to thank Philipp Locher, Reto Koenig, and Rolf Haenni for their review of an earlier version of the document.

## References

- [1] Stephanie Bayer and Jens Groth. Efficient Zero-Knowledge Argument for Correctness of a Shuffle. In David Pointcheval and Thomas Johansson, editors, *Advances in Cryptology – EUROCRYPT 2012*, pages 263–280, Berlin, Heidelberg, 2012. Springer Berlin Heidelberg.
- [2] Swiss Federal Chancellery. Federal Chancellery Ordinance on Electronic Voting (VEleS). <https://www.admin.ch/opc/en/classified-compilation/20132343/index.html>, July 2018.
- [3] Swiss Federal Chancellery. Technical and administrative requirements for electronic vote casting. Annex of the Federal Chancellery Ordinance on Electronic Voting 2.0. <https://www.admin.ch/opc/en/classified-compilation/20132343/index.html#app1>, July 2018.
- [4] Eidgenössisches Departement für auswärtige Angelegenheiten EDA. Swiss Political System - Direct Democracy. <https://www.eda.admin.ch/aboutswitzerland/en/home/politik/uebersicht/direkte-demokratie.html/>. Retrieved on 2020-07-15.
- [5] gfs.bern. Vorsichtige Offenheit im Bereich digitale Partizipation - Schlussbericht, 3 2020.
- [6] Oded Goldreich. *Foundations of cryptography: volume 1, basic tools*. Cambridge University Press, 2007.
- [7] Rolf Haenni. Swiss Post Public Intrusion Test: Undetectable attack against vote integrity and secrecy, 2019.
- [8] Rolf Haenni, Eric Dubuis, Reto E Koenig, and Philipp Locher. CHVote: Sixteen Best Practices and Lessons Learned. In *International Joint Conference on Electronic Voting*, pages 95–111. Springer, 2020.
- [9] Rolf Haenni, Reto E. Koenig, Philipp Locher, and Eric Dubuis. CHVote Protocol Specification, Version 3.2. Cryptology ePrint Archive, Report 2017/325, 2020. <https://eprint.iacr.org/2017/325>.
- [10] Thomas Haines, Rageev Goré, and Bhavesh Sharma. Did you mix me? Formally Verifying Verifiable Mix Nets in Electronic Voting.
- [11] Thomas Haines, Sarah Jamie Lewis, Olivier Pereira, and Vanessa Teague. How not to prove your election outcome. In *2020 IEEE Symposium on Security and Privacy (SP)*, pages 644–660. IEEE, 2020.
- [12] Simon Josefsson et al. The Base16, Base32, and Base64 Data Encodings. Technical report, RFC 4648, October, 2006.
- [13] Donald E. Knuth. *The Art of Computer Programming, Volume 2 (3rd Ed.): Seminumerical Algorithms*. Addison-Wesley Longman Publishing Co., Inc., USA, 1997.

- [14] Philipp Locher, Rolf Haenni, and Reto E Koenig. Analysis of the cryptographic implementation of the Swiss Post voting protocol, 2019.
- [15] Torben P. Pedersen. Non-interactive and information-theoretic secure verifiable secret sharing. In *CRYPTO*, pages 129–140, 1991.
- [16] Swiss Post. Protocol of the Swiss Post Voting System. Computational Proof of Complete Verifiability and Privacy. Version 0.9.8. <https://gitlab.com/swisspost-evoting/documentation/-/tree/master/Protocol>, Jan 2021.
- [17] Ben Smyth. A foundation for secret, verifiable elections. *IACR Cryptology ePrint Archive*, 2018:225, 2018.
- [18] Vanessa Teague and Olivier Pereira. Report on the SwissPost-Scytl e-voting system, trusted-server version, 2019.
- [19] Björn Terelius and Douglas Wikström. Proofs of restricted shuffles. In *International Conference on Cryptology in Africa*, pages 100–113. Springer, 2010.
- [20] Francois Yergeau. RFC3629: UTF-8, a transformation format of ISO 10646, 2003.