

Università degli Studi di Padova

DIPARTIMENTO DI MATEMATICA "TULLIO LEVI-CIVITA"

CORSO DI LAUREA MAGISTRALE IN INFORMATICA



**The advantages of the Scala language in
the context of Infrastructure as Code**

Master Thesis

Supervisor

Prof.ssa Crafa Silvia

Graduating

Cisotto Emanuele

ACADEMIC YEAR 2022-2023

Cisotto Emanuele: *The advantages of the Scala language in the context of Infrastructure as Code*, Master Thesis, © April 2023.

Dedicato alla mia famiglia, ai miei amici e a mio nonno che avrebbe voluto vedermi
raggiungere questo obiettivo
Dedicated to my family, my friends, and my grandpa who wished he had seen me
achieve this

Summary

The document describes the work done from the graduating Cisotto Emanuele, in collaboration with Zoleo Andrea, from the Kynetics Srl company. The objectives to achieve were many.

First, the study of the basics of the functioning of the Pulumi technology and the Scala language was made.

Second, a definition of a case study based on some [AWS EC2](#) resources was done. Hence, the respective implementation using Pulumi and the Typescript language has been done.

Then, after having identified the shortcomings of Pulumi with the Typescript language, a syntactic sugar for the Scala support for Pulumi has been manually coded. Such a syntactic sugar for Scala is based on the Java APIs for Pulumi.

At that point, the same case study has been implemented with the newly created Scala APIs for Pulumi.

Thus, an inspection of the Pulumi's Java libraries was made with the [JavaParser](#) library, to infer useful information about the structure of the APIs so that an automatic generation of the syntactic sugar code was possible.

Finally, the code to automatically generate all the Scala syntactic sugar code for all the AWS EC2 resources used in the case study was coded and used to generate such APIs. The generated code was eventually exported as a library so that it could be used in any Pulumi Scala project.

“If you define the problem correctly, you almost have the solution.”

— Steve Jobs

Ringraziamenti

Per iniziare, vorrei esprimere la mia gratitudine nei confronti della Prof.ssa Silvia Crafa, relatrice della mia tesi per ben una seconda volta, che ha sempre mostrato disponibilità e cortesia durante quest'ultima parte del mio percorso.

Desidero ringraziare inoltre Andrea Zoleo, che, con il considerevole tempo dedicatomi e i numerosi preziosi consigli fornitimi, mi ha assistito durante lo sviluppo della tesi.

Voglio infine ringraziare la mia famiglia e tutti i miei amici che mi sono stati vicini durante questo mio ultimo percorso accademico, risultando sempre di supporto.

Contents

1	Introduction	1
1.1	Infrastructure as Code	1
1.2	Pulumi, a second generation IaC tool	1
1.3	Scala, a promising language for Pulumi	1
1.4	The objective	2
1.5	Thesis organization	2
2	Introduction to Infrastructure as Code	5
2.1	Infrastructure as Code	5
2.1.1	What is IaC	5
	Types of approaches	5
	Methods	6
2.1.2	Advantages of IaC	6
2.1.3	Challenges of IaC	6
2.1.4	Evolution of IaC	7
	Tools designed for Serverless Applications - the first wave	7
	Serverless Infrastructure as programming language code - the second wave	7
3	Pulumi, an IaC platform	9
3.1	Introduction to Pulumi	9
3.1.1	The great advantages of Pulumi as a second generation IaC tool	9
3.2	Pulumi functioning	10
3.2.1	The stack	10
3.2.2	APIs to define the resources to be created	10
3.2.3	Creating and updating resources with Pulumi commands	10
3.2.4	Viewing resources state	11
3.2.5	Restoring resources state	11
3.3	Pulumi's Output	11
4	Scala, a modern functional and object-oriented programming lan- guage	13
4.1	Introduction to Scala	13

4.1.1	Scala, a modern functional and object oriented programming language	13
4.1.2	Object-orientation	13
4.1.3	Functional paradigm	13
4.1.4	Scala functionalities related to the work of the thesis	14
	Higher order functions and currying	14
	Pattern matching	15
	Extension methods	15
	Given and using keywords	16
	Traits	16
	Functors and monads	17
	For comprehension	18
	Union type	19
5	Study case: AWS EC2 resources generation with Pulumi	21
5.1	Amazon Web Services	21
5.1.1	AWS's EC2 module	21
5.2	Case study infrastructure overview	21
5.2.1	Components of the infrastructure	22
	VPC	23
	Subnet	23
	InternetGateway	24
	RouteTable	24
5.3	Typescript implementation of the case study	24
5.3.1	VPC resource creation	24
5.3.2	Internet gateway creation	25
5.3.3	Subnets creation	25
	pulumi.all	26
	.apply	26
5.3.4	Routing table creation	27
5.3.5	Attaching the public subnets to the internet gateway	28
5.4	Creating the resources with Pulumi	28
5.5	Destroying the resources with Pulumi	30
5.6	My Scala implementation of the case study	31
5.6.1	Structure of the Java APIs for the constructors of the resources in Pulumi	31
5.6.2	Syntactic sugar usage	32
	Vpc creation	32
	Internet gateway creation	32
	Routing table creation	33
	Subnets creation	33
	Attaching the subnets to the routing table	34
	Resources creation with pulumi up	34

5.6.3	Syntactic sugar for the constructors of the resources	35
	Correspondence between the input parameters and the user defined code used to create the VPC	36
	Vpc construction	37
	The baseOpts function	37
5.6.4	Syntactic sugar for the builders' methods	38
	Implicit conversion functions	41
5.6.5	Functor and Monad implementation for the Output type . . .	42
	Functor implementation	42
	Monad implementation	43
5.6.6	Automatic code generation for the syntactic sugar	44
	Pulumi Java APIs libraries inspection with JavaParser	44
	Raw automatic syntactic sugar code generation	46
	The automatically generated syntactic sugar code	46
6	Comparison between the languages for Pulumi and the advantages of Scala	51
6.1	Code readability in Typescript vs in Scala	51
6.1.1	Readability in Typescript	51
	Less readable code with pulumi.all and .apply	51
6.1.2	Readability in Scala	52
	Function currying	52
	Hidden builders	53
	Implicit conversion functions to get rid of Map and List construc- tors while passing a single value	53
	Readability of the Scala's for yield vs pulumi.all and .apply . .	54
6.2	Expressiveness in Typescript vs in Scala	55
6.2.1	pulumi.all and .apply vs for comprehension and monads	55
	Typescript compensate for its lack of expressiveness with the pulumi.all function	55
	Scala's expressiveness let us get rid of pulumi.all	55
7	Conclusions	57
7.1	The potential of Scala for Pulumi	57
	Glossary	59
	Bibliography	63

List of Figures

5.1	Infrastructure Architecture	22
5.2	pulumi up preview	29
5.3	pulumi up confirmed	29
5.4	pulumi destroy preview	30
5.5	pulumi destroy confirmed	30
5.6	pulumi up result with the scala implementation	35
5.7	Parameters correspondence	36
5.8	vpc methods	38
5.9	Function calls flow and parameters passing	41
5.10	Constructors generation	46
5.11	Default import	47
5.12	Generated union types	47
5.13	Implicit conversion functions	47
5.14	Generated builders' methods	48
5.15	baseOpts function and generated constructors	49
6.1	Typescript subnets creation	52
6.2	Singleton map for a parameter	53
6.3	Tuple for a parameter	54
6.4	Scala subnets creation	54

List of Tables

Chapter 1

Introduction

1.1 Infrastructure as Code

In the last decade [cloud computing](#) has grown a lot, lifting many companies from the need to setup and maintain a physical infrastructure on their own. Many cloud service providers, such as [AWS](#), [Azure](#), and [GCP](#), are a great opportunity for companies to reduce the costs and the time needed to setup a working infrastructure.

Though, the manual management of the resources on the cloud service providers still has some downsides. First, the human error can lead to misconfiguration, that results in an unavailable infrastructure. Second, a suboptimal speed for its management is achieved since it is manually managed by human operators. Finally, the financial and humanitarian costs for the company are non-negligible since some personal has to be exclusively assigned to the management of the cloud resources of the infrastructure. Infrastructure as Code is the proposed solution that is taking hold across many companies. It is the management and provisioning the cloud providers' resources through machine-readable definition files. With such an approach the aforementioned risks are erased and a much more robust, efficient, and cheap solution is provided.

1.2 Pulumi, a second generation IaC tool

The Infrastructure as Code tools are divided into 2 generations. The first one comprises tools that adopt a declarative approach based on JSON or YAML files. The second one includes tools based on actual programming languages.

The second generation has more potential since the management of the infrastructure when all the features of the programming languages are given can be more sharp and precise.

Pulumi supports already many programming languages such as Python, JavaScript, TypeScript, Go, and (partially) Java.

1.3 Scala, a promising language for Pulumi

Every language has its own features that make it a best fit to solve some problems, and a sub-optimal solution for others.

My tutor and I have identified Scala as a language with good features for the Infrastructure as Code scenario. The declarative approach nature of Pulumi is matching with the Scala's functional paradigm.

1.4 The objective

The final objective for the thesis is to understand if Scala's features are suitable to define some syntactic sugar functions to let the user use Pulumi with Scala in an intuitive way, writing concise and readable code, with expressive constructs that are instead missing in Typescript.

Furthermore, for all the resources used in the case study, an automatic generator for the Scala's syntactic sugar has to be created, to allow the user to have access to all the APIs of the those cloud resources.

1.5 Thesis organization

The content of the thesis is structured as follows:

Introduction to Infrastructure as Code Introduces the Infrastructure as Code, the various approaches, its advantages and challenges, and an overview of the evolution of the IaC tools.

Pulumi, an IaC Platform Gives an introduction to Pulumi, lists the advantages of Pulumi over the first generation of IaC tools, describes the functioning of the flow of Pulumi for creating the cloud resources and introduces the concept of the `Output` type in the Pulumi APIs, that will be a key argument for the work thesis.

Scala, a modern functional and object-oriented programming language The chapter begins with a brief introduction to the Scala language. Then, all the functionalities of the language used for the creation of the *sugarized* Scala APIs for Pulumi are presented and explained.

Study case: AWS EC2 resources generation with Pulumi First, the infrastructure of the chosen study case is presented, and all the AWS EC2 resources that has been used are introduced. Then we have the details on how the Typescript implementation has been coded. For each resource created, the code is provided and analyzed to understand its functioning. Then we have a couple of short sections that illustrate how to create and destroy the resource once the IaC code is set in place. It follows the Scala implementation, that is divided in 3 subsections:

- * A first part that defines how the personally created *sugarized* functions have been used to create the resources
- * A second section, that presents all the code of the *sugarized* APIs
- * Finally, the automatic *sugarized* code generator is presented

Comparison between the languages for Pulumi and the advantages of Scala
In this chapter the Typescript and the Scala implementations of the case study

are compared. The pros and cons of each solutions are highlighted and some final thoughts for the Scala solutions are given.

Conclusions All the conclusions that have been made about Scala for Pulumi and the work done are summarized here along a final thought about the worth to fully extend the Pulumi APIs with a Scala support.

Chapter 2

Introduction to Infrastructure as Code

An introduction to IaC. The possible approaches are presented, the advantages of using IaC, its challenges, and the evolution of the IaC with the second generation of tools

2.1 Infrastructure as Code

2.1.1 What is IaC

Infrastructure as Code is the process of managing and provisioning computer data centers through machine-readable definition files, rather than physical hardware configuration or interactive configuration tools.

The IT infrastructure managed by this process comprises both physical equipment, such as bare-metal servers, as well as virtual machines, and associated configuration resources.

The definitions may be in a version control system. The code in the definition files may use either scripts or declarative definitions, rather than maintaining the code through manual processes, but IaC more often employs declarative approaches.

Types of approaches

There are generally two approaches to IaC: declarative (functional) vs imperative (procedural). The difference between the declarative and the imperative approach is essentially *what* versus *how*. The declarative approach focuses on what the eventual target configuration should be; the imperative focuses on how the infrastructure is to be changed to meet this. The declarative approach defines the desired state and the system executes what needs to happen to achieve that desired state. Imperative defines specific commands that need to be executed in the appropriate order to end with the desired conclusion.

Methods

There are two methods of IaC: push and pull. The main difference is the manner in which the servers are told how to be configured. In the pull method, the server to be configured will pull its configuration from the controlling server. In the push method, the controlling server pushes the configuration to the destination system.

2.1.2 Advantages of IaC

The value of IaC can be broken down into three measurable categories: **cost**, **speed**, and **risk**. Cost reduction aims at helping not only the enterprise financially, but also in terms of people and effort, meaning that by removing the manual component, people are able to refocus their efforts on other enterprise tasks. Infrastructure automation enables speed through faster execution when configuring your infrastructure and aims at providing visibility to help other teams across the enterprise work quickly and more efficiently. Automation removes the risk associated with human error, like manual misconfiguration; removing this can decrease downtime and increase reliability.

Related to the risk, we could highlight the importance of the **consistency** of such an approach. Through the manual modifications to the infrastructure achieved in a solution without IaC, at some point will be extremely hard to reproduce an exact configuration since some ad-hoc steps were required whilst some others were executed in a different order. Infrastructure as Code enforces consistency by allowing users to represent infrastructure environments using code. Therefore, the deployment and modification of resources will always be consistent and idempotent (i.e. every time a specific operation gets executed, the same result will be generated).

Furthermore, IaC tools usually offer mechanisms to enhance reusability. This feature makes your code base less verbose and more readable while at the same time team members are encouraged to apply best practices.

Finally, another big advantage of IaC is collaboration. Since the infrastructure resources are defined in configuration files it means that these files can be version controlled. At any given time, the team is able to collaborate together in order to modify an environment and even be able to see the history (from commits) of an infrastructure resource. This also makes debugging much easier and accurate.

2.1.3 Challenges of IaC

While IaC offers numerous benefits, there are also several challenges that organizations must address when implementing this approach.

One of the major challenges is the adoption discrepancies that arise when integrating new frameworks with existing technology. This requires careful coordination with other teams, particularly those responsible for security and compliance, and can result in difficulties in determining where resources are being delivered, controlled, and managed. To address these issues, organizations must continually communicate and audit their IaC adoption to minimize infrastructure drift and ensure that security measures remain up to date.

Another challenge is the need for security assessment tools that can effectively evaluate the dynamic nature of IaC. Traditional security measures may require significant cycles to be integrated with IaC, and there may be a need for human checks to ensure that resources are operating correctly and being used by the appropriate applications.

Organizations may need to invest in new tools or capabilities to ensure proper control and monitoring.

The implementation of IaC also requires a high degree of technical competence, which can result in the need for new human capital. Senior executives may face challenges in continually investing in employee skills, particularly if the organization is in the early adoption phase. Outsourcing IaC services may be a viable option for organizations to improve automation processes in terms of cost and overall IT infrastructure quality.

Versioning and traceability of settings can also be a challenge when IaC is utilized widely across an organization with various teams. As IaC becomes more complex, it can be difficult to keep track of infrastructure and identify infra-drift, making it essential to implement effective version control and tracking mechanisms.

2.1.4 Evolution of IaC

Tools designed for Serverless Applications - the first wave

The foundation of IaC in the public clouds is these three cloud vendor-specific tools: AWS CloudFormation in [AWS](#), [Azure Resource Manager](#) (ARM) in [Azure](#), and [Cloud Deployment Manager](#) in [GCP](#). These are YAML or JSON based, declarative tools and have been in cloud toolboxes for a long time and require a fair amount of markup code. Tools with shortcuts or “conventions over configuration” were developed to boost productivity and make distributed microservice applications seem more like a traditional monolithic application or a framework. These tools provide best-practice defaults and enable building and testing your serverless applications locally on your machine.

Serverless Infrastructure as programming language code - the second wave

Declarative language has some limitations when there is the need to do more complex business logic than what parameters, conditions, mappings, and loops (Terraform only) allow to do. Sometimes, there is the need to use external scripting to have the work done. A programming language could address such a problem and let us get around these boundaries and limitations. This second generation tools generate the declarative markup code with the aid of a programming language, or bypass it and utilizes cloud APIs. These kind of tools with programming language support is a rising and trending approach in IaC at the moment.

Chapter 3

Pulumi, an IaC platform

An introduction to Pulumi

3.1 Introduction to Pulumi

Pulumi is a cloud engineering platform that enables developers and infrastructure teams to build, deploy, and manage cloud-native applications and infrastructure across multiple cloud providers, including AWS, Azure, Google Cloud, and Kubernetes.

Pulumi provides a programming model that allows developers to use familiar languages, such as Python, JavaScript, TypeScript, Go, and (partially) Java to define their IaC and manage it as software. In fact, it belongs to the second generation tools of the IaC. As already mentioned in the [Introduction to Infrastructure as Code](#) chapter, such an approach, makes it easier to automate the deployment and management of infrastructure and applications, as well as to collaborate across teams and projects.

Pulumi offers a range of tools and features to simplify the development and management of cloud infrastructure, including version control, testing, continuous integration and delivery (CI/CD), monitoring, and security. It also provides templates, examples, and libraries for common infrastructure patterns and services, such as containers, serverless functions, databases, and networking.

Overall, Pulumi aims to streamline the process of building and managing modern cloud-native applications and infrastructure, while providing a flexible and developer-friendly experience.

3.1.1 The great advantages of Pulumi as a second generation IaC tool

First of all, as mentioned in the [Serverless Infrastructure as programming language code - the second wave](#) paragraph, all the functionalities that comes along a programming language are letting us achieve more robust and powerful solutions for our infrastructure, rather than what we could achieve with the expressive power of a markup language (like the ones used with [Terraform](#)). Being the focus of this thesis, we'll discuss more about such advantages in the [Comparison between the languages for Pulumi and the advantages of Scala](#) chapter.

Furthermore, as aforementioned, Pulumi is a multi-cloud tool. Thanks to this we can rely on a single IaC tool for managing resources across different cloud platforms. Moreover, Pulumi lets the user choose its favorite programming language, or the one that in its opinion is a best-fit for the need to be addressed. In other words, such a choice can both reduce the requirements placed on the user's knowledge, since it can choose among many different programming languages, and at the same time offer different programming paradigms to choose from, so that for any need there is a programming language that is addressing such a need better than the others. Finally, Pulumi comes with a range of integrated tools and features, such as automatic parallelism, drift detection, and stack references, making it easier to manage complex infrastructure and deployments.

3.2 Pulumi functioning

3.2.1 The stack

When creating a new Pulumi application, the first step is to define a stack. A stack represents a set of cloud resources that can be managed as a cohesive unit. Each stack is associated with a particular cloud provider (such as AWS, Azure, or GCP), and contains a list of the resources that should be created.

The stack definition typically includes information such as the provider, the region in which the resources should be created, and any required configuration settings. This information is used by Pulumi to provision and manage the resources in the stack.

3.2.2 APIs to define the resources to be created

Once the stack is defined, you write code that implements the resource management logic. Pulumi provides libraries for several programming languages, including TypeScript, Python, Go, .NET, and partially Java. You use these libraries to create and configure cloud resources.

In Pulumi, you define resources using a "resource constructor" function. This function takes in the configuration for the resource as input, and returns a reference to the newly-created resource. You can then use this reference to manage the resource throughout its lifecycle.

Pulumi code can also contain logic for managing relationships between resources. For example, you can specify that one resource depends on another, so that Pulumi knows to create the dependent resource first.

3.2.3 Creating and updating resources with Pulumi commands

Once the code is written, you use Pulumi to create the cloud resources specified in the stack definition. Pulumi uses the provider cloud API to create the resources and corresponding configurations. The resource creation process is declarative, which means that Pulumi automatically figures out the order in which resources should be created based on their dependencies.

Pulumi also supports continuous delivery, meaning that changes to your code are automatically detected and used to update existing resources. When a change is detected, Pulumi compares the desired state (based on your code) to the current state

(based on the resources in the cloud) and makes any necessary changes to bring the resources into compliance with the desired state.

3.2.4 Viewing resources state

Pulumi provides a command to view the state of the resources managed by the application: `pulumi stack`. This command shows the created resources, their properties, and their current state. This information can be used to debug issues and ensure that resources are configured correctly.

The state of a resource is maintained by Pulumi in a "state file". This file contains information about the resources that have been created, as well as their current configuration and state. The state file is automatically updated by Pulumi as resources are created, updated, or deleted.

3.2.5 Restoring resources state

In case of issues or errors during resource creation or management, you can use Pulumi to restore the resource state to the last known good state. This ensures that cloud resources are always consistent with the code and stack definition.

Pulumi uses the state file to track the current state of the resources it manages. If the state of a resource becomes inconsistent with the desired state (for example, if a resource is accidentally deleted), you can use Pulumi to recreate the resource based on the information in the state file. This restores the resource to its last known good state and brings it back into compliance with the stack definition.

3.3 Pulumi's Output

In an IaC context, and therefore with Pulumi, the creation of the resources is not immediate. Hence, in our code when we call a constructor for given resource, we are not actually creating it in that exact moment, but we are rather requesting Pulumi to instantiate such a resource on the given cloud provider. So, the usage of that resource is not available until Pulumi will have completed its creation on the cloud provider. How can we perform operations on a resource when we do not know when it will become available? Pulumi addresses such a problem with the `Output` type.

In Pulumi, `Output` values are typically computed asynchronously, so that they can represent resources that are being provisioned by cloud providers. Like a future, an `Output` can be used to chain operations that depend on the completion of other operations. This feature will come handy to chain the definition of resources that depends on other resources.

We'll see how to create a Monad out of the `Output` type so that we'll be able to boost our syntactic sugar in the Scala version of the case study.

Chapter 4

Scala, a modern functional and object-oriented programming language

Scala brief overview

4.1 Introduction to Scala

4.1.1 Scala, a modern functional and object oriented programming language

Scala is a modern multi-paradigm programming language designed to express common programming patterns in a concise, elegant, and type-safe way. It seamlessly integrates features of object-oriented and functional languages.

4.1.2 Object-orientation

Scala is a pure object-oriented language in the sense that every value is an object. Types and behaviors of objects are described by classes and traits. Classes can be extended by subclassing, and by using a flexible [mixin-based composition](#) mechanism as a clean replacement for multiple inheritance.

4.1.3 Functional paradigm

Scala is also a functional language in the sense that every function is a value. Scala provides a lightweight syntax for defining anonymous functions, it supports higher-order functions, it allows functions to be nested, and it supports currying. Scala's case classes and its built-in support for pattern matching provide the functionality of algebraic types, which are used in many functional languages. Singleton objects provide a convenient way to group functions that aren't members of a class.

4.1.4 Scala functionalities related to the work of the thesis

For the work of the thesis, Scala 3 has been used.

Higher order functions and currying

Thanks to the functional paradigm of Scala, I used the higher order functions and the currying feature to create a powerful syntactic sugar for the declaration of AWS [EC2](#) IaC resources in a concise and elegant way.

Higher order functions An higher order function is function that either takes one or more functions as arguments or returns a function as return value, or both of them. Such a feature is at the basis of the functional programming paradigm since it lets concatenates function and create more complex and more powerful abstract constructs such as functors, applicatives and monads, so that we can eventually work on data in an immutable, and then safe, way. We'll see more about functors and monads in the [Functor and monads](#) paragraph.

Currying Currying is the transformation of a function with multiple arguments into a sequence of single-argument functions. That means, converting a function like `f(a, b, c, ...)` into a function like `f(a)(b)(c)....` To give a more detailed example let's consider the following function in Scala:

```
def sum(a: Int, b: Int) : Int =
  a + b
```

Such a function, takes two `Int` parameters as input and returns the sum of them. Therefore, if we call `sum(1, 2)` we get 3 as result. Now let's instead consider the following function:

```
def csum(a: Int)(b: Int) : Int =
  a + b
```

Here we can call the function writing `csum(1)(2)` and we'll get 3, but we could also write `csum(1)` and get, as output, a function that takes a single `Int` in input and sums it to 1 (the `Int` we passed to `csum` previously). The returned function will be analogous to this function:

```
def csum1(b: Int) : Int =
  1 + b
```

So the currying is letting us define and use partial functions, and this feature, combined with the feature of taking functions as parameters, will be a key ingredient for the highly expressive and readable solution achieved and proposed in the [Study case: AWS EC2 resources generation with Pulumi](#) chapter.

Pattern matching

Pattern matching is a mechanism for checking a value against a pattern. A successful match can also deconstruct a value into its constituent parts. It is a more powerful version of the switch statement in Java and it can likewise be used in place of a series of if/else statements. Let's now consider the following example, taken from [Tour of Scala - Pattern Matching](#), to have a better idea of the expressiveness of such a feature:

```
sealed trait Device
case class Phone(model: String) extends Device:
  def screenOff = "Turning screen off"

case class Computer(model: String) extends Device:
  def screenSaverOn = "Turning screen saver on..."

def goIdle(device: Device): String = device match
  case p: Phone => p.screenOff
  case c: Computer => c.screenSaverOn
```

We can notice how we are applying the pattern matching on the variable `device` to have a different behavior on the base of its actual type. This is useful when the case needs to call a method on the pattern. In fact, we'll see in the [Study case: AWS EC2 resources generation with Pulumi](#) chapter how this feature of Scala will be used to achieve our solution.

Obviously, in such an example, the right-hand side of the various cases must have a valid return type with respect to the return type given in the declaration of the method, that in this case is `String`.

Extension methods

Extension methods let you add methods to a type after the type is defined, i.e., they let you add new methods to closed classes. Let's consider an example from [Scala 3 Book - Extension Methods](#) about the calculation of the circumference of a circle.

In a file we may have:

```
case class Circle(x: Double, y: Double, radius: Double)
```

And in another:

```
extension (c: Circle)
  def circumference: Double = c.radius * math.Pi * 2
```

Then we could have this code in our main method:

```
val aCircle = Circle(2, 3, 5)
aCircle.circumference
```

We shall notice that such extension methods are letting us extend types without relying

on helper classes, letting us elegantly invoke methods on instances of the closed classes or objects we are referring to.

Given and using keywords

`given` has different usages, but we are interested into its capability to automatically construct an instance of a certain type and make it available to contexts in which we are expecting an implicit parameter. To mark a parameter as implicit we have to use the keyword `using`. Doing so, a `given` variable with a matching type to the implicit parameter's one, if present in the scope, will be automatically injected in **at compile time**.

Lets consider an example taken from [Given and Using Clauses in Scala 3 - Rock the JVM](#) to better understand such concepts:

```
given personOrdering: Ordering[Person] with {
  override def compare(x: Person, y: Person): Int =
    x.surname.compareTo(y.surname)
}
```

Here we are creating an instance of `Ordering` for the `Person` type. Now lets consider the following function declaration:

```
def listPeople(persons: Seq[Person])(using ordering: Ordering[Person]) = ...
```

We can notice how the `ordering` parameter has been marked with the `using` keyword. Now, when we'll have to call such a function, it'll require us to just pass the `persons` parameter, since the implicit one (`ordering`) will be automatically injected:

```
// the compiler will inject the ordering at the end of following function call
listPeople(List(Person("Weasley", "Ron", 15), Person("Potter", "Harry", 15)))
```

This is a key functionality that, among with other Scala features, will let us achieve our goal in our thesis as we will see in the [Comparison between the languages for Pulumi and the advantages of Scala](#) chapter.

Traits

Traits are used to share interfaces and fields between classes. They are similar to Java 8's interfaces. Classes and objects can extend traits, but traits cannot be instantiated and therefore have no parameters.

Here is a simple example of the traits usage:

```
trait Mighty:
  def roar(): Unit

abstract class Animal:
  def name(): Unit

class Lion extends Animal, Mighty:
```

```

    override def name(): Unit = println("Lion")
    override def roar(): Unit = println("The mighty Lion roars!")

class Cat extends Animal:
    override def name(): Unit = println("Cat")

```

The `Lion` class is extending the abstract class `Animal` and also the `Mighty` trait. This is providing the lion the extra `roar()` function.

In Scala is possible to extend from 0 or 1 abstract classes and as many traits we desire.

Functors and monads

Functors A `Functor` for a type provides the ability for its values to be "mapped over", i.e., apply a function that transforms the value contained in a given context while remembering its shape. We can represent all types that can be "mapped over" with `F`. `F` it's a type constructor: the type of its values becomes concrete when provided a type argument. Therefore we write it `F[_]`, hinting that the type `F` takes another type as argument. The definition of a generic `Functor` would thus be written as:

```

trait Functor[F[_]]:
  extension [A] (x: F[A])
    def map[B] (f: A => B): F[B]

```

The instance `Functor` to `List` is:

```

given Functor[List] with
  extension [A] (xs: List[A])
    def map[B] (f: A => B): List[B] =
      xs.map(f)

```

Here we can notice, as previously mentioned in the [Given and using keywords](#) paragraph, the `given` keyword is letting us create an instance of the `Functor` class for the `List` type.

Lets consider now the following usage of the `map` extension method on a list:

```

val l: List[Int] = List(1, 2, 3)
l.map(x => x * 2) // the output is List(2, 4, 6)

```

The `map` method is now directly used on `l`. It is available as an extension method since `l`'s type is `List[Int]` and a given instance for `Functor[List]`, which defines `map`, is in scope (thanks to the `given` keyword).

Monads A `Monad` provides the ability to sequence operations on values of a given type while maintaining the context of each operation. It is a generalization of the `Functor` concept, which allows us to apply a function to a value in a context. Such a generalization is letting us achieve a new level of expressiveness, that can be summarized as the chance to chain operations on a monadic value.

Like **Functors**, **Monads** can be represented by a type constructor `M[_]` that takes another type as an argument. The definition of a **Monad** is typically given in terms of two operations: `pure`, which lifts a value into the monadic context, and `flatMap`, which sequences operations on values in the context.

A generic **Monad** can be defined as follows:

```
trait Monad[M[_]] extends Functor[M] {
  def pure[A](a: A): M[A]
  extension [A, B](ma: M[A])
    def flatMap[B](f: A => M[B]): M[B]
}
```

And if we want to instantiate a given instance for the **List Monad** we shall write:

```
given Monad[List] with {
  def pure[A](a: A): List[A] = List(a)
  extension [A, B](xs: List[A])
    def flatMap[B](f: A => List[B]): List[B] = xs.flatMap(f)
}
```

To conclude consider this example on Lists:

```
val xs = List(1, 2, 3)
val ys = List(4, 5, 6)
xs.flatMap(x => ys.map(y => x + y)) // List(5, 6, 7, 6, 7, 8, 7, 8, 9)
```

The fact we got a `List[Int]` as return type from the `flatMap` operation is letting us the chance to apply immediately after another operation on such a value. Differently, if we use `map` on `xs`, we will obtain the following result:

```
val xs = List(1, 2, 3)
val ys = List(4, 5, 6)
xs.map(x => ys.map(y => x + y)) // List(List(5, 6, 7), List(6, 7, 8), List(7, 8, 9))
```

that is of type `List[List(Int)]`. With this new type, we might have troubles in chaining operations since the data structure has changed.

For comprehension

Scala offers a lightweight notation for expressing [sequence comprehensions](#). Comprehensions have the form `for (enumerators) yield e`, where **enumerators** refers to a semicolon-separated list of enumerators. An **enumerator** is either a generator which introduces new variables, or it is a filter. A comprehension evaluates the body `e` for each binding generated by the **enumerators** and returns a sequence of these values. The `for yield` construct in Scala requires two functions to be defined on the type we are iterating on to work: `map`, and `flatMap`. In fact, it is not a coincidence that we previously introduced the concept of **Functor** and **Monad** and `map` and `flatMap` functions. To better understand how the `for` comprehension concept works let's consider a brief example:

```
val xs = List("foo", "bar", "baz")
val ys = List("hello", "world")

for {
  x <- xs
  y <- ys
} yield s"$x $y"
// List("foo hello", "foo world", "bar hello", "bar world", "baz hello", "baz world")
```

We can notice how we are iterating on the two lists to generate a List of string as result, made of the combinations of the two lists' elements.

The `for yield` construct, in combination with the `Monads`, will be a key feature to improve our Scala syntactic sugar for the Pulumi APIs.

Union type

Scala has also the so called "union types". Used on types, the `|` operator creates a so-called union type. The type `A | B` represents values that are either of the type `A` or of the type `B`.

so the function declaration `def foo(a: Int | String) : Unit` is a function that takes as input either an `Int` parameter or a `String` parameter. Now we can write both the following function calls:

```
* foo(5)

* foo("bar")
```

and both will compile (if a valid function body has been provided obviously).

Chapter 5

Study case: AWS EC2 resources generation with Pulumi

Generation of AWS EC2 resources with Pulumi to compare how various languages supported by Pulumi will differ in the infrastructure resources declaration

5.1 Amazon Web Services

AWS is a wide collection of services with many different purposes and characteristics including compute, storage, databases, analytics, networking, mobile, developer tools, management tools, IoT, security, and enterprise applications: on-demand, available in seconds, with pay-as-you-go pricing. Anyway, for the purpose of the thesis we'll focus only on the EC2 module.

5.1.1 AWS's EC2 module

EC2 provides scalable computing capacity in the Amazon Web Services (AWS) Cloud. Amazon EC2 eliminates the need to invest in hardware up front, so that the development and deployment of the applications is faster. Such a characteristics is a perfect fit for an IaC scenario.

5.2 Case study infrastructure overview

For the thesis, only few components of the vast EC2 module have been selected to create a working infrastructure.
The infrastructure

5.2.1 Components of the infrastructure

The infrastructure we created for the case study of the thesis is an AWS EC2 [VPC](#) hosting 3 private [subnets](#), 3 public subnets, an [internet gateway](#) to let the public subnets connect to the internet and a [routing table](#) to map the public subnets to the internet gateway. The architecture will look like the following:

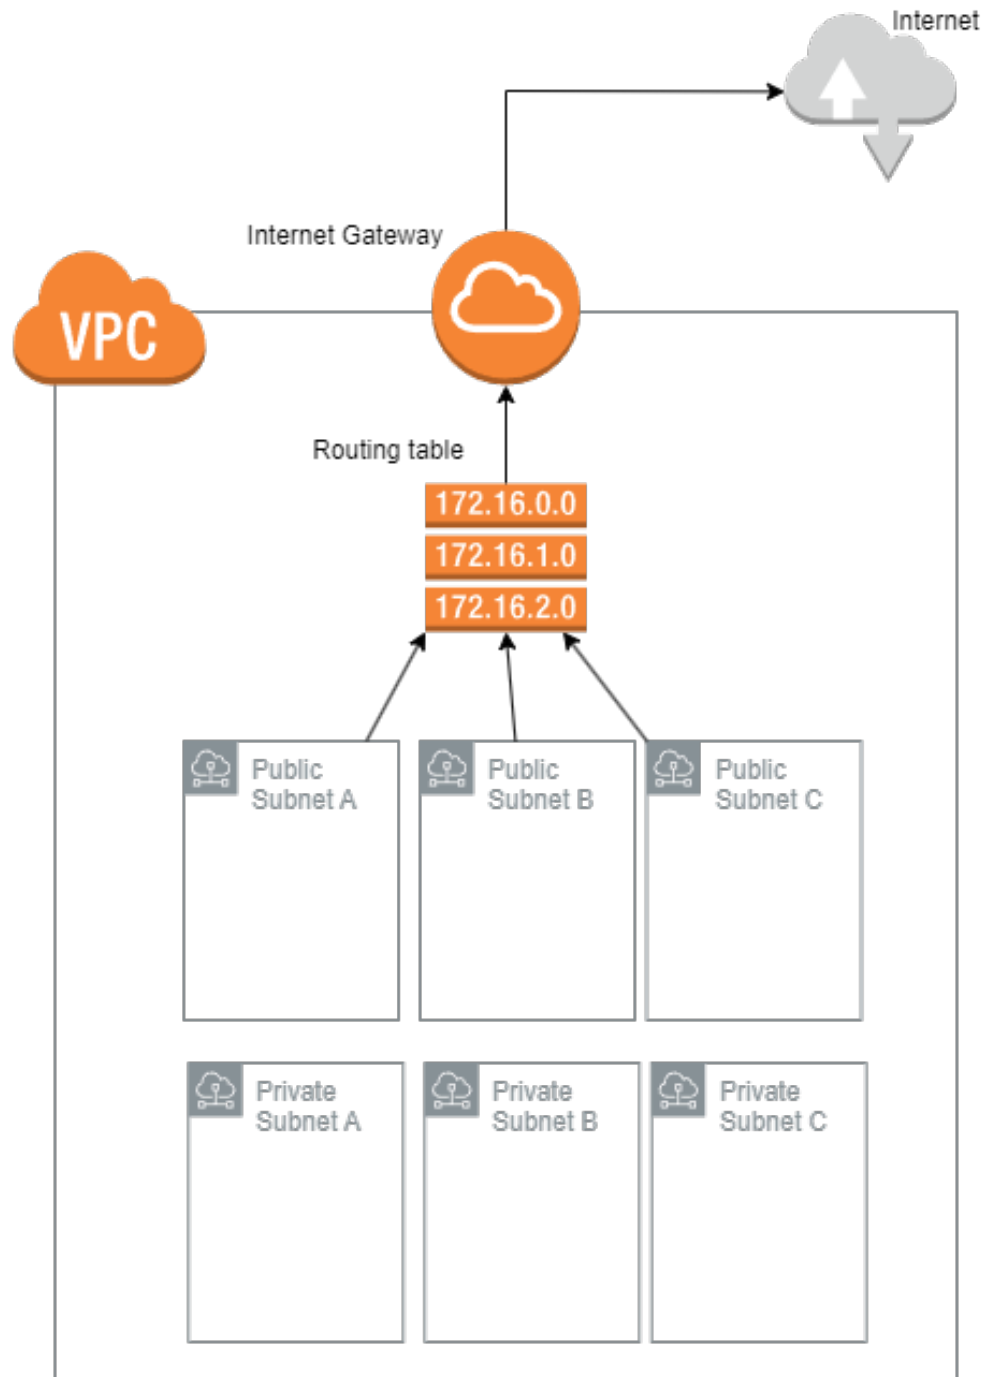


Image 5.1: Infrastructure Architecture

AWS is divided into regions, like us-east-1, eu-central-1, eu-south-1, etc. For the purpose of our thesis eu-south-1 as a region has been chosen. The servers of such a region are located in Milan. Each region can have multiple availability zones, eu-south-1 has 3 different availability zones, and because of this we chose to create 3 couples of public/private subnets (A-A, B-B, C-C). One couple on each availability zone. The purpose of the availability zones is mainly for robustness. If an availability zone becomes temporary unavailable, we can rely on the others to keep our services up.

VPC

The VPC is our "container" for all the other infrastructure resources. We'll define within it the subnets, the internet gateway and the routing table.

The most important setting of our AWS EC2 VPC is the CIDR (Classless Inter-Domain Routing) block. It represents the range of private IP addresses that the VPC can use to create and manage resources within the VPC.

CIDR The CIDR block is used to define the range of IP addresses that the VPC can use. In our case the CIDR block is 10.136.0.0/24, which means that the VPC has access to all IP addresses from 10.136.0.0 to 10.136.0.255. The 24 in the CIDR block is the prefix length, aka the subnet mask, that is used to identify the VPC. The remaining 8 bits of the IP address will be used to identify the hosts in the VPC. We'll assign a name as well to our VPC so that will be easier to recognize it when we'll inspect the AWS Management Console, that is the GUI version of the AWS CLI.

Subnet

The subnets will require the ID of the VPC and the CIDR block that defines their IP scope. For the subnets we'll use the following CIDR blocks:

- * Private Subnet A: 10.136.0.0/27
- * Private Subnet B: 10.136.0.32/27
- * Private Subnet C: 10.136.0.64/27
- * Public Subnet A: 10.136.0.96/27
- * Public Subnet B: 10.136.0.128/27
- * Public Subnet C: 10.136.0.160/27

3 of the 8 bits left out for the hosts identification have been used to identify the subnets. In fact we shall notice that now the subnet mask is not 24 anymore, but 27. Hence, we are left with 5 bits to identify the hosts within each subnet, giving us 32 possible IPs. From such IPs 2 are reserved for the network address and the broadcast address, so we have 30 possible IPs. We won't discuss this topic any further since it isn't essential for the final objective of the thesis.

Moreover, we'll define also the availability zone for each subnet.

InternetGateway

The definition of the internet gateway is actually quite straight forward. The mandatory parameter to assign is the ID of the VPC.

RouteTable

The definition of a route table is required in order to bind the public subnets to the internet gateway, so that they can send and receive data over the internet.

Here, along with the VPC ID, we assign the routes of such routing table. In order to do this we have to provide a CIDR and a target resource to which the packet will be forwarded to, that can be a subnet or the internet gateway in our case. The internet gateway is mapped with the CIDR block 0.0.0.0/0. Obviously also the ID of the internet gateway is required in order to bind it to the routing table.

In a nutshell this means that every packet not directed to a host within the VPC will be routed to the internet gateway and then to the internet.

The association of the public subnets to the routing table will be achieved using the *route table association* resource. Such a resource will require us to provide the id of the subnet and the id of the routing table to establish a connection. The private subnets will not be associated to such a routing table, since we want to keep them private. Differently, without explicitly associating them to a given routing table, AWS will automatically associate them to a default routing table that, being not bound to an internet gateway, will keep them private.

5.3 Typescript implementation of the case study

The first version of the implementation of the previously defined architecture is written using the Typescript APIs of Pulumi. The structure of the project, and this holds for the Java and Scala version as well, is trivial. We have a simple `index.ts` file that defines the entry point for our typescript project, and it is just a couple of lines long:

```
1 import { VPC } from './VPC/VPC';
2
3 const vpc = new MyVPC("Custom VPC");
```

The interesting part relies on the `MyVPC` class. Such a class extends the `ComponentResource` class of Pulumi. In our typescript implementation, we use the constructor of the user-defined `MyVPC` class to call all the class methods that are responsible for the creation of the resources. But this is just mentioned since the interesting part of the code are the actual methods that are responsible for the creation of the resources.

5.3.1 VPC resource creation

The code to the VPC resource creation API of Pulumi is done in this method of the `MyVPC` class:

```
1 protected createVPC() {
2   this.vpc = new Vpc("vpc\_res", {
```

```
3     cidrBlock: "10.136.0.0/24",
4     tags: {
5         Name: "myVPC-typescript",
6     },
7 },
8 {
9     parent: this,
10 });
11 }
```

`vpc_res` is the name that will be given by Pulumi at this resource once on the stack. We can notice how the various parameters are given in a declarative style within the curly brackets. Such a syntax is syntactic sugar for a Map definition. At line 8 the parent of this resource is set. With this specification, we are telling to the stack of Pulumi that the vpc resource `vpc_res` that we are creating is a child resource of the VPC resource identified by the `MyVPC` class.

5.3.2 Internet gateway creation

To create the internet gateway resource we can use the following code:

```
1 protected createIGW(){
2     this.gw = new InternetGateway("gw", {
3         vpcId: this.vpc?.id,
4         tags: {
5             Name: "myIGW-typescript",
6         },
7     },
8     {
9         parent: this.vpc,
10     });
11 }
```

It is really simple since it requires just the ID of the VPC in which it has to be created and optionally a name and a parent for the Pulumi's stack representation.

5.3.3 Subnets creation

To create the private and the public subnets we require a more complex logic. The function that has been used is `protected createAZsSubnets(isPvt: Boolean)`. It is called twice, once with a true value to create the private subnets, and another one with false to instantiate the public ones (and connect them to the routing table bound with the internet gateway).

In the body of the function, first we want to get all the availability zones present in the AWS region we are working on. To achieve this, we will use such a function `this.availableZones = aws.getAvailabilityZonesOutput()`.

Second, we want to create both a private and public subnet in each availability zone acquired with the aforementioned method. The `pulumi.all` function, in combination with the `apply` function will help us in achieving such a goal.

pulumi.all

`pulumi.all` is a utility function in Pulumi that allows you to combine multiple Outputs into a single Output that resolves to an array of the resolved values of each Output. So if we consider the following code:

```
1 pulumi.all([this.availableZones.names, this.vpc!.id])
```

Such a call returns us an `Output<[string[], string]>`. The array of strings is the list of the availability zones names, while the second string represents the ID of our VPC on AWS EC2. Now we have a new Output type that is more suitable to create the subnets based on our VPC ID, because the function `apply` is letting us "open" an `Output` value and access its content.

.apply

Lets extend our code in this way:

```
1 pulumi.all([this.availableZones.names, this.vpc!.id]).apply(([
    azNames, vpcId]) => {
2     // lambda's body to create the subnets here
3 })
```

The `apply` function is letting us access `Output<[string[], string]>` and apply some logic on the inner values.

The apply's lambda Now that we have the access to the list of availability zones and the VPC ID, we can iterate over the availability zones and create the subnets for our VPC. Here is the complete code of the function:

```
1 protected createAZsSubnets(isPvt: Boolean) : Output<Subnet[]>{
2     this.availableZones = aws.getAvailabilityZonesOutput()
3     return pulumi.all([this.availableZones.names, this.vpc!.id]).
        apply([azNames, vpcId]) => {
4         let i = 0
5         let listToPushInto: Subnet[] = Array<aws.ec2.Subnet>()
6         azNames.forEach(azName => {
7             let fullName = azName + (isPvt ? "-pvt" : "-pub") + "-
                subnet-typescript"
8             listToPushInto.push(new Subnet(fullName, {
9                 vpcId: vpcId,
10                availabilityZone: azName,
11                cidrBlock: isPvt ? this.pvtSubnetsCidrs[i] : this.
                    pubSubnetsCidrs[i],
12                tags: {
13                    Name: fullName,
14                },
15            }, {
16                parent: this.vpc
17            }));
```

```

18         i++;
19     });
20     return listToPushInto
21 });
22 }

```

In the code we instantiate private or public subnets basing on the `isPvt` passed in the `createAZsSubnets`. We can notice that for the creation of a subnet we pass arguments such as `vpcId`, the availability zone name, the CIDR block, and a name (that is a tag) to better identify it on the stack.

Each newly created subnet is then pushed into the class field `this.prvSubNets` or `this.pubSubNets` (that are arrays of subnets), basing on the nature of the subnet.

The creation of a subnet requires us to provide both the availability zone name and the ID of the VPC. Since these two pieces of information are contained in two separate `Outputs` (`Output<String[]>` and `Output<String>` respectively) we must first use the `pulumi.all` to wrap them in a single `Output<String[], String>`. This due to the fact that `.apply` can accept a single `Output<A>`, for any `A` type, value as input and not a pair. Then, we can use the `.apply` to unbox from the `Output<String[], String>` its inner value. Now that we have both the pieces of information out of the context value, we can use them to create the subnets.

We can notice that the `.apply` function is, at the end of its lambda function, returning a list of the created subnets. Such a return is also the return of the function and is indeed of the `Output<Subnet[]>` type.

5.3.4 Routing table creation

This is the code to create the routing table resource:

```

1  protected createRouteTable() {
2      this.routeTable = new RouteTable("example", {
3          vpcId: this.vpc!.id,
4          routes: [
5              {
6                  cidrBlock: "0.0.0.0/0",
7                  gatewayId: this.gw!.id,
8              },
9          ],
10         tags: {
11             Name: "myRouteTable-typescript",
12         },
13     },
14     {
15         parent: this.vpc,
16     });
17 }

```

On top of the classic VPC ID we are assigning here the routes. As we mentioned before in the [RouteTable](#) paragraph, we are defining the route with CIDR 0.0.0.0/0 to redirect all the packets coming from the public subnets, and not having as destination an IP internal at our VPC, to the internet gateway.

We are also giving a name to the routing table and assigning its parent.

5.3.5 Attaching the public subnets to the internet gateway

As we mentioned previously, we use the `this.attachRouteTableToPubSubnets()` function to attach the public subnets to the internet gateway. Here is the code of the function:

```

1 protected attachRouteTableToPubSubnets(){
2   let i = 0
3   this.pubSubNets.apply(subNets => {
4     subNets.forEach(sn => {
5       new aws.ec2.RouteTableAssociation(`${i}-
6         routeTableAssociation-typescript`, {
7         subnetId: sn.id,
8         routeTableId: this.routeTable!.id,
9       },
10      {
11        parent: this.vpc
12      });
13      i++;
14    })
15  });
16 }
```

Here we used once more, as for the subnets creation, a combination of `.apply` and a `foreach` to iterate over all the extracted subnets (`.foreach`) from the Output context (`.apply`).

Inside the `foreach`'s lambda we are defining a new `RouteTableAssociation` AWS EC2 resource that requires just the id of the subnet and the id of the routing table to which we want to attach the subnet to.

5.4 Creating the resources with Pulumi

After having seen all the code to create the resources, we'll see what the Pulumi command `pulumi up` will do. The command checks if all the resources that we want to create have valid parameters and there are not circular dependencies among the resources on their creation. If everything is nice and neat, it will show us the preview of the changes that we are about to get:

```

Previewing update (dev)

View Live: https://app.pulumi.com/Cis8/scala/dev/previews/c7370a40-7d38-41b7-820f-1329afafe1f2

  Type                                         Name                                         Plan
+ pulumi:pulumi:Stack                         scala-dev                                    create
+   └─ VPC                                    My Custom TS VPC                           create
+     └─ aws:ec2:Vpc                          my-vpc-main                                create
+       ├── aws:ec2:InternetGateway           gw                                           create
+       ├── aws:ec2:RouteTable                myRouteTable                               create
+       ├── aws:ec2:Subnet                    eu-south-1a-pub-subnet-typescript           create
+       ├── aws:ec2:Subnet                    eu-south-1a-pvt-subnet-typescript           create
+       ├── aws:ec2:Subnet                    eu-south-1b-pvt-subnet-typescript           create
+       ├── aws:ec2:Subnet                    eu-south-1b-pub-subnet-typescript           create
+       ├── aws:ec2:Subnet                    eu-south-1c-pub-subnet-typescript           create
+       ├── aws:ec2:Subnet                    eu-south-1c-pvt-subnet-typescript           create
+       ├── aws:ec2:RouteTableAssociation      0-assoc-typescript                         create
+       ├── aws:ec2:RouteTableAssociation      1-assoc-typescript                         create
+       └── aws:ec2:RouteTableAssociation      2-assoc-typescript                         create

Resources:
  + 14 to create

Do you want to perform this update? [Use arrows to move, type to filter]
[experimental] yes, using Update Plans (https://pulumi.com/updateplans)
> yes
  no
  details

```

Image 5.2: pulumi up preview

If we press yes this is the output:

```

Do you want to perform this update? yes
Updating (dev)

View Live: https://app.pulumi.com/Cis8/scala/dev/updates/28

  Type                                         Name                                         Status
+ pulumi:pulumi:Stack                         scala-dev                                    created (0.94s)
+   └─ VPC                                    My Custom TS VPC                           created
+     └─ aws:ec2:Vpc                          my-vpc-main                                created (1s)
+       ├── aws:ec2:InternetGateway           gw                                           created (0.64s)
+       ├── aws:ec2:Subnet                    eu-south-1a-pvt-subnet-typescript           created (0.94s)
+       ├── aws:ec2:Subnet                    eu-south-1a-pub-subnet-typescript           created (1s)
+       ├── aws:ec2:Subnet                    eu-south-1b-pvt-subnet-typescript           created (1s)
+       ├── aws:ec2:Subnet                    eu-south-1b-pub-subnet-typescript           created (1s)
+       ├── aws:ec2:Subnet                    eu-south-1c-pvt-subnet-typescript           created (2s)
+       ├── aws:ec2:Subnet                    eu-south-1c-pub-subnet-typescript           created (2s)
+       ├── aws:ec2:RouteTable                myRouteTable                               created (2s)
+       ├── aws:ec2:RouteTableAssociation      0-assoc-typescript                         created (0.57s)
+       ├── aws:ec2:RouteTableAssociation      1-assoc-typescript                         created (0.86s)
+       └── aws:ec2:RouteTableAssociation      2-assoc-typescript                         created (1s)

Resources:
  + 14 created

Duration: 22s

```

Image 5.3: pulumi up confirmed

We can notice how the resources created are nested into each other thanks to the parent option that we used. This is helping us in keeping our resources on the stack

nicely ordered and tied up.

5.5 Destroying the resources with Pulumi

Now let's use the `pulumi destroy` command to destroy the resources on our Pulumi's stack. The preview of the changes that we are about to get look like this:

```

Previewing destroy (dev)

View Live: https://app.pulumi.com/Cis8/scala/dev/previews/b9e0652e-9143-4a31-b9cc-f24cbc752bf4

  Type                                         Name                                         Plan
- pulumi:pulumi:Stack                         scala-dev                                    delete
-   └─ VPC                                    My Custom TS VPC                           delete
-     └─ aws:ec2:Vpc                          my-vpc-main                                delete
-       ├── aws:ec2:RouteTableAssociation      2-assoc-typescript                         delete
-       ├── aws:ec2:RouteTableAssociation      0-assoc-typescript                         delete
-       ├── aws:ec2:RouteTableAssociation      1-assoc-typescript                         delete
-       ├── aws:ec2:RouteTable                myRouteTable                              delete
-       ├── aws:ec2:Subnet                    eu-south-1b-pvt-subnet-typescript          delete
-       ├── aws:ec2:Subnet                    eu-south-1a-pub-subnet-typescript          delete
-       ├── aws:ec2:Subnet                    eu-south-1b-pub-subnet-typescript          delete
-       ├── aws:ec2:InternetGateway           gw                                           delete
-       ├── aws:ec2:Subnet                    eu-south-1c-pub-subnet-typescript          delete
-       ├── aws:ec2:Subnet                    eu-south-1c-pvt-subnet-typescript          delete
-       └─ aws:ec2:Subnet                    eu-south-1a-pvt-subnet-typescript          delete

Resources:
- 14 to delete

Do you want to perform this destroy? [Use arrows to move, type to filter]
> yes
  no
  details
  
```

Image 5.4: pulumi destroy preview

If we confirm the changes this is the result:

```

Do you want to perform this destroy? yes
Destroying (dev)

View Live: https://app.pulumi.com/Cis8/scala/dev/updates/29

  Type                                         Name                                         Status
- pulumi:pulumi:Stack                         scala-dev                                    deleted
-   └─ VPC                                    My Custom TS VPC                           deleted
-     └─ aws:ec2:Vpc                          my-vpc-main                                deleted (0.91s)
-       ├── aws:ec2:RouteTableAssociation      2-assoc-typescript                         deleted (0.55s)
-       ├── aws:ec2:RouteTableAssociation      0-assoc-typescript                         deleted (0.73s)
-       ├── aws:ec2:RouteTableAssociation      1-assoc-typescript                         deleted (1s)
-       ├── aws:ec2:RouteTable                myRouteTable                              deleted (0.68s)
-       ├── aws:ec2:InternetGateway           gw                                           deleted (0.62s)
-       ├── aws:ec2:Subnet                    eu-south-1c-pub-subnet-typescript          deleted (0.98s)
-       ├── aws:ec2:Subnet                    eu-south-1b-pub-subnet-typescript          deleted (1s)
-       ├── aws:ec2:Subnet                    eu-south-1a-pvt-subnet-typescript          deleted (1s)
-       ├── aws:ec2:Subnet                    eu-south-1b-pvt-subnet-typescript          deleted (1s)
-       ├── aws:ec2:Subnet                    eu-south-1a-pub-subnet-typescript          deleted (2s)
-       └─ aws:ec2:Subnet                    eu-south-1c-pvt-subnet-typescript          deleted (2s)

Resources:
- 14 deleted

Duration: 10s

The resources in the stack have been deleted, but the history and configuration associated with the stack are still maintained.
If you want to remove the stack completely, run `pulumi stack rm dev`.
  
```


Image 5.5: pulumi destroy confirmed

5.6 My Scala implementation of the case study

Since Scala is not supported by Pulumi, I had to implement it on my own. The Pulumi team is clear on the official way to add the support of a new language for Pulumi, and the procedure is long and laborious, too laborious for a master thesis. The full procedure can be found on [New Language Bring Up](#).

The idea behind the adopted solution is to exploit the compatibility of Scala with the Java libraries to write custom syntactic sugar. Such syntactic sugar will be based on the Pulumi Java's APIs and will provide to the user cool constructs to write readable and expressive code to interact with Pulumi.

The steps of the work done have been the followings:

1. manually write the *sugarized* functions to create the Pulumi resources using Scala
2. use such functions to recreate the Stack obtained with the typescript solution shown before in the [Typescript implementation of the case study](#) section
3. create an automatic code generator for our syntactic sugar functions, so that we can quickly create a library for Scala's Pulumi APIs
4. try to recreate the stack with the automatically generated code

Obviously, the third step is quite wide, and if fact with my work I had the time to generate only the functions for a part of the Java's Pulumi APIs for the AWS EC2 module.

Now the just defined steps will more accurately presented.

5.6.1 Structure of the Java APIs for the constructors of the resources in Pulumi

To understand the syntactic sugar functions that I defined, let's first consider the general structure of the Java APIs for the constructors of the resources.

The constructor of a resource, in general accepts a name and an instance of the corresponding `Args` class of the resource we are creating. Lets consider for example the `Vpc` resource. In Java, to instantiate such a resource we'd call:

```
1 protected Vpc vpc = new Vpc("my-vpc-java", VpcArgs.builder()  
2     .cidrBlock("10.136.0.0/24")  
3     .tags(Map.of("Name", "main"))  
4     .build(),  
5         CustomResourceOptions.builder()  
6             .parent(this)  
7             .build());
```

We can (hardly) see that along with the name to be assigned to the vpc "my-vpc-java", a `VpcArgs` builder and a `CustomResourceOptions` builder are passed by. These builders

will create an instance of the respective classes that will be used to set respectively the parameters and the parent of the Vpc resource. So, for our case study we need to consider: the name to be assigned at the created resource on the Pulumi stack, the builder of the respective `Args` class of the resource, and the `CustomResourceOptions` builder.

5.6.2 Syntactic sugar usage

Our syntactic sugar is split in 2 categories of functions. The first is about the functions that represent the constructors of the resources. The second is for the methods available within the builders of the `Args` classes and for the `CustomResourceOptions` builder functions. The idea to create a resource is to call the *sugarized* function that represent the constructor of that resource, and then call the Builder methods to assign the various parameters to the resource.

Vpc creation

This is how a Vpc resource can be created with my syntactic sugar:

```
1 val myVpc = vpc("scala-main") ({
2     cidrBlock("10.136.0.0/24")
3     tags("Name" -> "myVpcScala")
4 },{
5     parent(this)
6 })
```

At line 1, the `vpc` function is the actual *sugarized* function for the VPC resource constructor. In fact we can notice that we have a curried function. The first parentheses is taking the parameter for the resource name on the Pulumi stack, while the second one is containing two lambdas (defined by the curly brackets). These lambdas are respectively used to call all the builder methods of the `VpcArgs` class and the ones for the `CustomResourceOptions`.

We can notice that we didn't explicitly defined an instance of the builders of such classes. We will soon see how we achieved such a syntactic sugar trick.

The `cidrBlock` and the `tags` methods are the generated methods for builder of the `VpcArgs` class.

The `parent` method instead is the generated method for the builder of the `CustomResourceOptions` class.

Moreover, we can also notice that inside tags, that expects a `Map[String, String]` type, the instantiation of a `Map[String, String]` containing a single elements isn't required. This other trick will be explained later as well.

Internet gateway creation

Much similar to the VPC resource, we have this code for the internet gateway creation:

```
1 val myIGW = internetGateway("gw") ({
2     vpcId(myVpc.getId())
3     tags("Name" -> "myIGWScala")
4 },{
5     parent(myVpc)
```

```
6 })
```

The code won't be commented since is analogous to the VPC case.

Routing table creation

The code to create a routing table:

```
1 val myRouteTable = routeTable("myRouteTable") ({
2   vpcId(myVpc.getId())
3   routes(
4     routeTableRouteArgs(){
5       cidrBlock("0.0.0.0/0")
6       gatewayId(myIGW.getId())
7     })
8   tags("Name" -> "myRouteTableScala")
9 },{
10  parent(myVpc)
11 })
```

The only thing that is worth to mention here is that the `routes` function, at line 3, expects a `List[RouteTableRouteArgs]`, but we are providing only a `RouteTableRouteArgs`. As for the case of the `Map[String, String]` with the `parent` method mentioned above, the same trick has been used to provide syntactic sugar that lifts us from the need of instantiate a singleton `List[RouteTableRouteArgs]` manually.

Subnets creation

Much different from the other resources is the function to create the subnets:

```
1 def createAzSubnets(isPvt: Boolean) =
2   availabilityZonesNames().map((az: GetAvailabilityZonesResult) =>
3     for
4       (name, cidr) <- az.names().zip(if isPvt then pvtSubnetsCidrs else
5         pubSubnetsCidrs)
6     yield
7       val fullName = name + "-" + (if isPvt then "pvt" else "pub") + "-
8         subnet-scala"
9       subnet(fullName) ({
10        vpcId(myVpc.getId())
11        availabilityZone(name)
12        cidrBlock(cidr)
13        tags("Name" -> fullName)
14      },{
15        parent(myVpc)
16      })
17   )
```

We can notice here how we had the possibility to use the `map` function on `availabilityZonesNames()`. `availabilityZonesNames()` returns a `Output[GetAvailabilityZonesResult]` value,

that isn't directly accessible from the `map` function. To achieve such a result we made a monad out of the `Output` type, so that `map` can be applied on the inner value of the `Output` context. We'll see better how is the actual implementation of the monad soon. The `for yield` construct here is iterating over a zipped list made out of the availability zones names and the CIDR blocks for the respective kind of subnet to create (private or public, based on the input parameter `isPvt`). The `for yield`, for each tuple `(name, cidr)` will create a `Subnet` value and will return a `Subnet[]` as output. Now, the `for` is still inside the lambda of the `availabilityZonesNames().map` function. Consider the fact that `map` takes an `Output[A]` and returns an `Output[B]`, where `A = GetAvailabilityZonesResult` and `B = Output[Iterable[Subnet]]`. This is different from the typescript implementation in the [Apply's lambda](#) paragraph, where the function that creates the subnets returns a plain `Subnet[]`.

We will make further considerations about such a difference in the [Comparison between the languages for Pulumi and the advantages of Scala](#) chapter.

Attaching the subnets to the routing table

```

1 def attachRouteTableToPubSubnets(): Output[Iterable[
    RouteTableAssociation]] =
2   pubSubnets.map((subnets: Iterable[Subnet]) =>
3     for
4       (ps, idx) <- subnets.zipWithIndex
5     yield
6       routeTableAssociation(idx + "-assoc-scala") ({
7         subnetId(ps.getId())
8         routeTableId(myRouteTable.getId())
9       }, {
10        parent(myVpc)
11      })
12   )

```

Similarly to the subnet creation function, also here we use `map` to "unbox" an `Output[Iterable[Subnet]]` value, to apply some logic on the inner value and then return a `Output[Iterable[RouteTableAssociation]]` value as result. Since the logic is analogous we won't comment this code further, but the fact we're having these two functions that both take an `Output[A]` as input and return an `Output[B]` will be a key point for our observations in the [Comparison between the languages for Pulumi and the advantages of Scala](#) chapter.

Resources creation with `pulumi up`

Now let's make sure that the stack created with `pulumi up` is the same of the one created with the typescript implementation. From this image we can see that they are equivalent to the ones shown in [Resources creation with pulumi up in Typescript](#):

```

Please choose a stack, or create a new one: dev
Previewing update (dev)

View Live: https://app.pulumi.com/Cis8/scala/dev/previews/d2916f08-b77f-4161-83d4-fc2f9323e714

  Type                                         Name                                         Plan
+-----+-----+-----+
+ pulumi:pulumi:Stack                         scala-dev                                    create
+   └─ VPC                                   My Custom scala VPC                        create
+     └─ aws:ec2:Vpc                         scala-main                                  create
+       ├── aws:ec2:InternetGateway          gw                                           create
+       ├── aws:ec2:RouteTable              myRouteTable                                create
+       ├── aws:ec2:Subnet                  eu-south-1a-pub-subnet-scala                create
+       ├── aws:ec2:Subnet                  eu-south-1a-pvt-subnet-scala                create
+       ├── aws:ec2:Subnet                  eu-south-1b-pvt-subnet-scala                create
+       ├── aws:ec2:Subnet                  eu-south-1b-pub-subnet-scala                create
+       ├── aws:ec2:Subnet                  eu-south-1c-pub-subnet-scala                create
+       ├── aws:ec2:Subnet                  eu-south-1c-pvt-subnet-scala                create
+       ├── aws:ec2:RouteTableAssociation    0-assoc-scala                              create
+       ├── aws:ec2:RouteTableAssociation    1-assoc-scala                              create
+       └── aws:ec2:RouteTableAssociation    2-assoc-scala                              create

Resources:
+ 14 to create

Do you want to perform this update? yes
Updating (dev)

View Live: https://app.pulumi.com/Cis8/scala/dev/updates/32

  Type                                         Name                                         Status
+-----+-----+-----+
+ pulumi:pulumi:Stack                         scala-dev                                    created (1s)
+   └─ VPC                                   My Custom scala VPC                        created
+     └─ aws:ec2:Vpc                         scala-main                                  created (1s)
+       ├── aws:ec2:InternetGateway          gw                                           created (0.62s)
+       ├── aws:ec2:Subnet                  eu-south-1a-pvt-subnet-scala                created (1s)
+       ├── aws:ec2:Subnet                  eu-south-1a-pub-subnet-scala                created (1s)
+       ├── aws:ec2:Subnet                  eu-south-1b-pvt-subnet-scala                created (1s)
+       ├── aws:ec2:Subnet                  eu-south-1b-pub-subnet-scala                created (1s)
+       ├── aws:ec2:Subnet                  eu-south-1c-pub-subnet-scala                created (2s)
+       ├── aws:ec2:Subnet                  eu-south-1c-pvt-subnet-scala                created (2s)
+       ├── aws:ec2:RouteTable              myRouteTable                                created (2s)
+       ├── aws:ec2:RouteTableAssociation    0-assoc-scala                              created (0.47s)
+       ├── aws:ec2:RouteTableAssociation    1-assoc-scala                              created (0.82s)
+       └── aws:ec2:RouteTableAssociation    2-assoc-scala                              created (1s)

Resources:
+ 14 created

Duration: 22s

```

Image 5.6: pulumi up result with the scala implementation

5.6.3 Syntactic sugar for the constructors of the resources

All the methods that we just used for creating the Pulumi resources in Scala (`vpc`, `internetGateway`, ecc.), behind the scenes are implemented following a common pattern. Consider the `vpc` function of the syntactic sugar defined inside the "PulumiUtilFunctionsForScala.scala" file:

```

1 def vpc(param: String)
2   (init: VpcArgs.Builder ?=> Unit,

```

```

3      initOpt: (CustomResourceOptions.Builder ?=> Unit) =
          baseOpts): Vpc =
4      given b: VpcArgs.Builder= VpcArgs.builder()
5      init
6      given bo: CustomResourceOptions.Builder =
          CustomResourceOptions.builder()
7      initOpt
8      new Vpc(param, b.build(), bo.build())

```

Lets analyze the function by steps. First of all we can see that the function declaration is curried, we have 2 parentheses with different input parameters.

The first parentheses take simply a string parameter, that is used to set the name of the `Vpc` resource on the Pulumi stack.

The second parentheses are taking two lambdas as parameters: a `VpcArgs.Builder ?=> Unit` and a `CustomResourceOptions.Builder ?=> Unit`, with default parameter `baseOpts`, that we'll see in a moment what is.

In Scala, a lambda that takes an `Int` and returns a `String` has this type notation: `Int => String`, so does that '?' in front of the '=' mean?

Such '?'=>' is denoting a context function, that is a function with (only) context parameters. In the [Given and using keywords](#) paragraph we introduced the `using` keyword. Such '?' is quite analogous to a `using` keyword used to mark an function's input parameter as a context parameter. This is, in part, what let us call the builder methods like `cidrBlock("10.136.0.0/24")` and `tags("Name" -> "myVpcScala")` (as shown in the code shown in the [Vpc creation in Scala](#) paragraph) without having to call them on a specific builder instance. We will get the whole picture of this trick when we'll talk about the syntactic sugar for the builder methods in the [Syntactic sugar for the builders' methods](#) paragraph.

Correspondence between the input parameters and the user defined code used to create the VPC

To have a better idea to what these parameters refer in our VCP creation case, consider this image:

VPC.scala

```

val myVpc: Vpc = vpc("scala-main") ({
  cidrBlock("10.136.0.0/24")
  tags("Name" -> "myVpcScala")
}, {
  parent(this)
})

```

PulumiUtilFunctionsForScala.scala

```

def vpc(param: String)(init: com.pulumi.aws.ec2.VpcArgs.Builder ?=> Unit, initOpt: (CustomResourceOptions.Builder ?=> Unit) = baseOpt
  given b: com.pulumi.aws.ec2.VpcArgs.Builder= com.pulumi.aws.ec2.VpcArgs.builder()
  init
  given bo: CustomResourceOptions.Builder = CustomResourceOptions.builder()
  initOpt
  new com.pulumi.aws.ec2.Vpc(param, b.build(), bo.build())

```

Image 5.7: Parameters correspondence

The red box represents the name for our VPC resource on the Pulumi stack.

The green one, with the curly brackets, is the lambda that takes a *given* `VpcArgs.Builder` as an implicit parameter from the context. In fact we are not providing any explicitly. The *given* `b` defined in the first line of the body of the `vpc` function is the instantiation of a *given* instance of such a builder, that will be automatically injected by the compiler in the `init` lambda represented by the green box.

Analogous is the concept for the blue box.

Vpc construction

Now that we understood what are the input parameters of our `vpc` function and to what do they correspond in the resource creation shown in the [Syntactic sugar usage](#) section, we can see how the actual creation of the resource is made. After having executed the `init` and `initOpt` lambdas, that behind the scenes will set the parameters of the respective *given* builders, we can create the resource using the constructor offered by the Pulumi Java APIs. `new Vpc(param, b.build(), bo.build())` is a direct call to such libraries, and will actually create the VPC.

The baseOpts function

The `baseOpts` function that we mentioned before as a default lambda for our `vpc` function is the following:

```
1 def baseOpts(using o: CustomResourceOptions.Builder) : Unit =
  {}
```

In practice, is an vacuous lambda that does nothing on the `CustomResourceOptions` builder. The question here is: *why do we need such a default function?* To answer the question let's consider one more time the code to create a VPC with out syntactic sugar:

```
1 val myVpc: Vpc = vpc("scala-main") ({
2   cidrBlock("10.136.0.0/24")
3   tags("Name" -> "myVpcScala")
4 },{
5   parent(this)
6 })
```

We can see that we passed both the lambdas for the `VpcArgs` builder and for the `CustomResourceOptions` builder, but what if we want to simply use the `VpcArgs` builder and not set the parent? We can do the following:

```
1 val myVpc: Vpc = vpc("scala-main") {
2   cidrBlock("10.136.0.0/24")
3   tags("Name" -> "myVpcScala")
4 }
```

This code compiles, and we can notice that we even got rid of the parentheses around the two groups of curly brackets for the lambdas. If this compiles is only thanks to the

default parameter that is automatically injected in by the compiler, as we didn't give an explicit one.

Another question now might arise: *why didn't we change the signature of the function in the following way?*

```
1 def vpc(param: String)(using initOpt: (CustomResourceOptions.  
    Builder ?=> Unit), init: VpcArgs.Builder ?=> Unit) : ecc.
```

Here we have set the `initOpt` as an implicit parameter with the `using` keyword. The main problems that we face with this solution are mainly 2: we have to swap the order of the parameters and we will be forced to use the `using` keyword to explicitly pass a custom lambda for the `CustomResourceOptions` builder.


The first problem leads to a sort of awkwardness while defining the VPC resource, since we have to define first the parent and then the actual parameters of the VPC resource.

The second problem is requiring us to write `using` every time we want to pass an explicit and custom lambda that sets some parameters of the `CustomResourceOptions` builder, that is annoying.

These problems are due to the functioning of the Scala language. An implicit parameter must come before all the explicit parameters and when trying to use an explicit parameter in place of an implicit one we must use the `using` keyword. So, the original solution with the default parameter is the best one since it doesn't require us to swap the order of the parameters and we are totally free to choose whether to pass or not the explicit lambda for the `CustomResourceOptions` builder without worsening our syntactic sugar.

5.6.4 Syntactic sugar for the builders' methods

What we have shown up to now is not enough to have our syntactic sugar working, we are missing a subtle point to get the work done. Lets pay attention to how the `VpcArgs.Builder` parameters are set inside the `vpc` function call. To be precise we are referring to these methods:

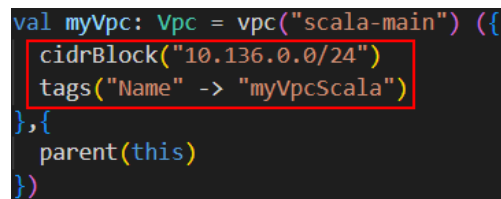

```
val myVpc: Vpc = vpc("scala-main") ({  
  cidrBlock("10.136.0.0/24")  
  tags("Name" -> "myVpcScala")  
},{  
  parent(this)  
})
```

Image 5.8: vpc methods

Once such a lambda will be invoked inside the `vpc` function itself, these methods will be executed, but on which builder?

We already mentioned the fact that inside the `vpc` function a context instance of the `VpcArgs.Builder` is initialized and the `init` lambda is able to use it as input parameter thanks to the `'?=>'` operator we have seen. But how can the actual `cidrBlock` and `tags` methods know on which builder they are being invoked?

Without surprise, those methods take the `VpcArgs.Builder` builder as an implicit

parameter with the `using` keyword.

This is the signature for the `cidrBlock` method in the syntactic sugar file named `"PulumiBuilderUtilFunctionsForScala.scala"`:

```
1 def cidrBlock(param: String | Output[String]) (using b: cidrBlockOwners)
  : Unit
```

We can notice that we have once more a curried function. Anyway, from how we have seen before, the `cidrBlock` (and analogously for all the other builder methods) is called with just a single set of parentheses. This is due to the fact that the second parentheses here are taking an implicit parameter, properly marked with the `using` keyword.

The `param` parameter is, as we have seen in the [Union type](#) paragraph, a union type. The `String | Output[String]` type is defined so since the Pulumi Java APIs for the builders' methods accept both a `String` and an `Output[String]`. Actually, in the Java implementation an overloading of methods is given since the union type of Scala is not available.

The second parentheses are taking an implicit parameter `b` of the type `cidrBlockOwners`, that is defined as follows:

```
1 type cidrBlockOwners = RouteTableRouteArgs.Builder | SubnetArgs.Builder
  | VpcArgs.Builder
```

This is a user defined type that I defined to match the builders of all the `Args` classes that are interested in having such a parameter to assign on their builder instance. In fact in the Java APIs of Pulumi we have many different `Args` classes' builders that want to assign the same parameter (aka. `cidrBlock`) to their own builder. I remind that in the AWS EC2 module there are much more builders of the `Args` classes that define a `cidrBlock` method, but my syntactic sugar has created the methods for only the classes that I used in the case study. This choice has been made also for simplicity in presenting the work done, otherwise the `cidrBlockOwners` type would have been featuring many tens of types. The fact we used a union type to define this function has two main motivations. The first is a Scala language constraint that we came across. Let's say that we wanted to define a function to assign the CIDR block working exclusively for `VpcArgs.Builder` class. A definition of such a function would look like:

```
1 def cidrBlock(param: String | Output[String]) (using b: VpcArgs.Builder)
  : Unit =
2   param match
3     case x: String => builder.cidrBlock(x)
4     case x: Output[String] => builder.cidrBlock(x)
```

And now let's define another function that is working for the `RouteTableRouteArgs.Builder`:

```
1 def cidrBlock(param: String | Output[String]) (using b:
  RouteTableRouteArgs.Builder): Unit =
2   param match
3     case x: String => builder.cidrBlock(x)
4     case x: Output[String] => builder.cidrBlock(x)
```

First, we can notice that they are actually the same, except for the signature, but such a solution is not going to compile if we try to call the method `cidrBlock("10.136.0.0/24")` here:

```
1 val myVpc: Vpc = vpc("scala-main") ({
2   cidrBlock("10.136.0.0/24") \\ ERROR
3   tags("Name" -> "myVpcScala")
4 }, {
5   parent(this)
6 })
```

The compiler will tell us that an ambiguous function call is present at the line 2 of this block of code. This is due to the fact that the functions we defined are curried and their type is `(String | Output[String]) => (VpcArgs.Builder => Unit)` and `(String | Output[String]) => (RouteTableRouteArgs.Builder => Unit)` respectively. When we call `cidrBlock("10.136.0.0/24")` on the line 2 of the code showed above, we are partially applying the curried function and so the compiler doesn't know which function we are trying to call, since it can't infer the exact function call basing only on a different return type (that is the only difference in the two functions).

The second reason is that our *all-in-one* solution is reducing the size of the generated *sugarized* code, since we have just one single method instead of having as many as the builders of the `Args` classes that require that methods are.

Now we are ready to present the entire `cidrBlock` method:

```
1 def cidrBlock(param: String | Output[String]) (using b: cidrBlockOwners)
2   : Unit =
3   b match
4     case builder: RouteTableRouteArgs.Builder =>
5       param match
6         case x: String => builder.cidrBlock(x)
7         case x: Output[String] => builder.cidrBlock(x)
8     case builder: SubnetArgs.Builder =>
9       param match
10        case x: String => builder.cidrBlock(x)
11        case x: Output[String] => builder.cidrBlock(x)
12    case builder: VpcArgs.Builder =>
13      param match
14        case x: String => builder.cidrBlock(x)
15        case x: Output[String] => builder.cidrBlock(x)
```

The body of the function is quite simple in its functioning. It uses the pattern matching to match the correct builder type and then uses pattern matching once more to match the `param` parameter to a `String` or an `Output[String]`. Finally it calls the Java API of Pulumi to set the `cidrBlock` parameter on the builder instance `b`.

The fact we have duplicated code here is inevitable. This is the only solution since if we try to split the duplicated code into an helper function, we would fall again in the ambiguous call error presented above. But since this is automatically generated code, it is not a real problem to have some duplicated code.

To have the final picture of all the functioning lets consider this image:

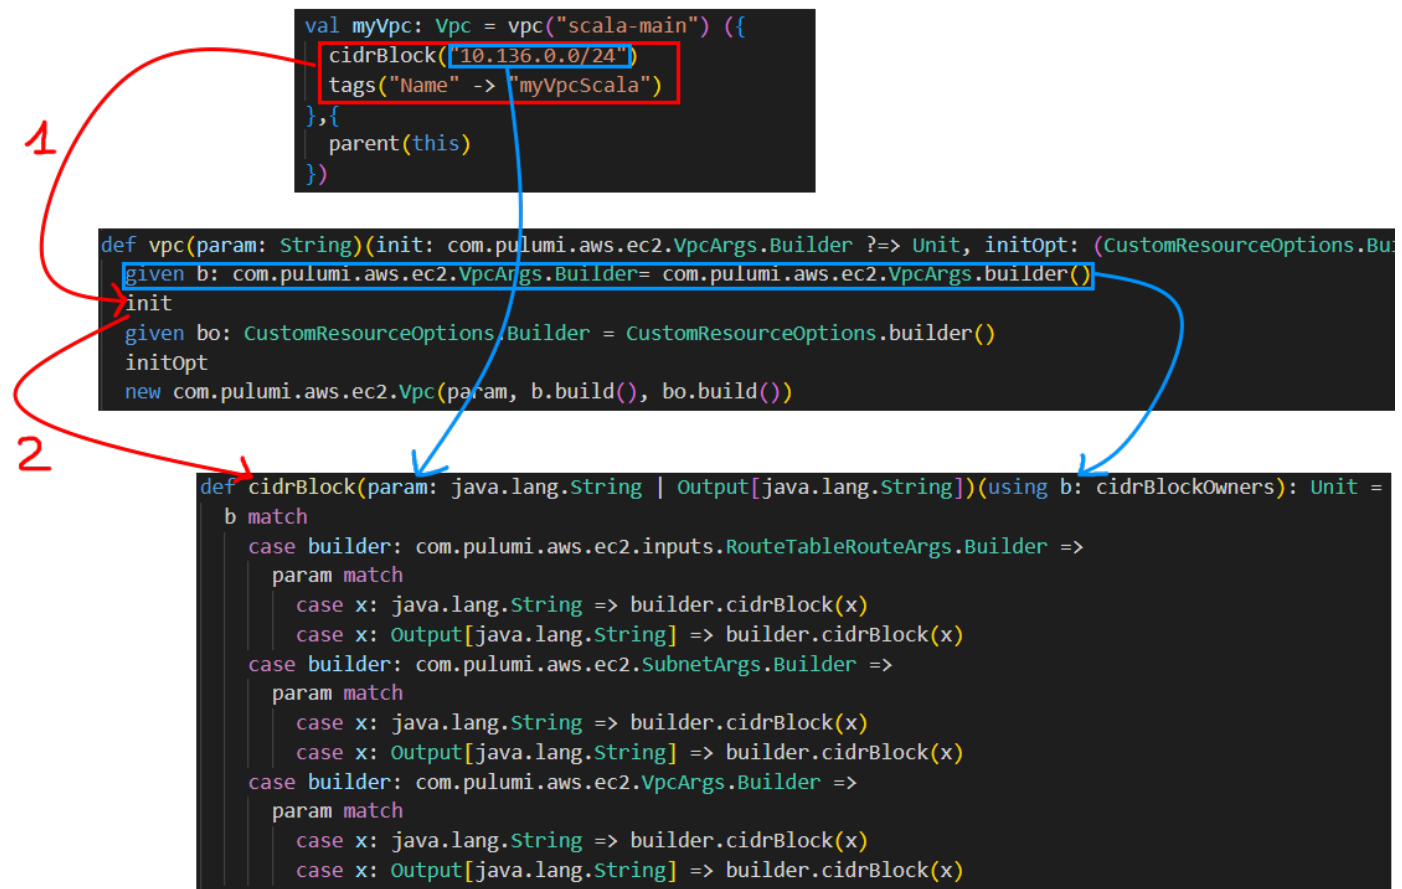


Image 5.9: Function calls flow and parameters passing

We can see how the lambda with the calls to our defined methods `cidrBlock` and `tags` is passed as the `init` parameter of the *sugarized* `vpc` function. Inside the `vpc` function we execute that lambda and so, the `cidrBlock` method is invoked.

In blue we can see from where the parameters of the `cidrBlock` method are coming from. The `String` representing the CIDR block is coming directly from the explicit parameter that we passed, while the `VpcArgs` builder is implicitly injected from the compiler since a *given* instance is defined inside the `vpc` function and the `b` parameter of the `cidrBlock` method is marked with `using`.

Implicit conversion functions

On top of this, to boost our syntactic sugar I defined also two extra functions: `tupleToMap` and `elemToList`. The purpose of this functions is to achieve the tricks that I mentioned previously (in the [Vpc creation in Scala](#) and in the [Routetable creation in Scala](#)) about not needing to explicitly instantiate a singleton Map and a singleton List while passing a single argument to the `tags` or the `routes` methods.

The `tupleToMap` function is implemented like this:

```
1 given tupleToMap[A, B]: Conversion[(A, B), Map[A, B]] =
2     (tuple: (A, B)) => Map(tuple)
```

We can notice that the function that converts our tuple into a singleton Map is based on the `Conversion` class of Scala. When a suitable argument for the conversion of type `(A, B)` is found in the code, and a `Map[A, B]` type is expected, then the compiler will apply the conversion to that type. This is exactly what happens with our tuple as single parameter passed to the `tags` method.

And the `elemToList` function is defined in this way instead:

```
1 given elemToList[A <: ResourceArgs]: Conversion[A, List[A]] =
2     (elem: A) => List(elem)
```

The functioning is analogous to `tupleToMap`, but here we added the extra constraint that `A` must be a subtype of the `ResourceArgs` type. This will prevent undesired too generic conversions that could create problems in the compilation of our program.

5.6.5 Functor and Monad implementation for the Output type

After having introduced the concept of functor and monad in the [Functor and monads](#) section, it is here show how the implementation of the monad for the `Output` type has been achieved.

Since a monad is also a functor, let's see how `Functor[Output]` has been implemented.

Functor implementation

First a `Functor` trait has been defined:

```
1 trait Functor[F[_]]:
2     extension [A](x: F[A])
3         def map[B](f: A => B): F[B]
```

A type `Output` to be a functor has to implement a `map` method, that as we have already seen is provided as an extension method.

The functor for the `Output` type is implemented like this:

```
1 given Functor[Output] with
2     extension [A](oa: Output[A])
3         def map[B](f: A => B): Output[B] =
4             oa.applyValue(f.asJava)
```

The implementation of the `map` method relies on the Java APIs of Pulumi, where the `applyValue` method from the `Output` class is provided.

The signature of the given method is `default <U> Output<U> applyValue(Function<T, U> func)`. We are interested in observing that this method takes a function that transforms a value of a type `T` in a value of type `U`, and then it returns an `Output[U]` value as result. This signature is exactly the one we need.

In fact it is sufficient to pass the function `f` taken in input from the `map` invocation and pass it directly to the `applyValue` method. To be precise, being `f` a Scala function, we need to convert it to a Java function before passing it to `applyValue`. We achieve this by using the `.asJava` method from the `scala.jdk.FunctionConverters._` conversion library for Scala.

Monad implementation

As for the `Functor`, the `Monad` trait has been defined:

```
1 trait Monad[F[_]] extends Functor[F]:
2   // The unit value for a monad
3   def pure[A](x: A): F[A]
4
5   extension [A](x: F[A])
6     // The fundamental composition operation
7     def flatMap[B](f: A => F[B]): F[B]
8     // The 'map' operation can now be defined in terms of 'flatMap'
9     def map[B](f: A => B) = x.flatMap(f.andThen(pure))
```

A monad, to be called so, must define a `pure` function. I remind that such a method puts a value inside a context.

Then the `flatMap`, that is the other method required from a monad, is defined as an extension method.

The `map` method instead can now be redefined using `flatMap`. This is letting us not depend any more on the `.applyValue` from the Pulumi libraries for Java, because we can now use `flatMap` to achieve the desired result.

The monad for the `Output` type is implemented in this way:

```
1 given Monad[Output] with
2   def pure[A](x: A): Output[A] = Output.of(x)
3   extension [A](oa: Output[A])
4     def flatMap[B](f: A => Output[B]): Output[B] = oa.apply(f.asJava)
```

The `pure` method is defined with the Java's Pulumi method `of`. It simply boxes the value in an `Output` context.

The `flatMap` function for the `Output[A]` type is implemented using the `.apply` function offered from the Pulumi's Java `Output` class. The `apply` function has a different type from the `applyValue` one. As we have seen above, `applyValue` is matching with the type of `map`, while the `apply` has the following signature: `<U> Output<U> apply(Function<T, Output<U>> func)`. Since the function passed to `apply` takes a type `T` as input and returns a type `Output<U>` as result, and the whole `apply` returns an `Output<U>`, we have a perfect type match with the `flatMap` signature. In fact it will suffice us to use `apply.(f.asJava)` to have the work done.

Thanks to this implementation we are able, as we have seen in the [Subnets creation in Scala](#) paragraph, to use `map` on `availabilityZonesNames()` to apply some logic upon the extracted zone names. In fact, `availabilityZonesNames()` is `Output[GetAvailabilityZonesResult]`, and being now `Output` a monad, the `map` function is supported. We succeeded in getting rid of the `.pulumiAll` method.

5.6.6 Automatic code generation for the syntactic sugar

The generation of the syntactic sugar code required the following 2 passages:

- * Analyze the source code of Pulumi's Java APIs for AWS EC2 in order to infer information about the constructors of the various resources and the builders' methods present in the Builder of each **Args** class
- * Use the extracted information to automatically generate the *sugarized* code

The first step has been quite straight forward with the aid of the `JavaParser` library. The second step has been more problematic. As a first attempt, I tried to use the metaprogramming features offered from the new Scala 3 Macros to create the autogenerated code in the form of an [abstract syntax tree](#) (AST). This solution was potentially promising, since Scala also offers the opportunity to convert these ASTs in code and vice versa at compile time, and so telling us about any error at compile time. The problem encountered is that once we defined the macros for a new type (like `cidrBlockOwners`), such a type wasn't available at compile time for the other code. In other words, the types generated through the macro, cannot be referenced in the same project since the whole compilation must finish before having the chance to use the brand new types.

Another option was represented by `Scalameta`, a library to read, analyze, transform and generate Scala programs, but it isn't compatible with Scala 3, and so I had no chance to use it. If the support for Scala 3 will be added to `Scalameta`, it should be considered as a better approach for the generation of the syntactic sugar code in the future.

So, for the second step, a standard *naive* approach has been adopted. The autogenerated code is created with a program that inserts the piece of information extracted from the analysis of the Java APIs with `Javaparser` into a template for the `PulumiBuilderUtilFunctionsForScala` and the `PulumiUtilFunctionsForScala` functions. The generated code can then be exported as a library and included into the dependencies of the building tool used in the Pulumi Scala project.

Pulumi Java APIs libraries inspection with `JavaParser`

Since the code of the project for the inspection is quite verbose (`Javaparser` is a Java library) and not particularly interesting for the final objective of the thesis, I won't report any of the code here. I'll limit to describe the steps that are done to infer the required information from the Java libraries for Pulumi.

Non Args and Args classes In the Java APIs of Pulumi we have two kind of files (and so classes). The firsts are the **non ...Args** files, that are those files that contain the API for the constructor of a given resource. The second kind of files are represented by the **Args** files. These classes contains the Builder definition of the respective class and the APIs of the builders' methods used to pass the arguments of the resource while building it with an instance of a builder. For example, we have the `Vpc.java` file and the `VpcArgs.java` files.

DirExplorer The first class that I defined is `DirExplorer`. This class has the objective to find all the files in a given directory (and the files in the subdirectories),

letting us apply some extra logic during its traverse. We'll be using such a class in a `InferInformation` class to extract all the names of the files of our interest.

InferInformation In the `InferInformation` class we have 3 methods:

listBuilderMethods is the function that opens every `...Args.java` file and, after having parsed an AST of such file, will save all the methods of its builder in a data structure that we'll introduce soon

listConstructorMethods is the function that opens every **non** `...Args.java` and, after having parsed the corresponding AST, checks if a public constructor for the given resource is available. In such a case it will add the name of the class to a List that represents all the constructors that should be generated for our syntactic sugar code.

listFiles is an helper function for the other two methods that just provides the file names of the classes inspected

The data structure used to store the builders' method has the type `Map[String, (String, LinkedList[String])]`. The key of this map is the name of every different builders' method encountered during the parsing of the files. The value of the Map is a list of all the `...Args` classes that contain such a method. In other words, for each method we map all the classes that define such a function. The entry for the `cidrBlock` method on the Map (parsing all the files) looks like this:

```
cidrBlock: [
  DefaultNetworkAcLEgressArgs,
  DefaultNetworkAcLI ingressArgs,
  DefaultRouteTableRouteArgs,
  GetSubnetArgs,
  GetSubnetPlainArgs,
  GetVpcArgs,
  GetVpcPeeringConnectionArgs,
  GetVpcPeeringConnectionPlainArgs,
  GetVpcPlainArgs,
  NetworkAcLEgressArgs,
  NetworkAcLI ingressArgs,
  RouteTableRouteArgs,
  NetworkAcLRuleArgs,
  SubnetArgs,
  SubnetCidrReservationArgs,
  VpcArgs,
  VpcIpv4CidrBlockAssociationArgs
]
```

Among all this values, we can find the `VpcArgs`, `RouteTableRouteArgs` and `SubnetArgs` that we used in our implementation, and to which we passed a CIDR block using the `cidrBlock` method.

With the information achieved we are now ready to fill in the templates and generate the syntactic sugar for the Scala APIs of Pulumi.

Raw automatic syntactic sugar code generation

The class that generates all the code is quite simple. A Java `FileWriter` will take care of writing all the strings that represents our code in the `PulumiBuilderUtilFunctionsForScala.scala` and `PulumiUtilFunctionsForScala.scala` files.

We have two functions, named `writeContentForBuilders` and `writeContentForConstructors` that will write all the *various pieces* of generated code into the files using the `FileWriter`. With *various pieces* I refer to the generated types for the methods of the builders, the imports, the conversion functions, ecc.

Finally we have a bunch of functions that fill the various templates to generate the *various pieces* of code. These functions are: `generateTypes`, `generateBuilderMethods`, `generateConstructors`, and `generateImplicitConversionFunctions`. To have an idea of how the filling of a template works lets consider the `generateConstructors` function:

```
def generateConstructors(extractedConstructors: Array[String]) : Array[String] =
  for con <- extractedConstructors
  yield {
    val functionName = con.drop(con.lastIndexOf( ch = '.' ) + 1)
    val builderCon = con + "Args.Builder";
    "def " + functionName.head.toLowerCase + functionName.tail +
      "(param: String)(init: " +
        builderCon +
        " ?=> Unit, initOpt: (CustomResourceOptions.Builder ?=> Unit) = baseOpts): " +
        con + " =\n" +
        "\tgiven b: " + builderCon + " = " + con + "Args.builder()\n" +
        "\tinit\n" +
        "\tgiven bo: CustomResourceOptions.Builder = CustomResourceOptions.builder()\n" +
        "\tinitOpt\n" +
        "\tnew " + con + "(param, b.build(), bo.build())"
  }
```

Image 5.10: Constructors generation

The template is filled with the variables that represent the name of the constructors, and this is done for each constructor that has been found. Since also the other functions are similar to this one, won't be reported here.

The automatically generated syntactic sugar code

Since the generated files contains many hundreds of lines of code, I'll report here only some samples of each file.

PulumiBuilderUtilFunctionsForScala First we have some default imports:


```

1  package com.cisotto.myvpc.builder
2
3  import com.pulumi.Context
4  import com.pulumi.Pulumi
5  import com.pulumi.core.Output
6  import com.pulumi.resources.{CustomResourceOptions, Resource}
7  import scala.collection.JavaConverters._
8  import collection.convert.ImplicitConversionsToScala.`collection AsScalaIterable`
9  import scala.compiletime.ops.boolean
10 import scala.compiletime.ops.string
11 import scala.language.implicitConversions
12 import com.pulumi.resources.CustomResourceOptions
13 import com.pulumi.resources.ResourceArgs

```

Image 5.11: Default import

Then we have some all the generated union types, that look like:

```

28 type routeTableIdOwners = com.pulumi.aws.ec2.RouteTableAssociationArgs.Builder
29 type vpcIdOwners = com.pulumi.aws.ec2.InternetGatewayArgs.Builder | com.pulumi.aws.ec2.RouteTableArgs.Builder | com.pulumi.aws.ec2.SubnetArgs.Builder
30 type gatewayIdOwners = com.pulumi.aws.ec2.inputs.RouteTableRouteArgs.Builder | com.pulumi.aws.ec2.RouteTableAssociationArgs.Builder
31 type localGatewayIdOwners = com.pulumi.aws.ec2.inputs.RouteTableRouteArgs.Builder
32 type tagsOwners = com.pulumi.aws.ec2.InternetGatewayArgs.Builder | com.pulumi.aws.ec2.RouteTableArgs.Builder | com.pulumi.aws.ec2.SubnetArgs.Builder | com.pulumi.aws.ec2.VpcArgs.Builder
33 type privateDnsHostnamesTypeOnlyOwners = com.pulumi.aws.ec2.SubnetArgs.Builder

```

Image 5.12: Generated union types

The implicit conversion functions are then printed:

```

71 | given tupleToMap[A, B]: Conversion[(A, B), Map[A, B]] =
72 |   (tuple: (A, B)) => Map(tuple)
73 |
74 | given elemToList[A <: ResourceArgs]: Conversion[A, List[A]] =
75 |   (elem: A) => List(elem)

```

Image 5.13: Implicit conversion functions

Finally we have all the builders' methods that we encountered during our visit of the files with the JavaParser project:

```

102 def egressOnlyGatewayId(param: java.lang.String | Output[java.lang.String])(using b: egressOnlyGatewayIdOwners): Unit =
103   b match
104     case builder: com.pulumi.aws.ec2.inputs.RouteTableRouteArgs.Builder =>
105       param match
106         case x: java.lang.String => builder.egressOnlyGatewayId(x)
107         case x: Output[java.lang.String] => builder.egressOnlyGatewayId(x)
108
109
110 def ipv6IpamPoolId(param: java.lang.String | Output[java.lang.String])(using b: ipv6IpamPoolIdOwners): Unit =
111   b match
112     case builder: com.pulumi.aws.ec2.VpcArgs.Builder =>
113       param match
114         case x: java.lang.String => builder.ipv6IpamPoolId(x)
115         case x: Output[java.lang.String] => builder.ipv6IpamPoolId(x)
116
117
118 def cidrBlock(param: java.lang.String | Output[java.lang.String])(using b: cidrBlockOwners): Unit =
119   b match
120     case builder: com.pulumi.aws.ec2.inputs.RouteTableRouteArgs.Builder =>
121       param match
122         case x: java.lang.String => builder.cidrBlock(x)
123         case x: Output[java.lang.String] => builder.cidrBlock(x)
124     case builder: com.pulumi.aws.ec2.SubnetArgs.Builder =>
125       param match
126         case x: java.lang.String => builder.cidrBlock(x)
127         case x: Output[java.lang.String] => builder.cidrBlock(x)
128     case builder: com.pulumi.aws.ec2.VpcArgs.Builder =>
129       param match
130         case x: java.lang.String => builder.cidrBlock(x)
131         case x: Output[java.lang.String] => builder.cidrBlock(x)
132
133
134 def destinationPrefixListId(param: java.lang.String | Output[java.lang.String])(using b: destinationPrefixListIdOwners): Unit =
135   b match
136     case builder: com.pulumi.aws.ec2.inputs.RouteTableRouteArgs.Builder =>
137       param match
138         case x: java.lang.String => builder.destinationPrefixListId(x)
139         case x: Output[java.lang.String] => builder.destinationPrefixListId(x)
140
141
142 def mapPublicToOnLaunch(param: java.lang.Boolean | Output[java.lang.Boolean])(using b: mapPublicToOnLaunchOwners): Unit =

```

Image 5.14: Generated builders' methods

PulumiUtilFunctionsForScala Also here we start with some default imports, then we have the baseOpts function and then all the constructors for the various resources:

```

1 package com.cisotto.myvpc.function
2
3 import com.pulumi.Context
4 import com.pulumi.Pulumi
5 import com.pulumi.core.Output
6 import com.pulumi.resources.{CustomResourceOptions, Resource}
7 import scala.collection.JavaConverters._
8 import collection.convert.ImplicitConversionsToScala.`collection AsScalaIterable`
9 import scala.compiletime.ops.boolean
10 import scala.compiletime.ops.string
11 import scala.language.implicitConversions
12
13 def baseOpts(using o: CustomResourceOptions.Builder) : Unit = {}
14
15 def ami(param: String)(init: com.pulumi.aws.ec2.AmiArgs.Builder => Unit, initOpt: (CustomResourceOptions.Builder => Unit) = baseOpts): com.pulumi.aws.ec2.Ami =
16   given b: com.pulumi.aws.ec2.AmiArgs.Builder = com.pulumi.aws.ec2.AmiArgs.builder()
17   init
18   given bo: CustomResourceOptions.Builder = CustomResourceOptions.builder()
19   initOpt
20   new com.pulumi.aws.ec2.Ami(param, b.build(), bo.build())
21
22 def amiCopy(param: String)(init: com.pulumi.aws.ec2.AmiCopyArgs.Builder => Unit, initOpt: (CustomResourceOptions.Builder => Unit) = baseOpts): com.pulumi.aws.ec2.AmiCopy =
23   given b: com.pulumi.aws.ec2.AmiCopyArgs.Builder = com.pulumi.aws.ec2.AmiCopyArgs.builder()
24   init
25   given bo: CustomResourceOptions.Builder = CustomResourceOptions.builder()
26   initOpt
27   new com.pulumi.aws.ec2.AmiCopy(param, b.build(), bo.build())
28
29 def amiFromInstance(param: String)(init: com.pulumi.aws.ec2.AmiFromInstanceArgs.Builder => Unit, initOpt: (CustomResourceOptions.Builder => Unit) = baseOpts): com.pulumi.aws.ec2.AmiFromInstance =
30   given b: com.pulumi.aws.ec2.AmiFromInstanceArgs.Builder = com.pulumi.aws.ec2.AmiFromInstanceArgs.builder()
31   init
32   given bo: CustomResourceOptions.Builder = CustomResourceOptions.builder()
33   initOpt
34   new com.pulumi.aws.ec2.AmiFromInstance(param, b.build(), bo.build())
35
36 def amiLaunchPermission(param: String)(init: com.pulumi.aws.ec2.AmiLaunchPermissionArgs.Builder => Unit, initOpt: (CustomResourceOptions.Builder => Unit) = baseOpts): com.pulumi.aws.ec2.AmiLaunchPermission =
37   given b: com.pulumi.aws.ec2.AmiLaunchPermissionArgs.Builder = com.pulumi.aws.ec2.AmiLaunchPermissionArgs.builder()
38   init
39   given bo: CustomResourceOptions.Builder = CustomResourceOptions.builder()
40   initOpt
41   new com.pulumi.aws.ec2.AmiLaunchPermission(param, b.build(), bo.build())
42
43 def availabilityZoneGroup(param: String)(init: com.pulumi.aws.ec2.AvailabilityZoneGroupArgs.Builder => Unit, initOpt: (CustomResourceOptions.Builder => Unit) = baseOpts): com.pulumi.aws.ec2.AvailabilityZoneGroup =

```

Image 5.15: baseOpts function and generated constructors

Final observations on the generated code The builders' methods are really similar to each other, but they are not all following the same exact pattern across the whole AWS EC2 module. Due to this fact, the generation of the code was affordable for the resources used in the case study, but to cover some corner cases for the rest of the resources some extra work both for the parser and for the algorithm that fills in the template would have been required. Because of lack of time and since was not the final aim of the thesis to develop a complete support of Scala for all the AWS EC2 module, only the partial support for the used resources has been generated. The constructors, instead, are all similar to each other and a complete support for AWS EC2 has been generated.

Chapter 6

Comparison between the languages for Pulumi and the advantages of Scala

Here all the advantages and disadvantages detected while using Typescript and Scala for our case study will be presented.

6.1 Code readability in Typescript vs in Scala

6.1.1 Readability in Typescript

Typescript is less verbose than many other programming languages. In the implementation we can appreciate how the passing of the builders methods' parameters have been achieved in a concise way using the JSON format. This is fitting very well in a declarative approach and is very readable and intuitive, but some lacks of the language caused the code to lose readability and conciseness.

Less readable code with `pulumi.all` and `.apply`

Lets consider once again the Typescript version of the function that is responsible for creating the subnets across the various availability zones:

```
protected createAZSubnets(isPvt: Boolean) : Output<Subnet[]>{
  this.availableZones = aws.getAvailabilityZonesOutput()

  return pulumi.all([this.availableZones.names, this.vpc!.id]).apply(([azNames, vpcId]) => {
    let i = 0
    let listToPushInto: Subnet[] = Array<aws.ec2.Subnet>()

    azNames.forEach(azName => {
      let fullName = azName + (isPvt ? "-pvt" : "-pub") + "-subnet-typescript"
      listToPushInto.push(new Subnet(fullName, {
        vpcId: vpcId,
        availabilityZone: azName,
        cidrBlock: isPvt ? this.pvtSubnetsCidrs[i] : this.pubSubnetsCidrs[i],
        tags: {
          Name: fullName,
        },
      }));
      i++;
    });
    return listToPushInto
  });
}
```

Image 6.1: Typescript subnets creation

When talking about readability, the `pulumi.all` and the `apply` functions are quite cryptic. It takes us a little time to understand what are the return types of the `pulumi.all` and of the `apply` functions. I remind here that the types of these two functions are fully explained in the [The apply's lambda](#) paragraph.

We'll make further considerations on this function in the [Readability of the Scala's for yield vs pulumi.all and .apply](#) paragraph.

6.1.2 Readability in Scala

Also in Scala, thanks to the syntactic sugar used, we achieved a surprisingly readable code while defining the resources to be created on our Pulumi stack.

Function currying

The currying of Scala used to define our *sugarized* functions granted us the possibility to declare the resources with this syntax:

```
val resourceName = sugarizedResourceConstructor("res-name") {
  firstParameter(...)
  secondParameter(...)
  ...
}
```

This code is really readable (it resembles to a function definition) and is perfectly fitting in a declarative approach since we can have a straight list of the parameters we want to set for our resource.

Hidden builders

Thanks to the `given` and `using` keywords, builders aren't manually instantiated and we don't require to explicitly say on which builder instance we are calling the builders' methods. This is letting us have an even more lightweight code that is really just focusing on what we need to instantiate instead of the how we could instantiate it. Let's consider the VPC creation in our Scala solution and how would it be created instead in a Java solution.

Scala solution:

```
1 val myVpc = vpc("scala-main") {  
2   cidrBlock("10.136.0.0/24")  
3   tags("Name" -> "myVpcScala")  
4 }
```

Java solution:


```
1 protected Vpc vpc = new Vpc("my-vpc-java", VpcArgs.builder()  
2   .cidrBlock("10.136.0.0/24")  
3   .instanceTenancy("default")  
4   .tags(Map.of("Name", "myVpcJava"))  
5   .build(),  
6   CustomResourceOptions.builder()  
7     .parent(this)  
8     .build());
```

Even if our syntactic sugar is using the very same APIs used from the Java's solution, the readability and the conciseness are entirely on another level.

Implicit conversion functions to get rid of Map and List constructors while passing a single value

The implicit conversion functions presented in the [Implicit conversion functions](#) paragraph let us get rid of the constructor of the Map and of the List if we're interested in passing a single value.


It is common, while declaring a new resource, to pass a single parameter to a builder's method that is actually expecting a list or a map of parameters. In such cases the following syntax could be annoying:

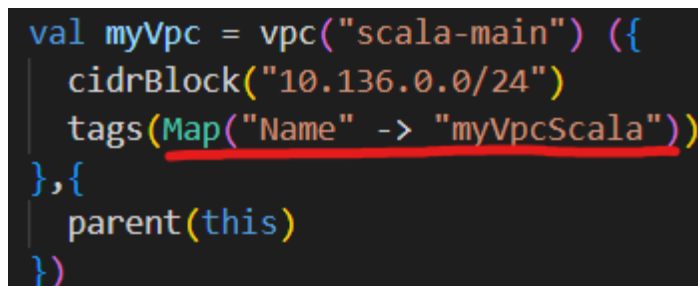

```
val myVpc = vpc("scala-main") ({  
  cidrBlock("10.136.0.0/24")  
  tags(Map("Name" -> "myVpcScala"))  
}, {  
  parent(this)  
})
```

Image 6.2: Singleton map for a parameter

But thanks to the implicit conversion functions the final result, as we have seen, is the desired one:

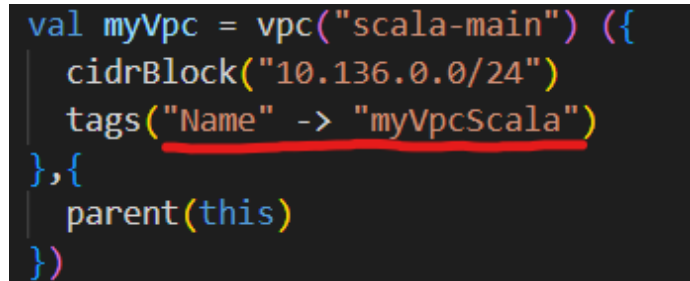


```
val myVpc = vpc("scala-main") ({
  cidrBlock("10.136.0.0/24")
  tags("Name" -> "myVpcScala")
},{
  parent(this)
})
```

Image 6.3: Tuple for a parameter

For a single parameter the difference of effort in explicitly writing the map constructor can be negligible, but when it comes to define many resources that use multiple methods that accept collections as input parameters, such a feature can really save us a lot of keystrokes, while keeping our code more readable and simple.

Readability of the Scala's for yield vs pulumi.all and .apply

Lets consider the function that creates the subnets. With respect to the Typescript solution, the Scala one is more readable:

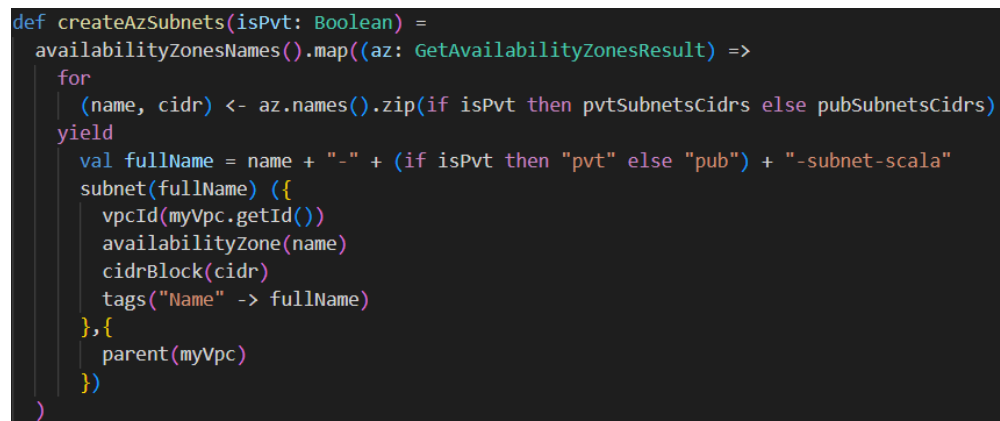

```
def createAzSubnets(isPvt: Boolean) =
  availabilityZonesNames().map((az: GetAvailabilityZonesResult) =>
    for
      (name, cidr) <- az.names().zip(if isPvt then pvtSubnetsCidrs else pubSubnetsCidrs)
    yield
      val fullName = name + "-" + (if isPvt then "pvt" else "pub") + "-subnet-scala"
      subnet(fullName) ({
        vpcId(myVpc.getId())
        availabilityZone(name)
        cidrBlock(cidr)
        tags("Name" -> fullName)
      }, {
        parent(myVpc)
      })
  )
```

Image 6.4: Scala subnets creation

First, the `map` function is much more intuitive with respect to the `pulumi.all` and `apply` combination in the [Typescript implementation](#). Moreover, the for comprehension used in the Scala version is a more elegant and concise solution. In fact, the map function is doing the work of both the `pulumi.all` and `apply` functions, with much less code and in a much more readable way.

Furthermore, with Scala we're using the language feature of the for comprehension to automatically create a collection of the generated subnets and return them all together. Differently, Typescript implementation requires us to explicitly insert the generated

subnets in a variable as a side effect of the `foreach`. Moreover, with Typescript, we also have to explicitly return the list at the end of the `apply`'s lambda.

6.2 Expressiveness in Typescript vs in Scala

6.2.1 `pulumi.all` and `.apply` vs for comprehension and monads

Typescript compensate for its lack of expressiveness with the `pulumi.all` function

In the [pulumi.all](#) paragraph of the subnets creation section, we have seen how the concatenation of `apply` to the `pulumi.all` function let us create the subnets across the various availability zones. Anyway, The process of wrapping two different `Output` values in a single `Output` using the `pulumi.all` function, and then extract that newly created value from the `Output` context is verbose and complex.

Now, the `pulumi.all` function is effective but its existence is required to compensate for the lack of expressiveness of the Typescript language.

Scala's expressiveness let us get rid of `pulumi.all`

The functional nature of the Scala language let us get rid of the `pulumi.all` function thanks to the monad implementation for the `Output` type. The `apply` function became the actual implementation of the `flatMap` function for the `Output[Monad]`. The `map` function that we used in our function for the [subnets creation](#) has been implemented only on the bases of the `flatMap` function. So, we replaced the `pulumi.all` function with the `map` function offered by the `Monad[Output]`, and the `apply` function is now hidden behind the `map` implementation.

This achievement is perfectly depicting how the expressiveness of Scala permitted us to satisfy our need of applying functions on values contained inside a context (`Output` in our case), without resorting to an ad-hoc function created only for that specific purpose. In fact, we would be able to implement a monad for any context type, while `pulumi.all` is working exclusively with the `Output` type. Moreover, the `map` function is much more intuitive to an user rather than the `pulumi.all` and the explicit `apply` functions.

Chapter 7

Conclusions

7.1 The potential of Scala for Pulumi

Scala's functional paradigm is matching very well the declarative approach of Pulumi. Therefore, the higher order functions, the currying, and the monad for the `Output` type, along with the modern features offered by the Scala language such as the `using` and `given` keywords, has let us create an expressive, concise, and readable syntactic sugar for our Scala Pulumi APIs.

Pulumi offers good challenges for the programming languages when it comes to declare resources that depends on other resources. Scala is able to keep up with these challenges, in fact its design features are letting us work perfectly with Pulumi without having to resort to ad-hoc functions created to compensate other languages' shortcoming, such as the `pulumi.all` function.

In my opinion, a further extension of the work done for the support of Scala in Pulumi would be a great addition to the currently supported languages. If possible, a official support of Scala for Pulumi would be much appreciated from the community.

Glossary

AST In computer science, an abstract syntax tree (AST), or just syntax tree, is a tree representation of the abstract syntactic structure of text (often source code) written in a formal language. Each node of the tree denotes a construct occurring in the text. [44](#), [59](#)

aws AWS stands for Amazon Web Services. It is a comprehensive, evolving cloud computing platform provided by Amazon that includes a mixture of infrastructure-as-a-service (IaaS), platform-as-a-service (PaaS) and packaged-software-as-a-service (SaaS) offerings. AWS services can offer an organization tools such as compute power, database storage and content delivery services. [ii](#), [1](#), [7](#), [59](#)

azure Microsoft Azure, formerly known as Windows Azure, is Microsoft’s public cloud computing platform. It provides a broad range of cloud services, including compute, analytics, storage and networking. [1](#), [7](#), [59](#)

Azure Resource Manager Azure Resource Manager is the deployment and management service for Azure. It provides a management layer that enables you to create, update, and delete resources in your Azure account . [7](#), [59](#)

cloud computing Cloud computing is on-demand access, via the internet, to computing resources—applications, servers (physical servers and virtual servers), data storage, development tools, networking capabilities, and more—hosted at a remote data center managed by a cloud services provider. [1](#), [59](#)

Cloud Deployment Manager Google Cloud Deployment Manager is an infrastructure deployment service that automates the creation and management of Google Cloud resources. Write flexible template and configuration files and use them to create deployments that have a variety of Google Cloud services, such as Cloud Storage, Compute Engine, and Cloud SQL, configured to work together. [7](#), [59](#)

EC2 EC2 stands for elastic computing 2. EC2 is a module of AWS that provides scalable computing capacity in the Amazon Web Services (AWS) Cloud . [ii](#), [14](#), [59](#)

gcp Google Cloud Platform (GCP), offered by Google, is a suite of cloud computing services that runs on the same infrastructure that Google uses internally for its end-user products, such as Google Search, Gmail, Google Drive, and YouTube. Alongside a set of management tools, it provides a series of modular cloud services including computing, data storage, data analytics and machine learning. [1](#), [7](#), [59](#)

internet gateway An internet gateway is a network component that serves as the entry and exit point between a private network, such as a Virtual Private Cloud (VPC) in the cloud, and the public internet.

An internet gateway is responsible for translating the private IP addresses used within a private network to public IP addresses used on the internet, and vice versa. It enables instances within a VPC to communicate with the internet, and allows external users and resources to communicate with instances within the VPC.

An internet gateway typically includes two network interfaces - one that connects to the VPC, and another that connects to the public internet. It forwards traffic between the VPC and the internet, and routes traffic between the different subnets within the VPC. [22](#), [60](#)

Javaparser JavaParser is a Java library that provides you with an Abstract Syntax Tree of your Java code. The AST structure then allows you to work with your Java code in an easy programmatic way. [ii](#), [60](#)

mixin-based composition In scala, trait mixins means you can extend any number of traits with a class or abstract class. You can extend only traits or combination of traits and class or traits and abstract class, Traits are used to share interfaces and fields between classes. They are similar to Java 8's interfaces . [13](#), [60](#)

routing table In computer networking, a routing table, or routing information base (RIB), is a data table stored in a router or a network host that lists the routes to particular network destinations, and in some cases, metrics (distances) associated with those routes. The routing table contains information about the topology of the network immediately around it.

In our case, the routing table has been used to bind the public subnets to the internet gateway, so that they can receive and send packets over the internet. [22](#), [60](#)

sequence comprehension In Scala, a sequence comprehension is a syntactic construct that allows you to create new sequences by transforming and filtering existing ones. It's similar to a for loop in other languages, but with a more concise and functional syntax . [18](#), [60](#)

Subnet In computer networking, a subnet is a smaller network within a larger network. It is created by dividing a larger network into smaller segments, with each segment having its own unique network address.

A subnet is identified by its subnet mask, which is a 32-bit number used to divide an IP address into two parts - the network address and the host address. The subnet mask determines which bits in the IP address are used to identify the network and which bits are used to identify the hosts.

Subnets are commonly used to improve network performance and security. By dividing a larger network into smaller subnets, network traffic can be reduced and more efficiently managed. Additionally, subnets can be used to isolate different parts of a network for security purposes, preventing unauthorized access to sensitive data or resources. [22](#), [60](#)

terraform Terraform is an open-source infrastructure as code (IaC) tool developed by HashiCorp. It allows developers to automate the creation, modification, and deletion of cloud resources in a scalable and efficient way . [9](#), [60](#)

vpc A virtual private cloud (VPC) is a secure, isolated private cloud hosted within a public cloud. VPC customers can run code, store data, host websites, and do anything else they could do in an ordinary private cloud, but the private cloud is hosted remotely by a public cloud provider. (Not all private clouds are hosted in this fashion.) VPCs combine the scalability and convenience of public cloud computing with the data isolation of private cloud computing. [22](#), [61](#)

Bibliography

Consulted web sites

- 10 years of cloud infrastructure as code - history and trends.* URL: <https://www.nordhero.com/posts/10-years-iac/>.
- Context functions.* URL: <https://docs.scala-lang.org/scala3/reference/contextual/context-functions.html>.
- Currying.* URL: <https://towardsdatascience.com/what-is-currying-in-programming-56fd57103431>.
- For Comprehension.* URL: <https://docs.scala-lang.org/tour/for-comprehensions.html>.
- Functors and Monads.* URL: <https://docs.scala-lang.org/scala3/reference/contextual/type-classes.html>.
- Infrastructure as Code.* URL: https://en.wikipedia.org/wiki/Infrastructure_as_code.
- Infrastructure as Code - Managing infrastructure resources with code.* URL: <https://towardsdatascience.com/infrastructure-as-code-f153d810428b>.
- Pattern matching.* URL: <https://docs.scala-lang.org/tour/pattern-matching.html#>.
- Pulumi.* URL: <https://www.pulumi.com/>.
- Scala trait.* URL: <https://docs.scala-lang.org/tour/traits.html>.
- Union type.* URL: <https://docs.scala-lang.org/scala3/book/types-union.html>.
- Using and Given.* URL: <https://blog.rockthejvm.com/scala-3-given-using/>.