



CRR Notification

- CRR notification is based on push and pull mechanism both.
- Pull is being used at time of page load only, so that in case if cache service goes down all together then we still have notification in UI page based on Pull mechanism.
- Push is being used for sending notifications as and when sandbox status is being changed.

Flow Chart

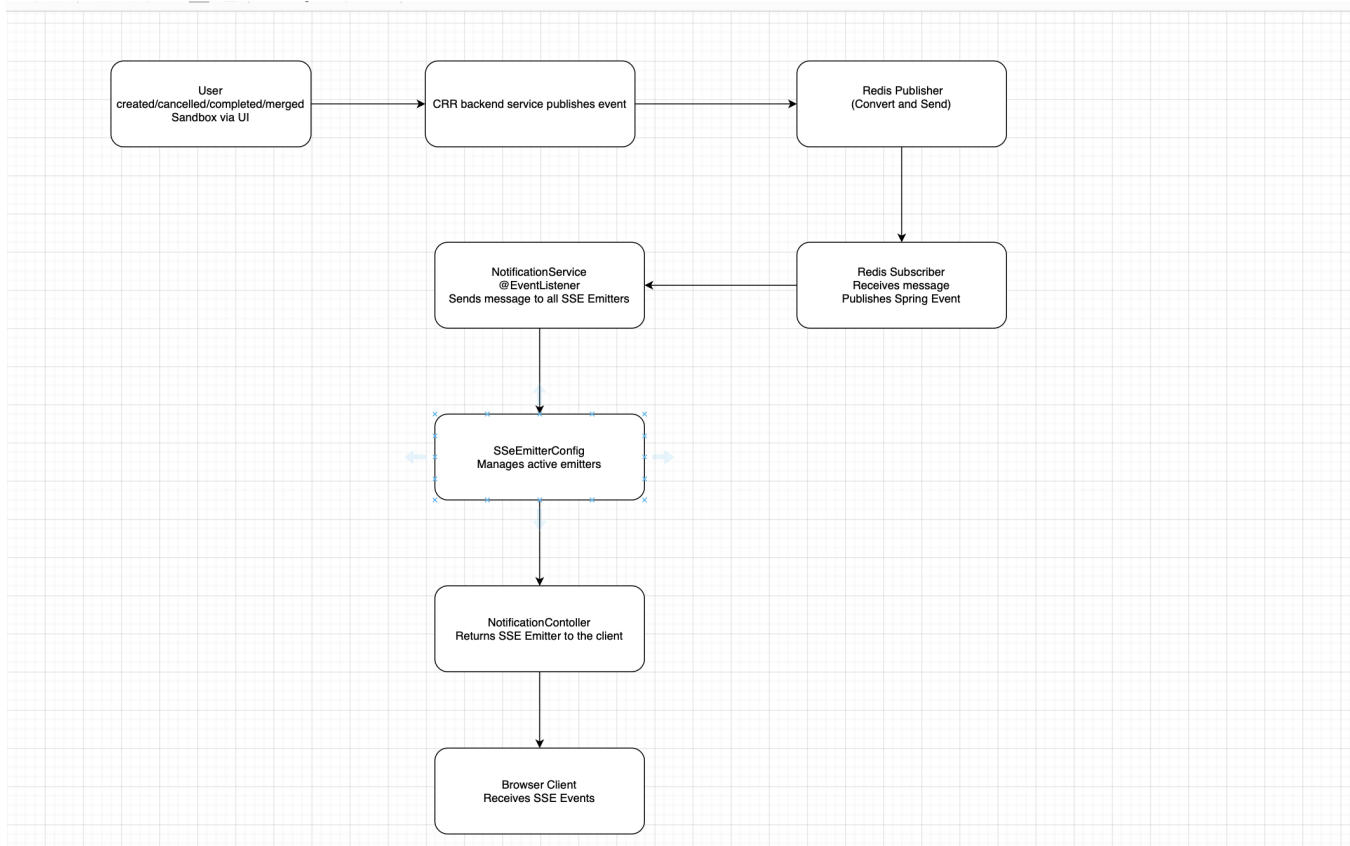

Architecture

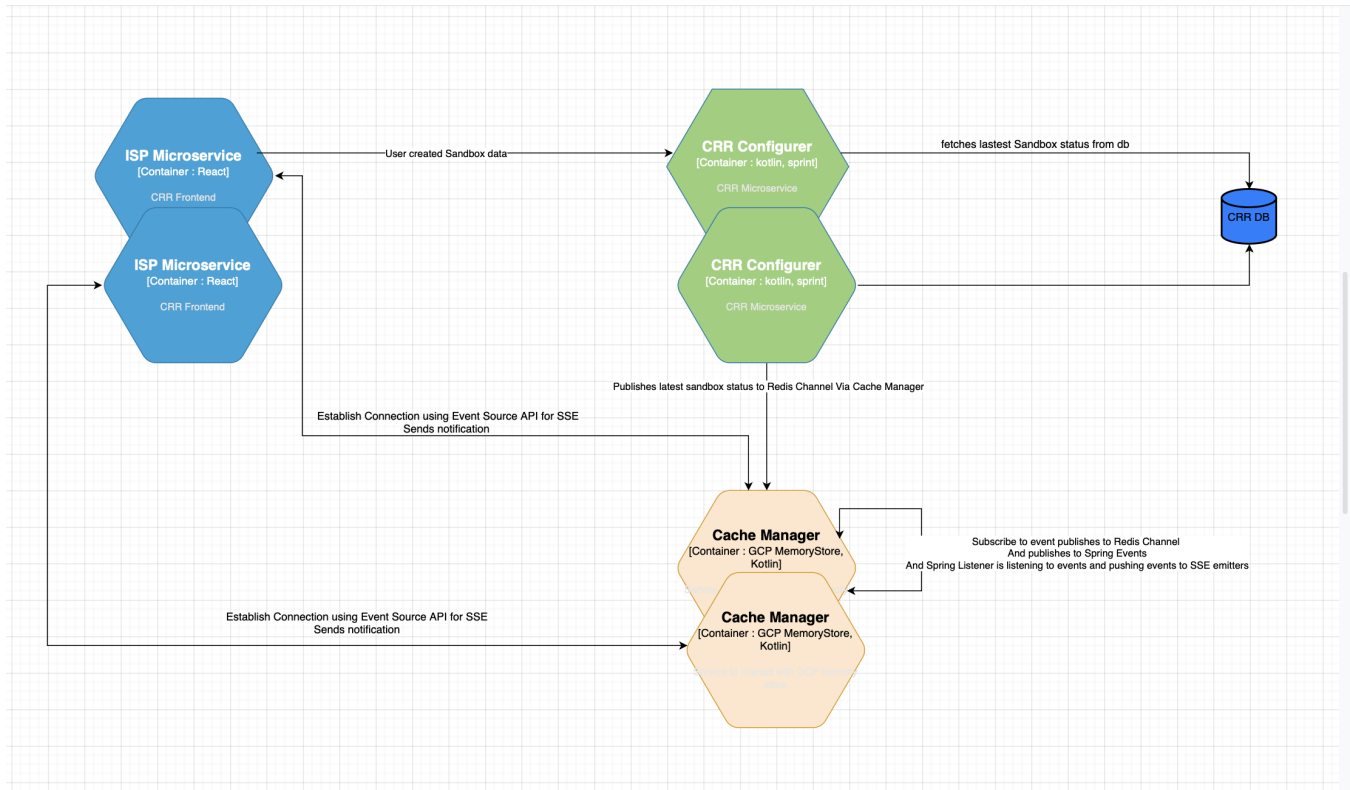

For push based notifications, Redis PubSub is used and below is the reason of choosing **Redis PubSub**

	Google Pub Sub	RTF	Redis Pubsub
Message Consumption	Only single Pod consumes Pub/Sub Message	Only single Pod consumes Pub/Sub Message	Redis fan-out to all pods

As, SSE (ServerClient) is used to push notifications, where each client is connected to one of the backend instances, so it was important that each instance of server have same data to push, which is why Redis Pubsub is used.