

CRR CACHE Service Deployment

1. Raise a ticket to LUMI for Auth String and Certificate of Redis Memory Store.

```
https://jira.aexp.com/jira/browse/LUCS-3709
```

2. Convert .pem certificate file to .jks file using below command

```
keytool -import -trustcacerts -alias rediscert -file server-ca.pem -keystore truststore.jks -storepass changeit
```


3. Add Auth String as REDIS_PWD in <https://ecpvault.aexp.com/environments> for cache service
4. Add .jks as file with key MEMORY_STORE_REDIS_CA_CERT in <https://ecpvault.aexp.com/environments> for cache service
5. After uploading the .jks file edit MEMORY_STORE_REDIS_CA_CERT and remove below from the uploaded content

```
data:application/octet-stream;base64,
```

6. Get Service Account created with MemoryStore RoleBinding

 [LUCS-3607 - Authenticate](#) to see issue details

7. Add service account in corresponding value.yml file for helm.

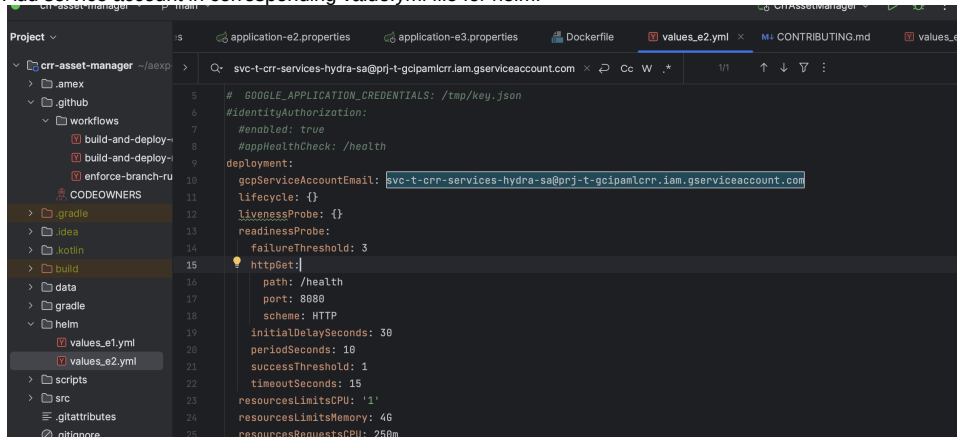


```
Project: crr-asset-manager ~/aexp
application-e2.properties application-e3.properties Dockerfile values_e2.yml CONTRIBUTING.md values_e1
crr-asset-manager ~/aexp
  .amex
  .github
    workflows
      build-and-deploy-
      build-and-deploy-
      enforce-branch-ru
    CODEOWNERS
  gradle
  idea
  kotlin
  build
  data
  gradle
  helm
    values_e1.yml
    values_e2.yml
  scripts
  src
  .gitattributes
  .gitignore

5 # GOOGLE_APPLICATION_CREDENTIALS: /tmp/key.json
6 #identityAuthorization:
7   #enabled: true
8   #appHealthCheck: /health
9 deployment:
10   gcpServiceAccountEmail: svc-t-crr-services-hydra-sa@prj-t-gcipamlcrr.iam.gserviceaccount.com
11   lifecycle: {}
12   livenessProbe: {}
13   readinessProbe:
14     failureThreshold: 3
15     httpGet:
16       path: /health
17       port: 8888
18       scheme: HTTP
19     initialDelaySeconds: 30
20     periodSeconds: 10
21     successThreshold: 1
22     timeoutSeconds: 15
23   resourcesLimitsCPU: '1'
24   resourcesLimitsMemory: 4G
25   resourcesRequestsCPU: 250m
```

8. Get a Service Profile created

RITM6236341

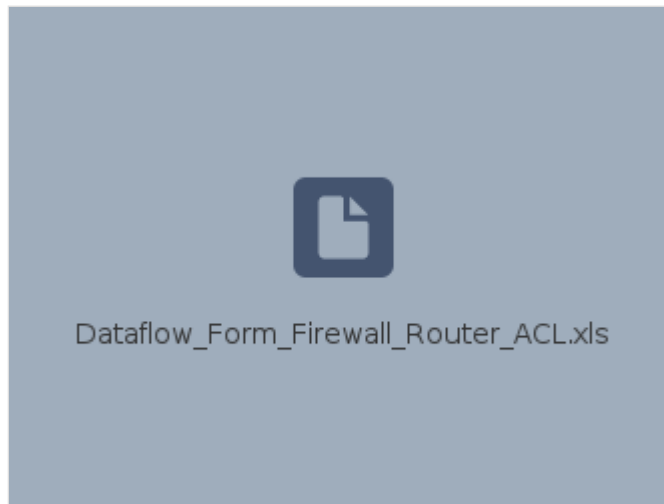

ACL Request Template -

9. Get the DNS created for memory store ip, using infrabot, giving details in below format, Sid is crr:

Give below details:


Private IP - <your memstore IP>

GCP Project : <gcp project>

Hostname of A record - ms-d-<sid>.gcp.aexp.com

Requirement: Please add these records in gcp.aexp.com domain in Shared services project. Also enable reverse dns lookup.

10. Once, Service Profile and DNS get created, add it in Firewall, like below

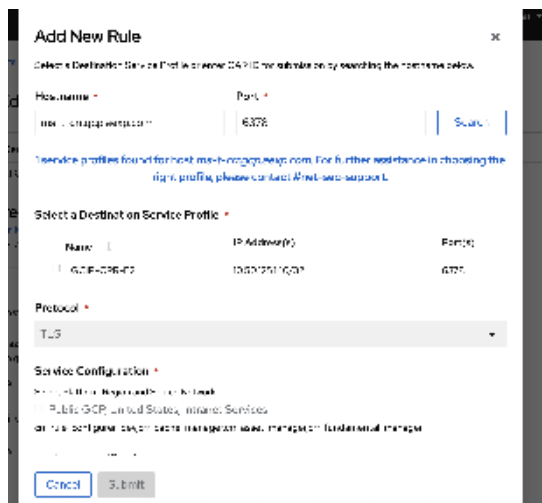

Add New Rule

Select a Destination Service Profile (GCP) to add rules by searching the service profile.

Name: ms-d-crraexp.com **Port:** 6379 **Submit**

Service profiles found for host ms-d-crraexp.com. For further assistance in choosing the right profile, please contact [infrastructure@ms-d-crraexp.com](#).

Select a Destination Service Profile:

Name	IP Address(es)	Port(s)
ms-d-crraexp.com	10.0.0.1/24	6379

Protocol: TCP

Service Configuration:

Service Profile: ms-d-crraexp.com

Public IP: 10.0.0.1

Private IP: 10.0.0.1

Cancel **Submit**

11. After all prerequisite are set, deploy the service.