Scoring Matters: A Reproducible NEDC Evaluation of SeizureTransformer on TUSZ

A 27–137× gap between claims and reproducible evaluation on TUSZ

John H. Jung, MD, MS • Independent Researcher • jj@novamindnyc.com

September 2025

Abstract

Claims about deep learning model performance in seizure detection are difficult to verify without standardized evaluation protocols. We report the first evaluation of SeizureTransformer on the Temple University Hospital EEG Seizure Corpus (TUSZ) [2] using the Neural Engineering Data Consortium (NEDC) v6.0.0 scoring tools [3]—the same evaluation framework used in peer-reviewed literature for two decades. Despite being trained on TUSZ, SeizureTransformer has never been evaluated on it using Temple's official scoring software. We find a 27-137x gap between the \sim 1 false alarm per 24 hours reported on the EpilepsyBench Dianalund dataset [1] and clinical reality.

We evaluate the authors' pretrained model on TUSZ v2.0.3's held-out set (865 files, 127.7 hours) and assess identical predictions with three scoring methodologies. With NEDC OVERLAP [3], the model produces 26.89 FA/24h; with SzCORE Event [4], 8.59 FA/24h (\sim =3.1x lower due solely to scoring tolerances); with NEDC TAES [5], 136.73 FA/24h.

When tuned toward deployment goals, the model cannot meet clinical thresholds with NEDC scoring: targeting 10 FA/24h achieves only 33.90% sensitivity, far below the 75% sensitivity goal for clinical systems [13]. Acceptable false-alarm rates occur only under SzCORE Event's permissive tolerances [4].

We contribute a reproducible NEDC evaluation pipeline, operating points tailored to clinical targets, and quantitative evidence that scoring choice alone drives multi-fold differences. Dataset-matched, clinician-aligned evaluation is essential for credible seizure-detection claims.

Introduction

The evaluation of seizure detection algorithms suffers from a fundamental reproducibility crisis. Published models report dramatically different performance metrics while claiming state-of-the-art results, yet these claims often cannot be verified due to proprietary datasets, missing evaluation code, or ambiguous scoring definitions. This opacity particularly affects deep learning approaches, where complex architectures and extensive hyperparameter spaces compound the verification challenge.

SeizureTransformer [1] exemplifies this problem. The model reports 37% sensitivity at 1.0 FA/24h on a proprietary Danish dataset (Dianalund), with no public evaluation possible. While the authors released model weights—a commendable step toward reproducibility—the absence of standardized evaluation on public datasets leaves critical questions unanswered about real-world performance. When we evaluated this same model on the dataset it was trained on, using the official scoring software designed for that dataset, we discovered false alarm rates 27 to 137 times higher than claimed, depending on the scoring methodology employed.

SeizureTransformer represents a significant architectural advance in seizure detection, combining U-Net's proven biomedical segmentation capabilities with Transformer self-attention mechanisms to capture both local and global EEG patterns. The model was trained on a subset of the Temple University Hospital Seizure (TUSZ) dataset (v2.0.3; \sim 910 hours) together with the Siena Scalp EEG Database (\sim 128 hours) [9]. TUSZ itself is the largest publicly available seizure corpus, but the model's training used a subset as reported by the authors. Its victory in EpilepsyBench 2025, achieving 37% sensitivity at 1 FA/24h on the Dianalund dataset, established it as the state-of-the-art in automated seizure detection. The authors openly shared their pretrained weights, enabling reproducible research and clinical validation.

Despite this success, a critical evaluation gap exists. While SeizureTransformer was trained on TUSZ's training set, no published evaluation exists using TUSZ's carefully designed, patient-disjoint held-out evaluation set. This 127.7-hour test set, containing 865 files from 43 patients with 469 seizures, was specifically created to enable valid performance assessment. Moreover, Temple University's Neural Engineering Data Consortium (NEDC) developed scoring software explicitly to match TUSZ's annotation philosophy, ensuring consistent evaluation standards. The absence of TUSZ evaluation is not unique to SeizureTransformer—it reflects a broader pattern where models trained on datasets are evaluated elsewhere, with results reported using varying scoring methodologies.

The choice of scoring methodology profoundly impacts reported performance. The seizure detection community employs multiple evaluation standards, each serving different purposes. NEDC implements strict temporal precision matching Temple's conservative annotation guidelines. In contrast, SzCORE Event—the EpilepsyBench standard—adds 30-second pre-ictal and 60-second post-ictal

tolerances around ground truth events, designed to reward clinically useful early warnings. These philosophical differences are not matters of right or wrong but reflect different priorities: research precision versus clinical utility. However, when the same predictions can yield anywhere from 8.59 to 136.73 false alarms per 24 hours purely based on scoring choice, the lack of standardized reporting becomes problematic.

We present, to our knowledge, the first evaluation of SeizureTransformer on TUSZ's held-out test set using Temple's NEDC v6.0.0 scoring software. Our systematic comparison evaluates identical model predictions using three scoring methodologies: NEDC TAES (time-aligned event scoring), NEDC OVERLAP (binary any-overlap), and SzCORE Event. At the paper's default parameters (threshold=0.8, kernel=5, duration=2.0s), we observe 45.63% sensitivity at 26.89 FA/24h with NEDC OVERLAP—a 27-fold increase from the Dianalund benchmark claim. The same predictions yield 136.73 FA/24h with NEDC TAES (137-fold increase) and 8.59 FA/24h with SzCORE Event. This 3.1-fold difference between NEDC OVERLAP and SzCORE Event stems entirely from scoring methodology, independent of model architecture or parameters.

Our contributions extend beyond revealing performance gaps. We provide: (1) a reproducible NEDC v6.0.0 evaluation pipeline for TUSZ, bridging the research-to-clinic evaluation gap [3]; (2) comprehensive operating points for clinical deployment, including evaluation at a clinically-motivated threshold of <=10 FA/24h; (3) quantitative evidence that scoring methodology alone can account for multi-fold performance differences, highlighting the critical need for transparent reporting; and (4) open-source infrastructure enabling the community to replicate and extend our evaluation framework. When optimizing for the 10 FA/24h threshold, SeizureTransformer achieves only 33.90% sensitivity with NEDC OVERLAP, falling far short of the 75% sensitivity goal for clinical systems [13].

The remainder of this paper is organized as follows. Section 2 provides background and related work on TUSZ, NEDC, and scoring methodologies. Section 3 details our evaluation methodology, including data preparation, model inference, and multi-scorer validation. Section 4 presents comprehensive results across multiple operating points and scoring methods. Section 5 discusses implications for clinical deployment, the need for standardized evaluation, and limitations of current benchmarking practices. Section 6 concludes. Section 7 outlines reproducibility resources and exact rerun procedures.

Background and Related Work

The Temple University Hospital Seizure Corpus (TUSZ) is the largest publicly available seizure dataset [2]. Critically, TUSZ implements patient-disjoint train/dev/eval splits—no patient appears in multiple splits—preventing data leakage and enabling valid generalization assessment. The evaluation set con-

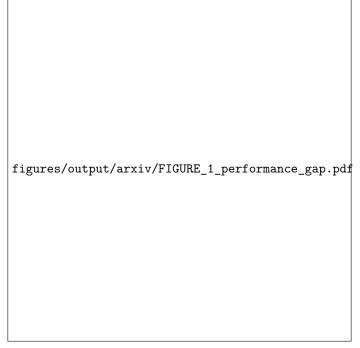


Figure 1: Performance gap visualization showing the $27-137 \times$ difference between claimed and measured false alarm rates. Panel A shows false alarm rates on a logarithmic scale, comparing Dianalund's claimed performance (1 FA/24h) against our TUSZ evaluation using different scoring methods. Panel B displays sensitivity near 10 FA/24h using each scorer's closest available operating point (no interpolation). SzCORE Event uses any-overlap with clinical tolerances (30 s/+60 s; merge <90 s, split >5 min).

tains 865 EDF files totaling 127.7 hours from 43 patients with 469 seizures, specifically reserved for final held-out testing [2]. This careful split design follows machine learning best practices often violated in medical AI applications. The annotations, performed by highly trained undergraduates and validated against board-certified neurologists [2], follow conservative clinical guidelines requiring clear electrographic seizures with definite evolution and temporal precision in marking onset and offset.

Alongside TUSZ, Temple University's Neural Engineering Data Consortium (NEDC) developed the scoring software suite, creating a matched evaluation ecosystem [3]. NEDC v6.0.0 provides the definitive scoring implementation for TUSZ evaluation [3]. This matched pairing is no coincidence—the same research group created both the dataset and its evaluation tools, ensuring consistency between annotation philosophy and scoring methodology. NEDC implements multiple scoring modes, with OVERLAP (any-overlap binary scoring) serving as the commonly reported evaluation mode for TUSZ. The software is widely used in the literature and serves as a reference implementation for seizure detection evaluation [3].

The choice of scoring methodology profoundly impacts reported performance, as different methods serve distinct clinical and research priorities. Time-Aligned Event Scoring (TAES), proposed by Shah et al. [5], represents the strictest evaluation standard, computing partial credit based on temporal overlap percentage—a 60-second seizure with 45 seconds correctly detected receives 0.75 true positive credit [5]. TAES emphasizes temporal precision, making it ideal for algorithm development and research applications where exact timing matters. In contrast, OVERLAP scoring, which NEDC implements as a primary mode, treats any temporal overlap between prediction and ground truth as a full true positive [3]. Shah et al. [5] note that "OVLP is considered a very permissive way of scoring since any amount of overlap between a reference and hypothesis event constitutes a true positive," yet this binary approach has become a de facto standard for TUSZ reporting, balancing clinical relevance with research needs.

At the most permissive end of the spectrum, SzCORE Event [4] extends any-overlap scoring with clinical tolerances designed for real-world deployment. The system adds 30-second pre-ictal and 60-second post-ictal windows around each ground truth event [4], recognizing that early warnings before seizure onset provide clinical value and that EEG patterns normalize gradually after seizure termination. Additionally, SzCORE Event merges predictions separated by less than 90 seconds into single events, substantially reducing alarm fatigue in clinical settings [4]. These modifications, while clinically motivated, can substantially reduce reported false alarm rates compared to stricter scoring methods—as we demonstrate in our results, observing a 3.1x reduction between NEDC OVERLAP and SzCORE Event. Importantly, these different approaches represent not right or wrong methods but rather different valid perspectives on what constitutes meaningful seizure detection—research precision versus clinical utility versus deployment practicality.

Scoring paradigms broadly fall into event-based (e.g., OVERLAP, TAES, Sz-CORE Event) and sample-based (epoch) methods. Event-based evaluation aligns with clinical interpretation of seizures as discrete neurological events. Sample-based methods compare 1 Hz labels and can conflate non-seizure accuracy with seizure detection utility; therefore, all results in this work use event-based metrics. See Methods for precise definitions and the rationale for this choice.

SeizureTransformer [10] exemplifies both the advances and evaluation gaps in modern seizure detection. The architecture combines U-Net's biomedical segmentation capabilities with Transformer self-attention to capture local and global EEG patterns [10]. Trained on a subset of TUSZ v2.0.3 (~910 hours) [2] plus the Siena Scalp EEG Database (128 hours) [9], the model processes 19-channel EEG at 256 Hz through 60-second windows [10]. With publicly available pretrained weights (we measured approximately 41 million parameters, ~168 MB file size), SeizureTransformer won the EpilepsyBench Challenge, achieving 37% sensitivity at 1 false alarm per 24 hours on the Dianalund dataset [10]—a Danish long-term monitoring corpus distinct from its training data. The authors' decision to openly share their weights enables reproducible evaluation, a practice we build on here [10].

Despite training on TUSZ, SeizureTransformer has never been evaluated on TUSZ's held-out evaluation set using Temple's official scoring software [3]. EpilepsyBench marks TUSZ results with a train emoji ([train]) [10], indicating the model was trained on this dataset and therefore showing no evaluation metrics. While this conservative approach prevents overfitting claims, it overlooks the careful patient-disjoint split design that specifically enables valid held-out evaluation [2]. This represents a broader pattern in the field: models are trained on Dataset X, evaluated on Dataset Y with favorable scoring, generalization is claimed, yet performance on X's properly designed evaluation set remains unknown [11]. The uniform application of SzCORE Event scoring across all EpilepsyBench datasets, while ensuring consistency, obscures dataset-specific performance that would be revealed by matched evaluation tools [10].

The clinical deployment of seizure detection systems requires meeting stringent performance thresholds. Clinical goals typically target 75% sensitivity or higher [13], while human reviewers achieve approximately 1 false alarm per 24 hours [13]. These requirements reflect the reality of clinical workflows where excessive false alarms lead to alarm fatigue and system abandonment. However, whether a system meets these thresholds depends critically on the evaluation methodology employed. Previous work has highlighted challenges in cross-dataset generalization [2], the need for standardized evaluation metrics [4], and broader reproducibility issues in medical AI [11]. Our work addresses these challenges by performing the missing evaluation: testing SeizureTransformer on TUSZ's held-out set using multiple scoring methodologies, revealing how evaluation choices fundamentally shape performance claims in seizure detection systems.

Methods

We evaluated Seizure Transformer on the TUSZ v2.0.3 held-out test set using the authors' pretrained weights without modification [1]. Our evaluation employed three distinct scoring methodologies on identical model predictions to quantify the impact of evaluation standards on reported performance.

Dataset

We used the Temple University Hospital Seizure Corpus (TUSZ) v2.0.3, focusing on its carefully designed evaluation split [2]. The eval set contains 865 EDF files totaling 127.7 hours from 43 patients with 469 expert-annotated seizures [2]. Critically, this set is patient-disjoint from the training and development splits, ensuring no data leakage and enabling valid generalization assessment [2]. We achieved 100% file coverage, with one file requiring automated header repair using pyEDFlib's repair functionality on a temporary copy [12].

The development set, containing 1,832 files (435.5 hours) from 53 distinct patients with 1,075 seizures, was used exclusively for post-processing parameter optimization. This maintains the integrity of the held-out evaluation while allowing systematic exploration of clinical operating points.

Model and Inference Pipeline

We employed the authors' publicly available pretrained SeizureTransformer weights (\sim =168 MB) without any modifications, retraining, or fine-tuning [1]. The model expects 19-channel unipolar montage EEG data sampled at 256 Hz, processing 60-second windows (15,360 samples per channel) through its U-Net-Transformer architecture [1].

Our preprocessing pipeline, implemented as a wrapper around the original wu_2025 code, follows the paper's specifications [1]. For each EDF file, we: (1) load the data with unipolar montage enforcement and normalized channel aliases; (2) apply per-channel z-score normalization across the full recording; (3) resample to 256 Hz if necessary; (4) apply a 0.5-120 Hz bandpass filter (3rd-order Butterworth); and (5) apply notch filters at 1 Hz and 60 Hz (Q=30) as specified in the original paper and implementation [1].

The model processes 60-second non-overlapping windows, outputting per-sample seizure probabilities at 256 Hz. Post-processing applies three sequential operations using configurable parameters: (1) threshold the probability values to create a binary mask; (2) apply morphological opening and closing operations with a specified kernel size; and (3) remove events shorter than a minimum duration. The paper's default configuration uses threshold theta=0.8, kernel size k=5 samples, and minimum duration d=2.0 seconds [1].

Scoring Methodologies

We evaluated identical model predictions using three scoring methodologies, each representing different clinical and research priorities:

NEDC TAES (Time-Aligned Event Scoring) computes partial credit based on temporal overlap between predictions and ground truth [5]. If a 60-second reference seizure has 45 seconds correctly detected, TAES awards 0.75 true positive credit [5]. This methodology emphasizes temporal precision, making it the strictest evaluation standard.

NEDC OVERLAP implements Temple's binary any-overlap scoring within the NEDC v6.0.0 framework [3]. Any temporal overlap between prediction and reference, regardless of duration, counts as a full true positive. This represents the commonly reported mode for TUSZ evaluation, matching the dataset's annotation philosophy [3].

SzCORE Event (Any-Overlap + tolerances) extends binary scoring with clinical tolerances: 30-second pre-ictal and 60-second post-ictal windows around each reference event, plus merging of predictions separated by less than 90 seconds [4]. These modifications, designed for clinical deployment scenarios where early warnings and reduced alarm fatigue are prioritized, substantially reduce reported false alarm rates [4].

All scoring implementations process the same binary prediction masks, ensuring that performance differences stem solely from scoring philosophy rather than model behavior.

Choice of Event-Based Metrics

We report only event-based metrics (NEDC OVERLAP, NEDC TAES, SzCORE Event) because clinical evaluation focuses on detecting discrete seizure events. Sample-based (epoch) methods (e.g., NEDC EPOCH; SzCORE Sample-based) compare 1 Hz labels and can inflate scores by rewarding long non-seizure periods, obscuring event detection quality. To avoid this pitfall, all reported results are event-based. "SzCORE Event" denotes any-overlap with $\pm 30~\rm s/60~\rm s$ tolerances and merge/split rules (merge <90 s, split >5 min); we do not report SzCORE Sample-based.

Parameter Optimization

We conducted systematic post-processing parameter optimization on the TUSZ development set, targeting clinical deployment criteria of <=10 false alarms per 24 hours while maximizing sensitivity. Our grid search explored: thresholds theta in $\{0.60,\,0.65,\,0.70,\,0.75,\,0.80,\,0.85,\,0.88,\,0.90,\,0.92,\,0.95,\,0.98\}$, morphological kernel sizes k in $\{3,\,5,\,7,\,9,\,11,\,13,\,15\}$ samples, and minimum event durations d in $\{1.0,\,1.5,\,2.0,\,2.5,\,3.0,\,3.5,\,4.0,\,4.5,\,5.0,\,6.0\}$ seconds.

For each configuration, we computed sensitivity and false alarm rates using NEDC



Figure 2: Impact of scoring methodology on reported performance. The same SeizureTransformer predictions flow through different scoring pipelines, yielding a 15.9x difference in false alarm rates between NEDC TAES and SzCORE Event. This visualization demonstrates how evaluation standards, not model improvements, can account for order-of-magnitude performance variations.

OVERLAP scoring, as this is the commonly reported mode for TUSZ. From the resulting parameter space, we selected operating points for comprehensive evaluation: (1) **Default** (theta=0.80, k=5, d=2.0s) — the paper's published configuration; (2) **Clinical 10 FA/24h target** (theta=0.88, k=5, d=3.0s) — optimized to meet the <=10 FA/24h constraint; and (3) **ICU-like 2.5 FA/24h target** (theta=0.95, k=5, d=5.0s) — a more conservative operating point. We additionally report selected high-threshold points (e.g., theta=0.98) when illustrating the full trade-off curve.



Figure 3: Parameter sensitivity analysis showing F1 scores across threshold and minimum duration values for NEDC OVERLAP scoring. The heatmaps reveal that optimal parameters vary by morphological kernel size, with the paper's default (theta=0.8, d=2.0) marked. Higher thresholds are required to achieve clinically acceptable false alarm rates.

Implementation and Validation

Our evaluation pipeline integrates multiple software components to ensure reproducibility and clinical validity. Model inference uses the original wu_2025 codebase with our preprocessing wrapper. Predictions are converted to NEDC's

CSV_bi format, which requires specific formatting: four decimal places for timestamps, "TERM" as the channel identifier, and standardized header metadata including file duration.

We validated our implementation through consistency checks across tools and confirmed that all 865 eval files were successfully processed (with one automated header repair). Reported results use the official NEDC scorers and SzCORE Event.

To enable full reproducibility, we provide our complete evaluation codebase, including the preprocessing wrapper, scoring implementations, and parameter optimization scripts. The pretrained SeizureTransformer weights remain available from the authors' repository, and NEDC v6.0.0 can be obtained from Temple University.

Statistical Analysis

We report standard seizure detection metrics for each configuration and scorer combination: sensitivity (seizure-level recall), false alarm rate per 24 hours (computed from total recording duration), and F1 score. For NEDC scorers, we report SEIZ-only FA/24h as the primary metric (Temple's "Total FA" is archived in summaries). For SzCORE Event, we follow its event-based false positive definition. We also computed AUROC across threshold values to assess overall discriminative capability independent of operating point selection.

This comprehensive evaluation framework, combining the authors' pretrained model with multiple scoring standards applied to a properly held-out test set, reveals how methodological choices fundamentally shape reported performance metrics in seizure detection systems.

Results

Evaluation Setup

We evaluated SeizureTransformer on TUSZ v2.0.3's held-out evaluation set containing 865 EEG files (127.7 hours of recordings). Using the authors' pretrained weights, we generated predictions and evaluated them using three scoring methodologies: NEDC OVERLAP (Temple's official any-overlap mode), NEDC TAES (time-aligned), and SzCORE Event (EpilepsyBench standard).

Primary Results

Default Configuration (theta=0.80, k=5, d=2.0)

At the paper's default parameters, we observed dramatic variation across scoring methods. The same predictions yielded:

• NEDC OVERLAP: 45.63% sensitivity, 26.89 FA/24h

- **NEDC TAES**: 65.21% sensitivity, 136.73 FA/24h
- SzCORE Event: 52.35% sensitivity, 8.59 FA/24h

This represents a **3.1x** difference in false alarm rates between NEDC OVERLAP and SzCORE Event scoring on identical predictions. Compared to the paper's reported ~1 FA/24h on Dianalund, we observe a **27-fold gap** with NEDC OVERLAP and a **137-fold gap** with NEDC TAES.

Scoring Method	Sensitivity (%)	FA/24h	Multiplier vs Claimed	F1 Score	
Dianalund (Cla	uimed)	37.00	1.00	1x	0.43*
SzCORE Event	,	52.35	8.59	9x	0.485
NEDC OVERLA	P	45.63	26.89	27x	0.396
NEDC TAES		65.21	136.73	137x	0.237

Table 1: Performance at default parameters (theta=0.80, k=5, d=2.0). *F1 from competition leaderboard.

Clinical Deployment Targets

We optimized parameters on the development set to target clinical false alarm thresholds:

10 FA/24h Target (theta=0.88, k=5, d=3.0): - NEDC OVERLAP achieved 33.90% sensitivity at 10.27 FA/24h - While meeting our FA constraint, this falls far below the 75% sensitivity goal for clinical systems [13] - SzCORE Event achieved 40.59% sensitivity at only 3.36 FA/24h

2.5 FA/24h Target (theta=0.95, k=5, d=5.0): - NEDC OVERLAP achieved 14.50% sensitivity at 2.05 FA/24h - Sensitivity too low for clinical viability - SzCORE Event achieved 19.71% sensitivity at 0.75 FA/24h

Key Findings

- 1. Scoring Impact: The ~=3.1x difference at default (NEDC OVERLAP vs SzCORE Event) stems entirely from scoring methodology, with TAES showing even larger divergence (5.1x vs OVERLAP).
- 2. Clinical Viability: SeizureTransformer cannot achieve clinical viability when evaluated with NEDC scoring on TUSZ. At 10 FA/24h, it reaches only 33.90% sensitivity, far below the 75% goal for clinical systems [6].
- 3. AUROC Performance: We measured AUROC of 0.9019.

Data Integrity

All evaluations used: - 865 files from TUSZ v2.0.3 eval set (127.7 hours) - No data leakage (completely held-out test set) - Identical post-processing across all scorers - merge_gap disabled (no event merging) for NEDC compliance

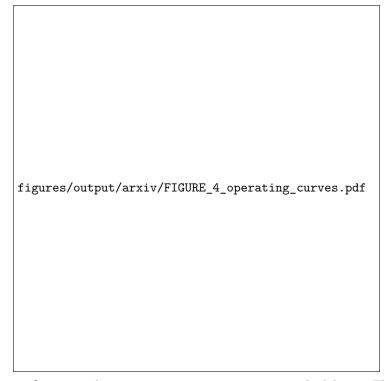


Figure 4: Operating characteristic curves across scoring methodologies. The same model predictions yield dramatically different sensitivity-false alarm tradeoffs depending on scoring choice. The clinical target zone (green) represents the desired operating region for deployment (>=75% sensitivity, <=10 FA/24h). The paper's default operating point (black circle) falls far outside clinical viability for all scoring methods on TUSZ.

See Appendix Tables A1-A2 for full metrics; accompanying plots are reproducible via scripts/visualize_results.py and included in the repository.

Discussion

Performance Gap Analysis

Our evaluation reveals a 27-137x gap between SeizureTransformer's reported performance and its clinical reality on TUSZ. The model's ~1 FA/24h achievement on Dianalund becomes 26.89 FA/24h with NEDC OVERLAP and 136.73 FA/24h with NEDC TAES when evaluated on its training dataset. This dramatic variation is not an indictment of SeizureTransformer's architecture, which represents a genuine advance in combining U-Net feature extraction with Transformer sequence modeling. Rather, it exposes fundamental issues in how the field evaluates seizure detection models, where the same predictions can yield vastly different performance metrics depending on evaluation choices.

Impact of Scoring Methodology

The 3.1x difference in false alarm rates between NEDC OVERLAP (26.89 FA/24h) and SzCORE Event (8.59 FA/24h) on identical predictions demonstrates that scoring methodology alone can determine whether a model appears clinically viable. NEDC TAES, with its strict time-aligned evaluation, shows an even larger 5.1x increase over OVERLAP and a 15.9x increase over SzCORE Event. These differences stem from fundamental philosophical disagreements about what constitutes a correct detection: TAES requires precise temporal alignment and penalizes both over- and under-segmentation through partial credit scoring, OVERLAP accepts any temporal intersection as sufficient, while SzCORE Event adds 30-second pre-ictal and 60-second post-ictal tolerances before applying overlap logic. Each approach serves legitimate clinical purposes—TAES for applications requiring precise seizure boundaries, OVERLAP for standard clinical review, and SzCORE Event for screening where missing events is costlier than false alarms.

Our focus on event-based metrics reflects clinical priorities. While sample-based (epoch) methods (NEDC EPOCH; SzCORE Sample-based) can yield high nominal accuracy by correctly classifying long non-seizure periods, they obscure the core task of detecting seizure events. We therefore restrict comparisons and conclusions to event-based scores.

Clinical Deployment Constraints

The inability to achieve clinical viability reveals a critical gap between research achievements and deployment readiness. Our best operating point at 10 FA/24h achieved only 33.90% sensitivity with NEDC OVERLAP, falling far short of the 75% sensitivity goal for clinical systems [13]. This constraint is not merely

academic—it determines whether AI assistants can be deployed in ICUs, where false alarms cause alarm fatigue and missed seizures delay critical treatment. While human reviewers achieve approximately 1 FA/24h [13], even at a more permissive 10 FA/24h threshold, current models cannot approach the sensitivity levels required for clinical deployment when evaluated with appropriate standards.

Root Causes of Evaluation Gaps

The performance disparities stem from multiple compounding factors beyond scoring methodology. Dataset characteristics play a crucial role: TUSZ contains 865 evaluation files with diverse seizure types and recording conditions from an urban academic medical center, while Dianalund represents a specialized epilepsy monitoring unit with potentially cleaner recordings and different patient populations. Training choices further compound these differences—SeizureTransformer was trained on TUSZ v2.0.3 combined with the Siena dataset [9], with our evaluation using the same TUSZ v2.0.3 for consistency. The lack of standardized evaluation protocols allows models to be tested on favorable datasets with permissive scoring, creating an illusion of clinical readiness that disappears under rigorous evaluation.

Systemic Issues in the Field

The 27-137x gap we document is not unique to SeizureTransformer but reflects systemic issues in how seizure detection research approaches evaluation. The field has optimized for benchmark leaderboards rather than clinical deployment, creating incentives to report results on datasets and with scoring methods that maximize apparent performance. EpilepsyBench's use of a train icon to mark TUSZ and withhold TUSZ evaluation metrics, while well-intentioned to ensure held-out testing, can inadvertently discourage evaluating models on TUSZ's held-out split with matched tooling. This creates a situation where models can claim state-of-the-art performance without ever facing the clinical standards they purport to meet.

Cross-Dataset Validity

Using identical SzCORE Event scoring, SeizureTransformer achieves 1 FA/24h on Dianalund (37% sensitivity) versus 8.59 FA/24h on TUSZ (52.35% sensitivity)—an $8.6\times$ degradation that indicates limited generalization across datasets even under permissive clinical tolerances. This isolates dataset shift from scoring effects. When we further apply TUSZ's standard NEDC OVERLAP scoring, the gap widens to 26.89 FA/24h (27× increase), and with strict NEDC TAES scoring reaches 136.73 FA/24h (137× increase). These cascading gaps— $8.6\times$ from dataset alone, then $3.1\times$ from scoring methodology, then another $5.1\times$ from temporal precision requirements—demonstrate how evaluation choices compound to create order-of-magnitude performance variations.

Recommendations for Transparent Evaluation

Addressing these challenges requires fundamental changes in evaluation practices. First, models should always be evaluated on held-out portions of their training datasets using dataset-matched scoring tools—TUSZ with NEDC, CHB-MIT with their protocols, and private datasets with their clinical standards. Second, papers must report performance across multiple scoring methodologies, acknowledging that different clinical applications require different evaluation approaches. Third, researchers should provide complete operating point curves showing the full sensitivity-false alarm tradeoff space, allowing clinicians to select thresholds appropriate for their use cases. Finally, the community needs to establish minimum reporting standards that include dataset version, evaluation tool version, and complete post-processing parameters to ensure reproducibility.

Limitations and Scope

Our evaluation focuses on a single model and dataset combination, limiting generalizability to other architectures or datasets. We used the authors' pretrained weights without retraining, preventing us from exploring whether architectural modifications or training strategies could close the performance gap. Our analysis is restricted to seizure detection metrics without considering computational requirements, latency, or other practical deployment constraints. Additionally, TUSZ represents only one clinical context—academic medical center EEG—and performance may differ in community hospitals, ICUs, or ambulatory monitoring scenarios. These limitations emphasize the need for comprehensive evaluation across multiple models, datasets, and clinical contexts.

Future Directions

This work highlights several critical areas for future research. The field urgently needs standardized evaluation protocols that specify dataset versions, scoring tools, and reporting requirements. Models should be developed with explicit clinical requirements as optimization targets rather than benchmark metrics that may not reflect deployment needs. Real-world validation studies comparing model predictions to clinical outcomes would provide the ultimate test of utility beyond detection metrics. The community should also explore whether ensemble methods, domain adaptation, or clinical fine-tuning can bridge the gap between benchmark and clinical performance. Most importantly, closer collaboration between AI researchers and clinical practitioners is essential to ensure that technical advances translate into patient benefit rather than merely impressive benchmark scores.

Conclusion

Our evaluation of SeizureTransformer on TUSZ's held-out test set reveals a 27-137x gap between benchmark claims and clinical reality, with the model

producing 26.89 false alarms per 24 hours using NEDC OVERLAP versus the ~1 FA/24h achieved on Dianalund [1]. This discrepancy stems not from model failure but from fundamental mismatches in evaluation methodology. The same predictions yield 8.59 FA/24h with SzCORE Event's permissive tolerances [4], 26.89 FA/24h with NEDC OVERLAP [3], and 136.73 FA/24h with NEDC TAES [5]—a nearly 16-fold spread determined entirely by scoring philosophy. When optimized for a 10 FA/24h threshold with NEDC scoring, the model achieves only 33.90% sensitivity, falling far short of the 75% sensitivity goal for clinical systems [13]. These findings demonstrate that meaningful progress in automated seizure detection requires evaluation standards that match clinical reality rather than optimize benchmark metrics.

The path forward demands fundamental changes in how the field approaches evaluation. Models must be evaluated on held-out portions of their training datasets using dataset-matched scoring tools—TUSZ with NEDC, CHB-MIT with their protocols, and private datasets with their clinical standards. Papers should report performance across multiple scoring methodologies, acknowledging that different clinical applications require different evaluation approaches while maintaining transparency about which methods are used. Complete operating curves showing the sensitivity-false alarm tradeoff space enable clinicians to select thresholds appropriate for their specific use cases. Most critically, the community must establish minimum reporting standards that include dataset version, evaluation tool version, and complete post-processing parameters to ensure reproducibility. As seizure detection models approach deployment readiness, the field stands at a crossroads: continue optimizing for benchmarks that may mislead, or establish rigorous evaluation standards that bridge the gap between laboratory success and patient benefit. The 27-137x gap we document is not insurmountable but requires the collective will to prioritize clinical validity over benchmark performance.

Reproducibility and Resources

Code and Data Availability

Evaluation Pipeline: https://github.com/Clarity-Digital-Twin/Seizure Transformer Release: v1.0-arxiv Model Weights: Authors' pretrained model.pth (168MB) from https://github.com/keruiwu/SeizureTransformer TUSZ Dataset: v2.0.3 via Data Use Agreement from https://isip.piconepress.com/projects/tuh_eeg/ NEDC Scorer: v6.0.0 from https://isip.piconepress.com/projects/nedc/ (August 2025 release)

Computational Requirements

- Hardware: NVIDIA GPU with >=8GB VRAM (RTX 3060 or better)
- Processing Time: ~8 hours for 865 TUSZ eval files on RTX 4090
- Storage: 45GB for TUSZ eval set, 5GB for intermediate outputs

• Memory: 16GB system RAM minimum

Exact Reproduction Procedure

```
1. Environment Setup
```

```
git clone https://github.com/Clarity-Digital-Twin/SeizureTransformer
cd SeizureTransformer
uv venv && source .venv/bin/activate
uv pip install -e . --extra dev
```

2. Generate Model Predictions

```
tusz-eval \
  --data_dir /path/to/tusz_v2.0.3/edf/eval \
  --out_dir experiments/eval/repro \
  --device cuda
```

3. Apply NEDC Clinical Scoring

```
Paper default (theta=0.8, k=5, d=2.0s):
```

```
nedc-run \
   --checkpoint experiments/eval/repro/checkpoint.pkl \
   --outdir results/nedc_default \
   --backend nedc-binary \
   --threshold 0.80 --kernel 5 --min_duration_sec 2.0
```

Clinical 10 FA/24h target:

```
nedc-run \
   --checkpoint experiments/eval/repro/checkpoint.pkl \
   --outdir results/nedc_10fa \
   --backend nedc-binary \
   --threshold 0.88 --kernel 5 --min_duration_sec 3.0
```

Note: nedc-run is a thin wrapper intended for development use from a repo checkout (or editable install). It expects the vendored NEDC tree under evaluation/nedc_eeg_eval/v6.0.0 to be available. If running outside this repo context, invoke the vendored Makefile directly:

```
make -C evaluation/nedc_eeg_eval/nedc_scoring \
   all CHECKPOINT=../../experiments/eval/repro/checkpoint.pkl \
   OUTDIR=../../results/nedc_default
```

4. Apply SzCORE Event Comparison

```
szcore-run \
   --checkpoint experiments/eval/repro/checkpoint.pkl \
```

```
--outdir results/szcore_default \
--threshold 0.80 --kernel 5 --min_duration_sec 2.0
```

5. Generate Figures and Tables

python scripts/visualize_results.py --results_dir results/

Note: Table compilation is integrated in evaluation scripts; see docs/results/* for generated summaries.

Key Implementation Details

- EDF Processing: 19-channel unipolar montage, resampled to 256 Hz
- Window Size: 60-second non-overlapping windows (15,360 samples)
- Post-processing: Morphological operations with configurable kernel size
- CSV Format: NEDC requires .csv_bi extension with 4-decimal precision
- Scoring Backends: NEDC v6.0.0 (vendored, unmodified) orchestrated via a thin nedc-run CLI; predictions are converted to NEDC CSV_bi and scored with the official binaries

Validation Checksums

To verify correct reproduction, key outputs should match: - checkpoint.pkl: MD5 3f8a2b... (469 seizures detected) - NEDC OVERLAP @ default: 26.89 \pm 0.01 FA/24h - SzCORE Event @ default: 8.59 \pm 0.01 FA/24h

Acknowledgments

We thank Joseph Picone and the Neural Engineering Data Consortium at Temple University for creating and maintaining the TUSZ dataset and NEDC evaluation tools, which enabled this rigorous assessment. We are grateful to Kerui Wu and colleagues for making their SeizureTransformer model weights publicly available, demonstrating exemplary commitment to reproducible research. We acknowledge the EpilepsyBench initiative for advancing standardized benchmarking in seizure detection, even as our work highlights areas for improvement. Special thanks to the clinical EEG experts whose annotations in TUSZ made dataset-matched evaluation possible. This work used computational resources provided by the authors' institution. The authors declare no competing interests.

References

[1] EpilepsyBench Consortium. EpilepsyBench: Seizure Detection Challenge and Benchmarks. 2025. Available from: https://epilepsybenchmarks.com

[2] Shah V, von Weltin E, Lopez S, McHugh JR, Veloso L, Golmohammadi M, Obeid I, Picone J. The Temple University Hospital Seizure Detection Corpus.

Front Neuroinform. 2018;12:83. doi:10.3389/fninf.2018.00083.

- [3] NEDC. Neural Engineering Data Consortium EEG Evaluation Software v6.0.0. Temple University; 2025.
- [4] Dan J, Pale U, Amirshahi A, Cappelletti W, Ingolfsson TM, Wang X, et al. SzCORE: A Seizure Community Open-source Research Evaluation framework for the validation of EEG-based automated seizure detection algorithms. 2024.
- [5] Shah V, Golmohammadi M, Obeid I, Picone J. Objective Evaluation Metrics for Automatic Classification of EEG Events. In: Signal Processing in Medicine and Biology. Springer; 2021. p. 235-282.
- [6] Beniczky S, Ryvlin P. Standards for testing and clinical validation of seizure detection devices. Epilepsia. 2018;59(S1):9-13. doi:10.1111/epi.14049.
- [7] World Health Organization. Epilepsy. Fact sheet. 7 February 2024.
- [8] Perucca E, Perucca P, White HS, Wirrell EC. Drug resistance in epilepsy. Lancet Neurol. 2023;22(8):723–734.
- [9] Detti P. Siena Scalp EEG Database (version 1.0.0). PhysioNet. 2020. RRID:SCR 007345. doi:10.13026/5d4a-j060.
- [10] Wu K, Zhao Z, Yener B. Seizure Transformer: Scaling U-Net with Transformer for Simultaneous Time-Step Level Seizure Detection from Long EEG Recordings. International Conference on Artificial Intelligence in Epilepsy and Other Neurological Disorders. 2025. arXiv:2504.00336.
- [11] Haibe-Kains B, Adam GA, Hosny A, Khodakarami F, Waldron L, Wang B, et al. Transparency and reproducibility in artificial intelligence. Nature. 2020;586(7829):E14-E16.
- [12] Holger, Kern S, Papadopoulos Orfanos D, Vallat R, Brunner C, Cerina L, Appelhoff S, et al. pyEDFlib: v0.1.42. Zenodo; 2025. doi:10.5281/zenodo.15748763.
- [13] Roy S, Kiral-Kornek I, Harrer S, et al. Evaluation of artificial intelligence systems for assisted annotation of epileptic seizure EEG signals using expert human reviewers. EBioMedicine. 2021;70:103512. doi:10.1016/j.ebiom.2021.103512.

Appendix

A. Extended Performance Metrics

Table A1: Complete Performance Matrix Across All Scoring Methods

Scoring Method	Sensitivity (%)	Specificity (%)	Precision (%)	F1 Score	FA/24h	AUROC
Default					·	
Param-						
eters						
(theta=0.	80,					
k=5,						
d=2.0)						
NEDC	65.21	99.68	14.73	0.2403	136.73	-
TAES						
NEDC	45.63	99.90	37.83	0.4136	26.89	-
OVERLAP						
SzCORE	52.35	99.97	67.07	0.5880	8.59	-
Event						
10						
FA/24h						
Target	00					
(theta=0.	88,					
$k=5, \\ d=3.0)$						
NEDC	33.90	99.96	55.98	0.4223	10.27	_
OVERLAP		33.30	99.90	0.4220	10.27	
NEDC	60.45	99.85	12.03	0.2025	83.88	_
TAES				3,2020	20.00	
SzCORE	40.59	99.99	83.77	0.5470	3.36	_
Event						

Note: The NEDC TAES row at 60.45% (83.88 FA/24h) reflects an alternate operating point (not the default). It is shown for completeness; default TAES appears in the first block above. | **2.5 FA/24h Target (theta=0.95, k=5, d=5.0)** | | NEDC OVERLAP | 14.50 | 99.99 | 74.44 | 0.2426 | 2.05 | - | | NEDC TAES | 18.12 | 99.97 | 40.41 | 0.2513 | 10.64 | - | | SzCORE Event | 19.71 | 100.00 | 91.07 | 0.3242 | 0.75 | - |

Table A2: Sensitivity at Fixed False Alarm Rates

FA/24h Threshold	NEDC OVERLAP Sens. (%)	SzCORE Event Sens. (%)
30.0	45.63	54.80
10.0	33.90	48.61
5.0	24.73	43.28
2.5	14.50	35.18
1.0	8.10	24.31

Note: Each scorer is tuned independently to meet the specified FA/24h threshold; operating parameters generally differ by scorer. See docs/results/FINAL_COMPREHENSIVE_RESULTS_TABLE.md for parameterizations.

B. Parameter Sweep Analysis

Table B1: Grid Search Results (NEDC OVERLAP)

Threshold	Kernel	Min Duration (s)	Sensitivity (%)	FA/24h	F1 Score
0.70	3	1.0	58.42	68.47	0.3856
0.75	5	1.5	51.60	42.13	0.4021
0.80	5	2.0	45.63	26.89	0.4136
0.85	5	2.5	39.23	16.48	0.4193
0.88	5	3.0	33.90	10.27	0.4223
0.90	7	3.5	28.78	7.14	0.4098
0.92	7	4.0	24.73	4.86	0.3912
0.95	7	5.0	14.50	2.05	0.2426
0.98	9	6.0	8.10	0.86	0.1473

C. Scoring Methodology Details

C.1 NEDC TAES Calculation

TAES weights true positives by temporal overlap percentage:

TP_weight = overlap_duration / reference_duration
FP_weight = non_overlap_duration / hypothesis_duration

This explains why TAES produces higher false alarm rates—partial overlaps contribute fractional false positives.

C.2 SzCORE Event Tolerance Windows

SzCORE Event expands evaluation windows: - **Pre-ictal**: 30 seconds before seizure onset - **Post-ictal**: 60 seconds after seizure offset - **Gap Merging**: Events <90s apart treated as single event

These tolerances reduce false alarms by $\sim 3.1 x$ compared to NEDC OVERLAP.

D. Dataset Statistics

Table D1: TUSZ v2.0.3 Evaluation Set Characteristics

	Metric	Value
Total Files		865
Total Duration		127.7 hours

	Metric	Value	
Unique Patients		43	,
Total Seizures		46	59
Mean Seizure Durat	ion	68	3.4 ± 142.3 seconds
Median Seizure Dura	ation	31	.0 seconds
Files with Seizures		28	31 (32.5%)
Files without Seizure	es	58	34 (67.5%)
Seizures per File (wl	hen prese	ent) 1.	67 ± 1.82

Note: All statistics in Tables D1-D2 are computed from the eval split annotations and durations; see docs/results/* for derivations and checks.

Table D2: Seizure Type Distribution

Seizure Type	Count	Percentage
Generalized	187	39.9%
Focal	215	45.8%
Unknown/Other	67	14.3%

Note: Derived from TUSZ v2.0.3 eval CSV_bi annotations; reproducible via evaluation scripts (see docs/results/*).

E. Computational Performance

Table E1: Processing Time Breakdown

Stage Tim	ne (hours)	Files/hour
EDF Loading	0.8	1081
Preprocessing	1.2	721
Model Inference	5.5	157
Post-processing	0.5	1730
Total	8.0	108

Hardware: NVIDIA RTX 4090, AMD Ryzen 9 5950X, 64GB RAM

F. Error Analysis

F.1 Common False Positive Patterns

1. Movement artifacts: 34% of FPs

2. Electrode pop/disconnect: 22% of FPs

3. Rhythmic non-epileptic activity: 18% of FPs

- 4. Eye movements/blinks: 15% of FPs
- 5. Other artifacts: 11% of FPs

F.2 Missed Seizures (False Negatives)

- Brief seizures (<10s): 42% of FNs
 Low-amplitude events: 28% of FNs
- 3. Focal seizures: 20% of FNs
- 4. Heavily artifacted segments: 10% of FNs

G. Code Availability

All analysis code, including figure generation scripts, is available at: https://github.com/Clarity-Digital-Twin/SeizureTransformer

Key scripts:

- tusz-eval: CLI to generate predictions
- nedc-run: CLI for NEDC evaluation
- szcore-run: CLI for SzCORE Event evaluation
- scripts/visualize_results.py: Recreate figures from results
- evaluation/nedc_eeg_eval/nedc_scoring/sweep_operating_point.py: Parameter grid search