

STL map

Maps

- C++ maps are sorted associative containers that contain unique key/value pairs.
- The container `unordered_map` does not do sorting. Faster on direct access. Less efficient for iteration.

Map Constructors & Destructors

- `#include <map>`
- `map();`
- `map(const map& m);`
- `map(iterator start, iterator end);`
- `map(iterator start, iterator end, const key_compare& cmp);`
- `map(const key_compare& cmp);`
- `~map();`

Map operators

- `TYPE & operator[] (const key_type& key);` //powerful. More example later.
- `map operator=(const map& c2);`
- `bool operator==(const map& c1, const map& c2);`
- `bool operator!=(const map& c1, const map& c2);`
- `bool operator<(const map& c1, const map& c2);`
- `bool operator>(const map& c1, const map& c2);`
- `bool operator<=(const map& c1, const map& c2);`
- `bool operator>=(const map& c1, const map& c2);`

Essential map methods

- `begin` returns an iterator to the beginning of the map
- `clear` removes all elements from the map
- `count` returns the number of elements matching a certain key
- `empty` true if the map has no elements
- `end` returns an iterator just past the last element of a map
- `erase` removes elements from a map
- `find` returns an iterator to specific elements
- `insert` insert items into a map
- `key_comp` returns the function that compares keys
- `equal_range` returns iterators to the first and just past the last elements matching a specific key

This slide is optional

- `lower_bound` returns an iterator to the first element greater than or equal to a certain value
- `max_size` returns the maximum number of elements that the map can hold
- `rbegin` returns a `reverse_iterator` to the end of the map
- `rend` returns a `reverse_iterator` to the beginning of the map
- `size` returns the number of items in the map
- `upper_bound` returns an iterator to the first element greater than a certain value
- `value_comp` returns the function that compares values

the [] operator for a map

- Each element is composed of a *key* and a *mapped* value
- Maps are also unique among associative containers in that they implement *the direct access operator (operator[])* which allows for direct access of the mapped value, but know that the [] is not referring to a specific position (as in vector).
- If *k* does not match the key of any element in the container, the function [] *inserts* a new element with that key and returns a reference to its mapped value. Notice that this always increases the container size by one.

Example:

```
map<string, int> ages;  
ages["Homer"] = 38;  
ages["Marge"] = 37;  
ages["Lisa"] = 8;  
ages["Maggie"] = 1;  
ages["Bart"] = 11;  
  
cout << "Bart is " << ages["Bart"] << " years old" << endl;
```


Iterator for map and the *pair* class

- Iterators to elements of map containers access to both the *key* and the *mapped value*. For this, the class defines what is called its `value_type`, which is a `pair` class
- `pair`: its first value corresponding to the const version of the *key* type (template parameter *Key*) and its second value corresponding to the *mapped value* (template parameter *T*):
 - `typedef pair<const Key, T> value_type;`
- A pair is an object that contains two values.
- It is a struct type. All members are public: first, second

Example:

```
pair<type1, type2> nameofPair;
```

```
pair<V1, V2> make_pair(x, y); → convenient function to construct a pair with first  
element is x, second element is y.
```

Iterator for map

- Iterators of a map container point to elements of this *value_type*.
- For an iterator called *it* that points to an element of a map, its key and mapped value can be accessed respectively with:
 - `map<Key,T>::iterator it;`
 - `(*it).first;` // the key value (of type Key)
 - `(*it).second;` // the mapped value (of type T)
 - `(*it);` // the "element value" (of type `pair<const Key,T>`)
- Other direct access operator, such as `->` or `[]` can be used, for example:
 - `it->first;` // same as `(*it).first` (the key value)
 - `it->second;` // same as `(*it).second` (the mapped value)

Example of Map

```
#include <iostream>
#include <map>
#include <string>
using namespace std;

int main() {
    map<int, string> mymap;
    mymap.insert(make_pair(4, "apple")); //or mymap[4] = "apple";
    mymap.insert(make_pair(1, "orange"));
    mymap.insert(make_pair(3, "grapes"));
    mymap.insert(make_pair(2, "peach"));
    auto it = mymap.begin();
    while(it != mymap.end()) { // *it will be a std::pair
        cout << it->first << "=" << it->second << " ";
        it++; }
    return 0;}
• // Output: 1=orange 2=peach 3=grapes 4=apple // pairs, sorted by key in it->first
```

Example 2

```
#include <map>
#include <iostream>
using namespace std;

void print_map(const map<string, int>& myMap)
{
    for(auto mapIt = myMap.begin(); mapIt != myMap.end(); ++mapIt)
        cout << mapIt->first << " : " << mapIt->second << endl;
}

int main()
{
    map<string, int> ages;
    ages["John"] = 38;
    ages["Jane"] = 3;
    ages["Amy"] = 4;
    print_map(ages);

    ages["John"] ++;
    print_map(ages);
    return 0;
}
```

9/17/24

CSCI 340

28

Revisit the example of phone book of list

```
struct Entry { string name; int number; };

const int N = 12;

list<Entry> phone_book;

void print_entry(const string&);

int main()
{
    for (int i = 0; i < N; i++) {
        Entry e;
        cin >> e.name >> e.number;
        phone_book.push_back(e);
    }

    cout << "Print the entire phone book" << endl;
    for(auto i = phone_book.begin(); i != phone_book.end(); i++)
        cout << i->name << ' ' << i->number << endl;
    cout << "Add jack 815111 to the phone book list. " << endl;
    Entry e = { "jack", 815111 };
    phone_book.push_back(e);
    cout << "Print the entry for jack: " << endl;
    print_entry("jack");
    return 0;
} 9/17/24
```

```
//If using a map, no need to loop
void print_entry(const string& s)
{
    for (auto i = phone_book.begin(); i != phone_book.end(); i++) {
        const Entry& e = *i;
        if (s == e.name) {
            cout << e.name << ' ' << e.number << endl;
        }
    }
}
```

How would you rewrite it using a map?

Solution

```
map<string, int> phonebook;
string name;
int num;
for (int i = 0; i < N; i++) {
    cin >> name >> num;
    phone_book[name] = num;
}
for(auto it = phonebook.begin(); it != phonebook.end(); ++it)
    cout << it->first << " : " << it->second << endl;
//add jack
phonebook["jack"] = 815111;
//print the entry for jack
cout << phonebook["jack"];
```

STL container's size, capacity, max_size

```
#include <iostream>
#include <vector>
int main() {
    std::vector<int> myvector;
    for(int i = 0; i<100; i++) myvector.push_back(i);
    std::cout << "size: " << (int) myvector.size() << '\n';
    std::cout << "capacity: " << (int) myvector.capacity() << '\n';
    std::cout << "max_size: " << (int) myvector.max_size() << '\n';
    return 0; }
// size: 100
// capacity: 141 (max# that can be inserted without reallocation)
// max_size: 1073741823 (max possible size)
```


Container Adaptors

- Encapsulated object of a specific container class as the underlying container, provide a *specific* set of member functions to access its elements.
- They are not first-class containers.
- They do not support iterators.

stack

- Container adaptor. Uses an underlying container. By default, deque is used. The containers vector and list may also be used to instantiate a stack.

```
template<class T, class Container = deque<T>> class stack;
```

- LIFO -- Last In First Out.

- Methods:

- bool empty() const;
- size_type size() const;
- value_type &top(); //return the element. Do not remove the element.
- void push(const value_type & val)
- void pop() //remove top element. Do not return the element.

```

#include <iostream>
#include <stack>
int main ()
{
    std::stack<int> mystack;
    for (int i=0; i<5; ++i)
        mystack.push(i);
    std::cout << "Popping out elements...";
    while (!mystack.empty())
    {
        std::cout << ' ' << mystack.top();
        mystack.pop();
    }
    std::cout << '\n';
    return 0;
}

```

Student exercise

- *Write a C++ program that initializes the content of a stack to a sequence of numbers (from 0 to 100) and then pops the elements one by one until it is empty, and print out the sum of these numbers.*

Solution

```
#include <iostream>
#include <stack>

int main ()
{
    int sum = 0;
    std::stack<int> mystack;
    for (int i=0; i<101; ++i)
        mystack.push(i);
    std::cout << "Popping out elements...";
    while (!mystack.empty())
    {
        sum += mystack.top();
        mystack.pop();
    }
    std::cout << sum << '\n';
    return 0;
}
```

9/17/24

An implementation of a stack using a vector or (linked) list or a deque

- The underlying container needs to support
 - empty, size, back, push_back and pop_back
- Push() and pop() can be implemented using:
 - push --- push_back()
 - pop --- pop_back() (return type void, does not return the popped value.)



A stack needs to support all of these


queue

- Container adaptor. Uses an underlying container. By default, deque is used. list may also be used to instantiate a stack.

```
template<class T, class Container = deque<T>> class queue;
```

- FIFO
- Methods:
 - bool empty()
 - size_type size()
 - value_type &front()
 - value_type &back()
 - void push(const value_type& val) //insert an element at the back of the queue
 - void pop() //remove the element at the front of the queue. Implemented using pop_front(). The element removed is the "oldest" element in the queue (the first element that was pushed in).

Example:

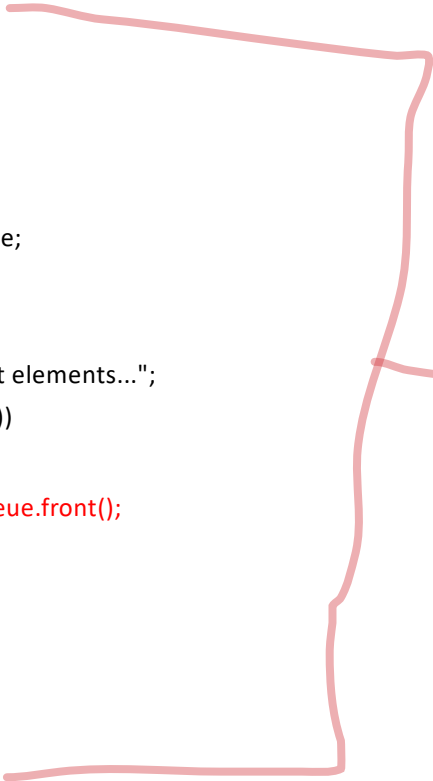

```
• #include <iostream>
• #include <queue>
• int main ()
• {
•     std::queue<int> myqueue;
•     for (int i=0; i<5; ++i)
•         myqueue.push(i);
•     std::cout << "Popping out elements...";
•     while (!myqueue.empty())
•     {
•         std::cout << ' ' << myqueue.front();
•         myqueue.pop();
•     }
•     std::cout << '\n';
•     return 0;
• }
```



output would be 0 1 2 3 4

Exercise: Add odd number to q1, even number to q2

```
queue<int> q1, q2;
int value;
cout << "\n Enter an integer > 0 or 0 to quit:" ;
cin >> value;
while(value != 0) {
    // what goes here?
    if (value % 2 == 0)
        q2.push(value);
    else
        q1.push(value);
    cout << "\n Enter an integer > 0 or 0 to quit:" ;
    cin >> value; }
```

Answer

```
queue <int> q1, q2;  
int value;  
cout << "\n Enter an integer > 0 or 0 to quit:" ;  
cin >> value;  
while(value != 0) {  
    if(value % 2 == 0) q2.push(value);  
    else q1.push(value);  
    cout << "\n Enter an integer > 0 or 0 to quit:" ;  
    cin >> value; }
```

priority_queue

- Container adaptor. The first element is always the highest priority.
- Default underlying container is vector. Can also use deque.
- Useful for situations need to consider priority.
- Will be discussed in heap later in the course.
- Methods:
 - `empty()`
 - `size()`
 - `top()`
 - `push()`: insert an element at the right location: `push_back`, then reorder using `heapsort`
 - `pop()`; implemented using `pop_back()`

Example

```
#include <iostream>
#include <queue>
using namespace std;
int main() {
    priority_queue <double> mypq;
    mypq.push (2.5);
    mypq.push (9.2);
    mypq.push (1.3);
    mypq.push (5.5);
    while(!mypq.empty()) {
        cout << mypq.top() << ", ";
        mypq.pop(); }
    return 0; }
// Output: 9.2, 5.5, 2.5, 1.3,
```