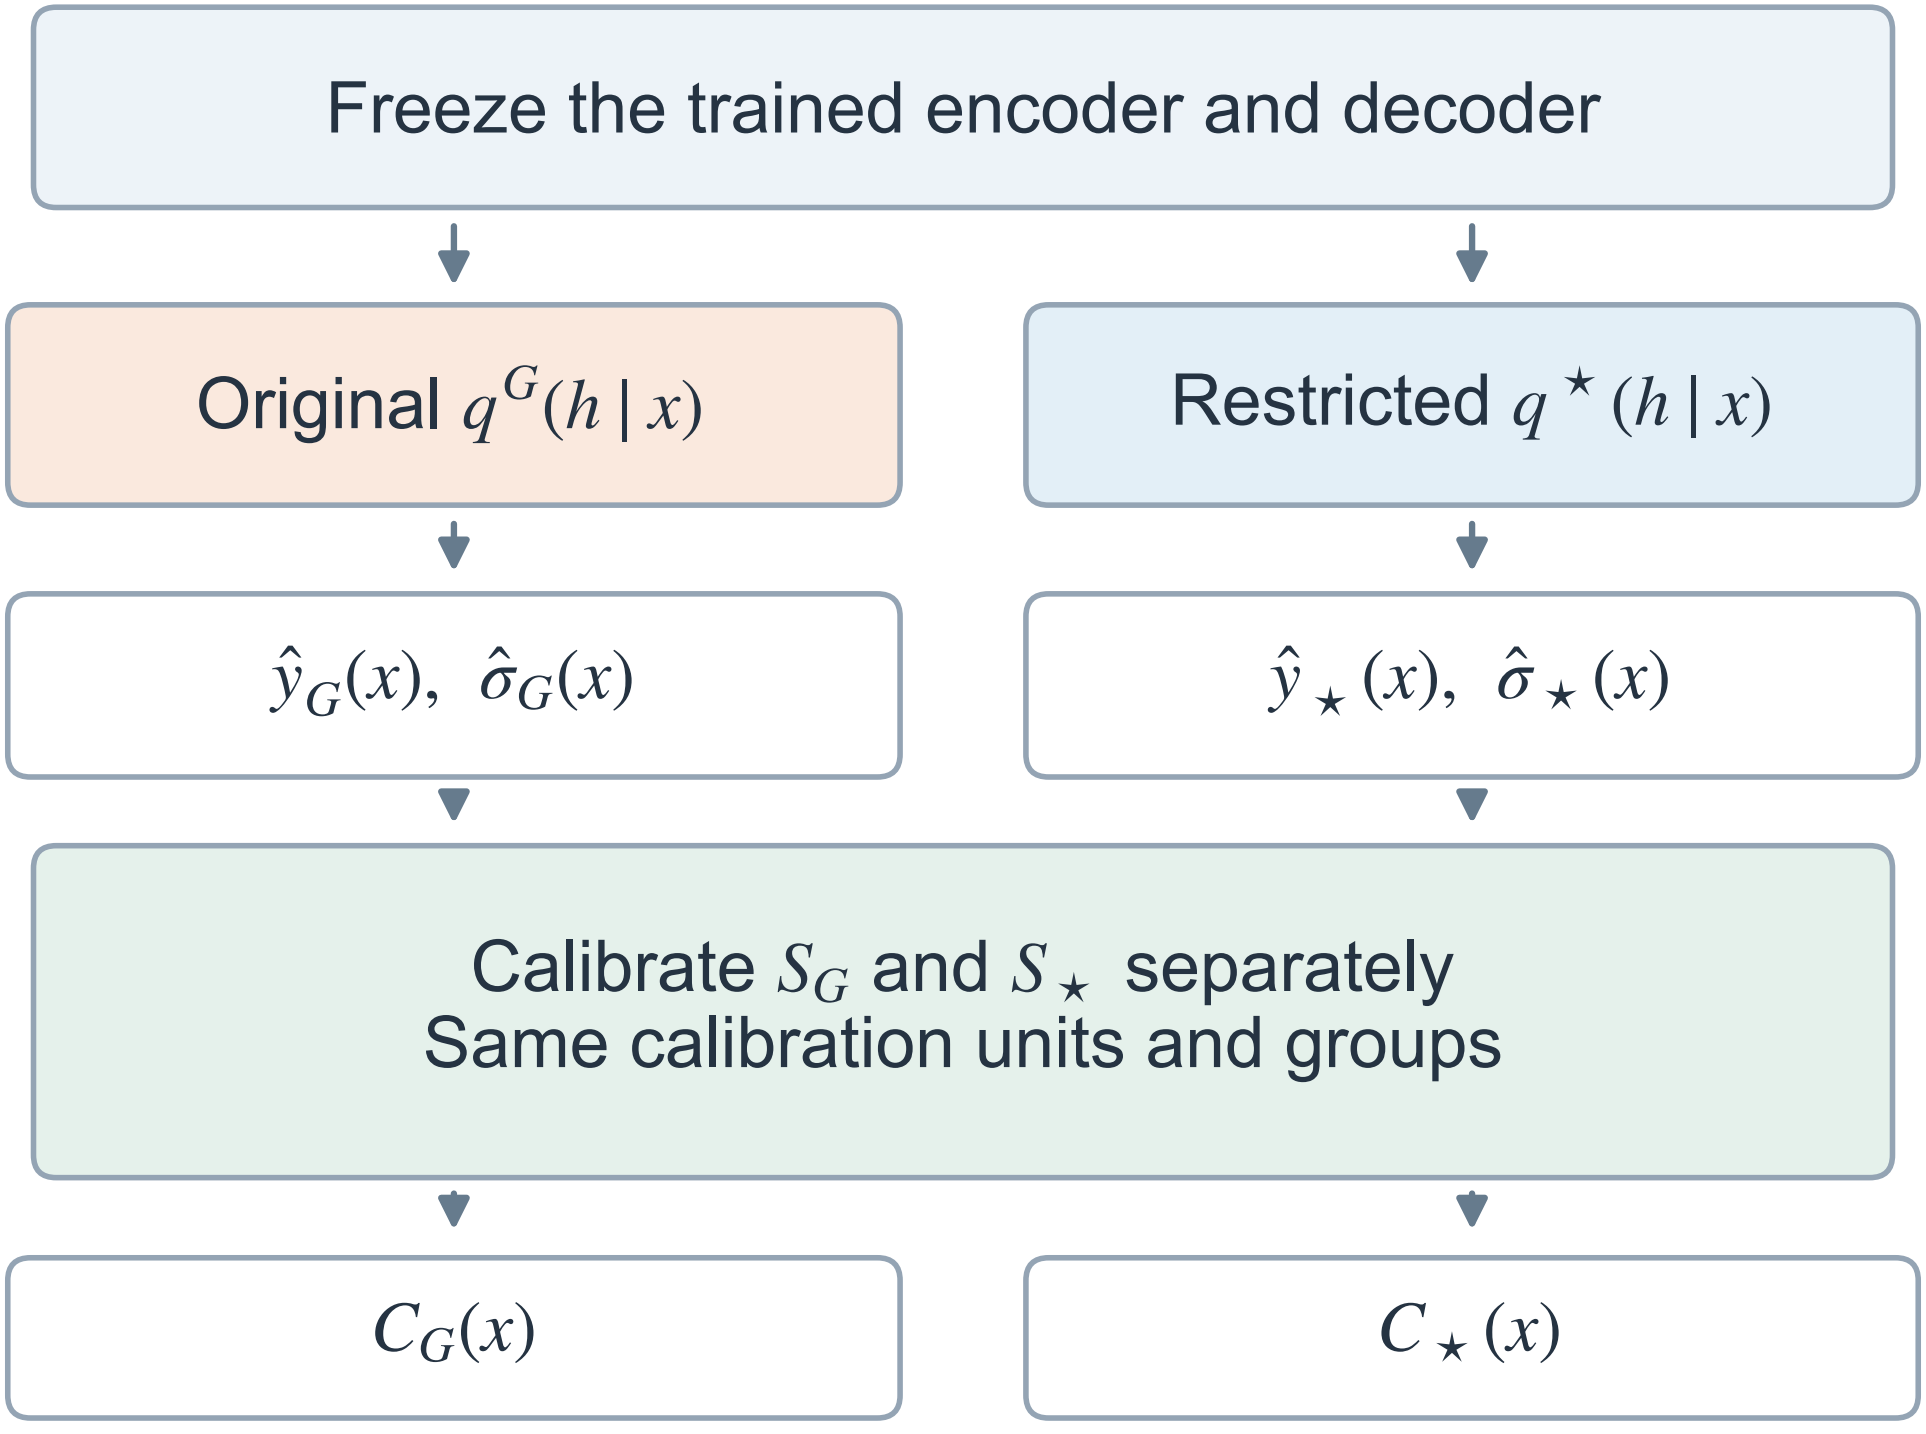
Freeze the trained encoder and decoder
Original $q^G(h \mid x)$
Restricted $q^\star(h \mid x)$
$\hat{y}_G(x),\ \hat{\sigma}_G(x)$
$\hat{y}_\star(x),\ \hat{\sigma}_\star(x)$
Calibrate S_G and $S_\star$ separately
Same calibration units and groups
$C_G(x)$
$C_\star(x)$
Common test units: compare coverage and size