```
using DataFrames
```

```
using CSV
```

```
using Plots
```

```
using Statistics
```

```
using DataStructures
```

```
using StatsBase
```

df =

	Fname	Lname	Gender	Hours Worked	SalesTraining	Years Experience	Cars Sold
1	"Jada"	"Walters "	"F"	39	"N"	3	2
2	"Nicole"	"Henderson"	"F"	46	"N"	3	6
3	"Tanya"	"Moore"	"F"	42	"Y"	4	6
4	"Ronelle"	"Jackson"	"F"	38	"Y"	5	3
5	"Brad"	"Sears"	"M"	33	"N"	4	2
6	"Jackie"	"Rogers"	"F"	45	"Y"	5	3
7	"Oliver"	"Vaughn"	"M"	46	"N"	5	3
8	"Carla"	"Sapp"	"F"	39	"Y"	3	6
9	"Karen"	"Moore"	"F"	33	"Y"	2	5
10	"Roger"	"Kane"	"M"	38	"N"	4	5
more							
999	"Mike"	"Gerardo"	"M"	20	"N"	3	3

```
df = DataFrame(CSV.File("C:/Users/claud/Documents/Dataset_Ciências_Dados/axisdata.csv"))
```

	Fname	Lname	Gender	Hours Worked	SalesTraining	Years Experience	Cars Sold
1	"Jada"	"Walters "	"F"	39	"N"	3	2
2	"Nicole"	"Henderson"	"F"	46	"N"	3	6
3	"Tanya"	"Moore"	"F"	42	"Y"	4	6
4	"Ronelle"	"Jackson"	"F"	38	"Y"	5	3
5	"Brad"	"Sears"	"M"	33	"N"	4	2

```
first(df, 5)
```

media = 3.9229229229229228

```
media = mean(df[!, "Cars Sold"])
```

maximo = 7

```
maximo = maximum(df[!, "Cars Sold"])
```

nomes_maxmo =
PooledArrays.PooledVector{InlineStrings.String15, UInt32, Vector{UInt32}}: ["Tom", "Sam", "T

```
nomes_maxmo =df[df[!, "Cars Sold"] .== maximo, "Fname"]
```

contagem_genero = Dict("M" => 510, "F" => 489)

```
contagem_genero = countmap(df[!, "Gender"])
```

x = ["M 510", "F 489"]

```
x = ["M 510", "F 489"]
```

y = [510, 489]

```
y = [510, 489]
```

cores = ["yellow", "blue"]

```
cores = ["yellow", "blue"]
```

labels = ["Masculino", "Feminino"]

```
labels =["Masculino", "Feminino"]
```

```
p =
```

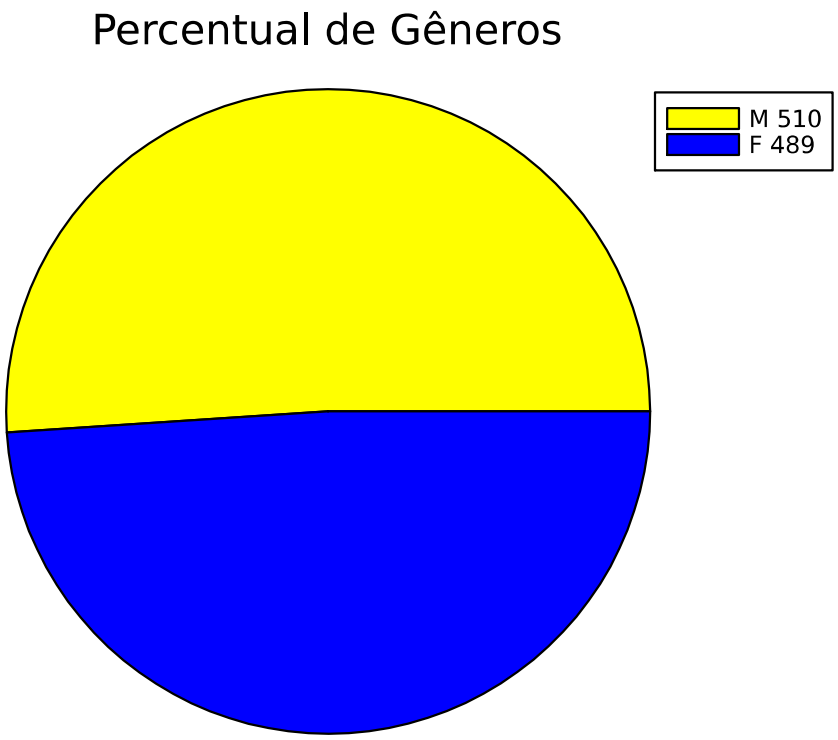


```
p = pie(x, y, labels, color=cores, title="Percentual de Gêneros")
```