

Chapter 2

Application Layer

A note on the use of these PowerPoint slides:

We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part.


In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

For a revision history, see the slide note for this page.

Thanks and enjoy! JFK/KWR

All material copyright 1996-2023
J.F Kurose and K.W. Ross, All Rights Reserved

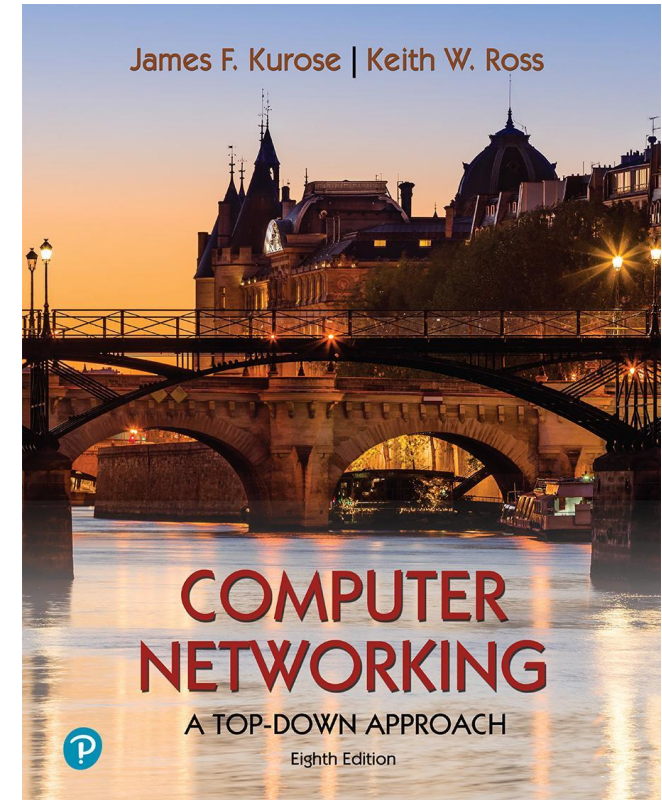

*Computer Networking: A
Top-Down Approach*

8th edition

Jim Kurose, Keith Ross
Pearson, 2020

Application layer: overview

- Principles of network applications
 - Web and HTTP
 - E-mail, SMTP, IMAP
 - The Domain Name System DNS
- P2P applications



Application layer: overview

Our goals:

- conceptual *and* implementation aspects of application-layer protocols
 - transport-layer service models
 - client-server paradigm
 - peer-to-peer paradigm
- learn about protocols by examining popular application-layer protocols and infrastructure
 - HTTP
 - SMTP, IMAP
 - DNS
 - video streaming systems, CDNs

Some network apps

- social networking
 - Web
 - text messaging
 - e-mail
 - multi-user network games
 - streaming stored video (YouTube, Hulu, Netflix)
 - P2P file sharing
 - voice over IP (e.g., Skype)
 - real-time video conferencing (e.g., Zoom)
 - Internet search
 - remote login
 - ...
- Q: *your* favorites?


Creating a network app

write programs that:

- run on (different) end systems
- communicate over network
- e.g., web server software communicates with browser software

no need to write software for network-core devices

- network-core devices do not run user applications
- applications on end systems allows for rapid app development, propagation

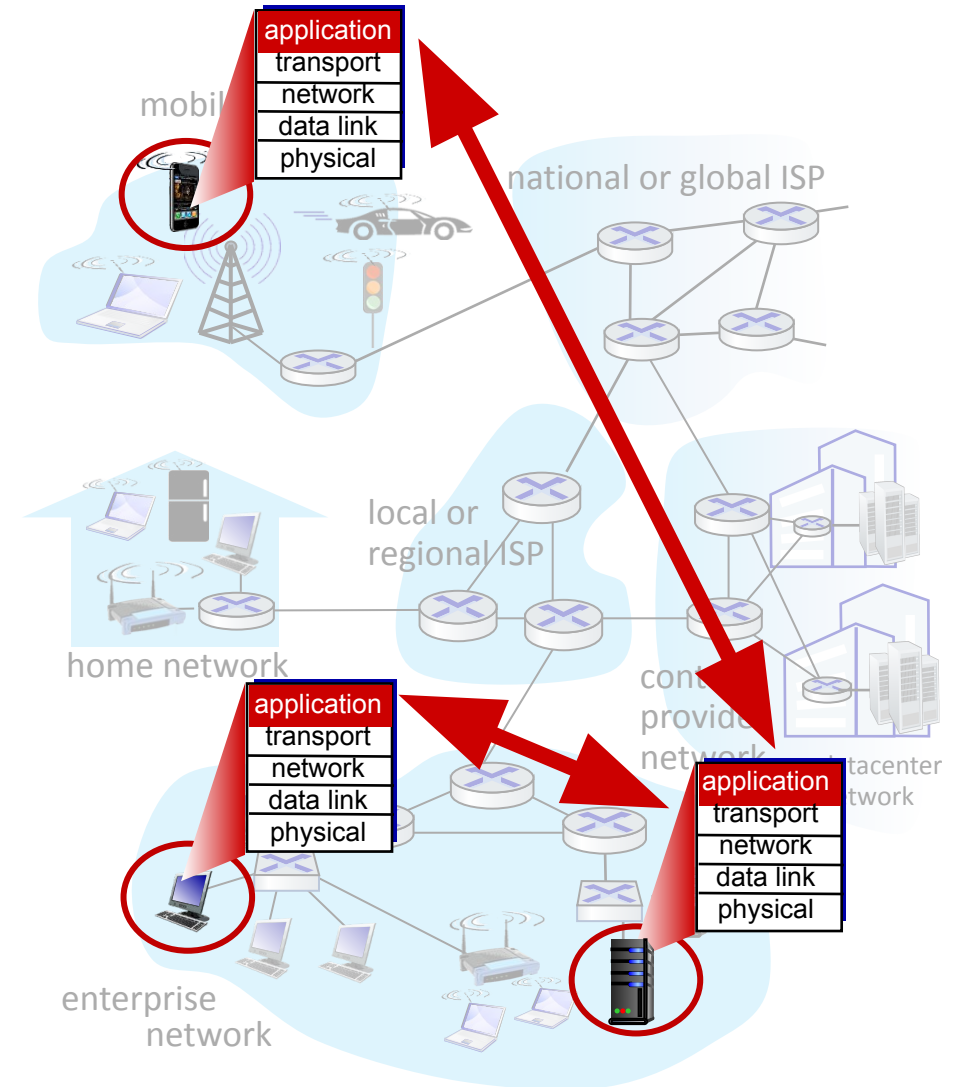


Client-server paradigm

server:

- always-on host
- permanent IP address
- often in data centers, for scaling


clients:

- contact, communicate with server
- may be intermittently connected
- may have dynamic IP addresses
- do *not* communicate directly with each other
- examples: HTTP, IMAP, FTP

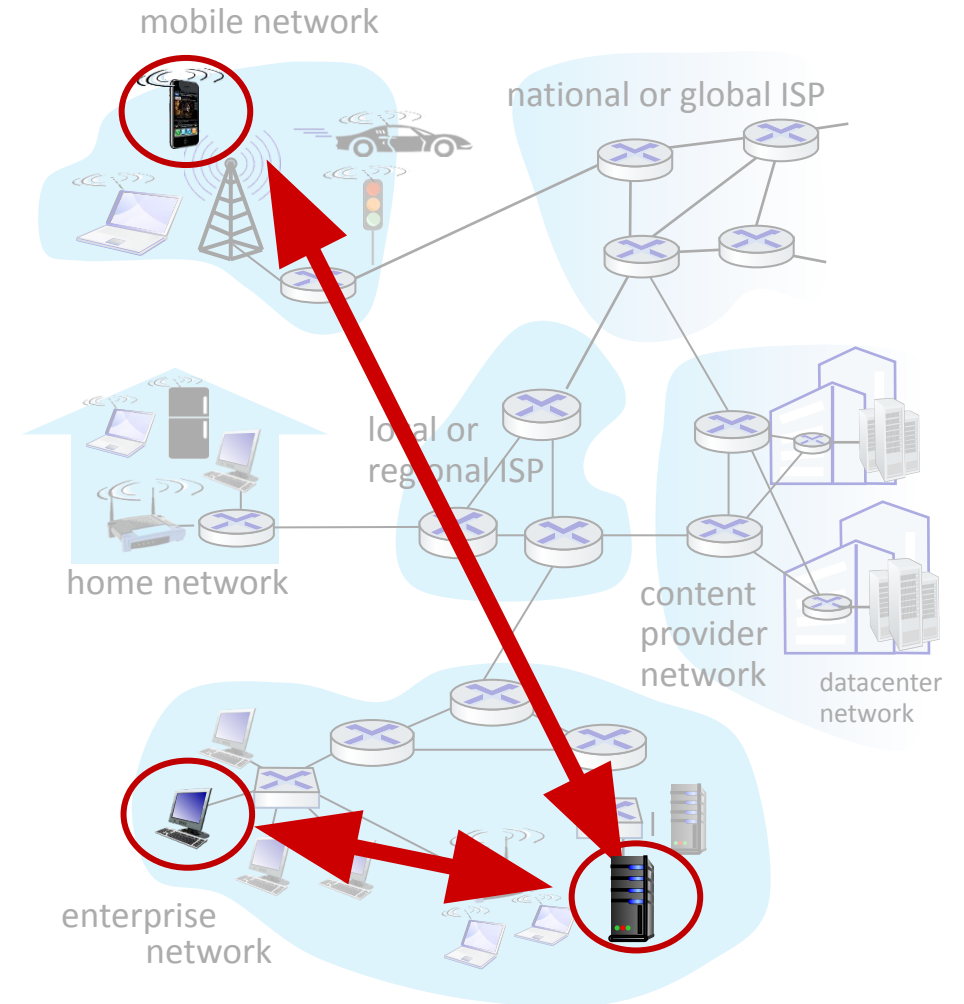

Peer-peer architecture

- *no* always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
 - *self scalability* – new peers bring new service capacity, as well as new service demands
- peers are intermittently connected and change IP addresses
 - complex management
- example: P2P file sharing [BitTorrent]

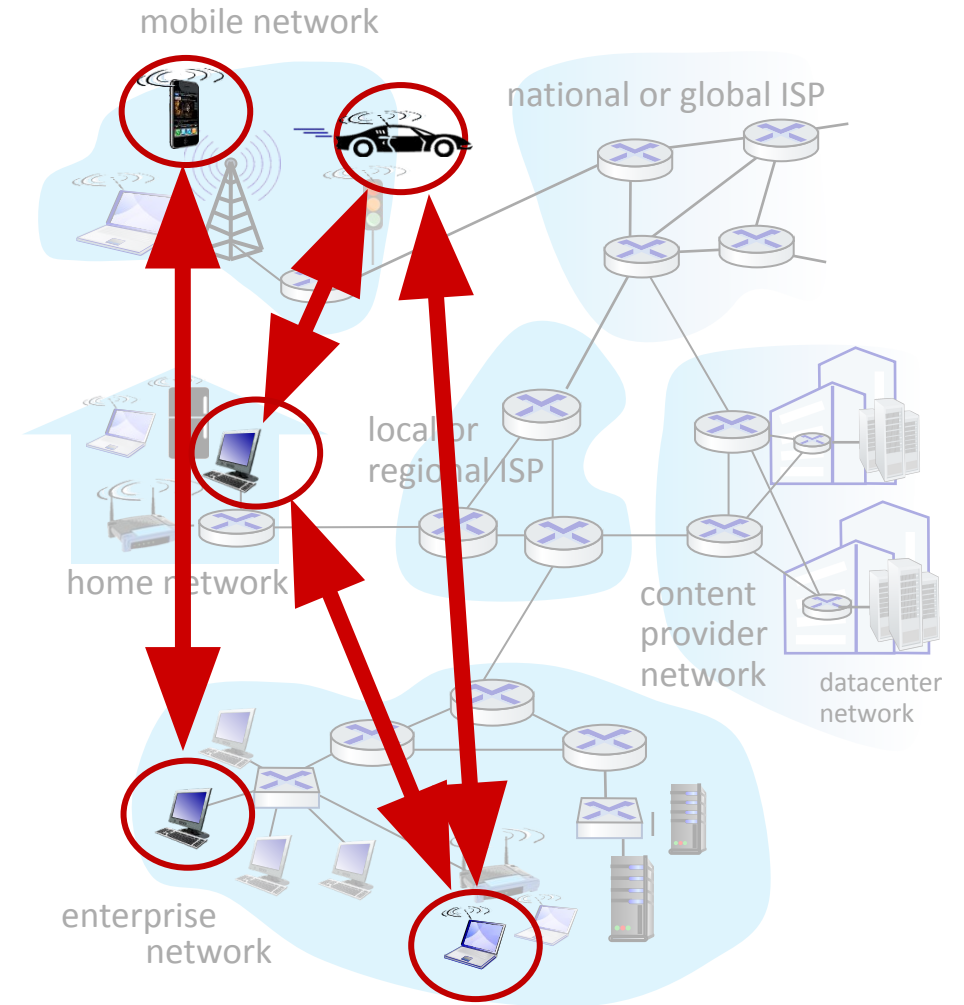

Processes communicating

process: program running within a host

- within same host, two processes communicate using **inter-process communication** (defined by OS)
- processes in different hosts communicate by exchanging **messages**

clients, servers


client process: process that initiates communication

server process: process that waits to be contacted

- note: applications with P2P architectures have client processes & server processes

Sockets

- process sends/receives messages to/from its **socket**
- socket analogous to door
 - sending process shoves message out door
 - sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process
 - two sockets involved: one on each side

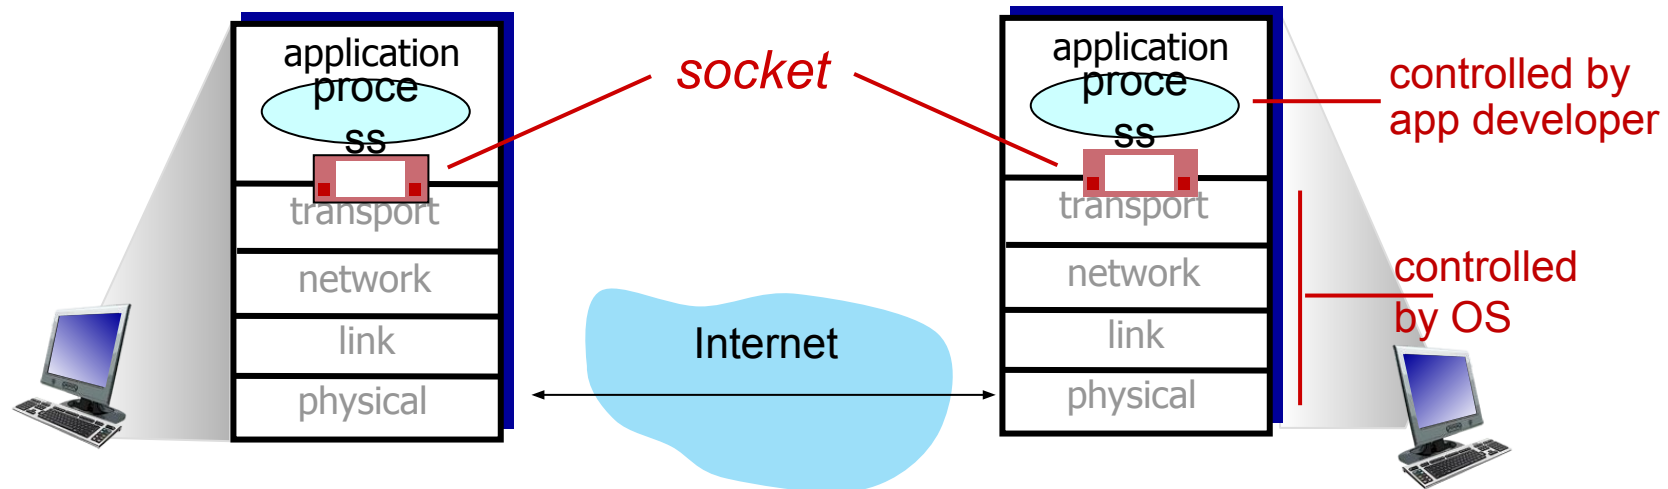

Addressing processes

- to receive messages, process must have *identifier*
- host device has unique 32-bit IP address
- Q: does IP address of host on which process runs suffice for identifying the process?
 - A: no, *many* processes can be running on same host
- *identifier* includes both IP address and port numbers associated with process on host.
- example port numbers:
 - HTTP server: 80
 - mail server: 25
- to send HTTP message to gaia.cs.umass.edu web server:
 - IP address: 128.119.245.12
 - port number: 80
- more shortly...

An application-layer protocol defines:

- **types of messages exchanged**,
 - e.g., request, response
- **message syntax**:
 - what fields in messages & how fields are delineated
- **message semantics**
 - meaning of information in fields
- **rules** for when and how processes send & respond to messages

open protocols:

- defined in RFCs, everyone has access to protocol definition
- allows for interoperability
- e.g., HTTP, SMTP

proprietary protocols:

- e.g., Skype, Zoom

What transport service does an app need?

data integrity

- some apps (e.g., file transfer, web transactions) require 100% reliable data transfer
- other apps (e.g., audio) can tolerate some loss

timing

- some apps (e.g., Internet telephony, interactive games) require low delay to be “effective”

throughput

- some apps (e.g., multimedia) require minimum amount of throughput to be “effective”
- other apps (“elastic apps”) make use of whatever throughput they get

security

- encryption, data integrity, ...

Transport service requirements: common apps

application	data loss	throughput	time sensitive?
file transfer/download	no loss	elastic	no
e-mail	no loss	elastic	no
Web documents	no loss	elastic	no
real-time audio/video	loss-tolerant	audio: 5Kbps-1Mbps video:10Kbps-5Mbps	yes, 10's msec
streaming audio/video	loss-tolerant	same as above	yes, few secs
interactive games	loss-tolerant	Kbps+	yes, 10's msec
text messaging	no loss	elastic	yes and no

Internet transport protocols services

TCP service:

- *reliable transport* between sending and receiving process
- *flow control*: sender won't overwhelm receiver
- *congestion control*: throttle sender when network overloaded
- *connection-oriented*: setup required between client and server processes
- *does not provide*: timing, minimum throughput guarantee, security

UDP service:

- *unreliable data transfer* between sending and receiving process
- *does not provide*: reliability, flow control, congestion control, timing, throughput guarantee, security, or connection setup.

Q: why bother? *Why* is there a UDP?

Internet applications, and transport protocols

application	application layer protocol	transport protocol
file transfer/download	FTP [RFC 959]	TCP
e-mail	SMTP [RFC 5321]	TCP
Web documents	HTTP [RFC 7230, 9110]	TCP
Internet telephony	SIP [RFC 3261], RTP [RFC 3550], or proprietary	TCP or UDP
streaming audio/video	HTTP [RFC 7230], DASH	TCP
interactive games	WOW, FPS (proprietary)	UDP or TCP

Application layer: overview

- Principles of network applications
 - **Web and HTTP**
 - E-mail, SMTP, IMAP
 - The Domain Name System DNS
- P2P applications



Web and HTTP

First, a quick review...

- web page consists of *objects*, each of which can be stored on different Web servers
- object can be HTML file, JPEG image, Java applet, audio file,...
- web page consists of *base HTML-file* which includes *several referenced objects, each* addressable by a *URL*, e.g.,
`www.someschool.edu/someDept/pic.gif`


host name

path name

HTTP overview

HTTP: hypertext transfer protocol

- Web's application-layer protocol
- client/server model:
 - *client*: browser that requests, receives, (using HTTP protocol) and “displays” Web objects
 - *server*: Web server sends (using HTTP protocol) objects in response to requests

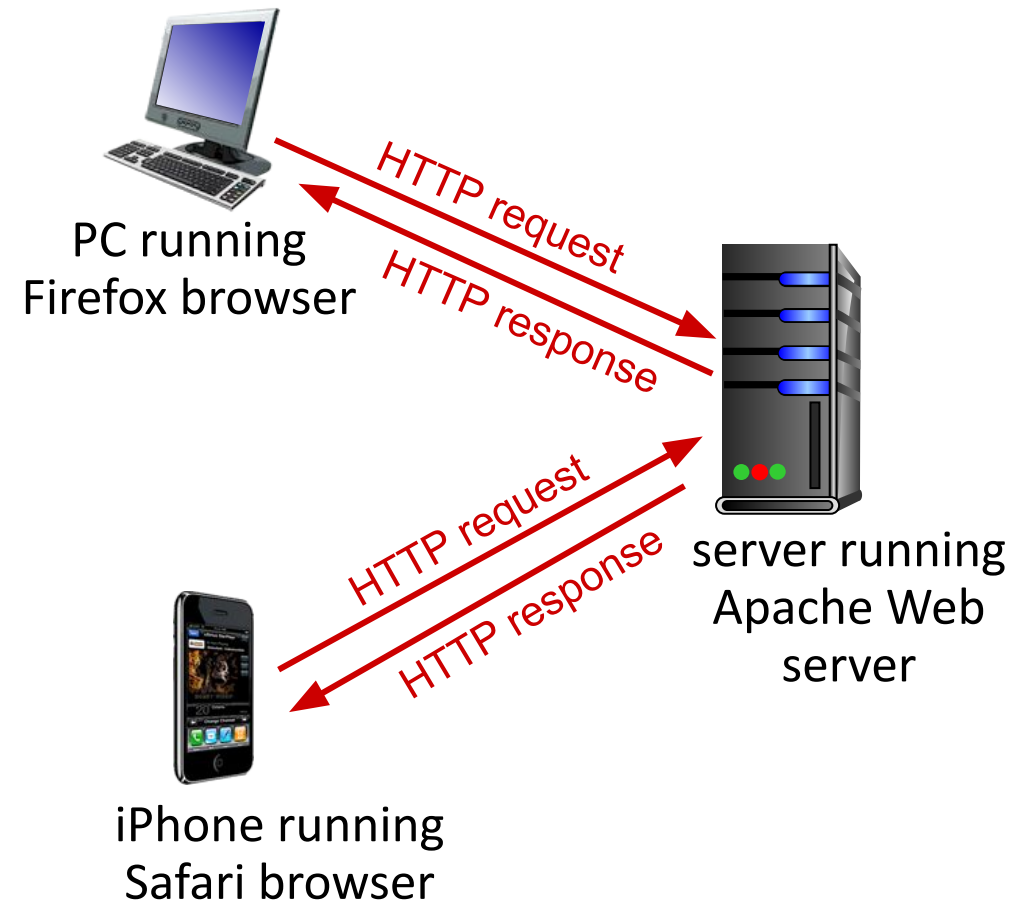

HTTP overview (continued)

HTTP uses TCP:

- client initiates TCP connection (creates socket) to server, port 80
- server accepts TCP connection from client
- HTTP messages (application-layer protocol messages) exchanged between browser (HTTP client) and Web server (HTTP server)
- TCP connection closed

HTTP is “stateless”

- server maintains *no* information about past client requests

aside
protocols that maintain
“state” are complex!

- past history (state) must be maintained
- if server/client crashes, their views of “state” may be inconsistent, must be reconciled

HTTP connections: two types

Non-persistent HTTP

1. TCP connection opened
 2. at most one object sent over TCP connection
 3. TCP connection closed
- downloading multiple objects required multiple connections

Persistent HTTP

- TCP connection opened to a server
- multiple objects can be sent over *single* TCP connection between client, and that server
- TCP connection closed

Non-persistent HTTP: example

User enters URL: `www.someSchool.edu/someDepartment/home.index`
(containing text, references to 10 jpeg images)



1a. HTTP client initiates TCP connection to HTTP server (process) at `www.someSchool.edu` on port 80



1b. HTTP server at host `www.someSchool.edu` waiting for TCP connection at port 80 “accepts” connection, notifying client

2. HTTP client sends HTTP *request message* (containing URL) into TCP connection socket. Message indicates that client wants object `someDepartment/home.index`

3. HTTP server receives request message, forms *response message* containing requested object, and sends message into its socket

time



Non-persistent HTTP: example (cont.)

User enters URL: `www.someSchool.edu/someDepartment/home.index`
(containing text, references to 10 jpeg images)



5. HTTP client receives response message containing html file, displays html. Parsing html file, finds 10 referenced jpeg objects

6. Steps 1-5 repeated for each of 10 jpeg objects

4. HTTP server closes TCP connection.




Non-persistent HTTP: response time

RTT (definition): time for a small packet to travel from client to server and back

HTTP response time (per object):

- one RTT to initiate TCP connection
- one RTT for HTTP request and first few bytes of HTTP response to return
- object/file transmission time

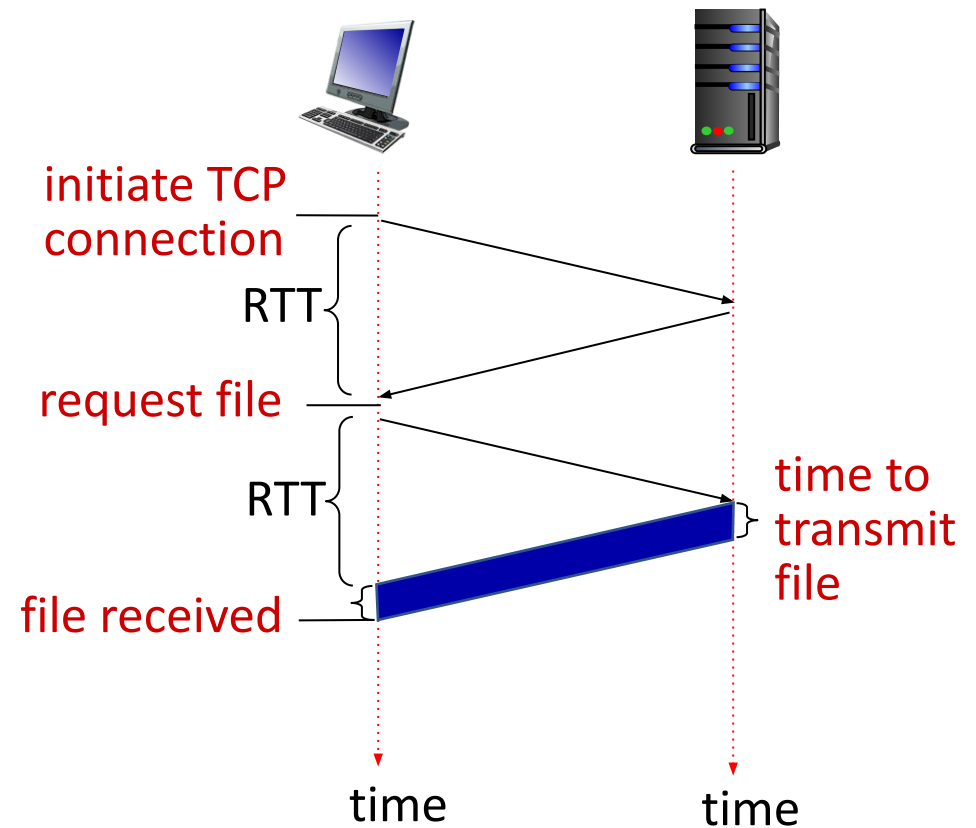

Non-persistent HTTP response time = $2RTT + \text{file transmission time}$

Persistent HTTP (HTTP 1.1)

Non-persistent HTTP issues:

- requires 2 RTTs per object
- OS overhead for *each* TCP connection
- browsers often open multiple parallel TCP connections to fetch referenced objects in parallel

Persistent HTTP (HTTP1.1):

- server leaves connection open after sending response
- subsequent HTTP messages between same client/server sent over open connection
- client sends requests as soon as it encounters a referenced object
- as little as one RTT for all the referenced objects (cutting response time in half)

HTTP request message

- two types of HTTP messages: *request, response*
- HTTP request message:
 - ASCII (human-readable format)


request line (GET, POST,
HEAD commands) →

carriage return character
/ line-feed character

carriage return, line feed →
at start of line indicates
end of header lines

* Check out the online interactive exercises for more
examples: http://gaia.cs.umass.edu/kurose_ross/interactive/

HTTP request message: general format

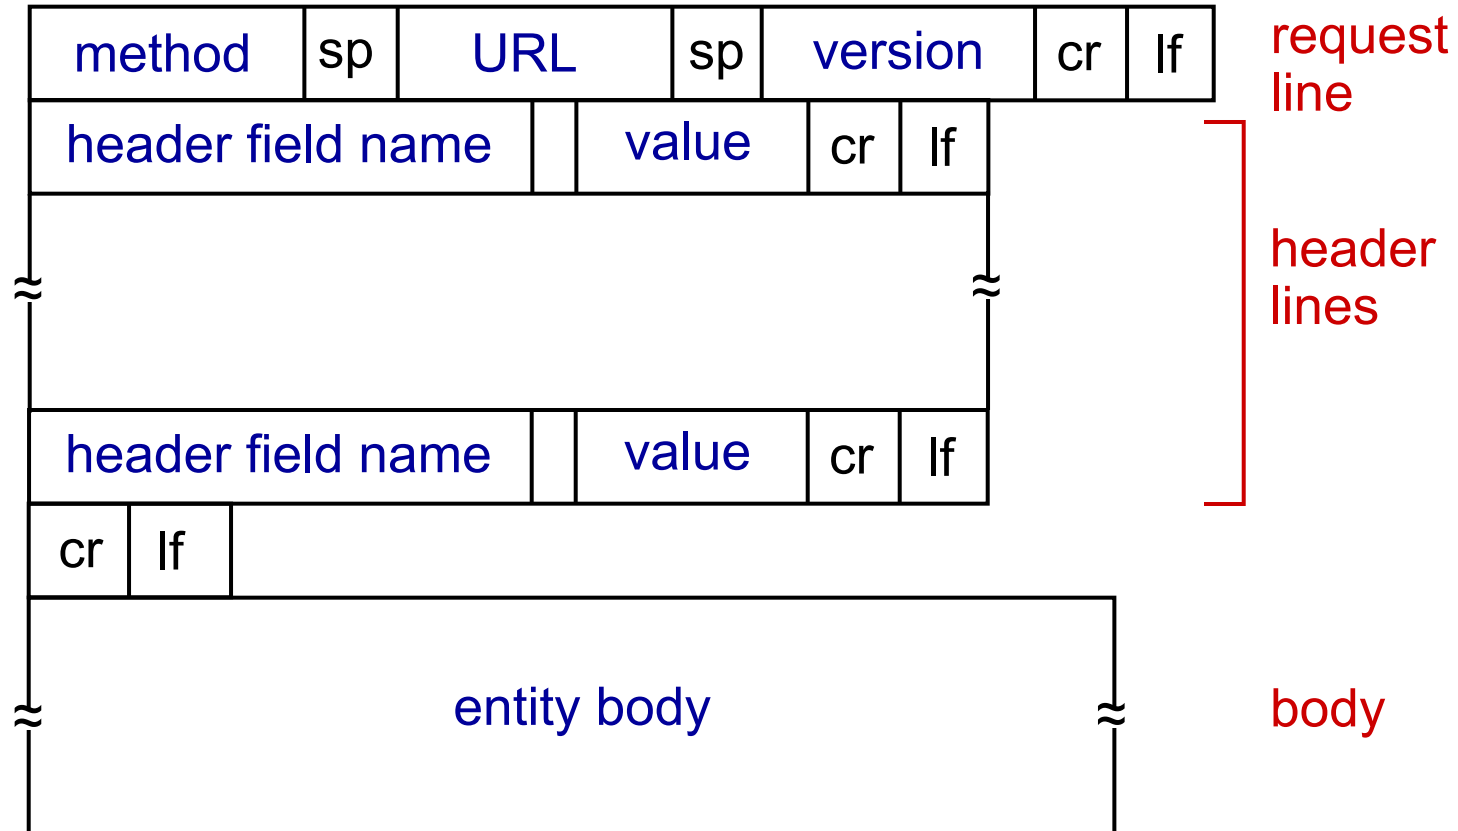

Other HTTP request messages

POST method:

- web page often includes form input
- user input sent from client to server in entity body of HTTP POST request message

GET method (for sending data to server):

- include user data in URL field of HTTP GET request message (following a '?'):

`www.somesite.com/animalsearch?monkeys&banana`


HEAD method:

- requests headers (only) that would be returned *if* specified URL were requested with an HTTP GET method.

PUT method:

- uploads new file (object) to server
- completely replaces file that exists at specified URL with content in entity body of POST HTTP request message

HTTP response message

status line (protocol  HTTP/1.1 200 OK
status code status phrase)

HTTP response status codes

- status code appears in 1st line in server-to-client response message.
- some sample codes:

200 OK

- request succeeded, requested object later in this message

301 Moved Permanently

- requested object moved, new location specified later in this message (in Location: field)

400 Bad Request

- request msg not understood by server

404 Not Found

- requested document not found on this server


505 HTTP Version Not Supported

Maintaining user/server state: cookies

Recall: HTTP GET/response interaction is *stateless*

- no notion of multi-step exchanges of HTTP messages to complete a Web “transaction”
 - no need for client/server to track “state” of multi-step exchange
 - all HTTP requests are independent of each other
 - no need for client/server to “recover” from a partially-completed-but-never-completely-completed transaction

a *stateful protocol*: client makes two changes to X, or none at all

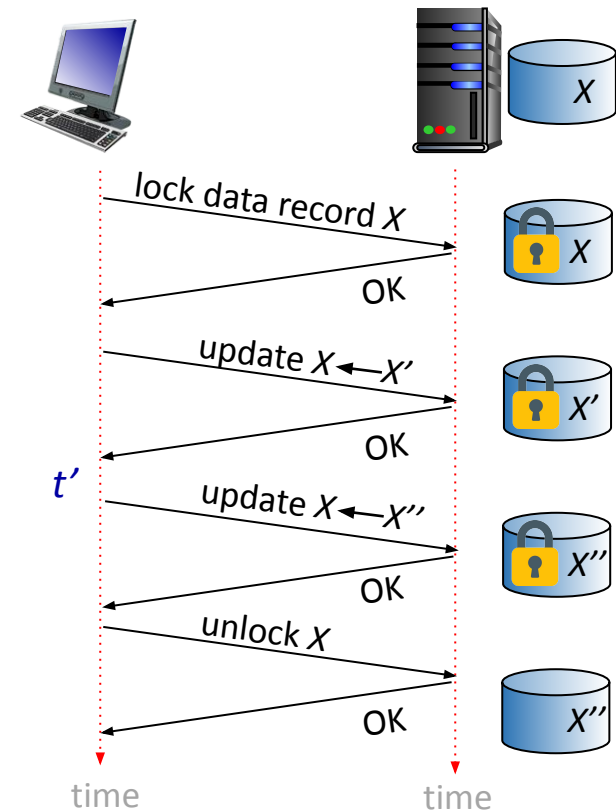

Q: what happens if network connection or client crashes at t' ?

Maintaining user/server state: cookies

Web sites and client browser use *cookies* to maintain some state between transactions


four components:

- 1) cookie header line of HTTP *response* message
- 2) cookie header line in next HTTP *request* message
- 3) cookie file kept on user's host, managed by user's browser
- 4) back-end database at Web site

Example:

- Susan uses browser on laptop, visits specific e-commerce site for first time
- when initial HTTP requests arrives at site, site creates:
 - unique ID (aka “cookie”)
 - entry in backend database for ID
- subsequent HTTP requests from Susan to this site will contain cookie ID value, allowing site to “identify” Susan

Maintaining user/server state: cookies

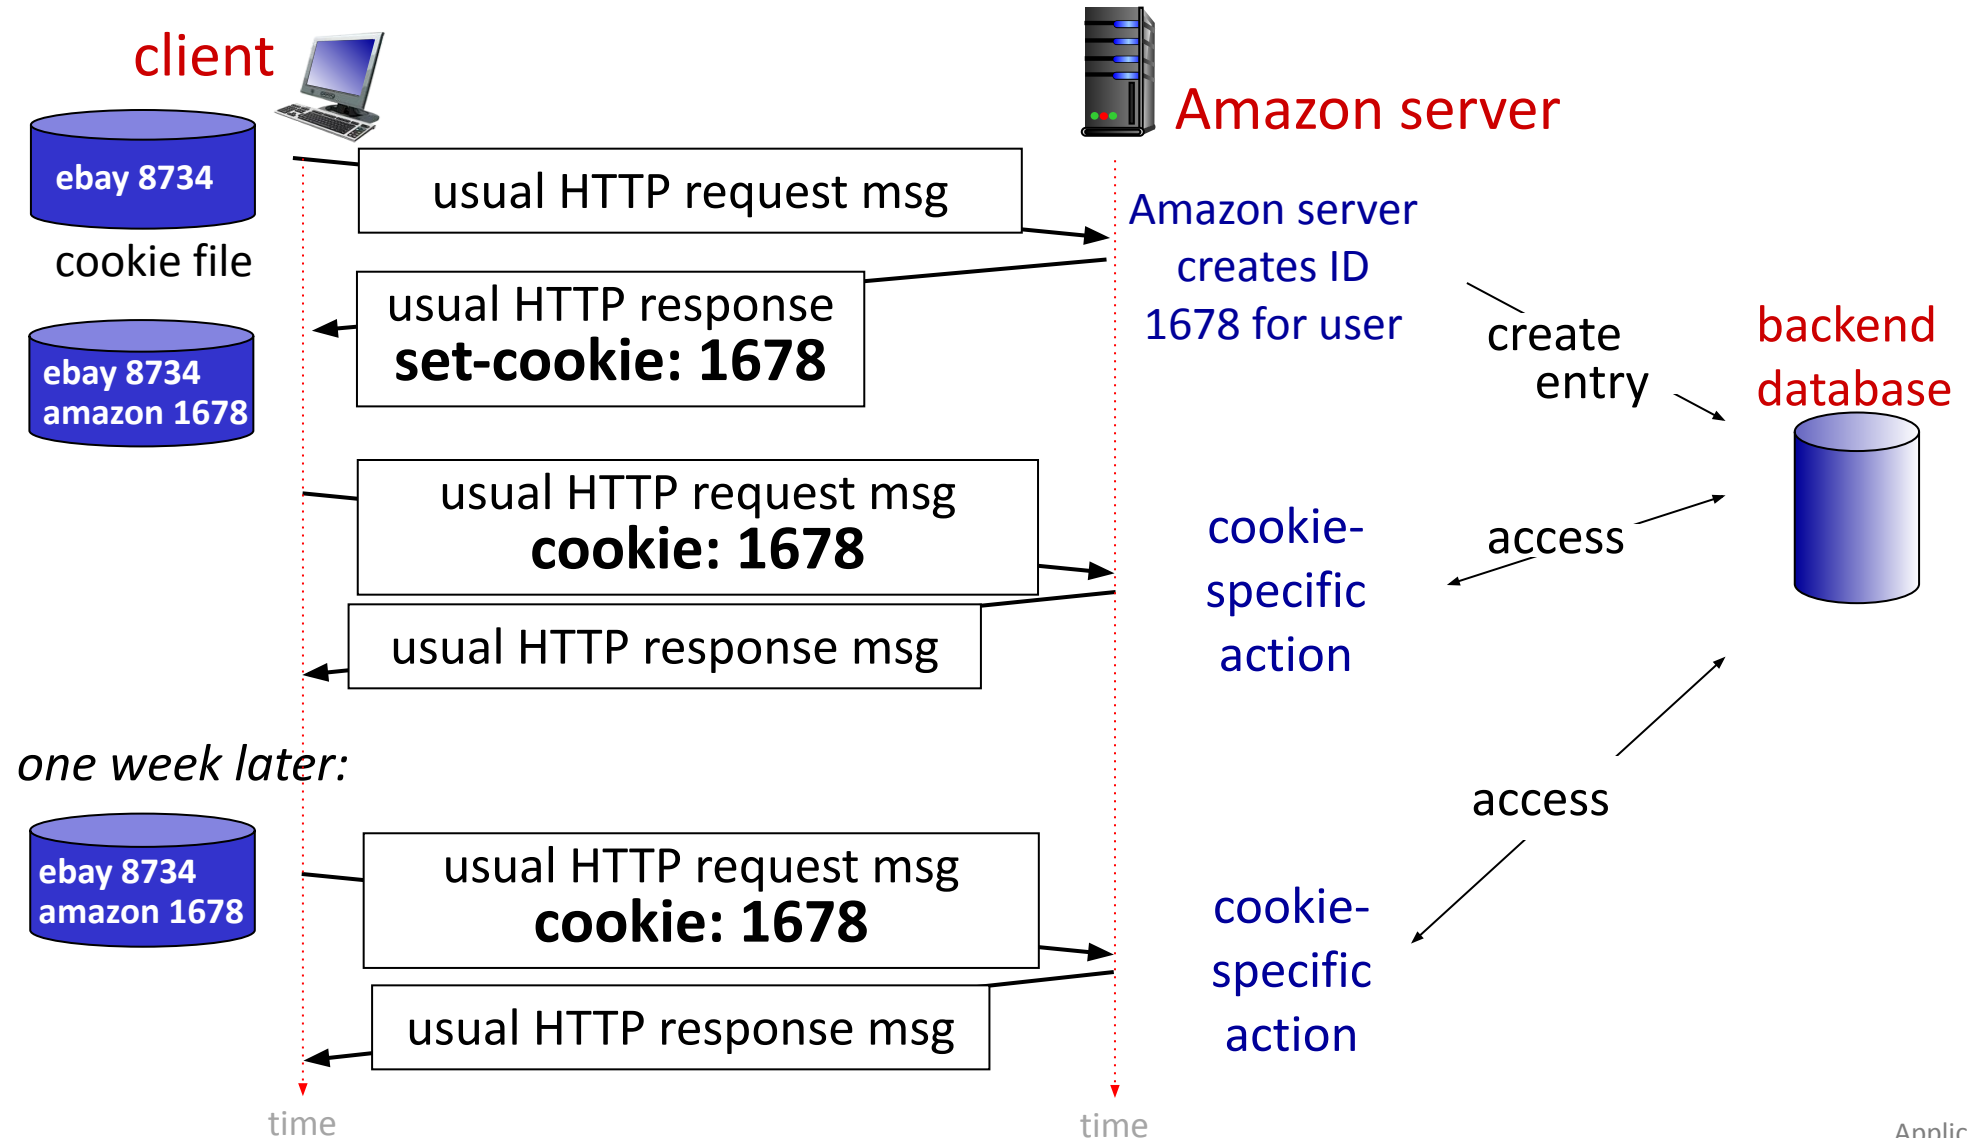

HTTP cookies: comments

aside

What cookies can be used for:

- shopping carts
- Recommendations
- etc


Challenge: How to keep state?

- *at protocol endpoints:* maintain state at sender/receiver over multiple transactions
- *in messages:* cookies in HTTP messages carry state

Web caches

Goal: satisfy client requests without involving origin server

- user configures browser to point to a (local) *Web cache*
- browser sends all HTTP requests to cache
 - *if* object in cache: cache returns object to client
 - *else* cache requests object from origin server, caches received object, then returns object to client

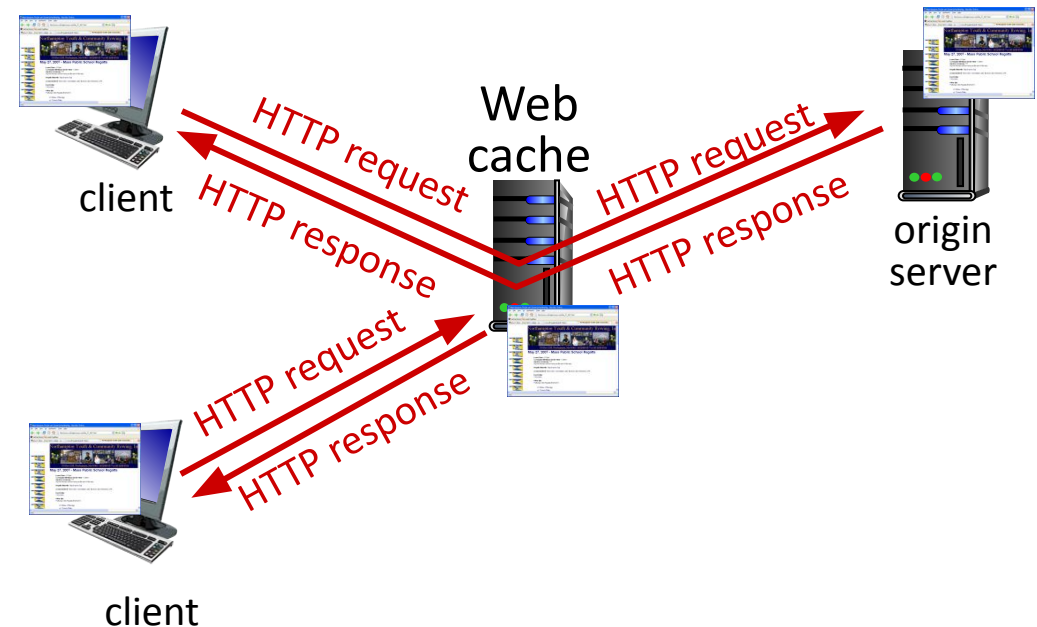

Web caches (aka proxy servers)

- Web cache acts as both client and server
 - server for original requesting client
 - client to origin server
- server tells cache about object's allowable caching in response header:

```
Cache-Control: max-age=<seconds>
```

```
Cache-Control: no-cache
```

Why Web caching?

- reduce response time for client request
 - cache is closer to client
- reduce traffic on an institution's access link
- Internet is dense with caches
 - enables “poor” content providers to more effectively deliver content

Caching example



Scenario:

- access link rate: 1.54 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
 - avg data rate to browsers: 1.50 Mbps

Performance:

- access link utilization = .97
- LAN utilization: .0015
- end-end delay = Internet delay +
access link delay + LAN delay
= 2 sec + minutes + usecs

problem: large
queueing delays at
high utilization!

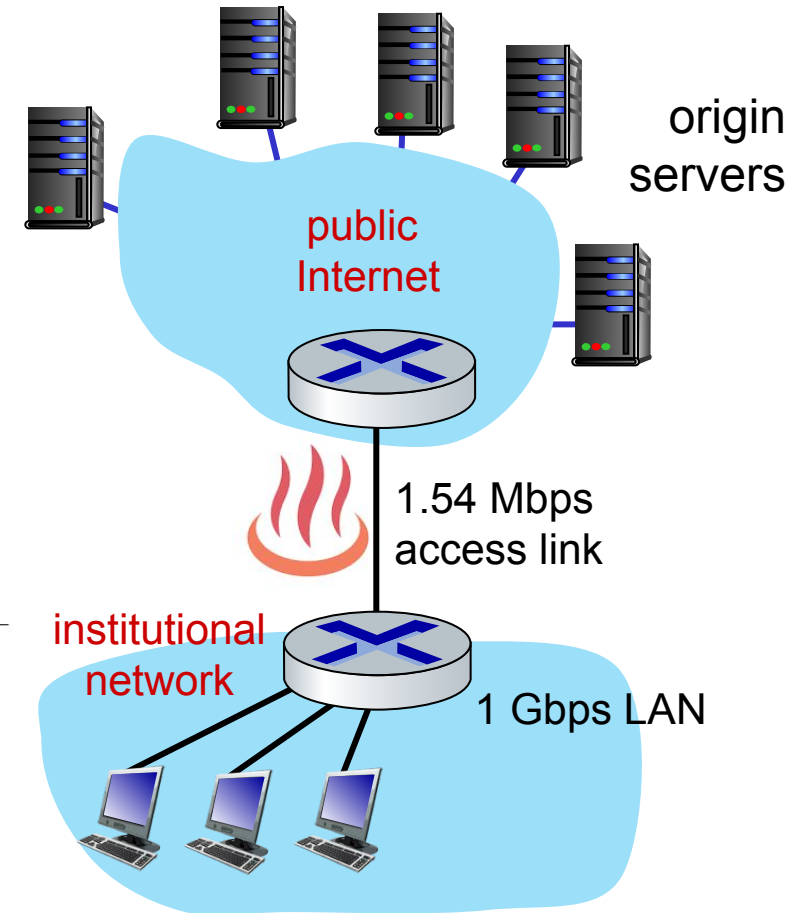

Option 1: buy a faster access link


Scenario:

- access link rate: ~~1.54~~ 154 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
 - avg data rate to browsers: 1.50 Mbps

Performance:

- access link utilization = ~~.97~~ .0097
- LAN utilization: .0015
- end-end delay = Internet delay +
access link delay + LAN delay
= 2 sec + ~~minutes~~ + usecs

Cost: faster access link (expensive!) → msecs

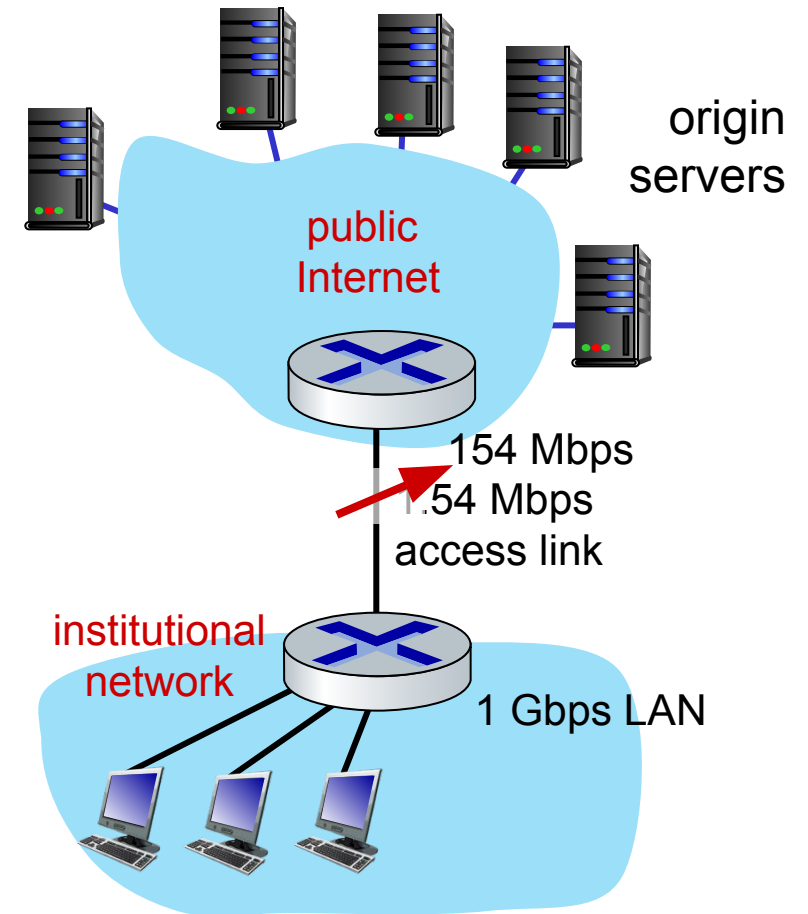

Option 2: install a web cache

Scenario:


- access link rate: 1.54 Mbps
- RTT from institutional router to server: 2 sec
- web object size: 100K bits
- average request rate from browsers to origin servers: 15/sec
 - avg data rate to browsers: 1.50 Mbps

Cost: web cache (cheap!)

Performance:

- LAN utilization: .?
- access link utilization = ?
- average end-end delay = ?


How to compute link utilization, delay?

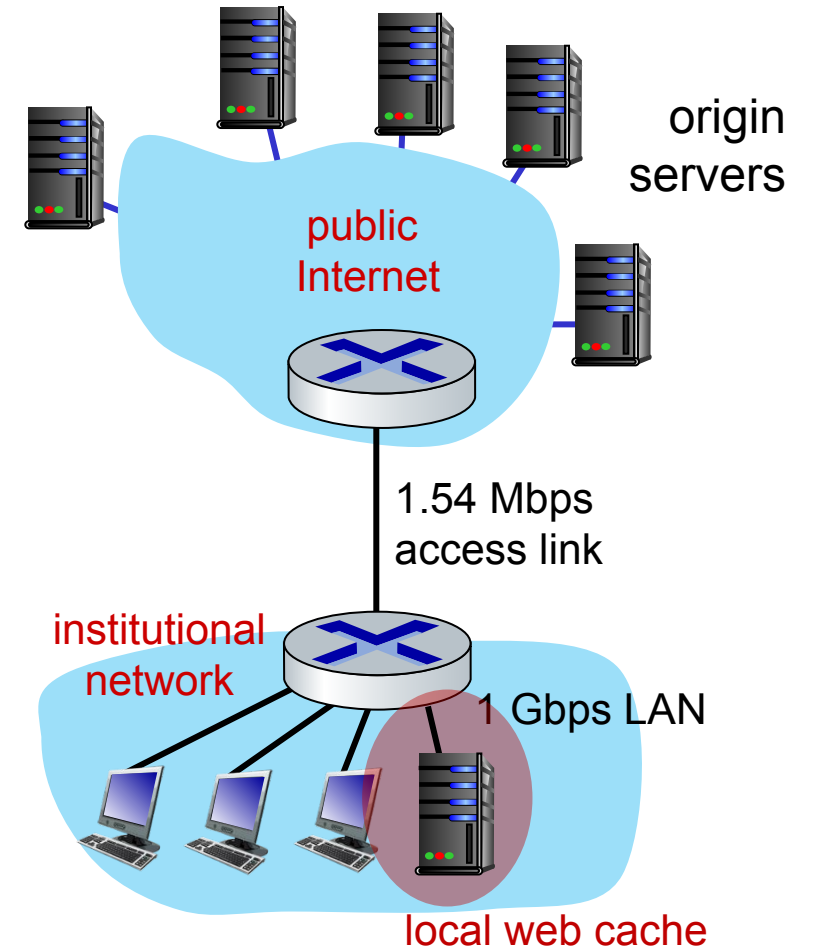

Calculating access link utilization, end-end delay with cache:

suppose cache hit rate is 0.4:

- 40% requests served by cache, with low (msec) delay
- 60% requests satisfied at origin
 - rate to browsers over access link
 $= 0.6 * 1.50 \text{ Mbps} = .9 \text{ Mbps}$
 - access link utilization $= 0.9 / 1.54 = .58$ means low (msec) queueing delay at access link
- average end-end delay:
 $= 0.6 * (\text{delay from origin servers})$
 $+ 0.4 * (\text{delay when satisfied at cache})$
 $= 0.6 (2.01) + 0.4 (\sim \text{msecs}) = \sim 1.2 \text{ secs}$

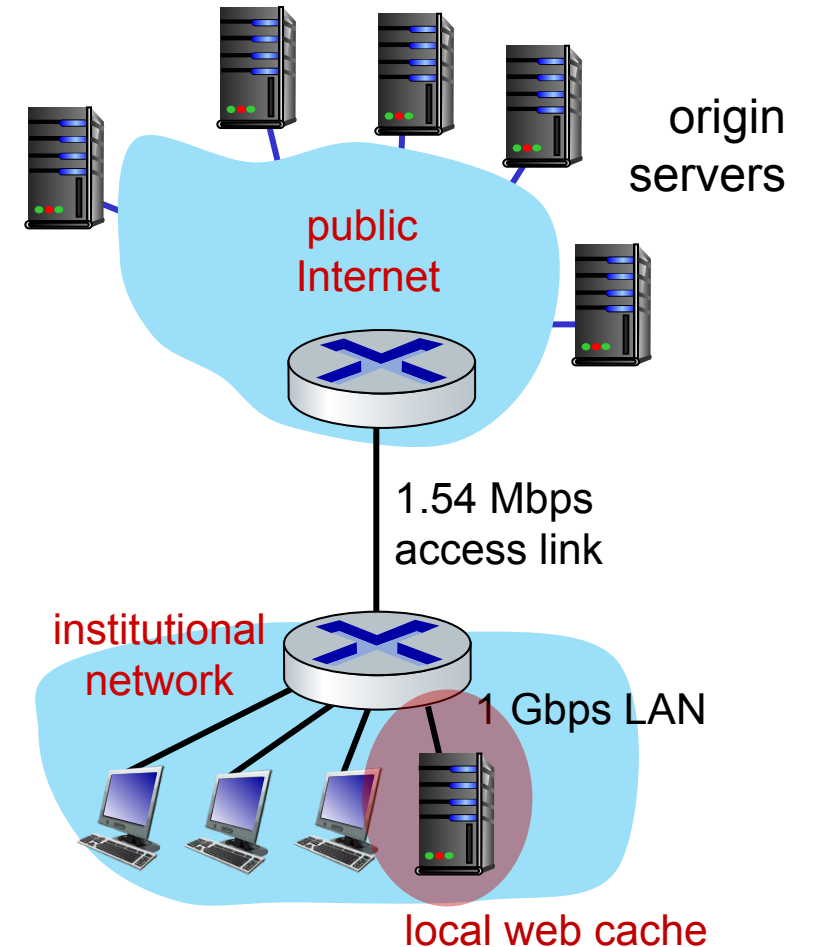

lower average end-end delay than with 154 Mbps link (and cheaper too!)

Browser caching: Conditional GET

Goal: don't send object if browser has up-to-date cached version


- no object transmission delay (or use of network resources)

▪ **client:** specify date of browser-cached copy in HTTP request

If-modified-since: <date>

▪ **server:** response contains no object if browser-cached copy is up-to-date:

HTTP/1.0 304 Not Modified

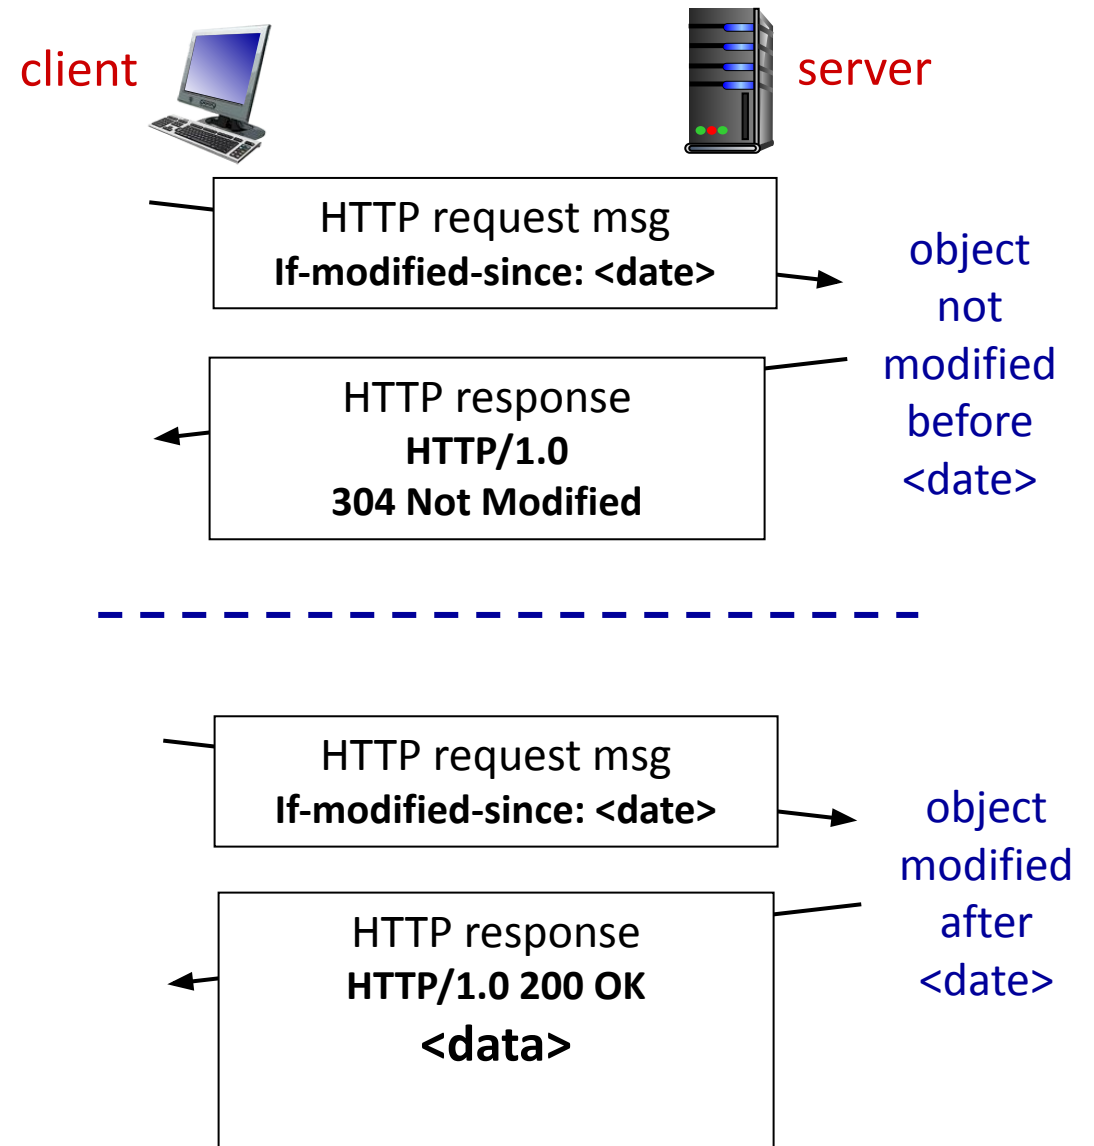

HTTP/2

Key goal: decreased delay in multi-object HTTP requests

HTTP1.1: introduced multiple, pipelined GETs over single TCP connection

- server responds *in-order* (FCFS: first-come-first-served scheduling) to GET requests
- with FCFS, small object may have to wait for transmission (**head-of-line (HOL) blocking**) behind large object(s)
- loss recovery (retransmitting lost TCP segments) stalls object transmission

HTTP/2


Key goal: decreased delay in multi-object HTTP requests

HTTP/2: [RFC 7540, 2015] increased flexibility at *server* in sending objects to client:

- methods, status codes, most header fields unchanged from HTTP 1.1
- transmission order of requested objects based on client-specified object priority (not necessarily FCFS)
- *push* unrequested objects to client
- divide objects into frames, schedule frames to mitigate HOL blocking

HTTP/2: mitigating HOL blocking


HTTP 1.1: client requests 1 large object (e.g., video file) and 3 smaller objects

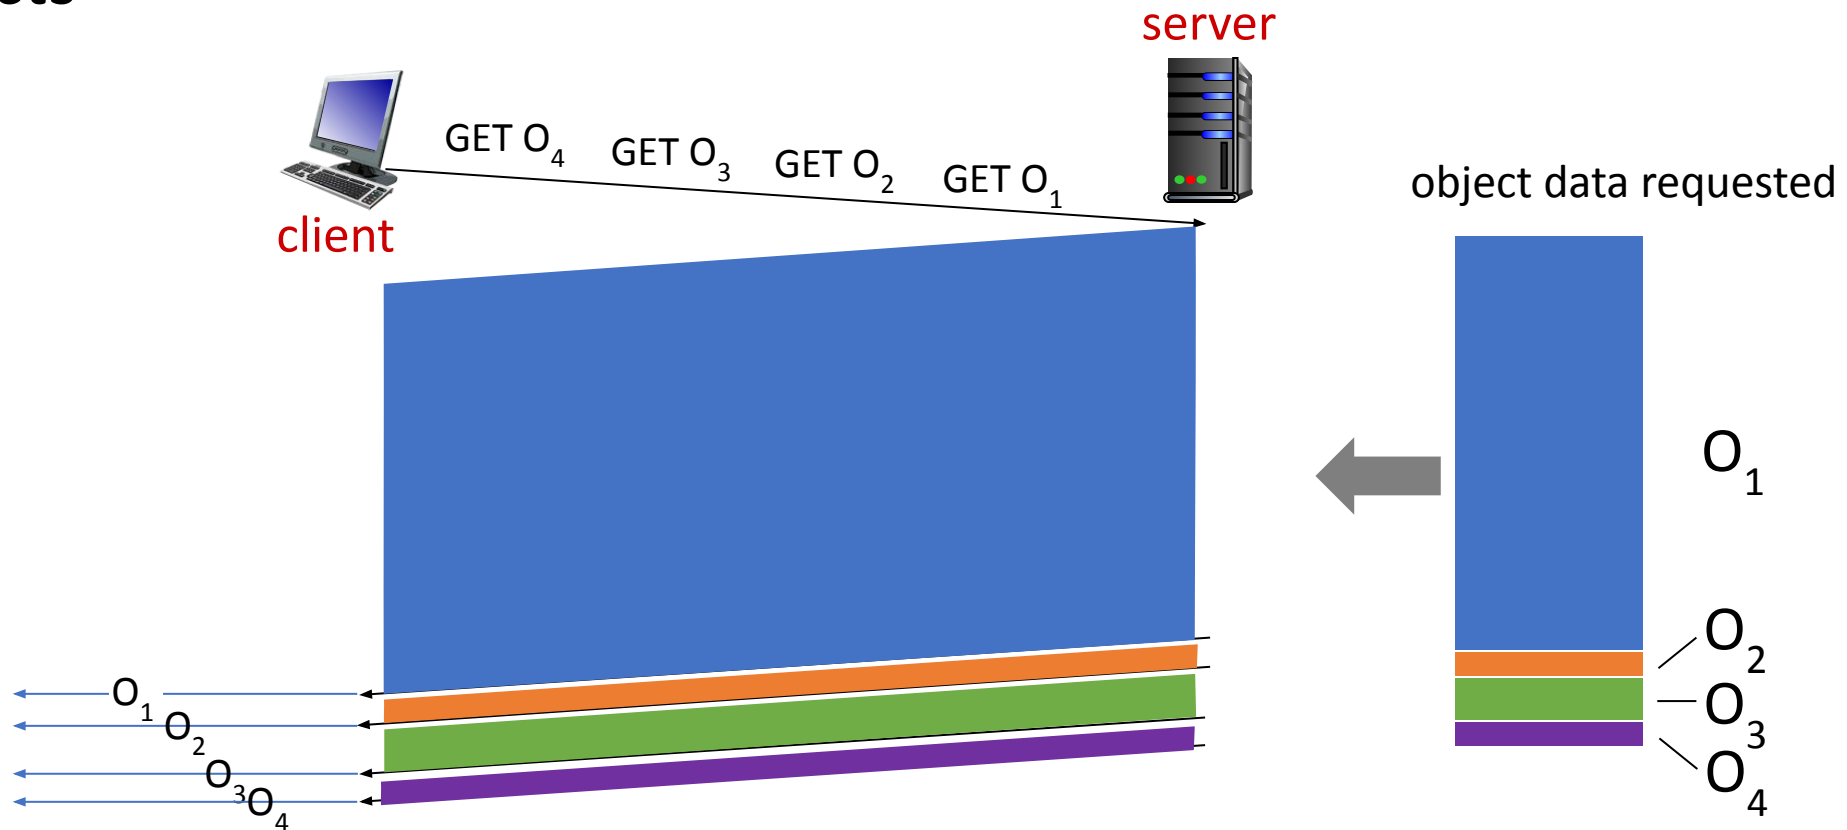

objects delivered in order requested: O_2 , O_3 , O_4 wait behind O_1

HTTP/2: mitigating HOL blocking

HTTP/2: objects divided into frames, frame transmission interleaved

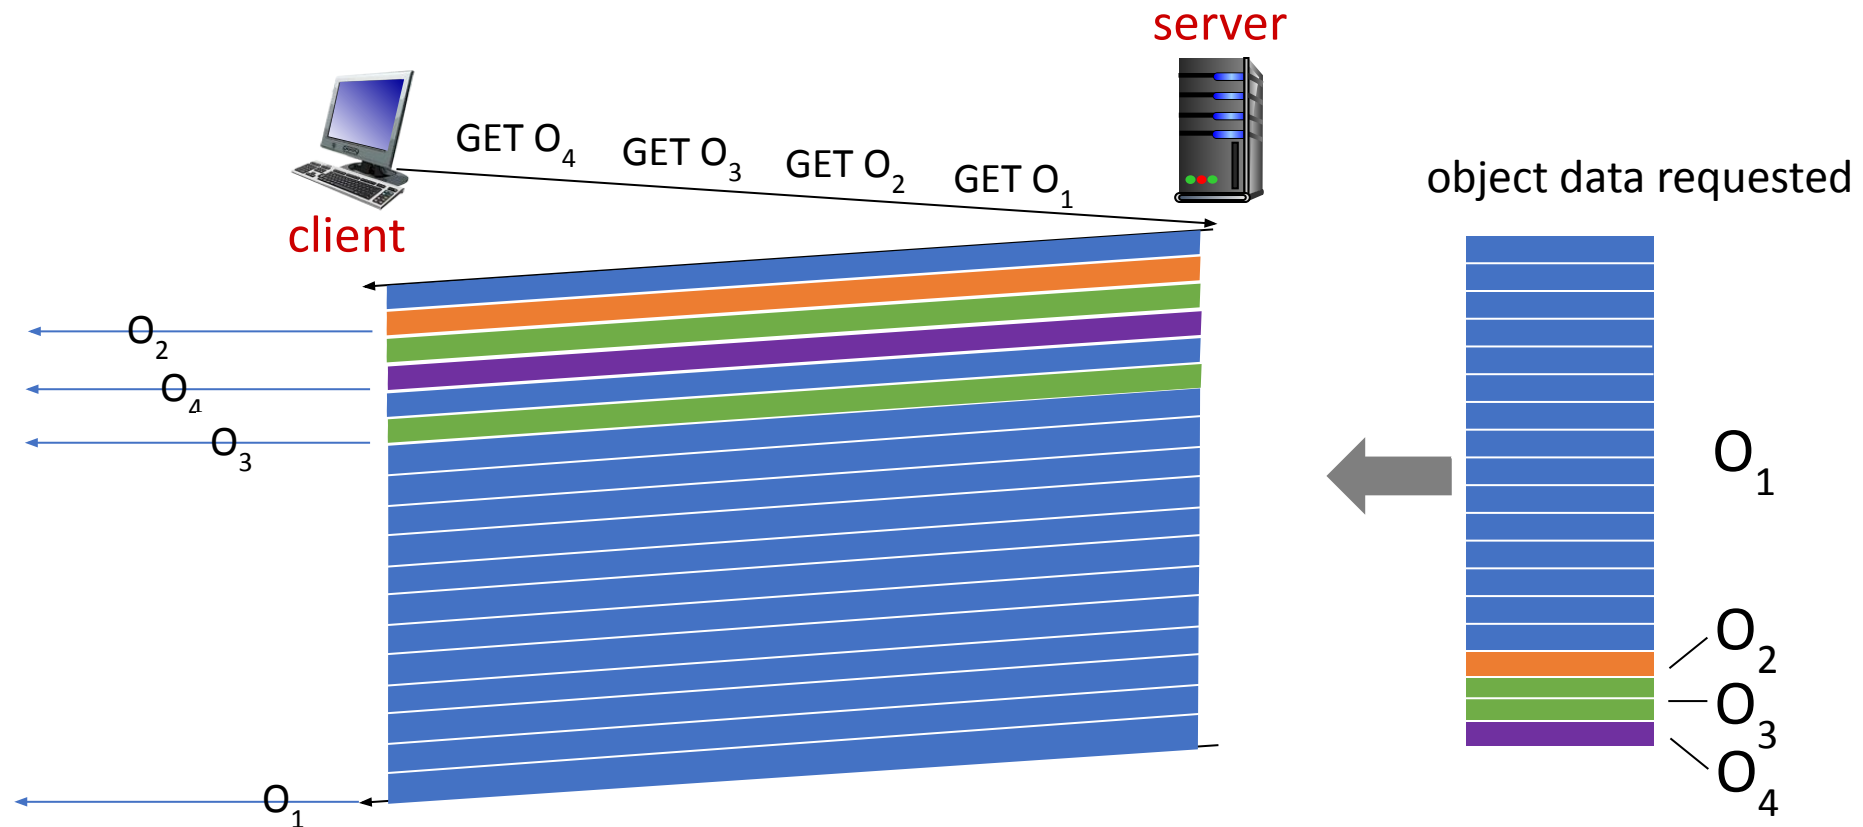

O_2 , O_3 , O_4 delivered quickly, O_1 slightly delayed

HTTP/2 to HTTP/3

HTTP/2 over single TCP connection means:

- recovery from packet loss still stalls all object transmissions
 - as in HTTP 1.1, browsers have incentive to open multiple parallel TCP connections to reduce stalling, increase overall throughput
- no security over vanilla TCP connection
- **HTTP/3**: adds security, per object error- and congestion-control (more pipelining) over UDP
 - more on HTTP/3 in transport layer

Application layer: overview

- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System DNS
- P2P applications
- video streaming and content distribution networks




E-mail

Three major components:

- user agents
- mail servers
- simple mail transfer protocol: SMTP

User Agent

- a.k.a. “mail reader”
- composing, editing, reading mail messages
- e.g., Outlook, iPhone mail client
- outgoing, incoming messages stored on server

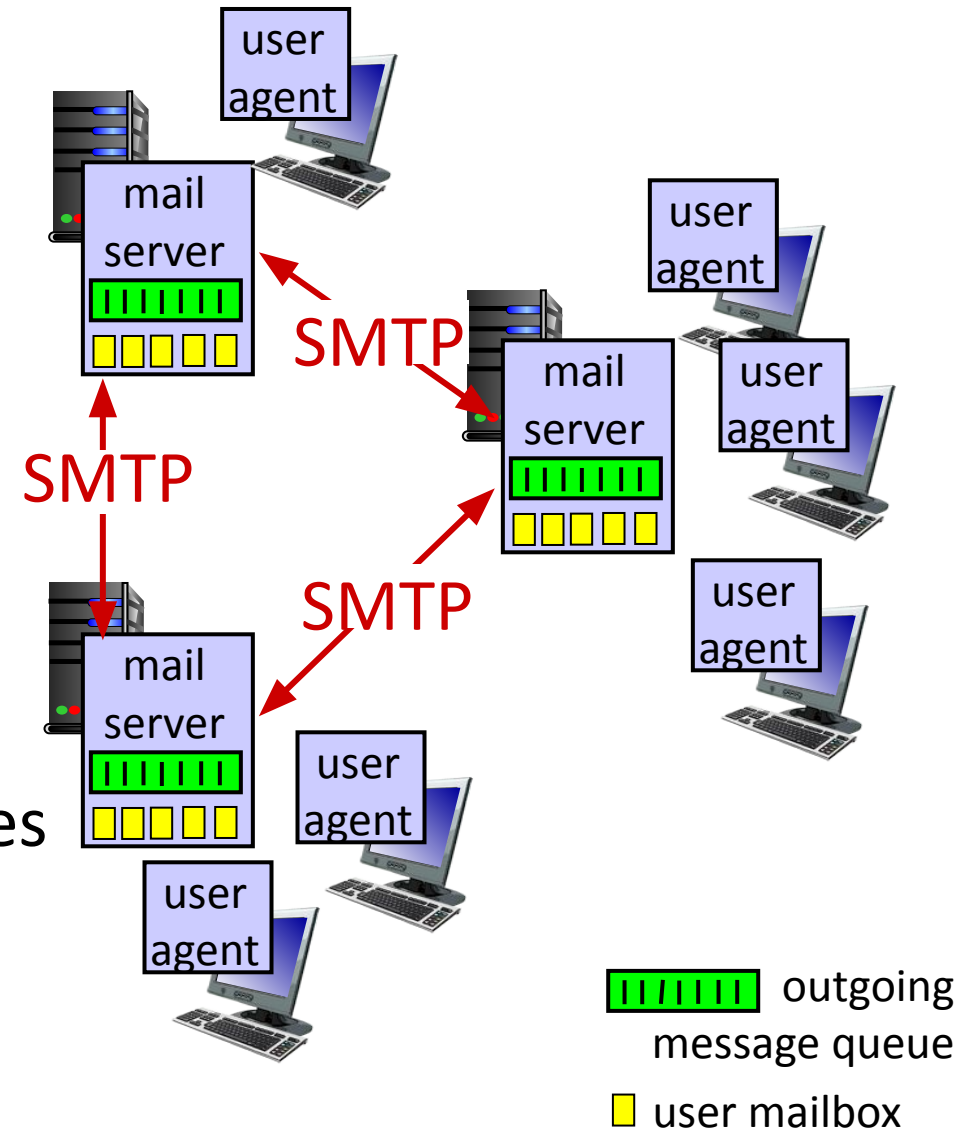


E-mail: mail servers

mail servers:

- *mailbox* contains incoming messages for user
- *message queue* of outgoing (to be sent) mail messages


SMTP protocol between mail servers to send email messages

- **client**: sending mail server
- **“server”**: receiving mail server

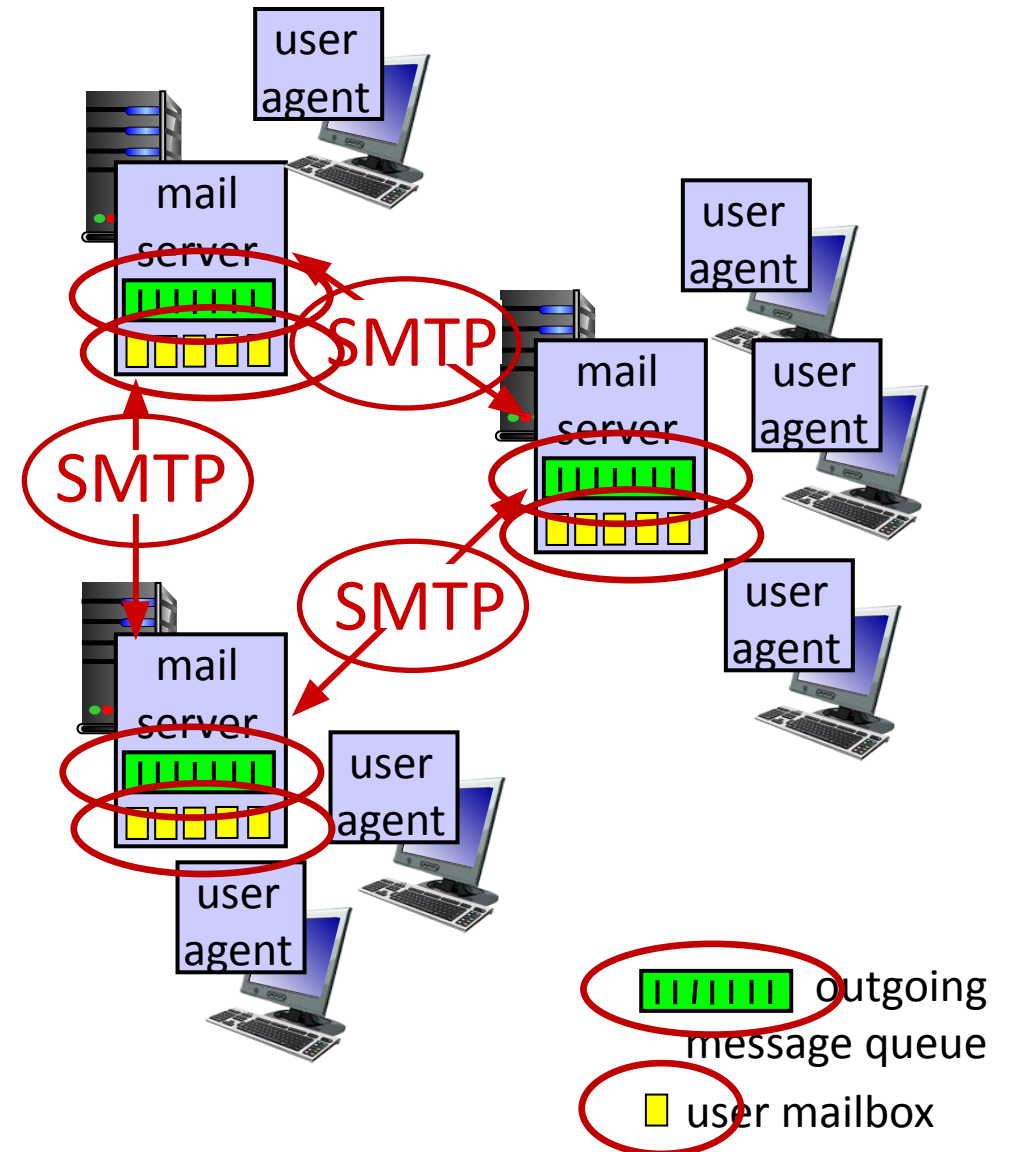


SMTP RFC (5321)

- uses TCP to reliably transfer email message from client (mail server initiating connection) to server, port 25
 - direct transfer: sending server (acting like client) to receiving server
- three phases of transfer
 - SMTP handshaking (greeting)
 - SMTP transfer of messages
 - SMTP closure
- command/response interaction (like HTTP)
 - **commands**: ASCII text
 - **response**: status code and phrase

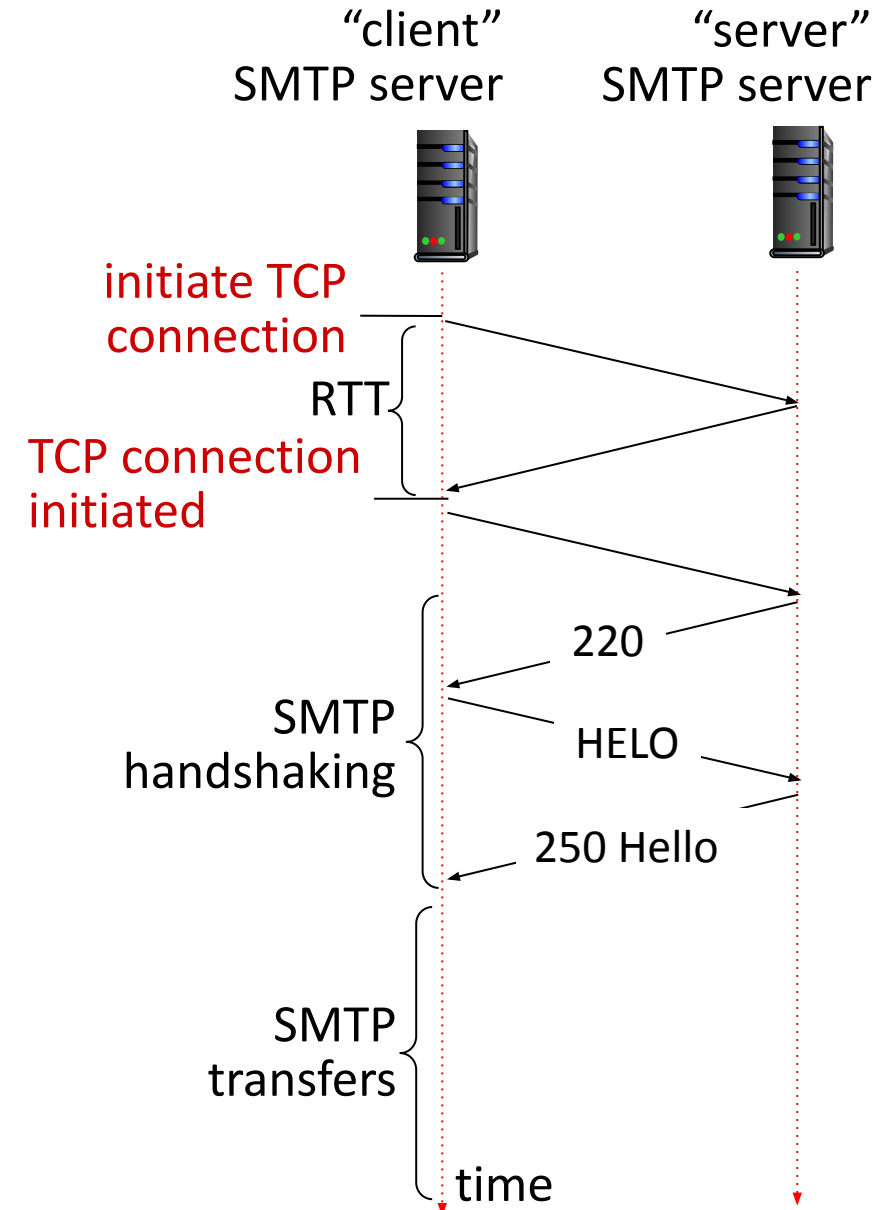

Scenario: Alice sends e-mail to Bob

- 1) Alice uses UA to compose e-mail message "to" bob@some school.edu
- 2) Alice's UA sends message to her mail server using SMTP; message placed in message queue
- 3) client side of SMTP at mail server opens TCP connection with Bob's mail server
- 4) SMTP client sends Alice's message over the TCP connection
- 5) Bob's mail server places the message in Bob's mailbox
- 6) Bob invokes his user agent to read message

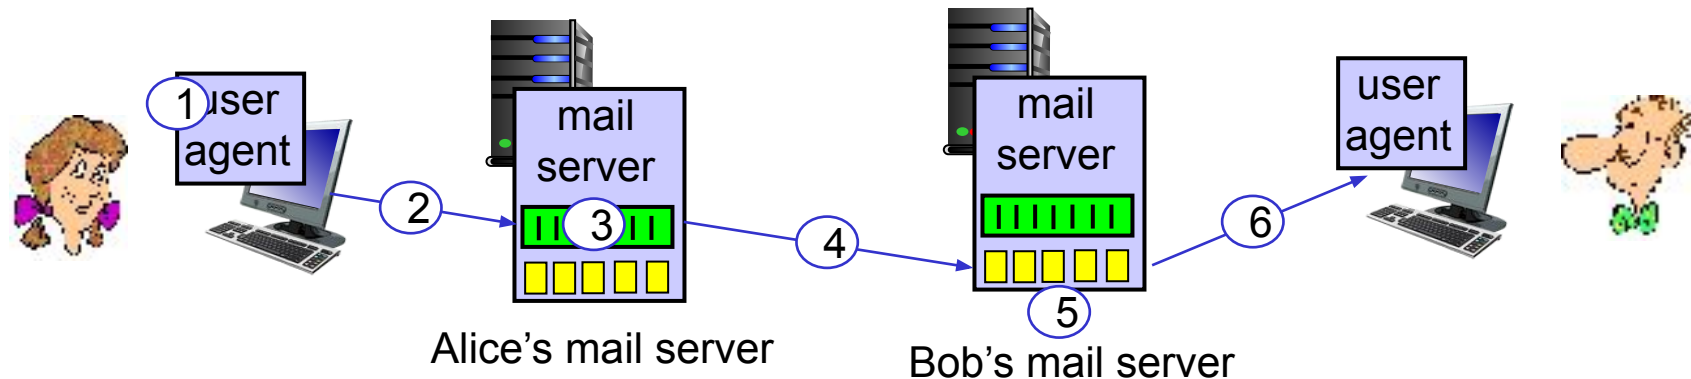

Sample SMTP interaction

S: 220 hamburger.edu

SMTP: observations

comparison with HTTP:


- HTTP: client pull
- SMTP: client push
- both have ASCII command/response interaction, status codes
- HTTP: each object encapsulated in its own response message
- SMTP: multiple objects sent in multipart message
- SMTP uses persistent connections
- SMTP requires message (header & body) to be in 7-bit ASCII
- SMTP server uses CRLF.CRLF to determine end of message

Mail message format


SMTP: protocol for exchanging e-mail messages, defined in RFC 5321 (like RFC 7231 defines HTTP)

RFC 2822 defines *syntax* for e-mail message itself (like HTML defines syntax for web documents)

- header lines, e.g.,
 - To:
 - From:
 - Subject:these lines, within the body of the email message area different from SMTP MAIL FROM:, RCPT TO: commands!
- Body: the “message” , ASCII characters only

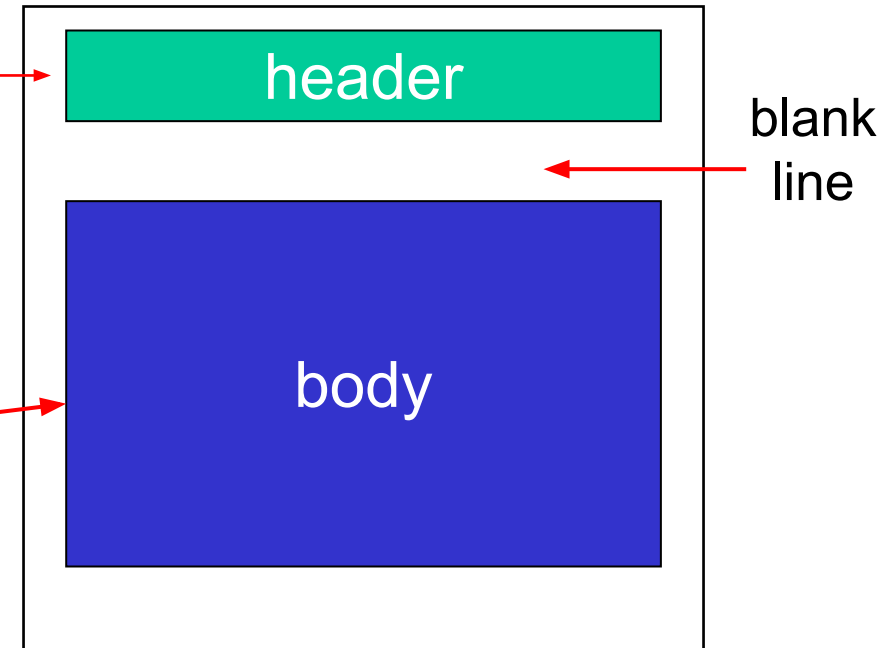

Retrieving email: mail access protocols

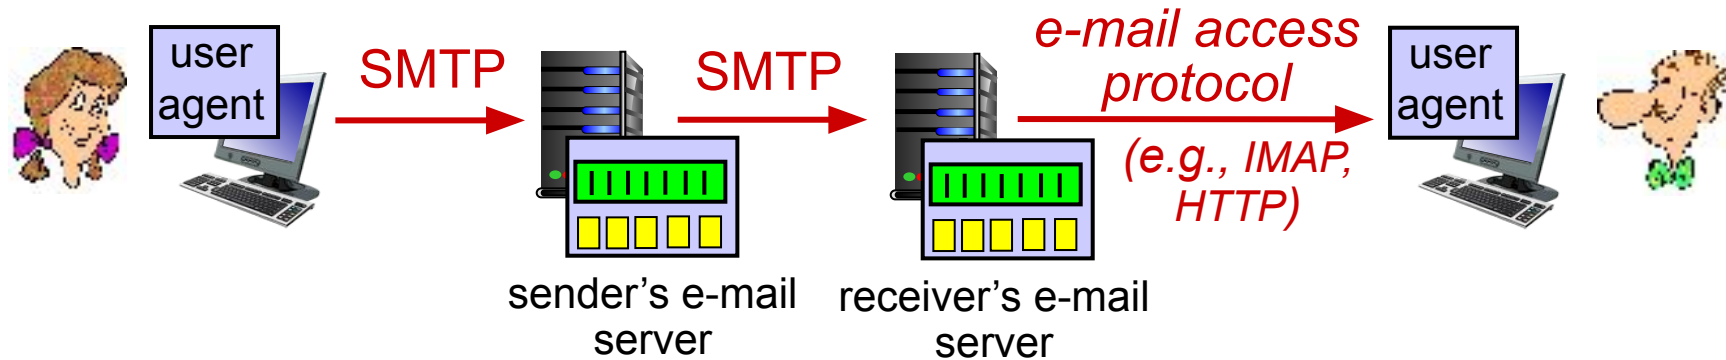

- **SMTP:** delivery/storage of e-mail messages to receiver's server
- mail access protocol: retrieval from server
 - **IMAP:** Internet Mail Access Protocol [RFC 3501]: messages stored on server, IMAP provides retrieval, deletion, folders of stored messages on server
- **HTTP:** gmail, Hotmail, Yahoo!Mail, etc. provides web-based interface on top of SMTP (to send), IMAP (or POP) to retrieve e-mail messages

Application Layer: Overview

- P2P applications
- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System
DNS



DNS: Domain Name System

people: many identifiers:

- SSN, name, passport #

Internet hosts, routers:

- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., cs.umass.edu - used by humans

Q: how to map between IP address and name, and vice versa ?

Domain Name System (DNS):

- *distributed database* implemented in hierarchy of many *name servers*
- *application-layer protocol*: hosts, DNS servers communicate to *resolve* names (address/name translation)
 - *note*: core Internet function, implemented as application-layer protocol
 - complexity at network’s “edge”

DNS: services, structure

DNS services:

- hostname-to-IP-address translation
- host aliasing
 - canonical, alias names
- mail server aliasing
- load distribution
 - replicated Web servers: many IP addresses correspond to one name

Q: Why not centralize DNS?

- single point of failure
- traffic volume
- distant centralized database
- maintenance

A: doesn't scale!

- Comcast DNS servers alone: 600B DNS queries/day
- Akamai DNS servers alone: 2.2T DNS queries/day

Thinking about the DNS

humongous distributed database:

- ~ billion records, each simple

handles many *trillions* of queries/day:

- *many* more reads than writes
- *performance matters*: almost every Internet transaction interacts with DNS - msec count!


organizationally, physically decentralized:

- millions of different organizations responsible for their records

“bulletproof”: reliability, security



DNS: a distributed, hierarchical database

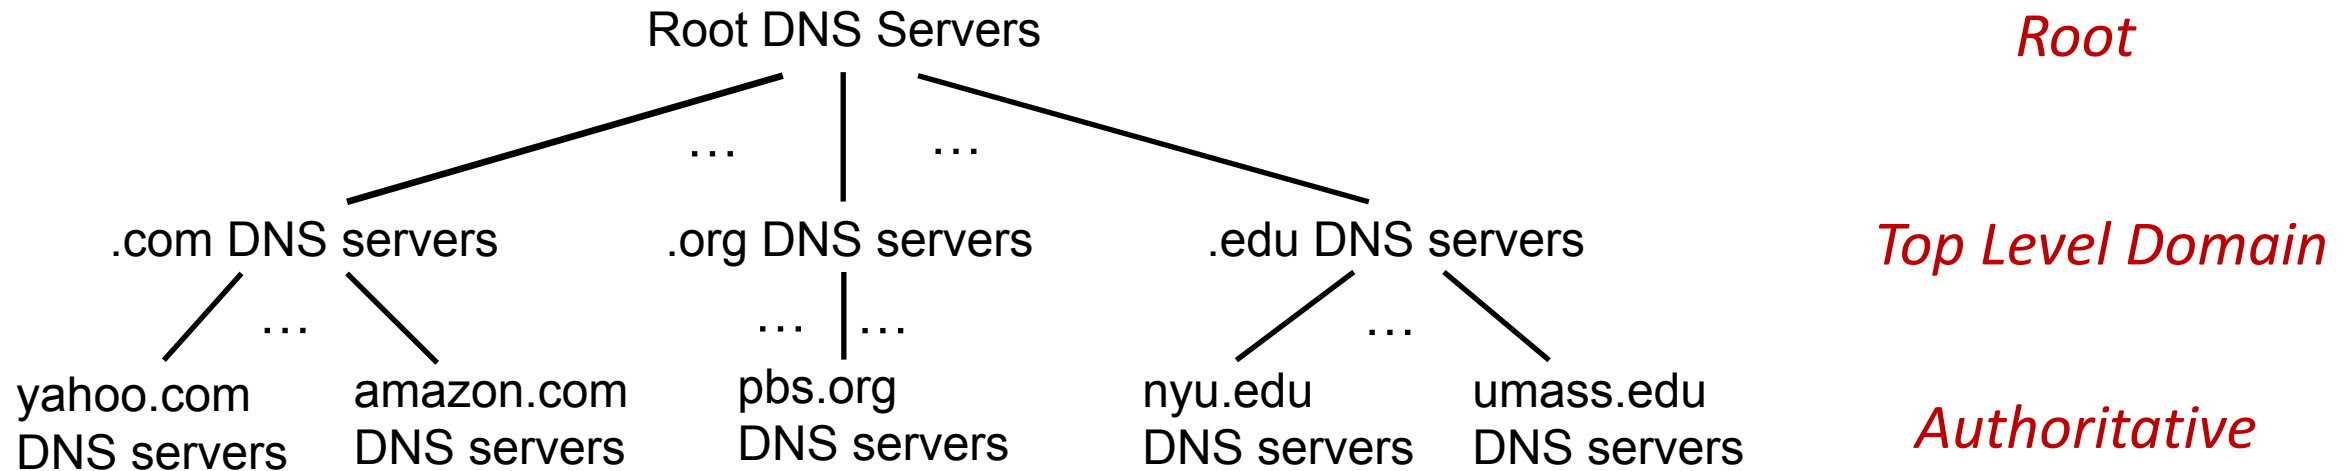


Client wants IP address for `www.amazon.com`; 1st approximation:

- client queries root server to find .com DNS server
- client queries .com DNS server to get amazon.com DNS server
- client queries amazon.com DNS server to get IP address for `www.amazon.com`

DNS: root name servers


- official, contact-of-last-resort by name servers that can not resolve name

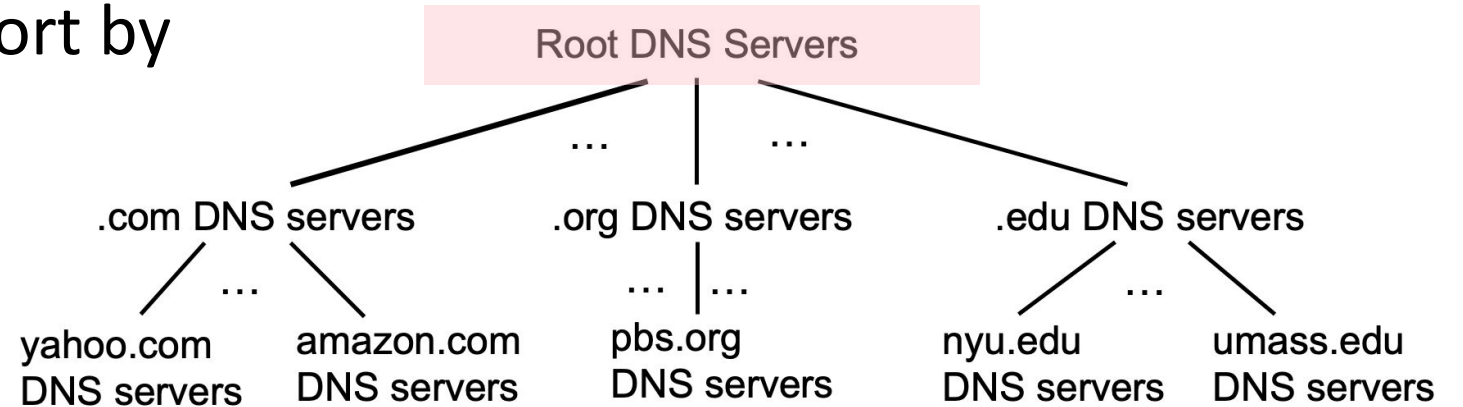

DNS: root name servers

- official, contact-of-last-resort by name servers that can not resolve name
- *incredibly important* Internet function
 - Internet couldn't function without it!
 - DNSSEC – provides security (authentication, message integrity)
- ICANN (Internet Corporation for Assigned Names and Numbers) manages root DNS domain


13 logical root name “servers”
worldwide each “server” replicated
many times (~200 servers in US)

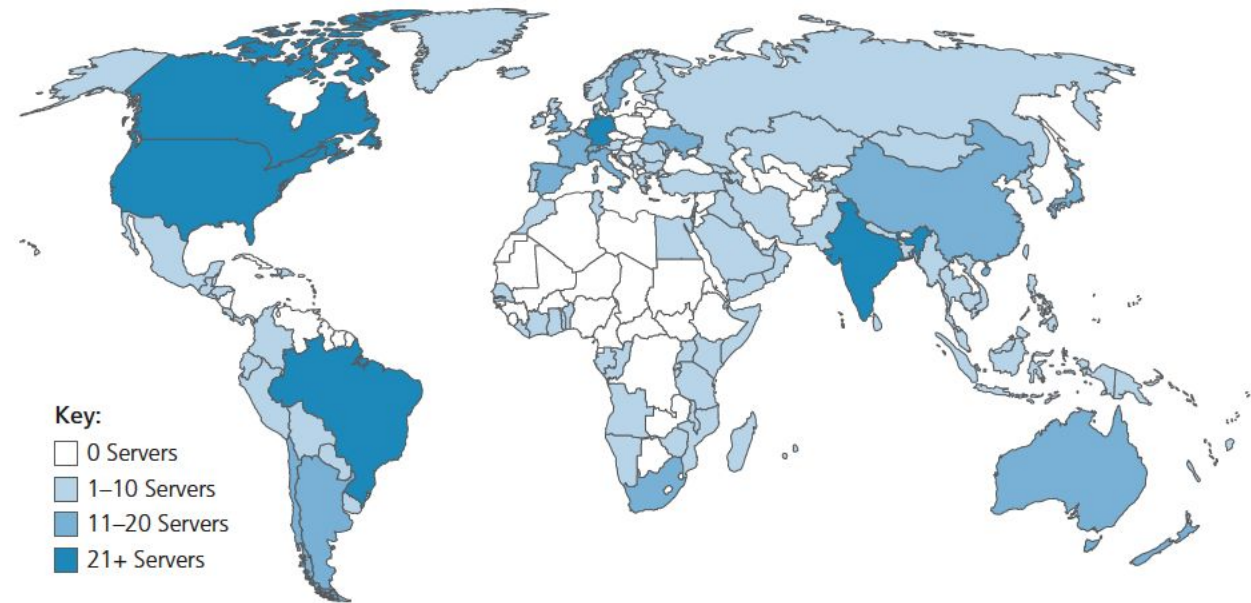

Top-Level Domain, and authoritative servers

Top-Level Domain (TLD) servers:

- responsible for .com, .org, .net, .edu, .aero, .jobs, .museums, and all top-level country domains, e.g.: .cn, .uk, .fr, .ca, .jp
- Network Solutions: authoritative registry for .com, .net TLD
- Educause: .edu TLD

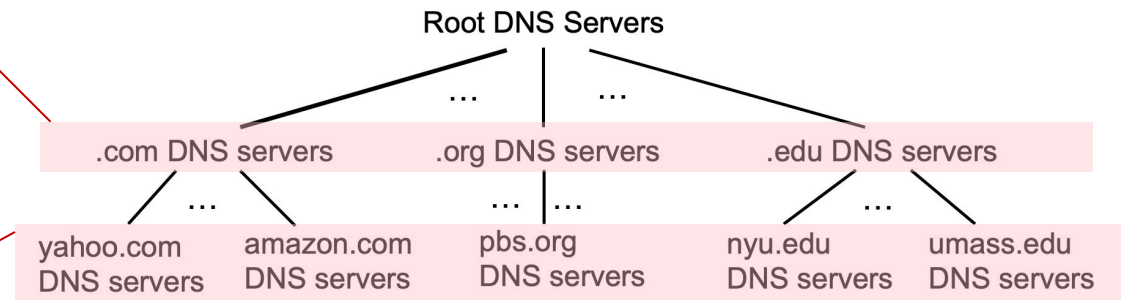

authoritative DNS servers:

- organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
- can be maintained by organization or service provider

Local DNS name servers


- when host makes DNS query, it is sent to its *local* DNS server
 - Local DNS server returns reply, answering:
 - from its local cache of recent name-to-address translation pairs (possibly out of date!)
 - forwarding request into DNS hierarchy for resolution
 - each ISP has local DNS name server; to find yours:
 - MacOS: `% scutil --dns`
 - Windows: `>ipconfig /all`
- local DNS server doesn't strictly belong to hierarchy

DNS name resolution: iterated query

Example: host at `engineering.nyu.edu`
wants IP address for `gaia.cs.umass.edu`

Iterated query:

- contacted server replies with name of server to contact
- “I don’t know this name, but ask this server”

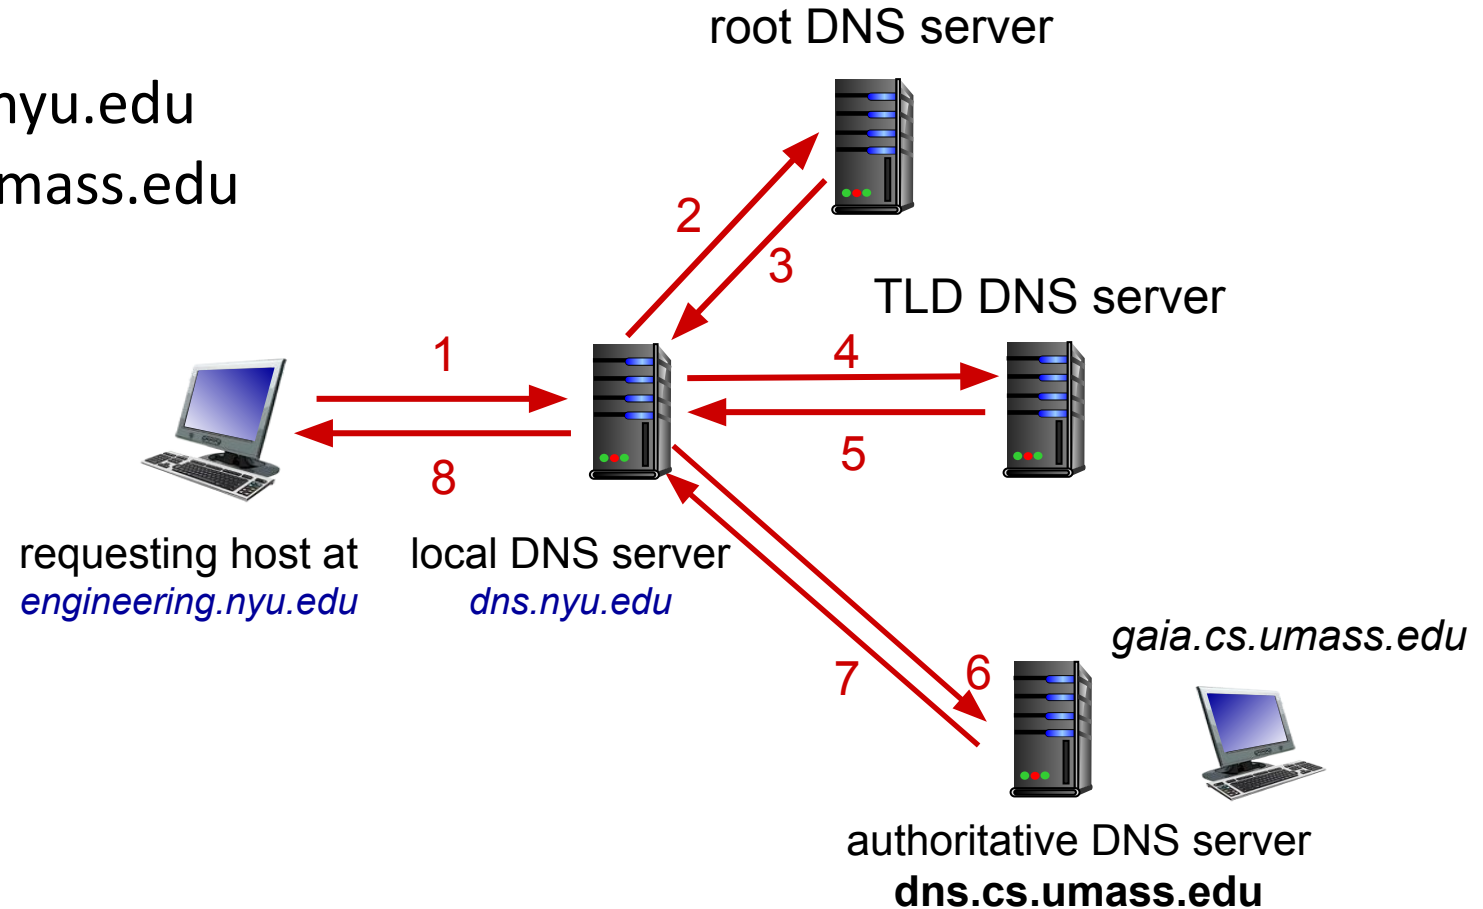


DNS name resolution: recursive query

Example: host at `engineering.nyu.edu` wants IP address for `gaia.cs.umass.edu`

Recursive query:

- puts burden of name resolution on contacted name server
- heavy load at upper levels of hierarchy?

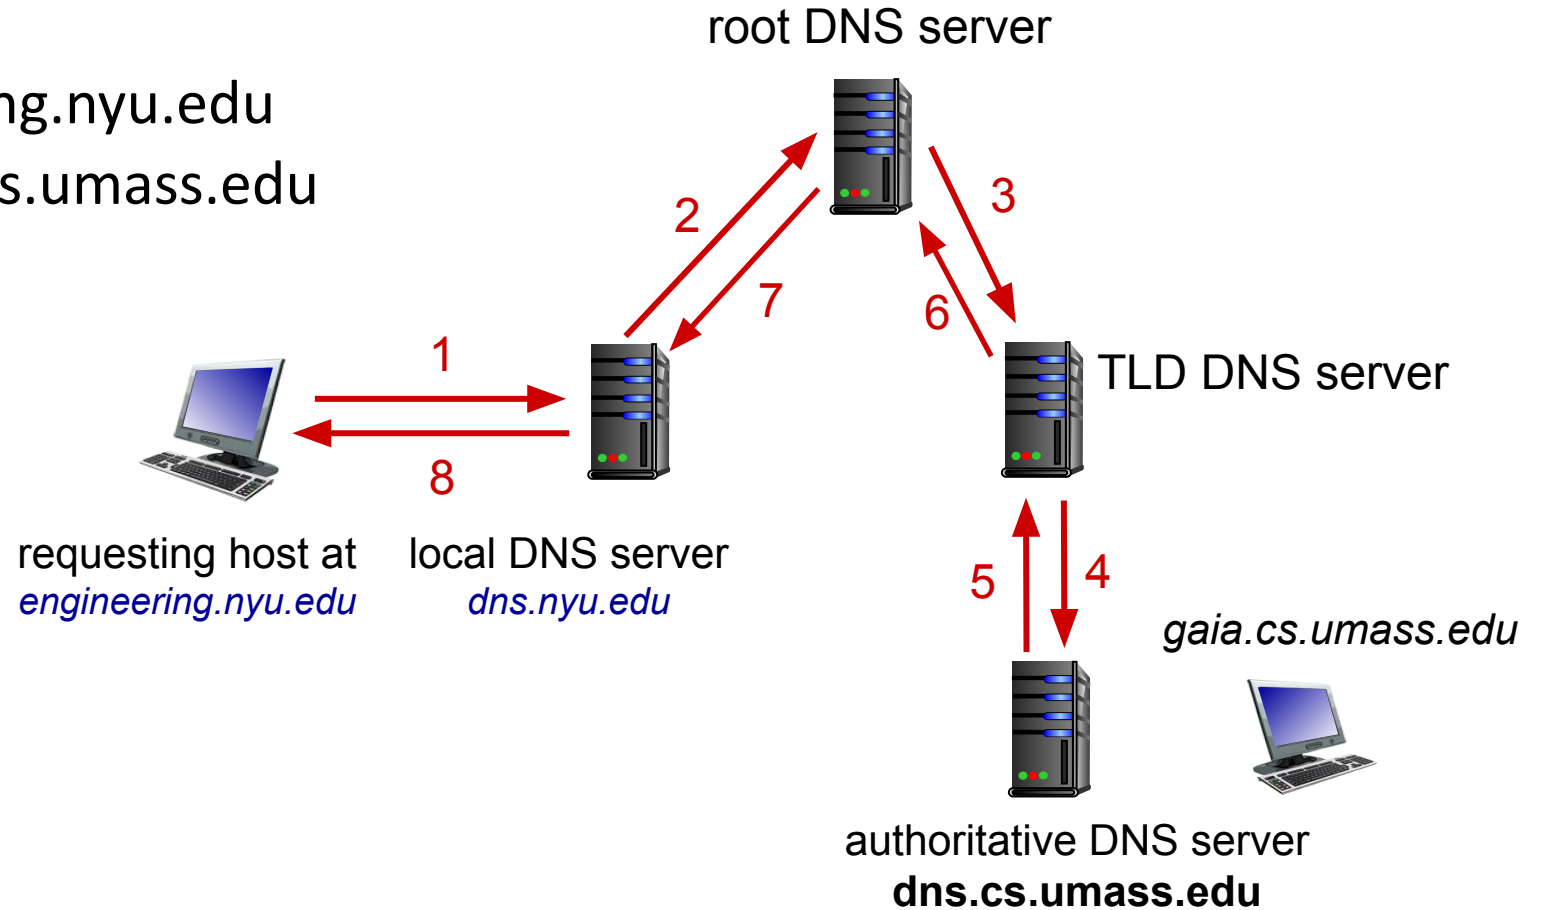

Caching DNS Information

- once (any) name server learns mapping, it *cached* mapping, and *immediately* returns a cached mapping in response to a query
 - caching improves response time
 - cache entries timeout (disappear) after some time (TTL)
 - TLD servers typically cached in local name servers
- cached entries may be *out-of-date*
 - if named host changes IP address, may not be known Internet-wide until all TTLs expire!
 - *best-effort name-to-address translation!*


Application Layer: Overview

- P2P applications
- Principles of network applications
- Web and HTTP
- E-mail, SMTP, IMAP
- The Domain Name System
DNS



Peer-to-peer (P2P) architecture


- *no* always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
 - *self scalability* – new peers bring new service capacity, and new service demands
- peers are intermittently connected and change IP addresses
 - complex management
- examples: P2P file sharing (BitTorrent), streaming (KanKan), VoIP (Skype)

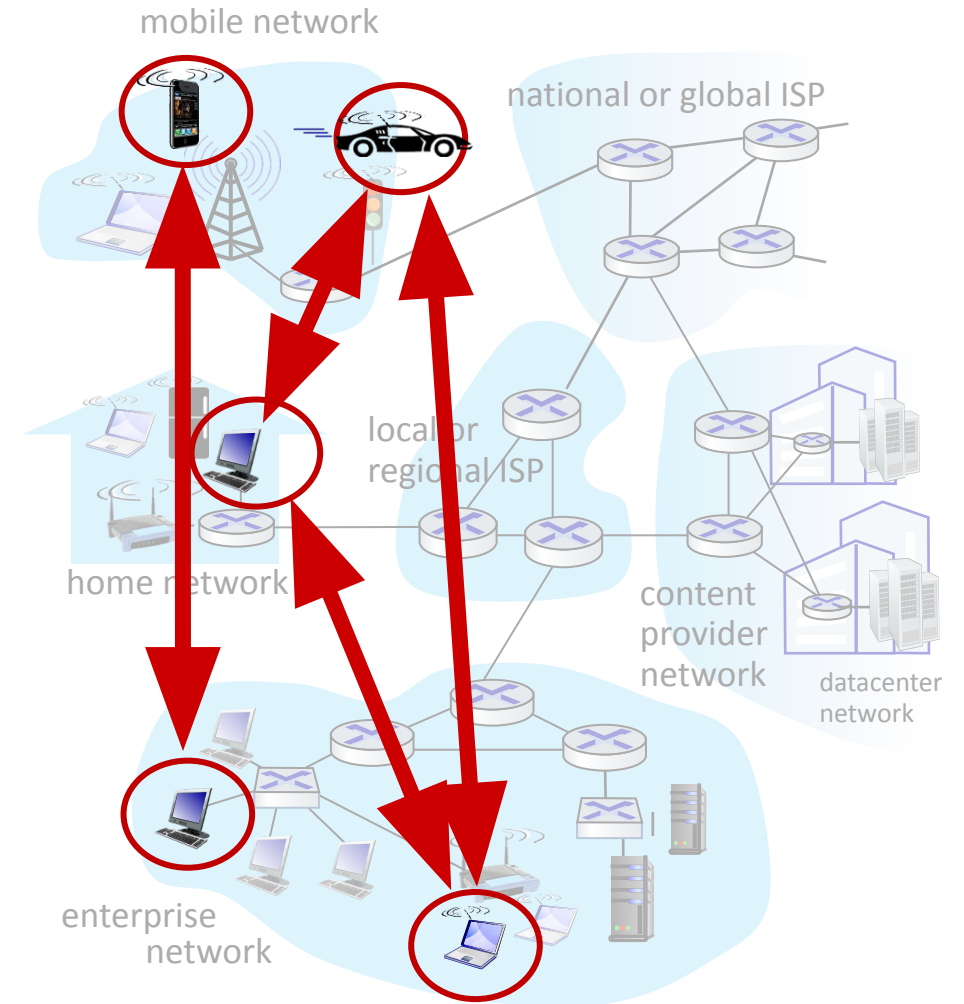

File distribution: client-server vs P2P

Q: how much time to distribute file (size F) from one server to N peers?

- peer upload/download capacity is limited resource

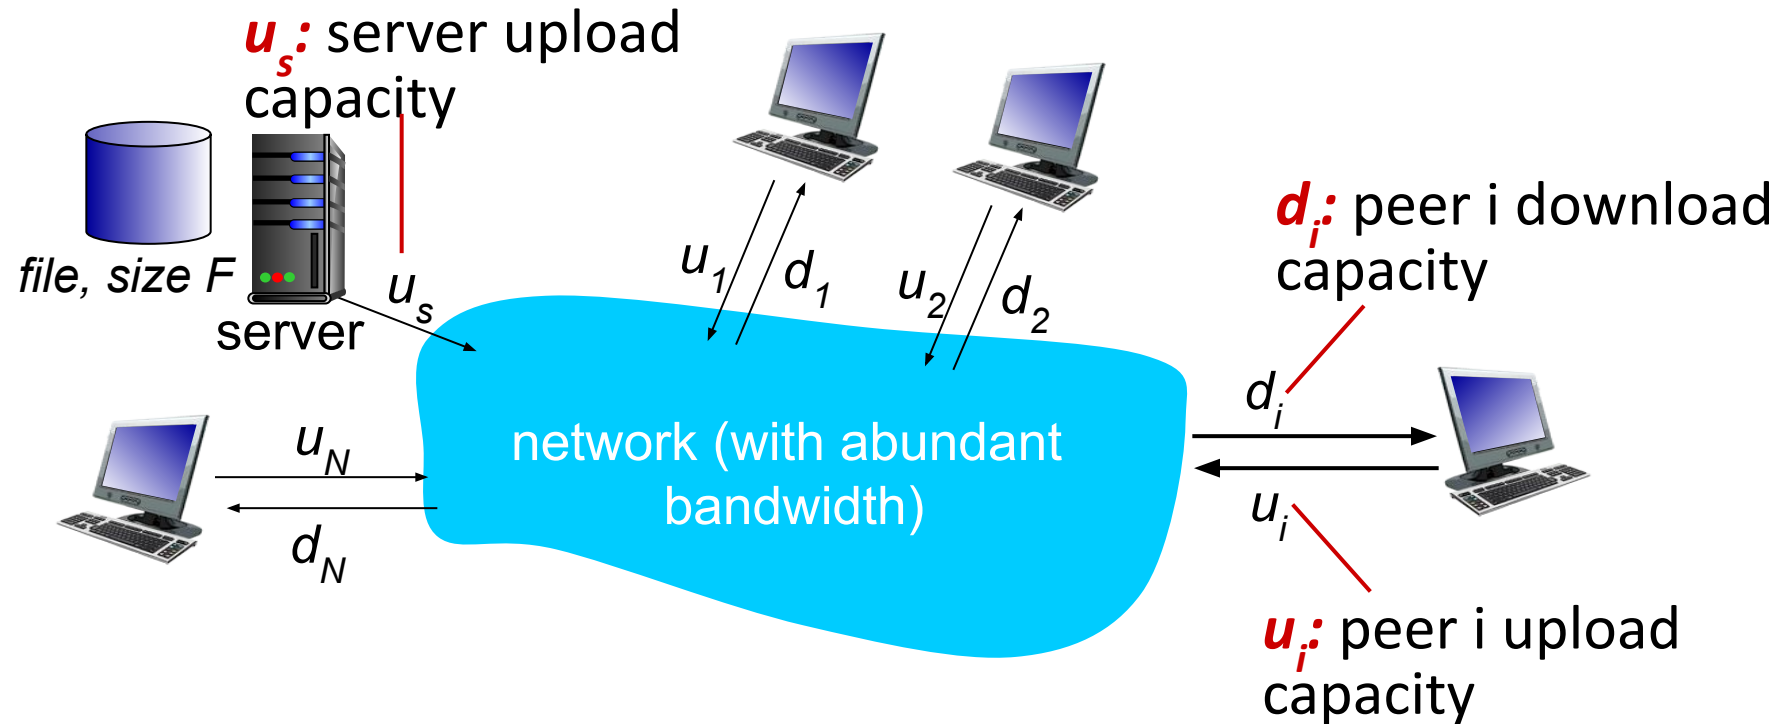


File distribution time: client-server

- **server transmission:** must sequentially send (upload) N file copies:

- time to send one copy: F/u_s
- time to send N copies: NF/u_s

- **client:** each client must download file copy

- d_{\min} = min client download rate
- min client download time: F/d_{\min}

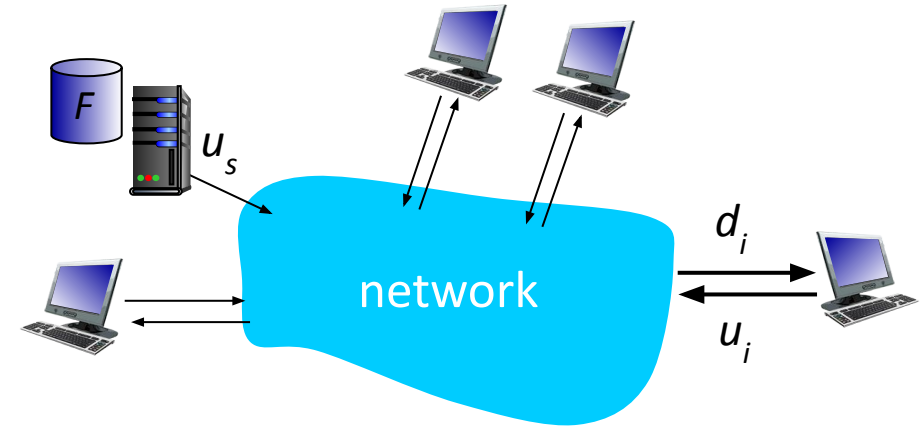

time to distribute F
to N clients using
client-server approach

$$D_{c-s} \geq \max\{NF/u_s, F/d_{\min}\}$$

increases linearly in N

File distribution time: P2P

- **server transmission:** must upload at least one copy:


- time to send one copy: F/u_s

- **client:** each client must download file copy

- min client download time: F/d_{min}

- **clients:** as aggregate must download NF bits

- max upload rate (limiting max download rate) is $u_s + \sum u_i$

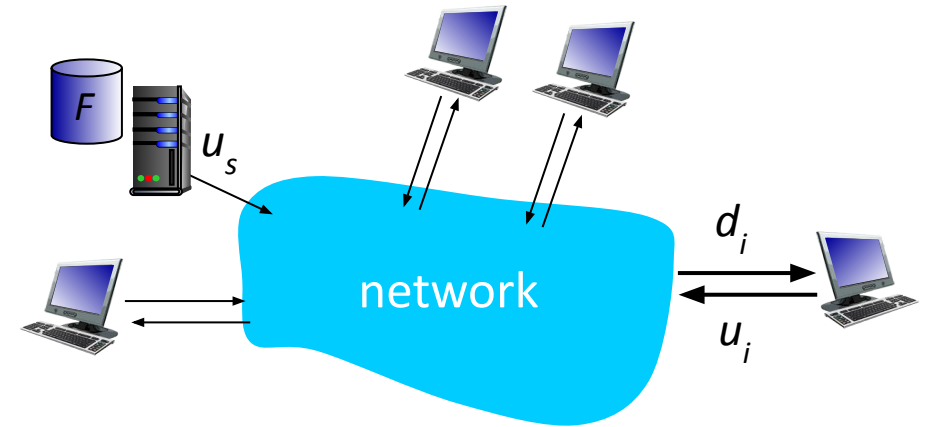

time to distribute F
to N clients using
P2P approach


$$D_{P2P} \geq \max\{F/u_s, F/d_{min}, NF/(u_s + \sum u_i)\}$$

increases linearly in N

... but so does this, as each peer brings service capacity

Client-server vs. P2P: example

client upload rate = u , $F/u = 1$ hour, $u_s = 10u$, $d_{min} \geq u_s$

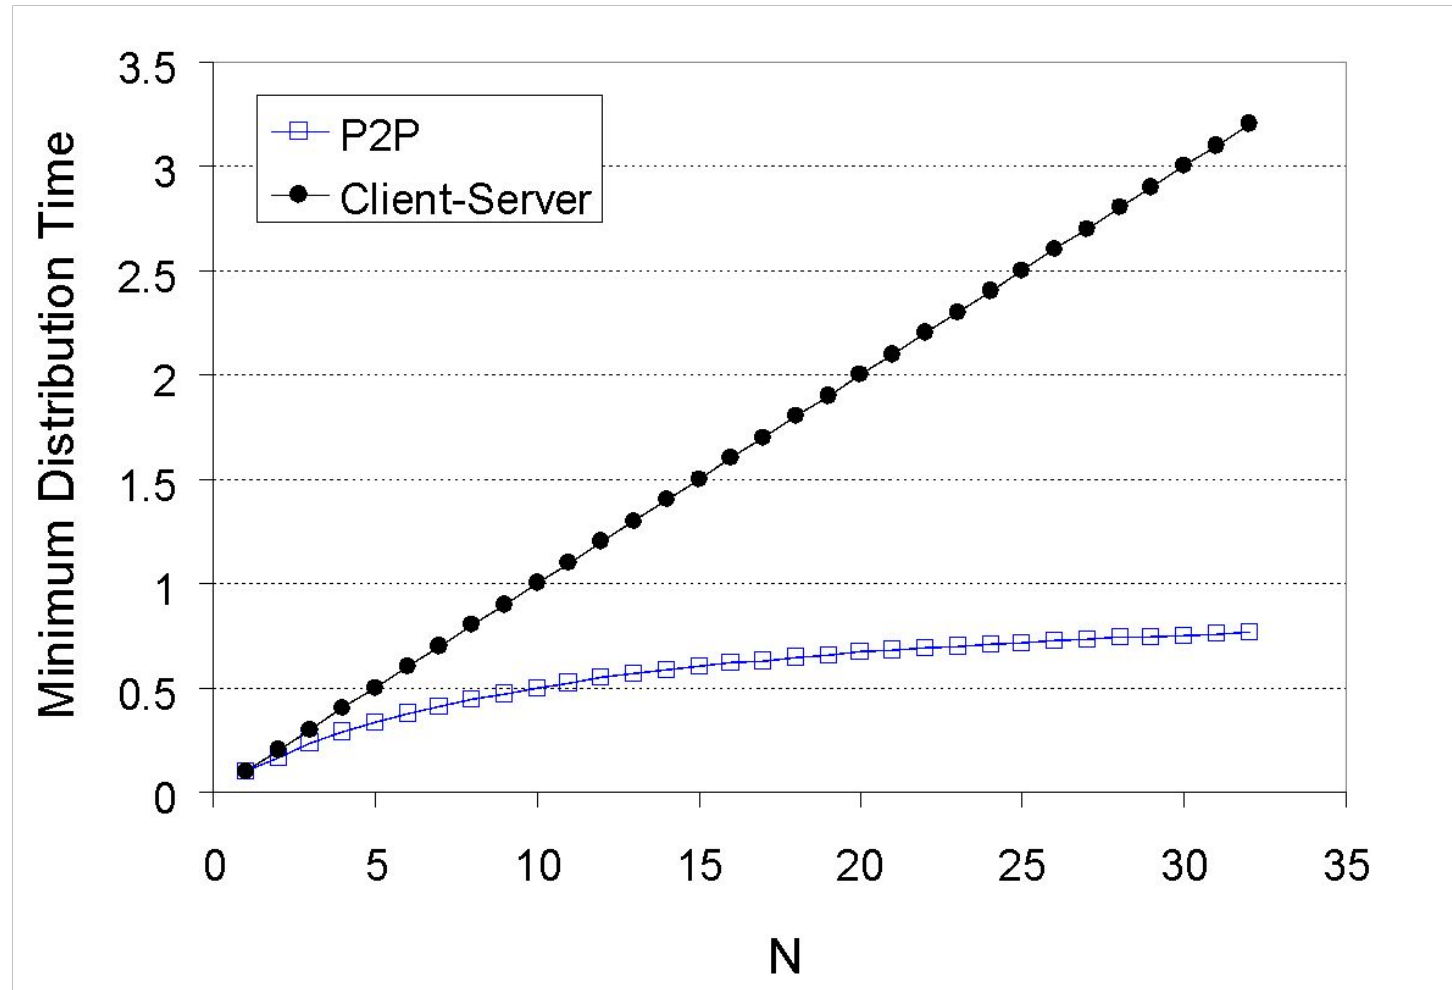


P2P file distribution: BitTorrent

- file divided into 256Kb chunks
- peers in torrent send/receive file chunks


tracker: tracks peers participating in torrent

torrent: group of peers exchanging chunks of a file

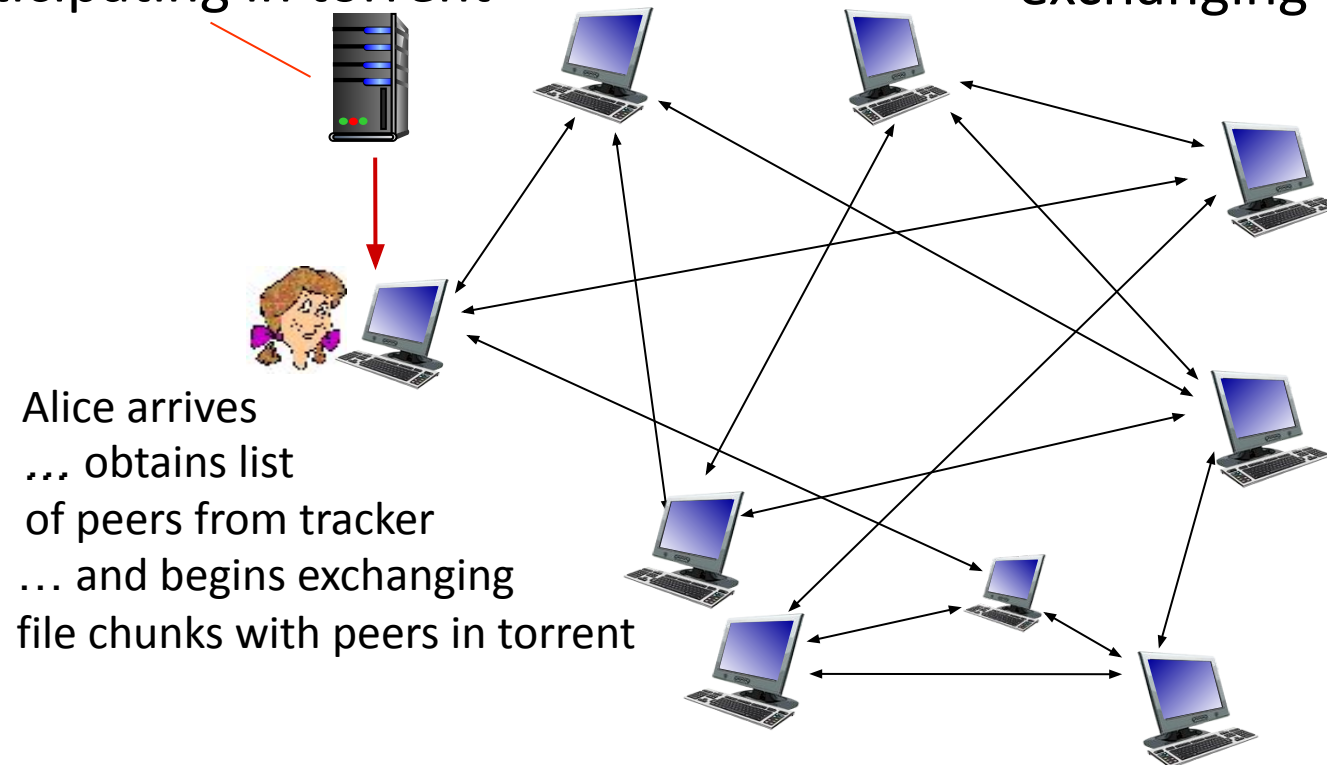

P2P file distribution: BitTorrent

- peer joining torrent:
 - has no chunks, but will accumulate them over time from other peers
 - registers with tracker to get list of peers, connects to subset of peers (“neighbors”)
- while downloading, peer uploads chunks to other peers
- peer may change peers with whom it exchanges chunks
- *churn*: peers may come and go
- once peer has entire file, it may (selfishly) leave or (altruistically) remain in torrent

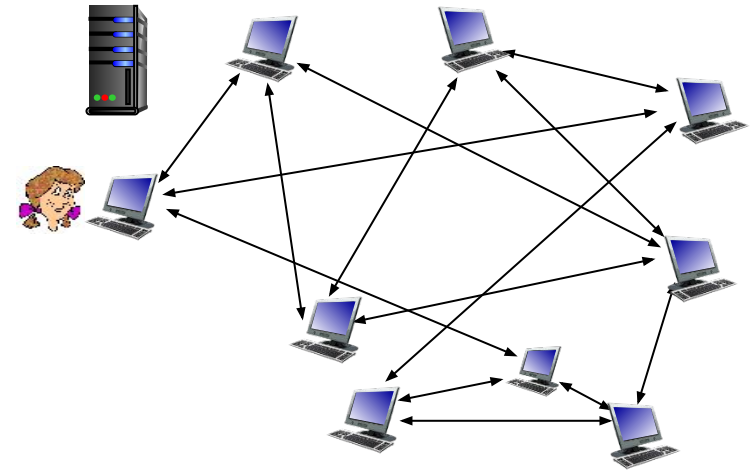

BitTorrent: requesting, sending file chunks

Requesting chunks:


- at any given time, different peers have different subsets of file chunks
- periodically, Alice asks each peer for list of chunks that they have
- Alice requests missing chunks from peers, rarest first

Sending chunks: tit-for-tat

- Alice sends chunks to those four peers currently sending her chunks *at highest rate*
 - other peers are choked by Alice (do not receive chunks from her)
 - re-evaluate top 4 every 10 secs
- every 30 secs: randomly select another peer, starts sending chunks
 - “optimistically unchoke” this peer
 - newly chosen peer may join top 4

BitTorrent: tit-for-tat

- (1) Alice “optimistically unchokes” Bob
- (2) Alice becomes one of Bob’s top-four providers; Bob reciprocates
- (3) Bob becomes one of Alice’s top-four providers

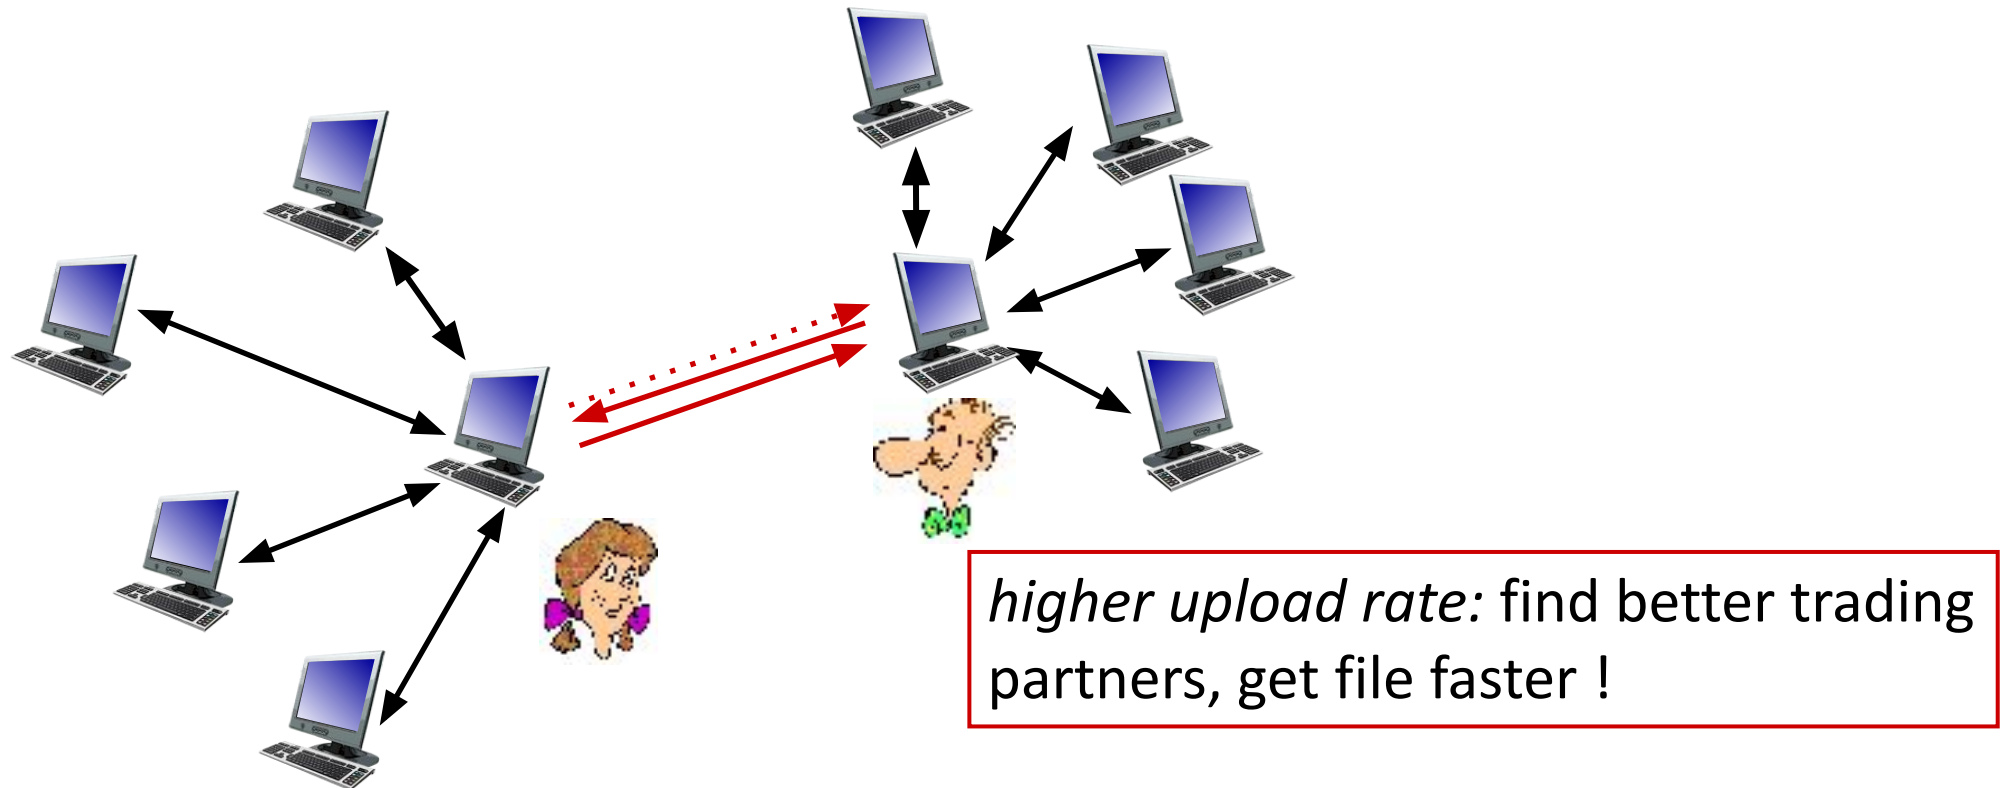

Chapter 2: Summary

our study of network application layer is now complete!

- application architectures
 - client-server
 - P2P
- application service requirements:
 - reliability, bandwidth, delay
- Internet transport service model
 - connection-oriented, reliable: TCP
 - unreliable, datagrams: UDP
- specific protocols:
 - HTTP
 - SMTP, IMAP
 - DNS
 - P2P: BitTorrent

Chapter 2: Summary

Most importantly: learned about *protocols*!

- typical request/reply message exchange:
 - client requests info or service
 - server responds with data, status code
- message formats:
 - *headers*: fields giving info about data
 - *data*: info(payload) being communicated

important themes:

- centralized vs. decentralized
- stateless vs. stateful
- scalability
- reliable vs. unreliable message transfer
- “complexity at network edge”