

The periphery

hypertuning, schedulers, linting, typehinting

deep learning 4

R. Grouls, 24 mei 2022

Manual search

Manual tuning is necessary to develop some intuition about complexity of models.

When encountering a problem, you will be able to make a guess:

- This problem seems more complex than MNIST, but not as complex as the flower photos;
- Let's start with settings somewhere between what worked for those two

However, *after* you have an intuition, it can be helpful to make the searching less random

The size of the search space

That escalated quickly

A typical mistake of a beginner is to make the search space way to big.

Let's say you consider amounts of:

- Linear units (between 16 and 256)
- Depth of linear layers (between 1 and 10)
- Convolution filters (between 16 and 64)
- kernel size (between 3 and 5)
- dropout (4 options)
- depth of convolutions (between 1 and 5)
- learning rate (4 options)
- optimizers (3 options)
- activation functions (3 options)
- batchsize (between 16 and 128)

Can you calculate how big the search space is?

The curse of dimensionality

Finding a grain of sand

This search space has almost 2.7×10^{10} options. This is roughly the amount of sand when you fill your $40m^2$ living room with 50 cm of sand.

If you test at random 50 options, you are just scanning a very small fraction of all options.


You shouldn't be surprised if the result of random hypertuning is worse than the result of your manual hypertuning!

Bayesian Hyperband


Algorithms for tuning algorithms

Some nice solutions are:

- bayesian search (a)
- hyperband (b)
- baysian hyperband (a + b)
- Tree Parzen Estimators
(optimization over
awkward search spaces
with real, discrete and
conditional parameters)

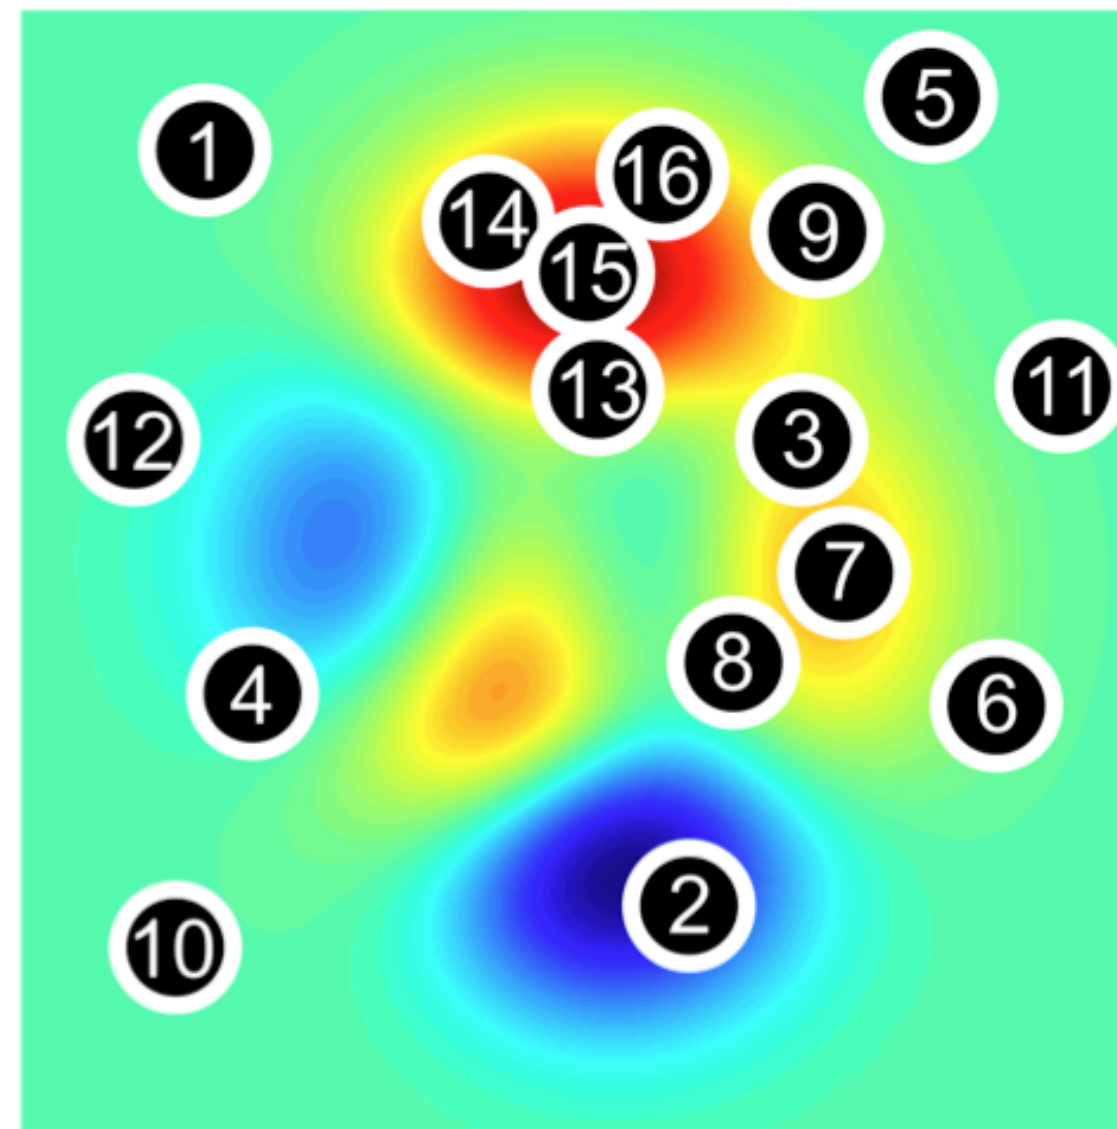

(a) Configuration Selection

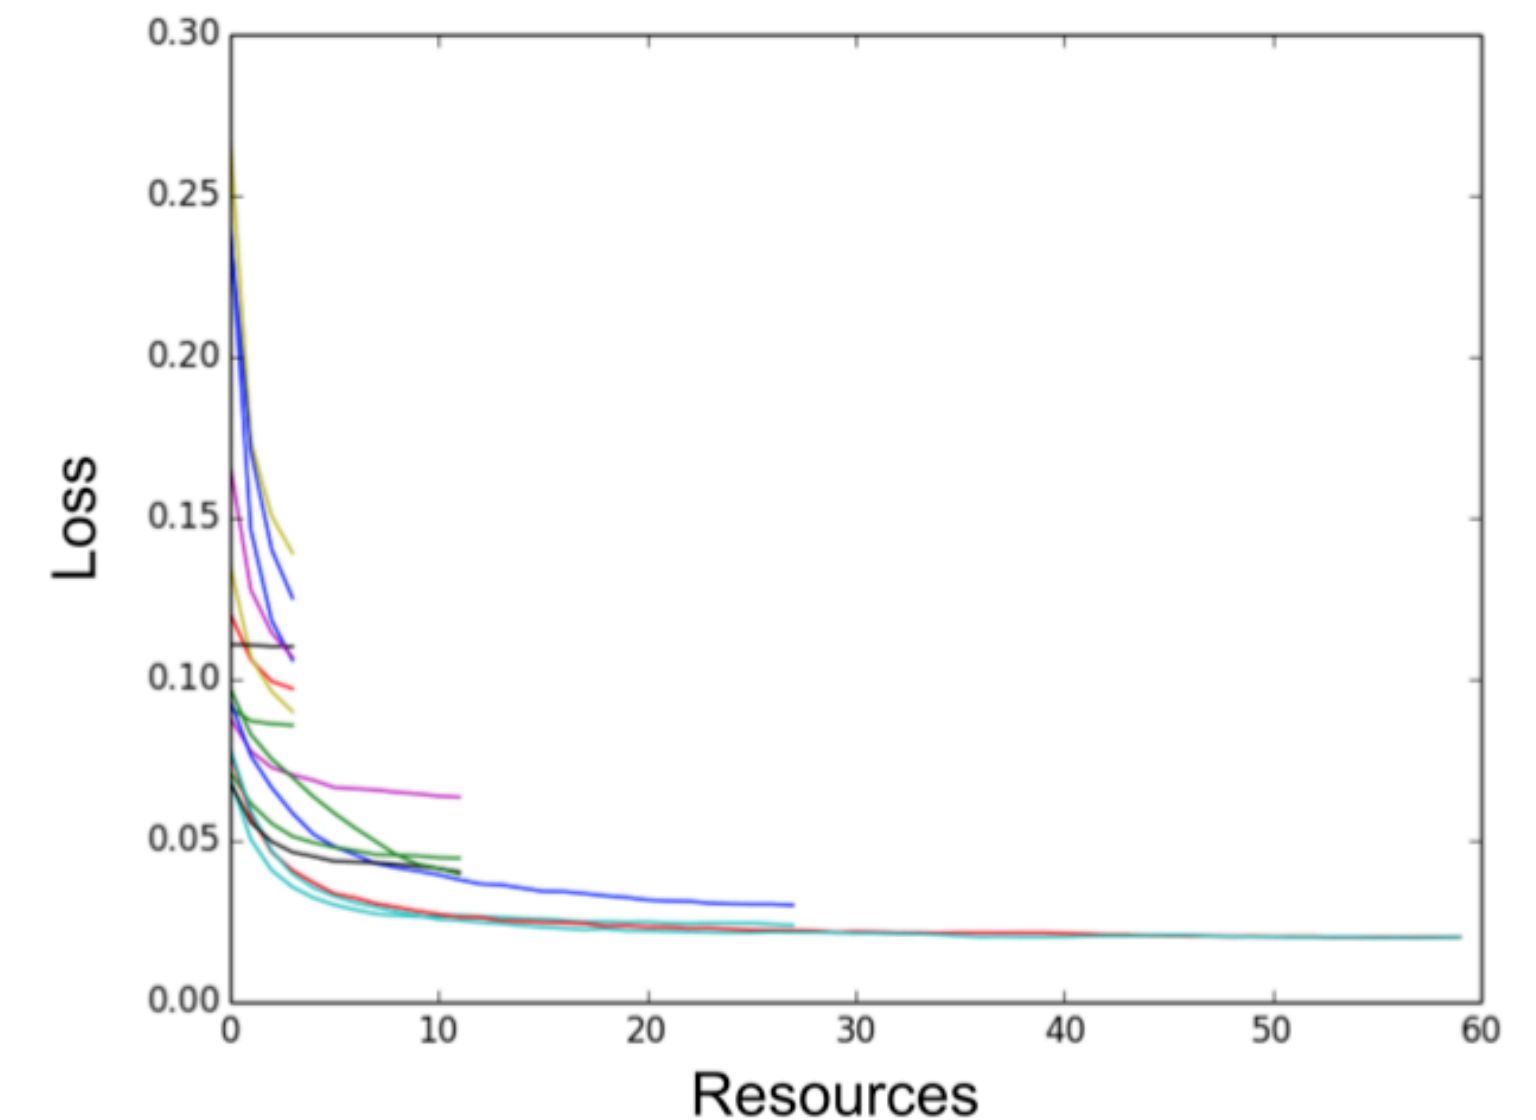

(b) Configuration Evaluation

Distributed frameworks

- we will use [Ray tune](#)
- [Horovod](#) is another alternative
- both are agnostic to ML frameworks; you can use TensorFlow or PyTorch etc
- Both offer parallel computing, also for training, data preprocessing etc



	HyperOpt	Optuna	Keras-Tuner	HpBandSter	Tune
Distributed Execution	✓	✓	☐	✓	✓
Fault Tolerance	☐	☐	☐	☐	✓
Search algorithms	2	4	3	3	6
Framework Support (TF/Keras, Sklearn, PyTorch)	✓	✓	☐	☐	✓

Learning rate schedulers


When to use a chainsaw or a pocket knife

The learning rate η tells how fast weights are adjusted

$$W_{t+1} \leftarrow W_t - \eta \times \text{gradient}$$

The learning rate can be compared to different sizes of tools to carve wood. Big tools go fast, but miss the details.

So, often a decay of the learning rate is a good idea.

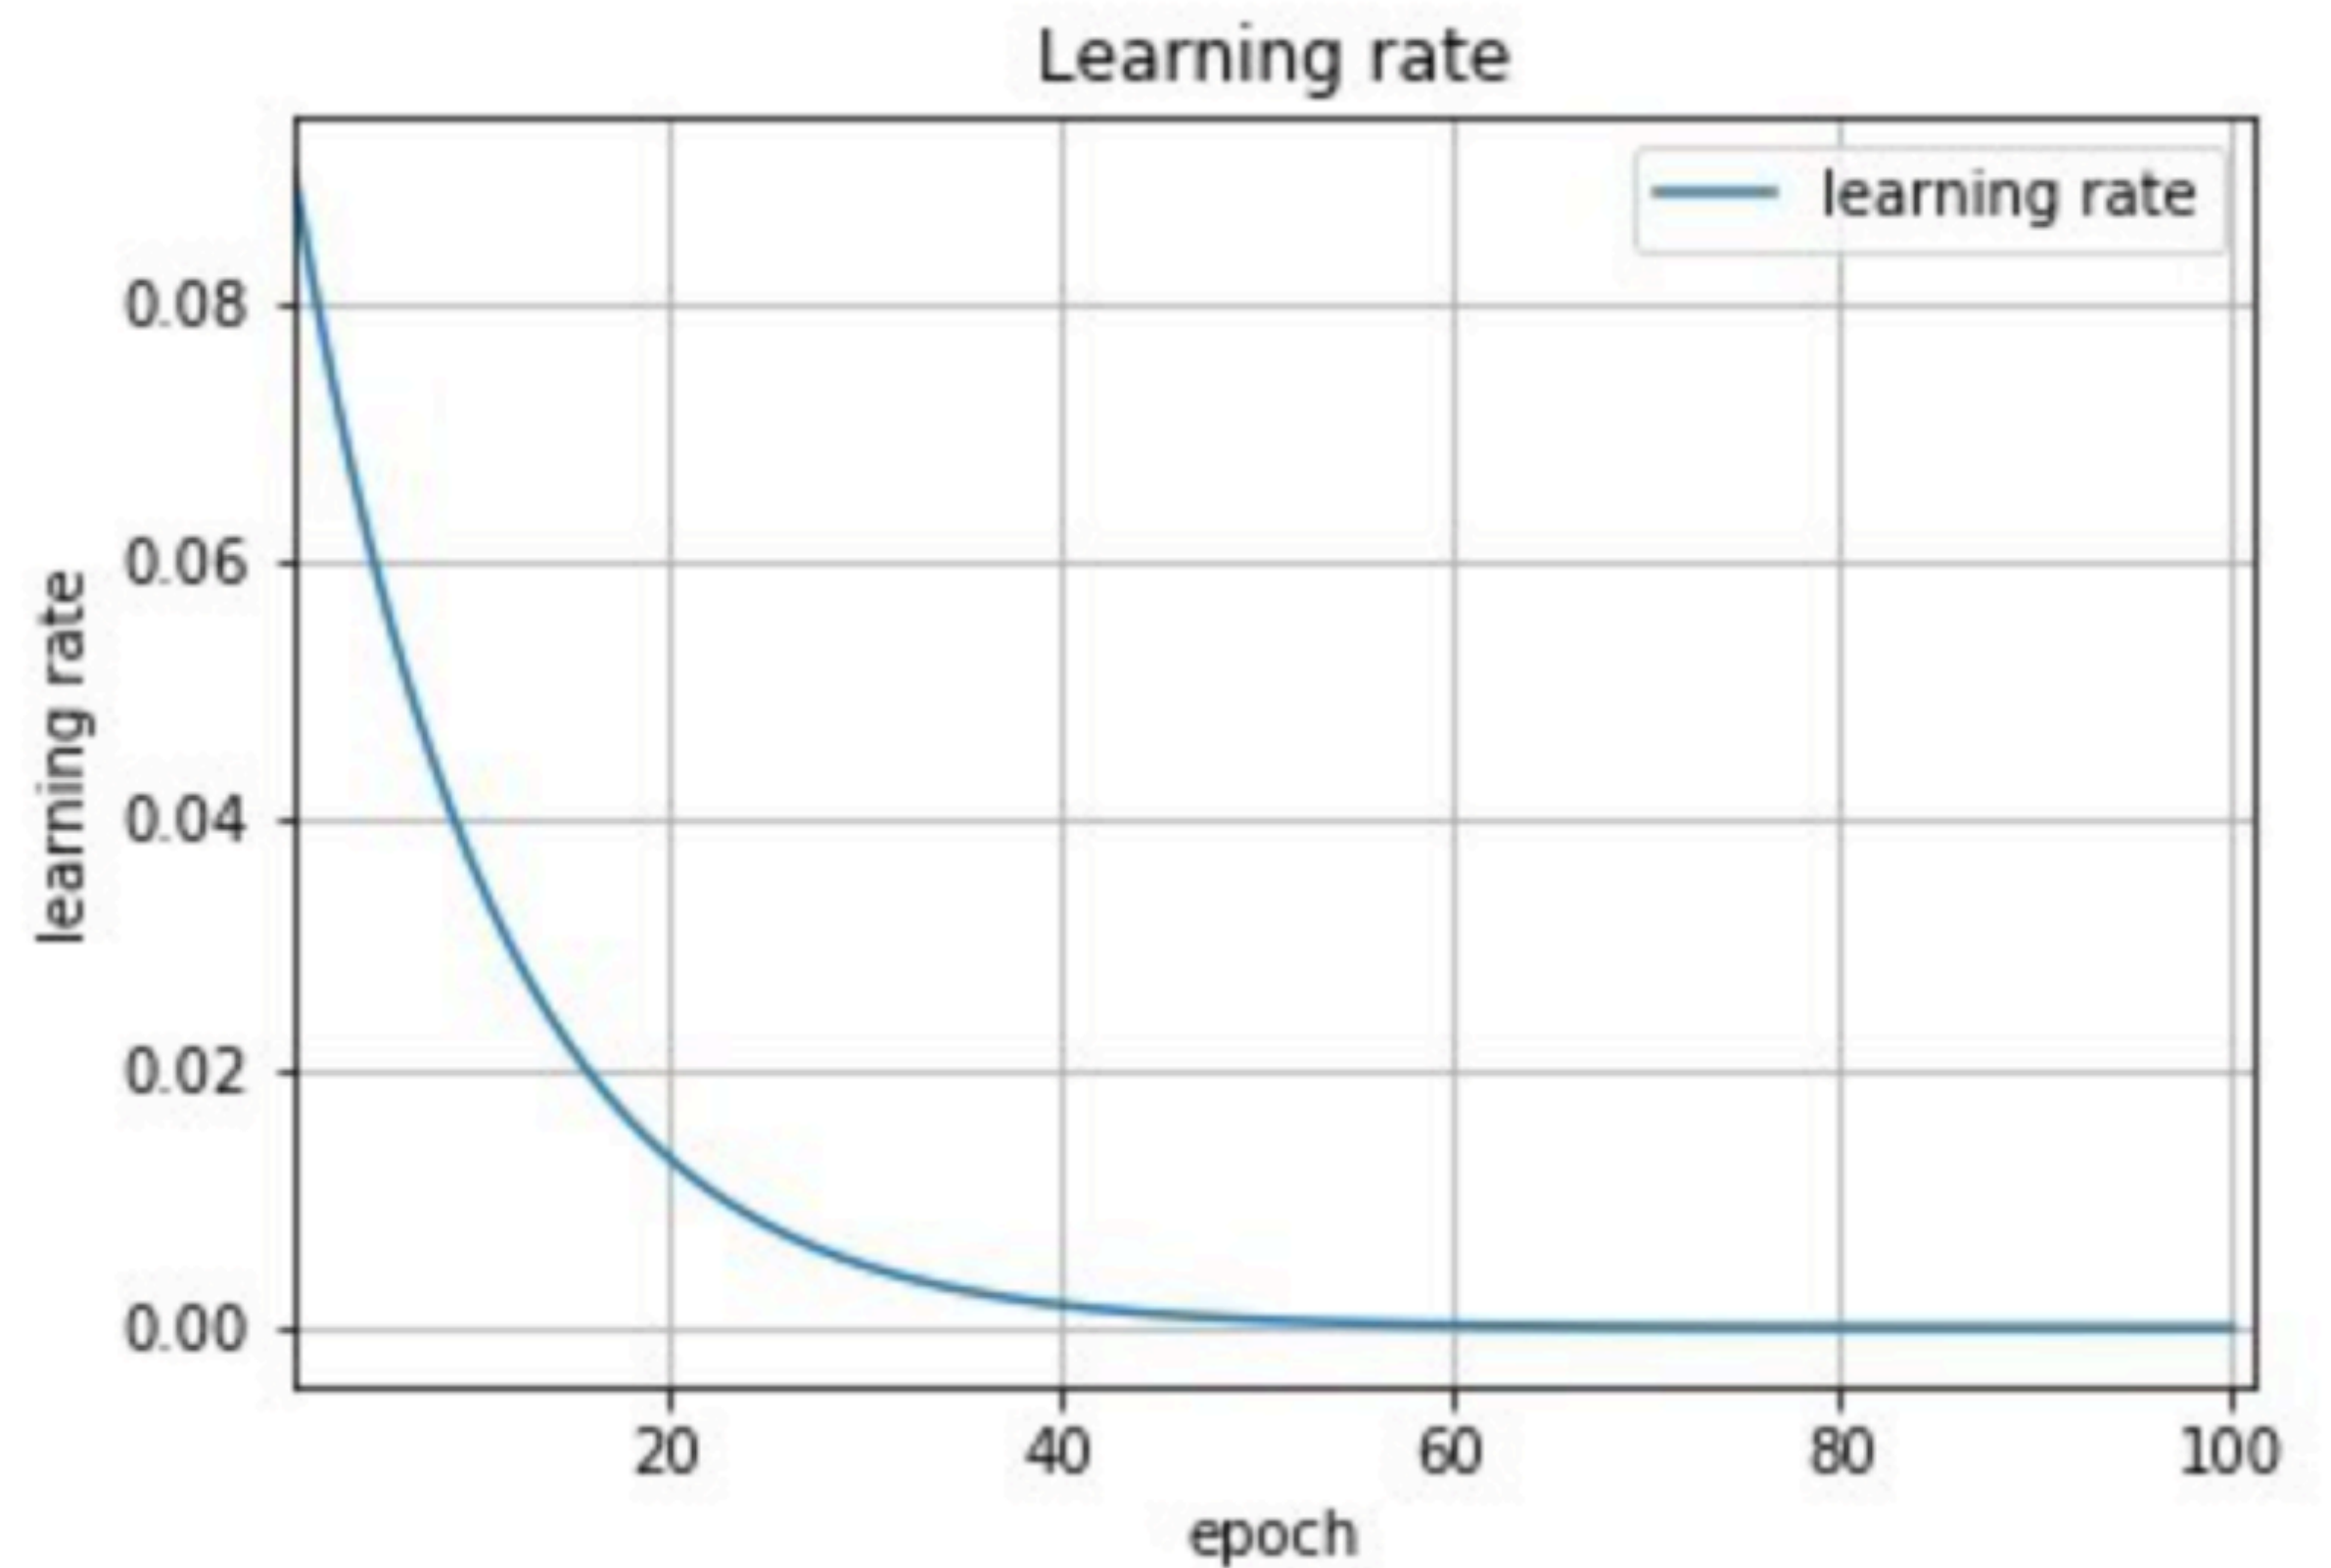


Learning rate schedulers

ReduceLROnPlateau

ResNet can be trained for very long. From the paper:

“The learning rate starts from 0.1 and is divided by 10 when the error plateaus, and the models are trained for up to 60×10^4 iterations”

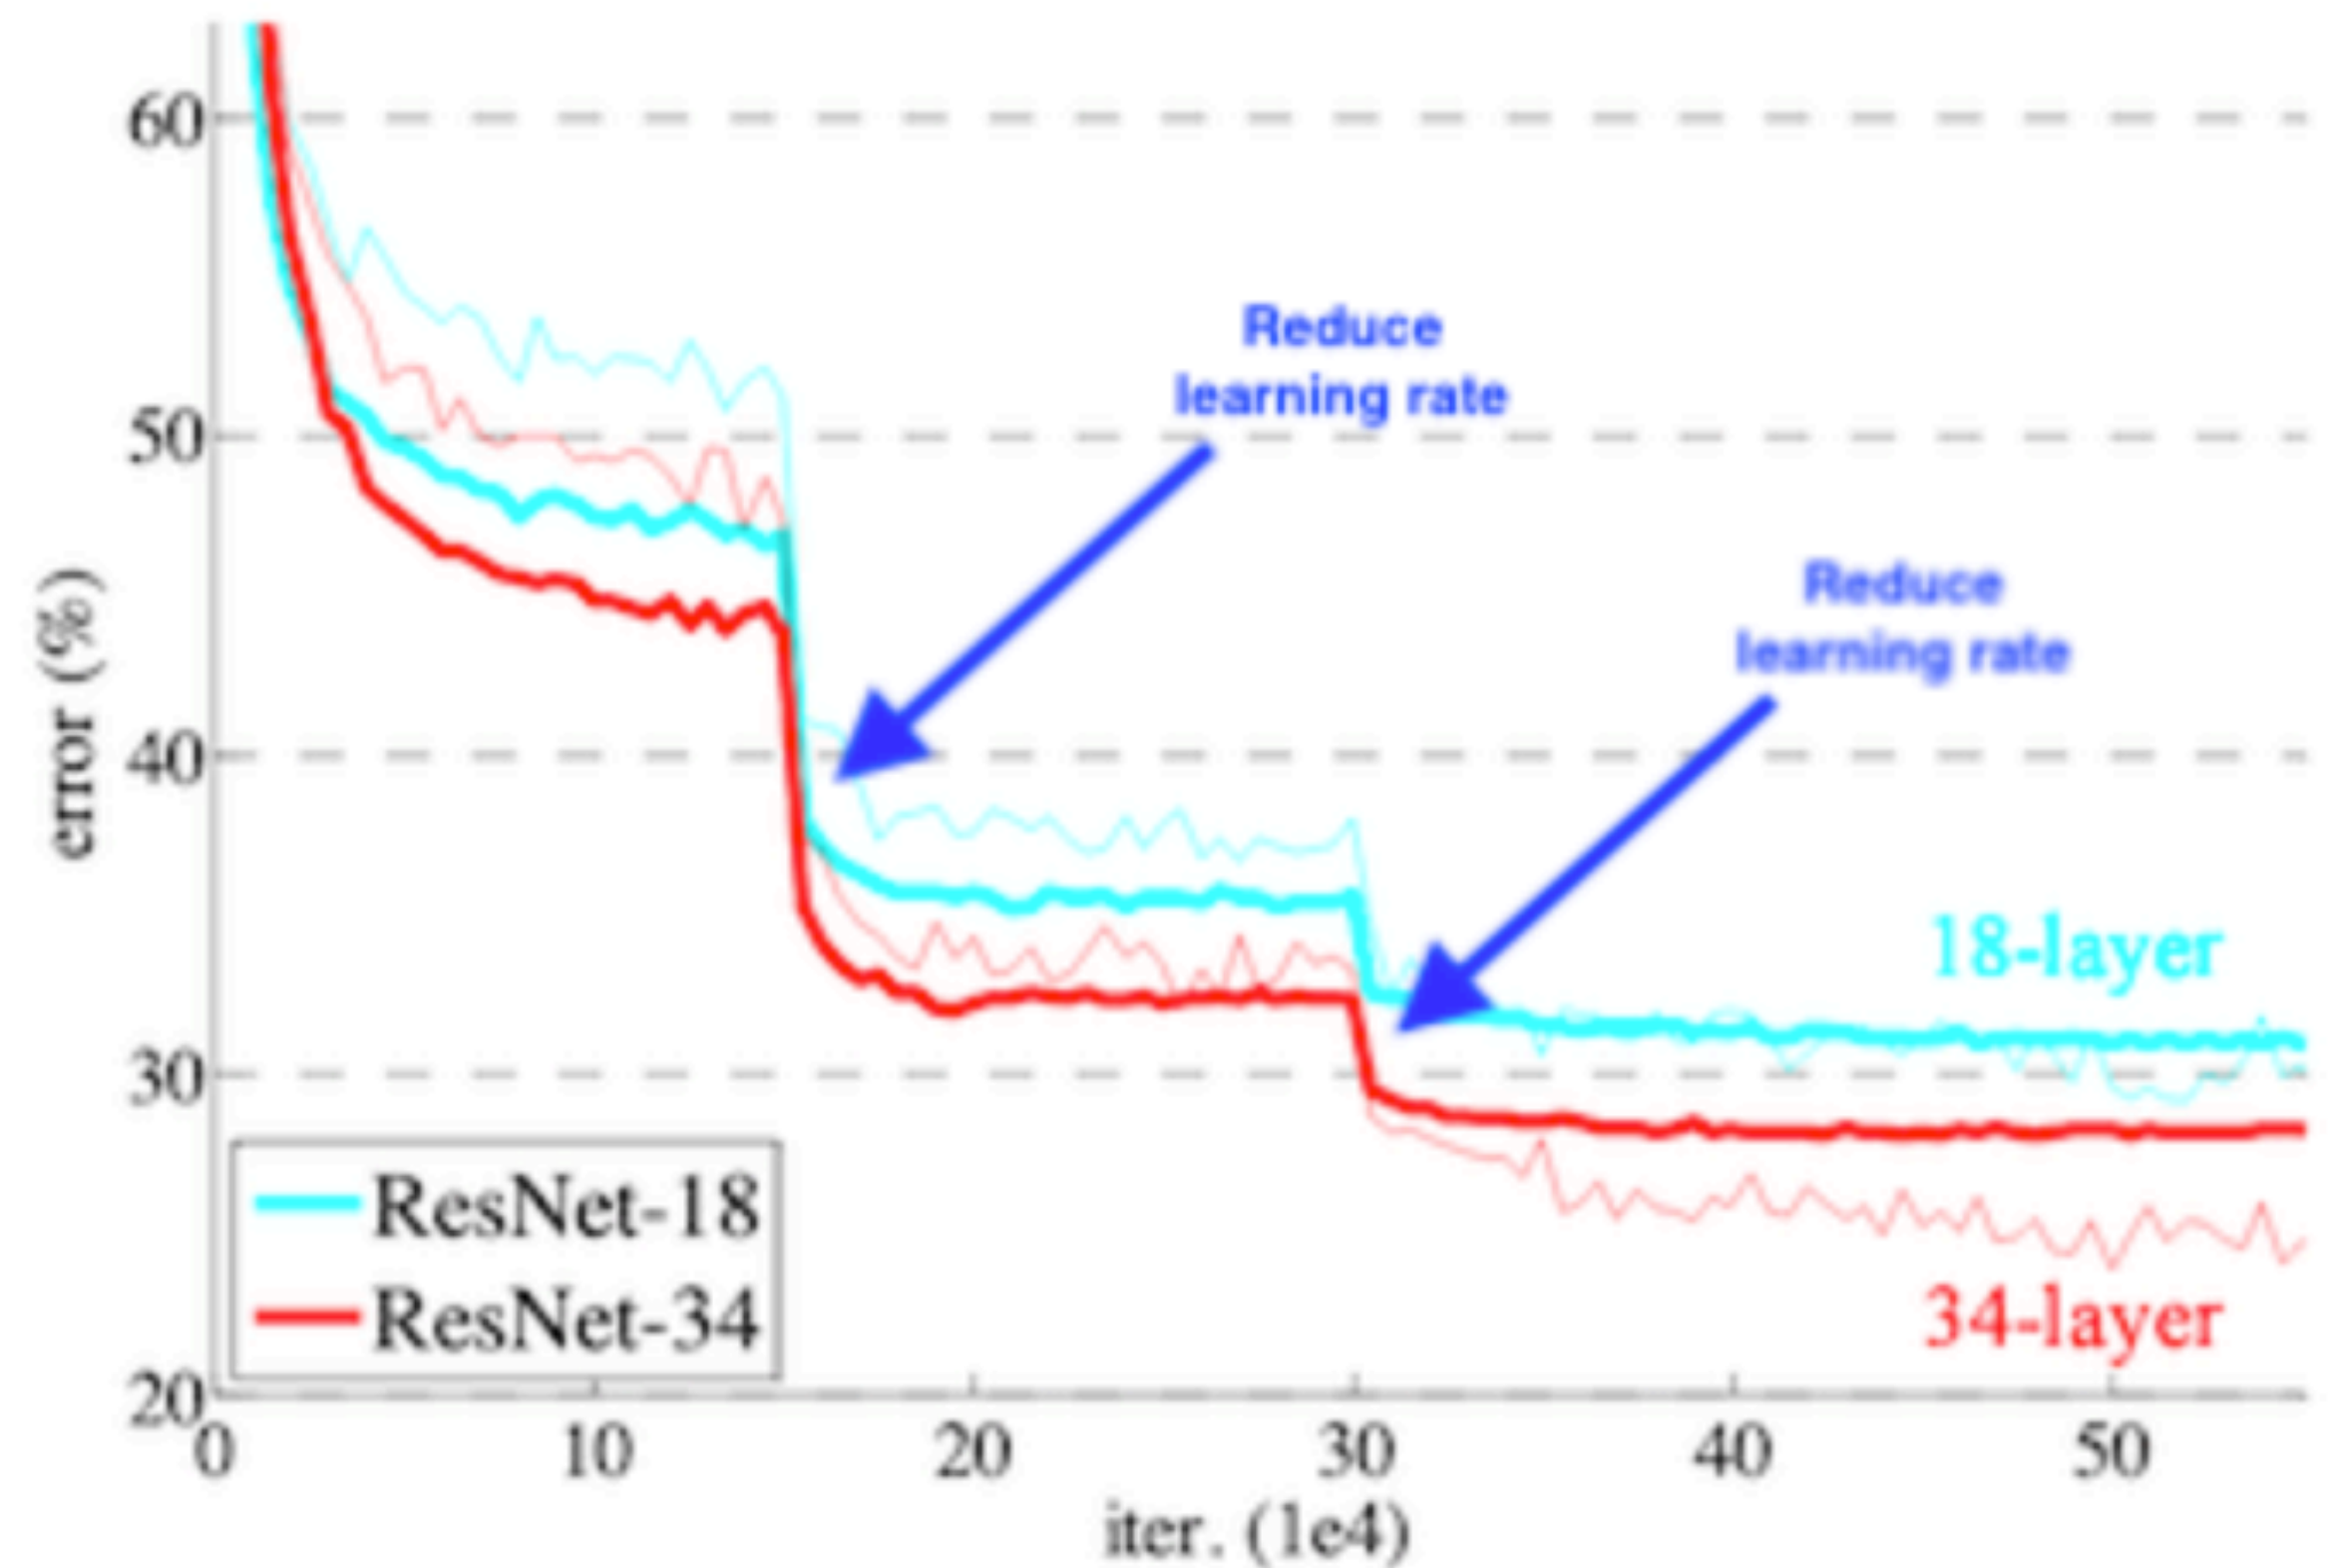



Learning rate schedulers

Learning rate warm up

The first iterations can have very high gradients, and could “lock” the model in the wrong direction.

A solution is to gradually increase the learning rate from 0 on to the originally specified learning rate in the first few iterations.

This is typically used with transformer architectures.

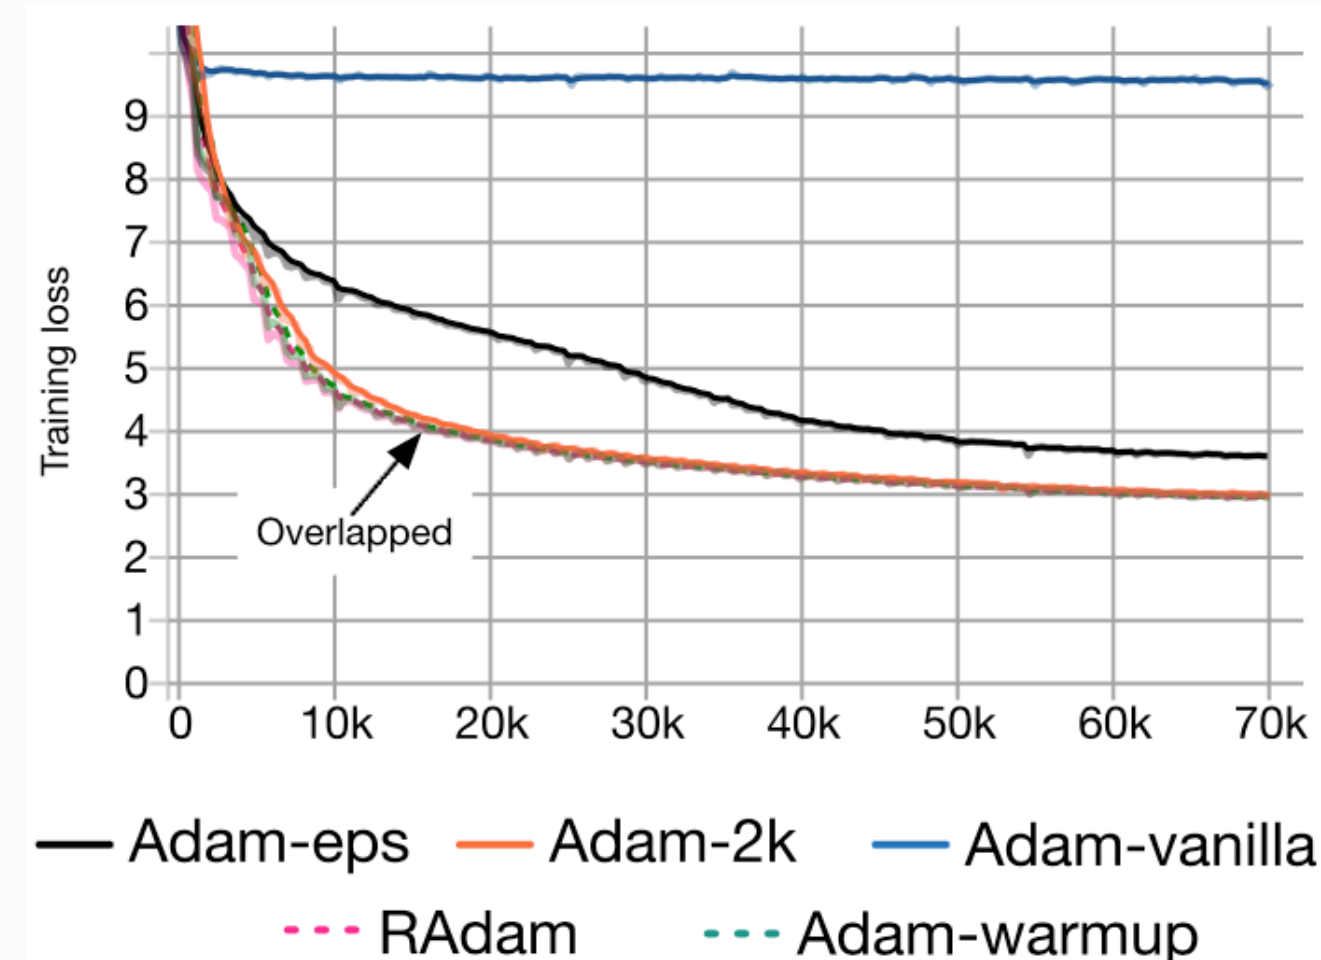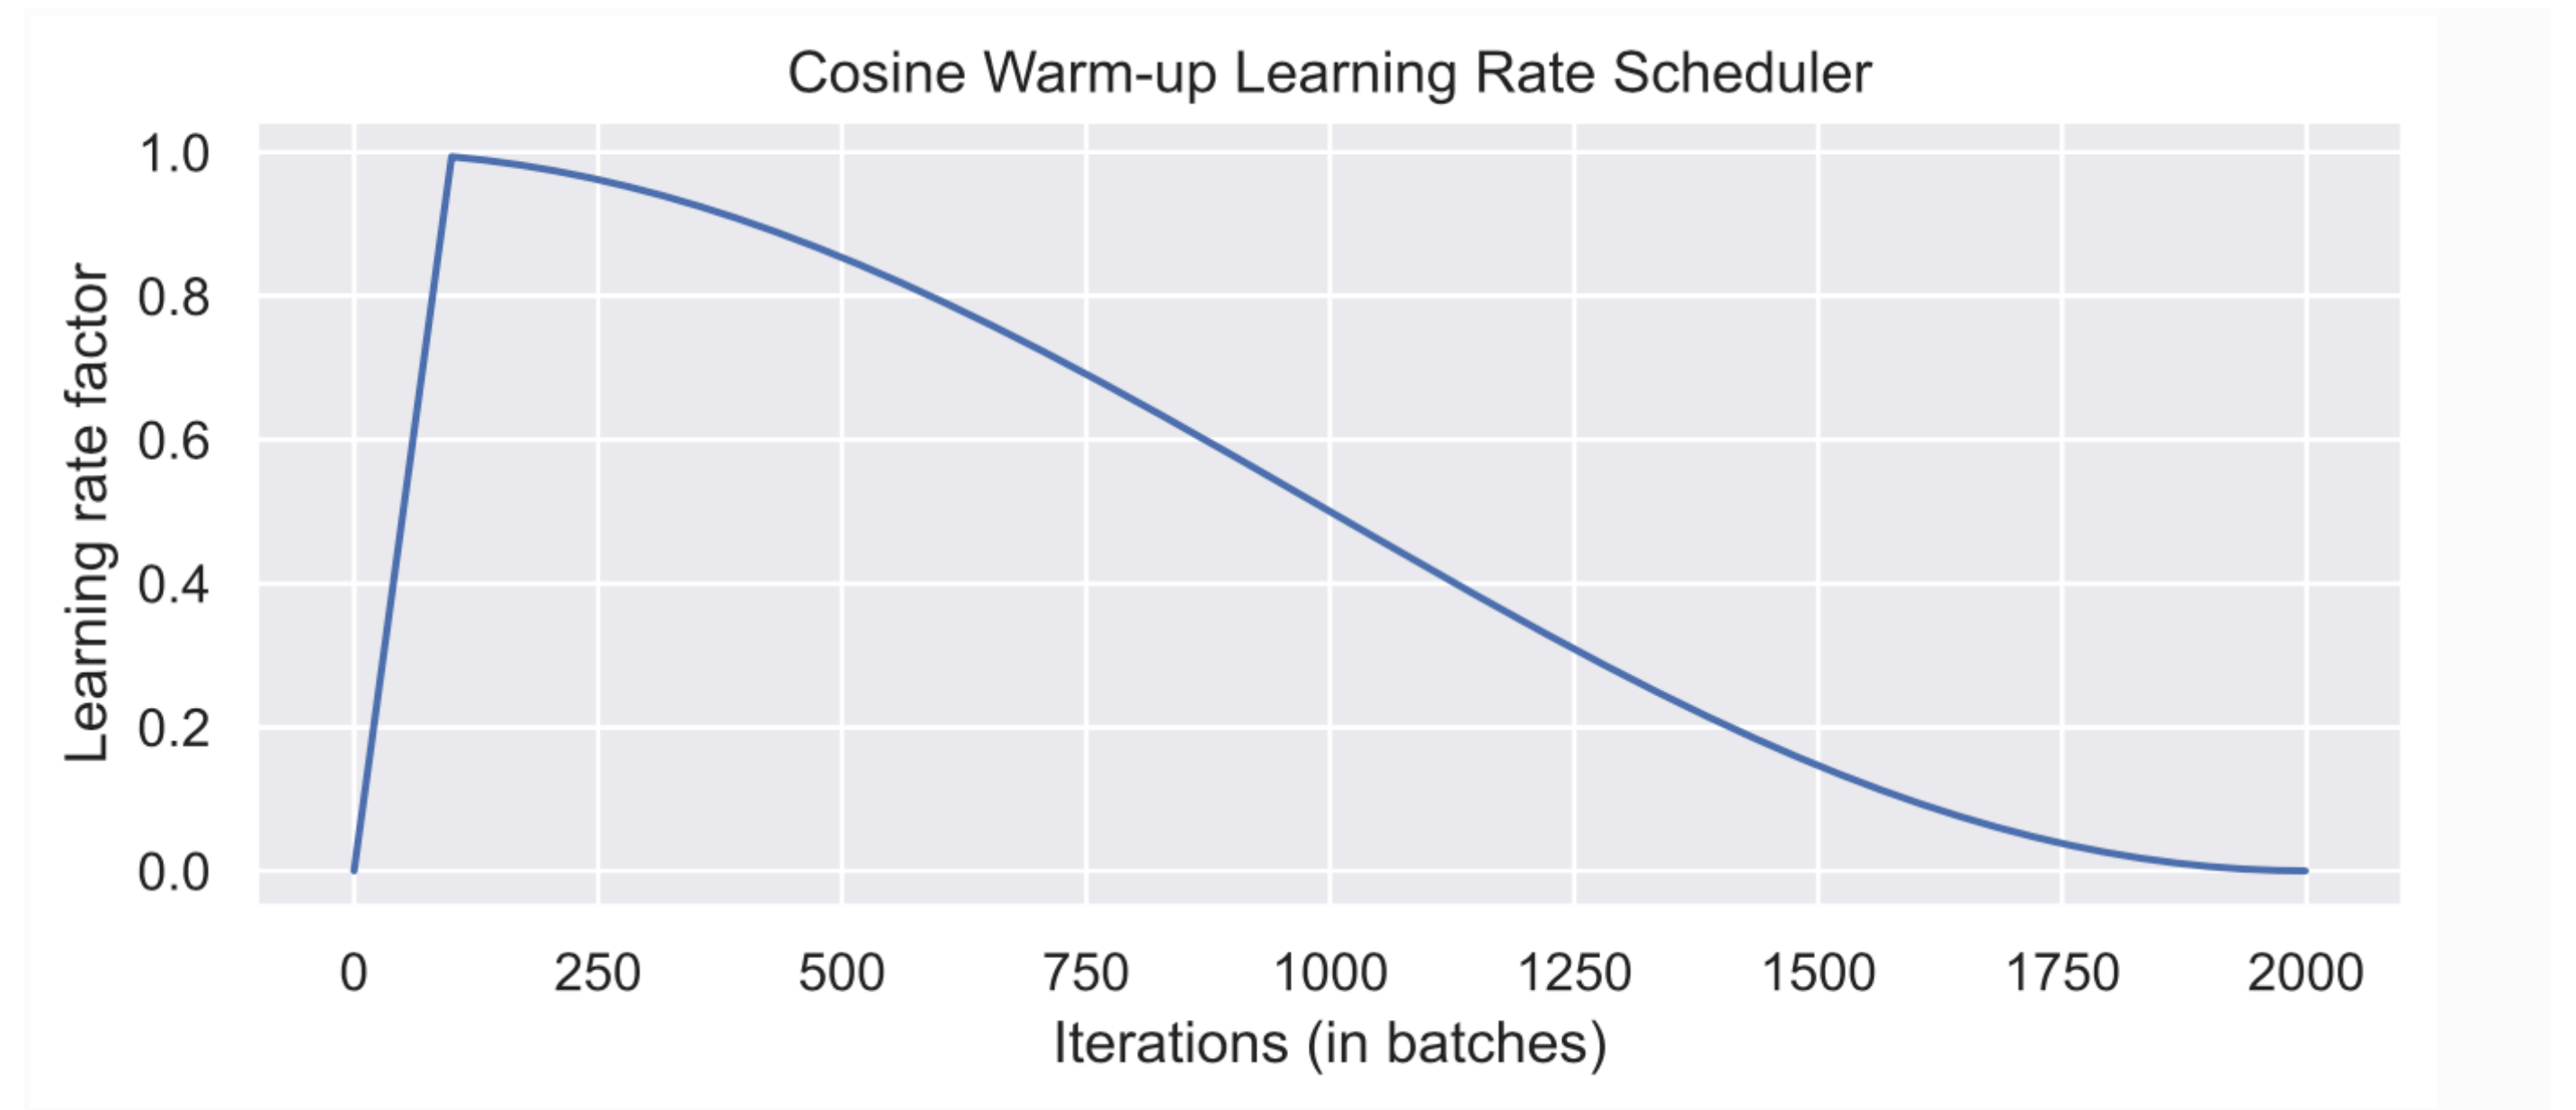

Code formatter

Any color you like

From the *black* github readme:

Black is the uncompromising Python code formatter. By using it, you agree to cede control over minutiae of hand-formatting. In return, *Black* gives you speed, determinism, and freedom.

You will save time and mental energy for more important matters.

Watch the [PyCon talk](#) for more



Typehinting

Typehinting was introduced in Python with PEP 484

The mypy package checks your type hinting:

- Makes it easier to find bugs, with less debugging
- Typing acts as machine-checked documentation
- Makes your code easier to understand

Simply run `mypy src`

Obligated for the exam

- Formatting and linting is obligated for the exam!
- This is the minimal setup:
 - `poetry add black flake8 isort mypy pep8-naming flake8-annotations -dev`
- You are done when you can run this without errors:
 - `poetry run isort src`
 - `poetry run black src`
 - `poetry run flake8 src`
 - `poetry run mypy src`
- See the `Makefile` for easy shortcuts.