



CLINICIAN CODERS

Handout

Contents

Licensing	3
Workshop 1 - Introduction to R.	4
Introduction	4
What is R?	4
Reproducible science	4
R Studio	5
R building blocks	6
1. Names	6
2. Data	6
3. Functions	9
R vocabulary.	9
Workshop 2 - Keeping a clean dataset.	10
Introduction	10
Spreadsheet applications	10
Data Types	11
Data types in R	12
Formatting	14
Common Mistakes to Avoid and Correct	15
Recording and Cleaning Data	17
Tips for recording data	17
Tips for cleaning data	18
Workshop 3 - Importing Data into R	19
Introduction	19
Reproducibility	19
Files and Directories	19
Importing Your Data into R	20
Point and Click	22
Importing Data with Commands	23
Reviewing Your Data in R	26
Description Functions	31
Exercises	32
Solutions	33
Addendum: Importing from Google Sheets	34
Workshop 4 - Data Wrangling.	35
Introduction	35
What is Data Wrangling?	35
Data wrangling with dplyr	35
Common dplyr functions	35
Filter	36
Select	37
Filter and select together	37
The group by and summarise functions.	38
Using the pipe with other functions	38
Favourite Data Tidying ‘Recipes’	39
1. Renaming a variable	39
2. Creating new columns	39
3. Extracting numbers	39
4. Manipulate strings	40
5. Manipulate dates	40

6. Columns to rows.	41
7. Deleting variables.	43
Excercises	44
Solutions	44
Workshop 5 - Visualising data	45
Introduction	45
1. Exploring data	45
2. Storytelling	45
3. Using colour	45
ggplot2	47
Creating a scatter plot	47
Creating a line graph	51
Creating a bar chart.	52
Cheat sheet.	54
Workshop 6 - Basic Statistics	55
Introduction	55
Types of data	55
Continuous data	55
Discrete data	57
Describing Data	57
Normally distributed data.	57
Non-normal data	59
Describing Discrete/Categorical data	60
Inferential statistics	61
Comparing means	62
Comparing counts	63
Comparing non-normal or skewed distributions	64
Workshop 7 - Writing functions	66
Introduction	66
Write a function	66

Licensing

This course is licensed under a Creative Commons share-alike licence. [Creative Commons](#)

The course has been adapted from the Data Science for Doctors course. [DS4D](#)

Workshop 1 - Introduction to R.

Introduction

What is R?

R is a FREE and open source software for statistical computing and graphics. It works with variety of platforms:

- UNIX
- MacOS
- Windows

R uses a computer ‘language’ that is thought to make it particularly suitable for statistics. Often the challenge new users face is learning that language. Most people are often used to a graphical user interface (GUI) where they can point and click. With R, you need to describe to the computer the steps you want it to take.

It does get better with practice!

But why bother with the practice for R? You are not limited to pre-designed command process of a particular GUI package – you can give R your data and ask it to work through almost any calculation or process.

Reproducible science


One of the main criticisms of data science may be that logging the steps of your analysis can be arduous or contain errors, so if a third party were to try and reproduce your findings they may well get different results. Also, how many times have you been working with a large database and found that there was either an error in the data or you made an error early on in your workings. You have then had to go back and re do the whole analysis from the point at which you made an error.

With R:

- The code you write to analyse your data is also the record of your analysis.
- If you make a mistake early on, this can be corrected and the subsequent code still valid and likely adaptable.
- You can use the similar analytical methods on a whole other database, by saving and re-using code.

R Studio

This is what the R studio interface looks like:

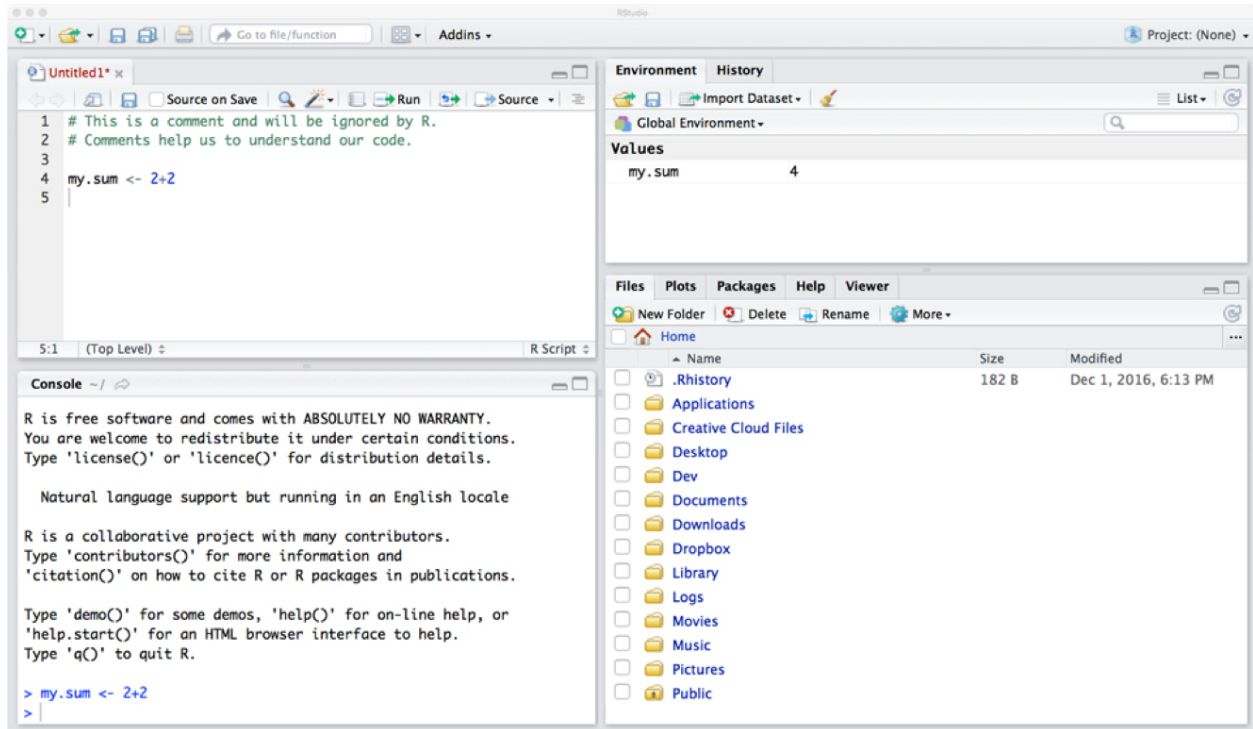

The windows (clockwise from bottom right) are:

Console When you type in the “Console”, you are typing into R itself. Commands are executed, but not saved. Here **Enter** executes a command

Source This is a text file. You can type commands in it, and send them to the “Console”, where they are executed in R. You can save the text file on your computer so that you have a record of the commands you run. Here **Cmd + Enter** (Mac) or **Ctrl + Enter** (Windows) executes your command.

Environment This lists the objects you are working with in your R environment.

Supporting Panes The supporting panes include:

- Help pages
- Plot outputs
- Browser for your files (this is your computer, if you delete something here it will also be deleted from your computer drive. BE CAREFUL)

R building blocks

We propose that there are three main building blocks to R:

1. Names
2. Data
3. Functions

1. Names

Names are assigned to a value/function/file.

The assignment operator is `<-`.

You can then recall the value/function/file by using the name

```
# Assign the value of 2+2+6 to the name `practice`. Notice there is no output in the  
# console, but 'practice' is added to the environment window.  
practice <- 2 + 2 + 6  
# Recall the value using the name.  
practice
```

```
## [1] 10
```

You can also assign names to text, but note that the text needs to be surrounded with `"`. Also note that object names can't have spaces in them.

```
say_hello <- "hello"  
say_hello
```

```
## [1] "hello"
```

2. Data

R is a statistical computing language; statistics uses vectors and matrices.

Vector

A vector is a structure containing elements of the same type of data.

- Collection of numbers (integer vector). Example - age.

```
## [1] 50 25 32 67 46 19 48
```

- Collection of real numbers (numeric vector). Example - temperature

```
c(37.5, 37.1, 37.3, 38.3, 37.4, 38.9)
```

```
## [1] 37.5 37.1 37.3 38.3 37.4 38.9
```

- Collection of characters (character vector). Example - name.

```
## [1] "Adam"      "Sally"     "Eve"       "John"      "James"     "Jennifer"
```

- Collection of true/false values (logical vector). Example - 'blood results available?'

```
## [1] TRUE FALSE FALSE TRUE TRUE
```

You can also assign names to vectors. You need to use `c()` in order to combine the elements of the vector. Remember, characters need to be surrounded with `"`.

```
age <- c(50, 25, 32, 67, 46, 19)
# Recall the whole vector using the name.
age

## [1] 50 25 32 67 46 19

# You can do the same thing for a character vector.
name <- c("Adam", "Sally", "Eve", "John", "James", "Jennifer")
name

## [1] "Adam"      "Sally"      "Eve"        "John"       "James"      "Jennifer"

gender <- c("male", "female", "female", "male", "male", "female")
```

You can recall specific elements of a vector using the name and `[]`.

```
# The age of the second person.
age[2]

## [1] 25

# The name of the fifth person.
name[5]

## [1] "James"
```

Vectors – Other properties.

If you add a character to a vector of integers, R will change the whole vector to a character vector.

```
test <- c(1, 2, 3, 4)
# Note that `test` is a numeric vector.
str(test)

##  num [1:4] 1 2 3 4

# Add a character to `test`
test <- c(1, 2, 3, 4, "x")
# Note that `test` is now a character vector.
str(test)

##  chr [1:5] "1" "2" "3" "4" "x"
```

If you add a logical to an integer vector, `TRUE` is converted to 1 and `FALSE` is converted to 0. The vector remains numeric.

```
test2 <- c(1, 2, 3, 4, TRUE)
# Note that the last element is `1`.
test2

## [1] 1 2 3 4 1

# Note that the vector is numeric.
str(test2)

##  num [1:5] 1 2 3 4 1
```

Matrix

A matrix is collection of elements of the same data type, arranged into rows and columns.

```
##      [,1] [,2] [,3]
## [1,]    1    4    7
## [2,]    2    5    8
## [3,]    3    6    9
```

Data Frame

A data frame is just a list of vectors. We are all familiar with data frames, as a properly formatted spreadsheet is a data frame. Here is an example:

```
##      name age gender
## 1    Adam  50   male
## 2   Sally  25 female
## 3     Eve  32 female
## 4    John  67   male
## 5   James  46   male
## 6 Jennifer 19 female
```

In the table above there are two character vectors and one numeric vector.

You can create a data frame in R with the command `data.frame()`. R arranges the vectors as names across columns, and also numbers each row automatically.

```
# Combining the vectors we created before into a data frame.
patients <- data.frame(name, age, gender)
patients
```

```
##      name age gender
## 1    Adam  50   male
## 2   Sally  25 female
## 3     Eve  32 female
## 4    John  67   male
## 5   James  46   male
## 6 Jennifer 19 female
```

Remember, if you try and create a data frame with unequal number of values in each vector R will try and fill in the missing values by filling them in for you.

```
name <- name <- c("Adam", "Sally", "Eve", "John", "James", "Jennifer")
gender <- c("male", "female")
# You probably don't want this to happen.
data.frame(name, gender)
```

```
##      name gender
## 1    Adam   male
## 2   Sally female
## 3     Eve   male
## 4    John female
## 5   James   male
## 6 Jennifer female
```

You can review a specific vector in a data frame using `$`. Try `patients$age`.

3. Functions

Finally, functions.

Think of functions as factories. Each factory is designed to have a certain output and needs a specific input. A function may conduct more than one step on the data you input e.g. `table()` counts values and presents them by the group parameter you set (we will use `table()` later).

Functions will try and process most of the arguments you give it but there will be constraints. The help pages for the functions (accessed with either `?function_name` or `??function_name`) will detail these constraints.

Examples of some functions which are useful for exploring your dataset are:

- `head(dataset_name)` - prints the first 6 rows.
- `tail(dataset_name)` - prints the last 6 rows.
- `summary()` - gives you information about either a data frame or a vector.
- `mean()` - calculates the mean of a numeric vector.

R has many inbuilt functions. Packages are repositories of functions separate to this inbuilt content. To access these packages from the online package repository, you need the commands:

```
install.packages("package.name")
```

```
library(package.name)
```

You only need to use the `install.packages()` command once. You will need to use `library()` to reload repositories you want to use each time you restart R.

R vocabulary.

The main terms to be get you started are:

- Names
- Vectors
- Data Frames
- Functions
- Packages

R Studio cheat sheet

Available here: <https://www.rstudio.com/wp-content/uploads/2016/01/rstudio-IDE-cheatsheet.pdf>

Workshop 2 - Keeping a clean dataset.

Introduction

Spreadsheets offer a simple and effective method to collect data. However, their ease of use often leads to a sloppy approach to data entry. Good data discipline is an essential foundation to data analysis, and a small investment at this stage can prevent you running into trouble when trying to analyse and publish your study. This tutorial will take you through the essential dos and don'ts of managing your data in a spreadsheet. As a word of caution, do not forget, that any data collection should be in line with the [Data Protection Act](#) and the [General Data Protection Regulation](#). Please ensure you manage your data appropriately.


This is a good opportunity to use the tutorial and compare the points below to your own original data. Take the time to clean your data as you read through the document. We have provided a 'dirty' sample of the Critical Care Health Informatics Collaborative (CC-HIC) public dataset to practice cleaning if you would prefer (see slack channel). Prior to using any of the CC-HIC extracts please ensure you have signed the End User Licence Agreement (EULA).

Spreadsheet applications

There are many different spreadsheets to use. Almost everyone will be familiar with Excel, although it is worth considering if this is actually the right choice for you. If you are planning a major collaboration, where many people need to enter data simultaneously, then an excel spreadsheet is probably not for you. Have a look at googlesheets as an alternative. As your requirements grow, you may want to explore a relational database. For now, we will assume you are using excel.

Data Types

To know how to best record and manage data, it is important to have an understanding of the type of data you are working with. Have a look at this diagram from derangedphysiology.com.

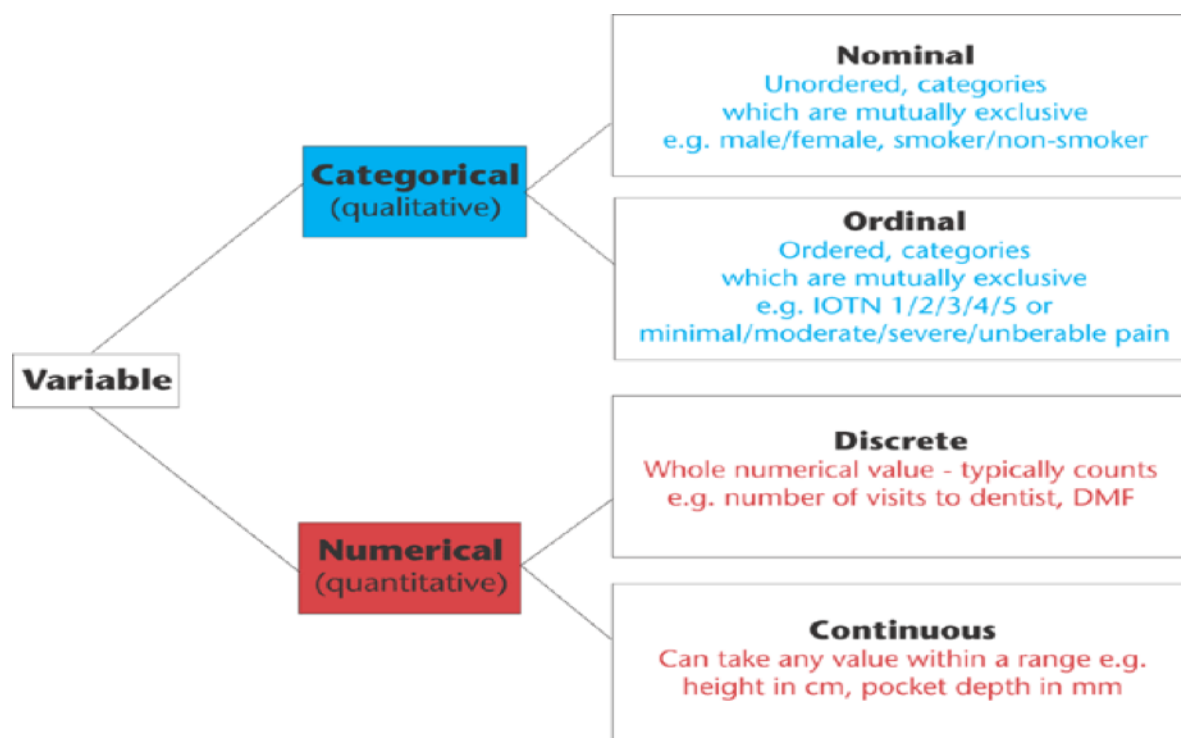

R supports all these data types. Look at the diagram below and consider how you may represent these data types in R.

If you intend to collect data on a spreadsheet program (e.g. excel), then import into R for further analysis, it is helpful to understand how R 'sees' data and what it is able to do with different types of data.

Data types in R

Integers and Decimals

The values recorded in numeric variables can be viewed as either integers or decimals.

- Integers are discrete whole numbers (counting numbers) e.g. 1, 2, 3
 - You can specify an integer in R by writing an “L” after the integer e.g. 1L, 2L, 3L. This might seem strange, but it guarantees that the value you are recording is an integer, and not a decimal.
- Decimals are numbers that appear in the real world e.g. 2.1, 2.0, 1.9
 - Decimals are often called floats or reals in computer science
 - R refers to decimals as numerics

Computers apply maths differently to these two numerical data types.

Factors

The values recorded in categorical variables can be either nominal (unordered names) or ordinal (ordered names). R stores both these variables as nominal and ordinal factors respectively.

Example of a nominal factor vector:

- Apples
- Oranges
- Pears

R will store this as:

1. Apples
2. Oranges
3. Pears

The numbers here do not indicate a relationship between the items. It is only used for indexing the list. R will not understand this as $1 > 2 > 3$, which makes no sense in this context.

Example of an ordinal factor vector:

- strongly disagree
- disagree
- neither agree/disagree
- agree
- strongly agree

This may be familiar to you as the Likert scale. Here the values are named, but there is an intrinsic order that may be relevant. Where there is an order to the values R stores the data as follows:

1. strongly disagree
2. disagree
3. neither agree/disagree
4. agree
5. strongly agree

For ordinal factors, R understands that $1 < 2 < 3 < 4 < 5$

Strings

A string is any sequence of characters. Literally anything you can type can be represented as a string. This is the default data type in excel, and is what data typically defaults to if there is any confusion about what the data is. This is because anything can be represented as a string. Take the example of recording the fluid balance of patients on the day of admission to ITU. If we write “480ml” excel will store this value as a string. It has no choice, since the “ml” adds data that cannot possibly be interpreted numerically. When dealing with data that is numerical in nature, it is best practice to keep all units elsewhere and keep the data as an integer or decimal.

Dates and Times

Dates and times are a special case of integers and decimals. Computers store date information as integers being counted from a specific point in time. This isn’t helpful for us, as we have no idea how many seconds there are since 1st January 1970. R stores the integer value, and presents this as a formatted date when we ask for the value.

You will be using an extract from the CC-HIC in the next few workshops. You will note that all the patients are admitted on 1st January 2000. This was one of the measures to protect patient identification. Thus events (e.g. discharge dates, death dates etc.) are recorded as respective to 1st January 2000.

The time is stored as a fraction of the date, but 10467.5674 is not intuitive to read. R will format this correctly when asked to present the data.

Depending on the cell format, typing the same date in excel will give you different appearances, or even a different actual date.

A	B	C	D	E	F	
what-I-type	what-you-want	mmm-yy	dd-mm	mm-dd	excel-number	
2-jul	2016-07-02	Jul-16	02-07	07-02	42553	

Booleans

These are binary statements, i.e. TRUE or FALSE, which are recorded by the computer as 1 or 0 respectively. Of note, FALSE is always 0. TRUE can be stored as any non-zero number. When recording TRUE or FALSE statements for any variable (e.g. on antibiotics, had steroids etc.), it is best to stick to this single conventional practice.

Formatting

What is a CSV file?

A comma separated values file is as it says on the tin! The structure of columns and rows stays the same but data values on a single row are separated by commas instead of walls of a cell. Here is what a CSV file looks like if you were to look at the data raw:

```
id,recruit,age,gender,random,ps0h,ps3h,ps12,
1,1 Jan 2014,80,F,drain,0,0,0,2,2,2,0,0,8g,0
2,2 Jan 2014,72,f,drain,1,2,2,1,2,2,1,2,8g,2
3,3 Jan 2014,72,F,drain,0,1,0,0,0,0,0,0,6g,0
4,4 Jan 2014,55,F,drain,0,0,0,0,1,0,0,1,4g,0
5,5 Jan 2014,84,f,skin,0,0,2,3, ,1,1, ,8g,0,2
6,6 Jan 2014,72,F,skin,1,2,2,2, ,1,1, ,8g,0,
7,7 Jan 2014,65,F,skin,0,1,0,0,0,0,0,0,4g,0,
8,8 Jan 2014,75,F,drain,0,0,0,0,0,0,0,0,0,0,
9,9 Jan 2014,64,F,skin,2,2,1,1,2,1,1,3,7g,0,
```

Here is what you see when you open up your CSV file in a spreadsheet application:

id	recruit	age	gender	random	ps0h	ps3h	ps12	ps24h	ps168h	move12h
1	1 Jan 2014	80	F	drain	0	0	0	2	2	2
2	2 Jan 2014	72	f	drain	1	2	2	1	2	2
3	3 Jan 2014	72	F	drain	0	1	0	0	0	0
4	4 Jan 2014	55	F	drain	0	0	0	0	1	0
5	5 Jan 2014	84	f	skin	0	0	2	3		1
6	6 Jan 2014	72	F	skin	1	2	2	2		1
7	7 Jan 2014	65	F	skin	0	1	0	0	0	0
8	8 Jan 2014	75	F	drain	0	0	0	0	0	0
9	9 Jan 2014	64	F	skin	2	2	1	1	2	1

Excel opens it up to view as above but also has formatting which makes it easier to read, and an interface where we can interact with the program to manipulate the data.

Home Insert Page Layout Formulas Data Review View										
Calibri (Body) 12 A A = = = Wrap Text B I U Merge & Center										
A1 fx id										
A	B	C	D	E	F	G	H	I	J	
1	id	recruit	age	gender	random	ps0h	ps3h	ps12	ps24h	ps168h
2	1	01-Jan-14	80	F	drain	0	0	0	2	2
3	2	02-Jan-14	72	f	drain	1	2	2	1	2
4	3	03-Jan-14	72	F	drain	0	1	0	0	0
5	4	04-Jan-14	55	F	drain	0	0	0	0	1
6	5	05-Jan-14	84	f	skin	0	0	2	3	
7	6	06-Jan-14	72	F	skin	1	2	2	2	
8	7	07-Jan-14	65	F	skin	0	1	0	0	0

What to do about formatting?

It is often easier for files to be converted into CSV before importing into R. This ensures that the data is being ‘translated’ into a universal structure that both applications can understand. Therefore, coloured cells and font formatting will not be translated when converted to CSV. Remove all coloured cells and formatting from the data you are using for this workshop.

Common Mistakes to Avoid and Correct

The following are a list of common mistakes to avoid. See if you can find examples in your data and correct as you go along:

- Multiple tables
 - Multiple tables in one sheet will confuse the computer
 - The computer will still identify each row as a different single identity across multiple tables
 - Using the same field name twice - this will confuse the computer.
- Multiple tabs
 - E.g. a different tab for each day of your wet lab experiment
 - Recording across different tabs means you may make mistakes or have inconsistencies in your recording
 - When you come to merge all the tabs together make sure to change the headings.
 - Multiple tabs can be avoided by accepting that your data sheet is going to be potentially quite large.
 - If you must use multiple tabs, consider before creating each one whether the information could be recorded on the single sheet.
 - You do not have to merge the multiple tabs made available in the CC-HIC dirty extract. Just have a look and think how you would do so.
- Repeating headers
 - Never ever do this. You will not be able to run calculations on these variables as the computer won’t know which column you are referring to.
 - In order to scroll across headers and columns, you can freeze them.
 - Freezing rows and columns, view > freeze top row
- Not filling in zeros
 - If a value of a recording actually is ‘zero’, record that ‘0’ e.g. number of infections during admission on ITU.
 - If there is no value in the cell (even if the value was counted but nothing observed) the computer will interpret that as missing
- Using bad null values
 - Essentially, don’t use numerical values (‘9999’ or ‘0’)
 - Blank or NA are reasonable choices
- Using formatting to convey information/make the sheet look pretty
 - The formatting (e.g. coloured cells) won’t be conveyed in R, try and change this to another column that gives you this information without the need for formatting.
 - Merging cells, including for headings, compromises your computer’s ability to read your data. Always avoid merging, consider instead adding pre/suffix to each heading.

- Using punctuation or units inside cells
 - Leaving units or comments may be a helpful aide memoire at the time but will confuse your data analysis process.
 - Create another variable/column
- More than one piece of information in a cell
 - E.g. BP 120/80, 90/60
 - Separate this out into 2 columns; DBP, SBP
- Special characters in data
 - E.g. tabs for format lines of data
 - Importing this in R could result in a line being cut in half/lost data/extra rows
- Inclusion of metadata in data table
 - It's natural, and good practice, to store information about your data
 - But, it doesn't (and shouldn't) be on the same sheet, as this can disrupt how the computer will interpret the data.
 - Store this in a different file.
- Field name problems
 - Avoid spaces and special characters
 - R doesn't like spaces
 - Some programs don't like text string names that start with a number
 - Generally consider using snake_case (this_is_snake_case) or CamelCase (ThisIsCamelCase) for all headers for consistency
 - Avoid uncommon abbreviations – you never know how long you may use this data for and keep referring to it or who you may need to share it with.

good name	good alternative	avoid
Max_temp	MaxTemp	Maximum Temp (°C)
Precipitation	Precipitation_mm	precmm
Mean_year_growth	MeanYearGrowth	Mean growth/year
sex	sex	M/F
weight	weight	w.
cell_type	CellType	Cell type
first_observation	Observation_01	1st Obs

Recording and Cleaning Data

Tips for recording data

1. Keep three sheets/tabs in a file:
 - Sheet 1: This is your data
 - Sheet 2: Dictionary – you can define the terms for each of the variables. It is good practice to define each variable as what may seem obvious now, may not in 6,12,18 months etc..
 - Sheet 3: readme – a file for string where you can record further information
 - Metadata goes in a different file.
2. Put all your variables in columns - the thing you're measuring, like 'weight', 'temperature' or 'SBP'. Break things down into their most basic constituents, and keep units in your headers only.
3. Put each observation in its own row. Think very carefully about what constitutes your basic observation. Often it's your patient, but it may not be as intuitive as you think.
 - e.g. for labour ward projects each row could indicate a delivery or a procedure and not necessarily a patient.
4. Don't combine multiple pieces of information in one cell.
5. Leave the raw data raw - don't mess with it! That means no formulas anywhere in your spreadsheet!
6. Dates and Times:
 - Absolutely separate out dates and times
 - To make life very easy you can consider separate columns for: day, month, year.
 - This is definitely more intensive at the beginning but saves you time later on in the analysis.
7. True/False, Yes/No (Boolean or Binary) statements, where there are only 2 possible 'answers' to the variable in question (e.g. 'severe CVS disease' – 'did the patient have known severe CVS disease when admitted?'):
 - Best to record as 1 and 0
 - You can of course just record TRUE and FALSE, but if typing in the answers 1 and 0 are quicker.
8. Export the cleaned data to a text based format like CSV. This ensures that anyone can use the data, and is the format required by most data repositories.

Tips for cleaning data

1. Understand what each row and column is meant to be recording:
 - Is each row a patient, or a patient event?
 - Does each column record a data point that applies to each patient
 - If a column contains information about other columns (and not specifically about the row unit) this is called metadata (data about data).
2. Understand the types of data being recorded in your spreadsheet
 - Assess each column, does it contain:
 - Integers
 - Decimals
 - Categorical: Nominal/Ordinal
 - Boolean
 - Dates
 - Times
 - (Dates and Times)
 - Strings
 - Ensure for each of the data you have identified, that your spreadsheet application has formatted for that column correctly.
 - E.g. numbers can be stored as string. They don't look any different. BUT when imported into R, mathematical calculations aren't possible as R does not see them as numbers.
 - Formatting in the spreadsheet is mostly straightforward with dropdown options. Just beware when formatting dates/times to ensure no major changes.
3. Go through each variable/column:
 - Review headers; rename duplicates, remove spaces
 - Decide how you are going to record your missing values, 'NA' is a good option.
 - Ensure that you aren't recording a single thing more than one way, e.g. 'F' and 'f' for female. Pick one and ensure all females are recorded the same way.
 - Remove units, you can create a different column to hold units if needed, though it is best to just convert all values to a common unit
 - Put '0's where they are meant to be
 - Remove punctuation/formatting
4. Remove "extra headers" – combine these into variable names
5. Remove colour formatting
6. Merge tabs if possible – then all your data can exist on one data frame
7. Remove columns containing calculations.
 - You can either change these to "values only" if you still really need the data
 - OR remove completely keeping only raw data, knowing you are going to be creating calculations in R.

Workshop 3 - Importing Data into R

Introduction

Reproducibility

We strongly believe that the greatest strength you will gain from the work today is reproducibility. Learning coding is a pain, and for a ‘one off’ process there will nearly always be some tempting point-and-click alternative. However, learning to code, means being forced to write down what you did to get from your data to your result. You’ll only have to reproduce something once to appreciate the value of having everything documented. Whether it is an error in your data, a new observation, or your supervisor or collaborator asking you to repeat an analysis with a twist, you will always be revisiting and revising your work. And the initial investment in writing (i.e. coding) your analysis means that these adjustments become simple.

What you will learn

What are files and directories?

Importing spreadsheet data into R

Initial exploration of your data

Tips on using Google sheets with R

Files and Directories

Directories are folders, they contain other folders and files.

Their relevance will become obvious once we need to instruct R, using code, where to find our stored databases. Therefore we will touch on this again later with greater detail.

Importing Your Data into R

There are three main methods for getting data into R:

1. Point and click
2. Using commands
 - Better for reproducibility
 - Someone else would just have to replace the source code to run the code on their own computer
3. Connecting to an online database like google spreadsheet
 - But first you need to save your data in a format that can be understood by R.

Saving your data as a CSV file


We need a ‘common data language’ that all spreadsheet languages can write to, and all statistical and programming languages can read. Arguably, one of the oldest and most ubiquitous is the ‘comma separated values’ (CSV) file. This is easily exportable from Microsoft Excel, Apple Numbers, Open Office, Google Sheets...etc.

It’s a simple format. The top line are the column names, each separated by a comma. The following lines are the observations in those columns, again, separated by a comma.

Its strength is in its simplicity. It only has data, no formulas, no tricks and is very well recognised amongst software packages as it is very easily supported. R has excellent support for CSV files.

```
id,recruit,age,gender,random,ps0h,ps3h,ps12,
1,1 Jan 2014,80,F,drain,0,0,0,2,2,2,0,0,8g,0
2,2 Jan 2014,72,f,drain,1,2,2,1,2,2,1,2,8g,2
3,3 Jan 2014,72,F,drain,0,1,0,0,0,0,0,0,6g,0
4,4 Jan 2014,55,F,drain,0,0,0,0,1,0,0,1,4g,0
5,5 Jan 2014,84,f,skin,0,0,2,3, ,1,1, ,8g,0,2
6,6 Jan 2014,72,F,skin,1,2,2,2, ,1,1, ,8g,0,
7,7 Jan 2014,65,F,skin,0,1,0,0,0,0,0,0,4g,0,
8,8 Jan 2014,75,F,drain,0,0,0,0,0,0,0,0,0,0,
9,9 Jan 2014,64,F,skin,2,2,1,1,2,1,1,3,7g,0,
```

Spreadsheet programs allow you to save your data in a .csv format.

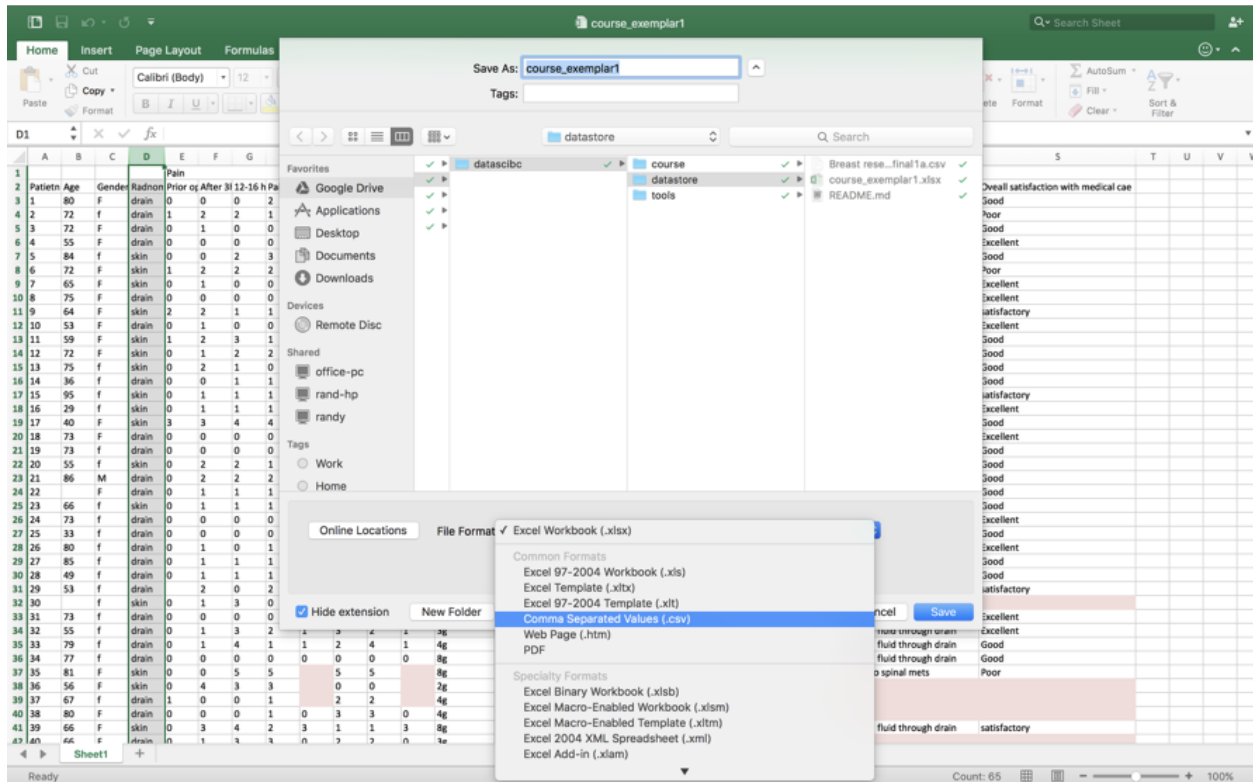


Point and Click

You can either use

1. Import Dataset tab in the Environment pane
- OR 2. Navigate with the Files tab in the Supporting Pane

The point and click method is not reproducible

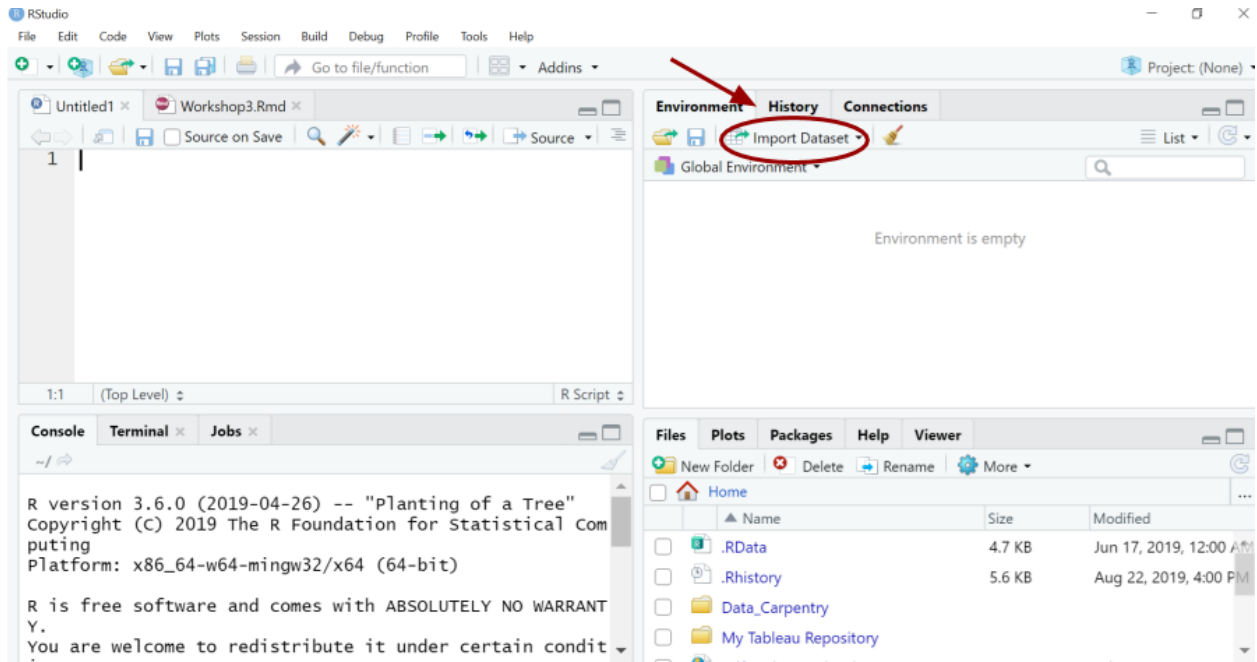

Importing Data with Commands

Finding and setting your working directory


To use commands for importing data you need to instruct R where to find your database file (this is where directories come in).

- R would have chosen a working directory for you. You can check what it is using the `getwd()` command.

```
getwd()
```

You can set your working directory to be the location of your file.

```
setwd()
```

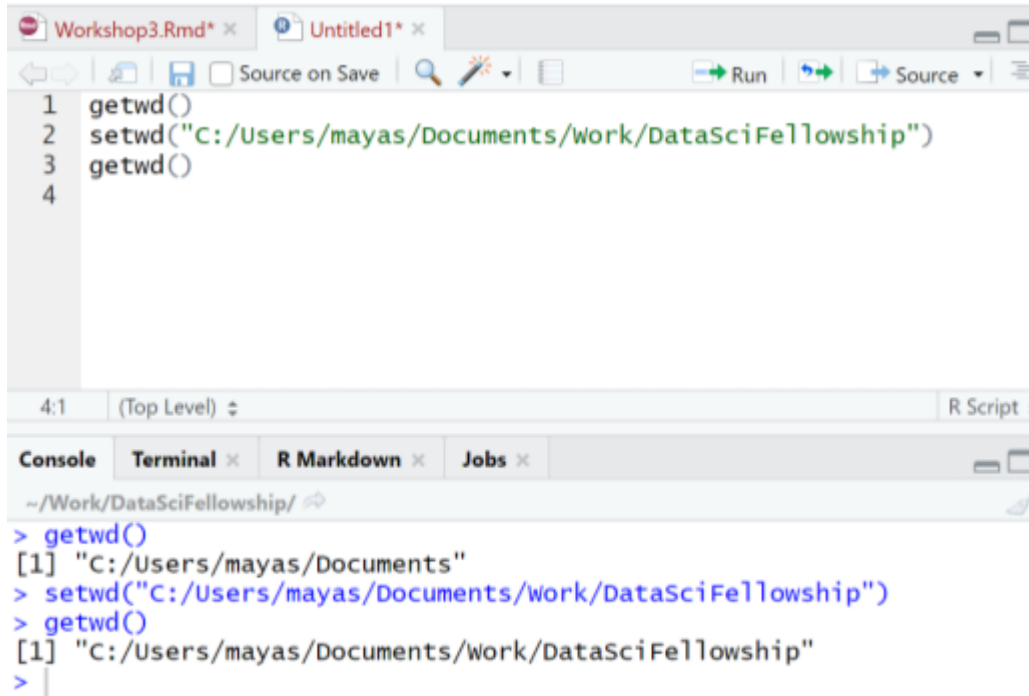


```
1 getwd()
2 setwd("C:/Users/mayas/Documents/Work/DataSciFellowship")
3 getwd()
4

4:1 (Top Level) R Script

Console Terminal R Markdown Jobs
~/Work/DataSciFellowship/
> getwd()
[1] "C:/Users/mayas/Documents"
> setwd("C:/Users/mayas/Documents/Work/DataSciFellowship")
> getwd()
[1] "C:/Users/mayas/Documents/Work/DataSciFellowship"
> |
```

Remember

- You need quotation marks (") around your file path name
- Start with a root directory and then specify branches
- If you have a file in the directory you wish to use, you can find out the file path name by right clicking on the file:
 - Properties in Windows
 - Get Info in Mac

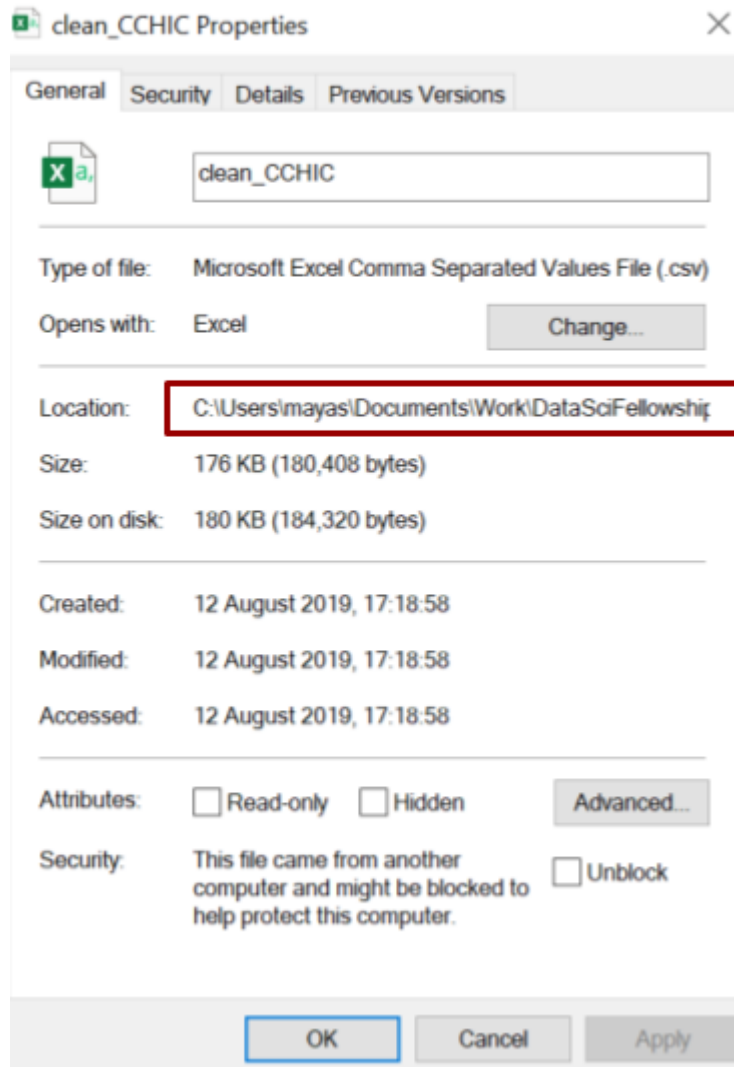

Note - Folders within directories are specified with:

- / in Mac
- \\ in Windows

However, the correct notation in R for both is /

The readr package

- readr is a package containing functions to help R read your external files
- It is automatically installed with tidyverse
- Install and load the package as follows

```
install.packages("tidyverse")  
library(tidyverse)
```

You are now ready to import the file.

You can then tell R to read a CSV file by specifying the full file path name. You can see an example of this below, but the path will be unique to your computer.


```
cchic <- read_csv("clean_CCHIC.csv")
```

Now look for the tibble in your console.

You have now imported the files into your R environment. How can you look at the contents of the dataset within R?

```
# Looking at the file in R  
View(cchic)
```

This gives you a neater view, which is more human legible than the output printed in the console.

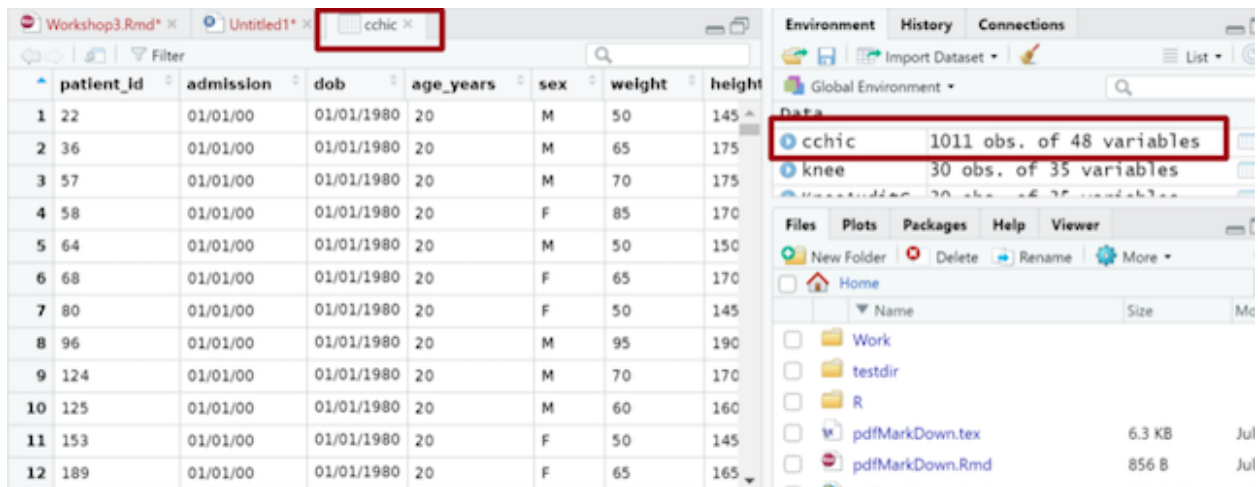

	patient_id	admission	dob	age_years	sex	weight	height
1	22	01/01/00	01/01/1980	20	M	50	145
2	36	01/01/00	01/01/1980	20	M	65	175
3	57	01/01/00	01/01/1980	20	M	70	175
4	58	01/01/00	01/01/1980	20	F	85	170
5	64	01/01/00	01/01/1980	20	M	50	150
6	68	01/01/00	01/01/1980	20	F	65	170
7	80	01/01/00	01/01/1980	20	F	50	145
8	96	01/01/00	01/01/1980	20	M	95	190
9	124	01/01/00	01/01/1980	20	M	70	170
10	125	01/01/00	01/01/1980	20	M	60	160
11	153	01/01/00	01/01/1980	20	F	50	145
12	189	01/01/00	01/01/1980	20	F	65	165

Shortcuts

- There are notations to shorten the code for the file path.
- Use a single dot for a file within the current working directory.

```
read_csv("./clean_CCHIC.csv")
```

- Use a double dot .. for a file within the directory above the current working directory.

Reviewing Your Data in R

Spreadsheets in R are called data frames.

You can get to know your data frame with the following functions:

- `head(cchic)`
- `tail(cchic)`
- `names(cchic)`
- `str(cchic)`

```
head(cchic)
```

```
## # A tibble: 6 x 48
##   patient_id admission dob   age_years sex   weight height lactate_abg
##         <dbl> <chr>   <chr>   <dbl> <chr>  <dbl>  <dbl>      <dbl>
## 1         22 01/01/00 01/0~    20 M     50    145        1.3
## 2         36 01/01/00 01/0~    20 M     65    175         NA
## 3         57 01/01/00 01/0~    20 M     70    175        3.4
## 4         58 01/01/00 01/0~    20 F     85    170        2.5
## 5         64 01/01/00 01/0~    20 M     50    150        0.6
## 6         68 01/01/00 01/0~    20 F     65    170        1.1
## # ... with 40 more variables: ph_abg <dbl>, hco3_abg <dbl>, temp_c <dbl>,
## #   temp_nc <chr>, urea <dbl>, creatinine <dbl>, na <dbl>, na_abg <dbl>,
## #   k <dbl>, k_abg <dbl>, glucose_abg <dbl>, hb_abg <dbl>, hb <dbl>,
## #   wbc <dbl>, neutrophil <dbl>, platelets <dbl>, organism <chr>,
## #   crp <dbl>, fluid_balance <dbl>, glucose_lab <dbl>, sao2_abg <dbl>,
## #   pao2_abg <dbl>, paco2_abg <dbl>, glucose_bed <dbl>, cvs <dbl>,
## #   lactate <dbl>, level_2_days <dbl>, level_3_days <dbl>,
## #   vital_status <chr>, care_level <dbl>, discharge <chr>, gi_days <dbl>,
## #   neuro_days <dbl>, resp_days <dbl>, liver_days <dbl>, derm_days <dbl>,
## #   basic_cvs_days <dbl>, adv_cvs_dats <dbl>, renal_days <dbl>,
## #   basic_resp_days <dbl>
```

- Returns the first 6 rows of the dataset.
- Lists other column headings at the bottom

```
tail(cchic)
```

```
## # A tibble: 6 x 48
##   patient_id admission dob   age_years sex   weight height lactate_abg
##         <dbl> <chr>   <chr>   <dbl> <chr>  <dbl>  <dbl>      <dbl>
## 1         980 01/01/00 01/0~    80 F     80    155        3.2
## 2         981 01/01/00 01/0~    80 M     80    180        2.3
## 3         991 01/01/00 01/0~    80 M     95    175        3.4
## 4         992 01/01/00 01/0~    80 M     75    170        0.9
## 5         995 01/01/00 01/0~    80 F     55    145        1.2
## 6        1008 01/01/00 01/0~    80 F     95    165         NA
## # ... with 40 more variables: ph_abg <dbl>, hco3_abg <dbl>, temp_c <dbl>,
## #   temp_nc <chr>, urea <dbl>, creatinine <dbl>, na <dbl>, na_abg <dbl>,
## #   k <dbl>, k_abg <dbl>, glucose_abg <dbl>, hb_abg <dbl>, hb <dbl>,
## #   wbc <dbl>, neutrophil <dbl>, platelets <dbl>, organism <chr>,
## #   crp <dbl>, fluid_balance <dbl>, glucose_lab <dbl>, sao2_abg <dbl>,
## #   pao2_abg <dbl>, paco2_abg <dbl>, glucose_bed <dbl>, cvs <dbl>,
## #   lactate <dbl>, level_2_days <dbl>, level_3_days <dbl>,
```

```
## # vital_status <chr>, care_level <dbl>, discharge <chr>, gi_days <dbl>,
## # neuro_days <dbl>, resp_days <dbl>, liver_days <dbl>, derm_days <dbl>,
## # basic_cvs_days <dbl>, adv_cvs_dats <dbl>, renal_days <dbl>,
## # basic_resp_days <dbl>
```

- Like `head()` but gives you the last 6 rows as a tibble
- Useful to look for missing data at the end of the dataset

```
names(cchic)
```

```
## [1] "patient_id"      "admission"       "dob"
## [4] "age_years"       "sex"             "weight"
## [7] "height"         "lactate_abg"     "ph_abg"
## [10] "hco3_abg"       "temp_c"          "temp_nc"
## [13] "urea"           "creatinine"      "na"
## [16] "na_abg"         "k"               "k_abg"
## [19] "glucose_abg"    "hb_abg"          "hb"
## [22] "wbc"           "neutrophil"      "platelets"
## [25] "organism"       "crp"             "fluid_balance"
## [28] "glucose_lab"    "sao2_abg"        "pao2_abg"
## [31] "paco2_abg"     "glucose_bed"     "cvs"
## [34] "lactate"        "level_2_days"    "level_3_days"
## [37] "vital_status"   "care_level"      "discharge"
## [40] "gi_days"        "neuro_days"      "resp_days"
## [43] "liver_days"     "derm_days"       "basic_cvs_days"
## [46] "adv_cvs_dats"   "renal_days"      "basic_resp_days"
```

- Lists the names of all the variables
- Useful if you want to check for the spelling of any variables

```
str(cchic)
```

```
## Classes 'spec_tbl_df', 'tbl_df', 'tbl' and 'data.frame': 1011 obs. of  48 variables:
## $ patient_id      : num  22 36 57 58 64 68 80 96 124 125 ...
## $ admission       : chr   "01/01/00" "01/01/00" "01/01/00" "01/01/00" ...
## $ dob             : chr   "01/01/1980" "01/01/1980" "01/01/1980" "01/01/1980" ...
## $ age_years       : num   20 20 20 20 20 20 20 20 20 20 ...
## $ sex             : chr    "M" "M" "M" "F" ...
## $ weight          : num   50 65 70 85 50 65 50 95 70 60 ...
## $ height          : num  145 175 175 170 150 170 145 190 170 160 ...
## $ lactate_abg     : num   1.3 NA 3.4 2.5 0.6 1.1 NA NA NA NA ...
## $ ph_abg          : num   7.31 NA 7.52 7.46 7.49 7.62 7.42 7.31 7.43 7.28 ...
## $ hco3_abg        : num   22 NA 26 24 24 28.3 23 22 21 21 ...
## $ temp_c          : num  36.1 37.9 35 37.2 37 35.9 35.3 35.8 36.3 34.3 ...
## $ temp_nc         : chr    NA NA NA NA ...
## $ urea            : num   3.2 14 6.1 3.2 6 1.1 2 4.8 NA 5.1 ...
## $ creatinine      : num   23 216 85 57 50 74 30 104 NA 81 ...
## $ na              : num  141 137 143 138 142 144 137 137 NA 137 ...
## $ na_abg          : num  138 NA 141 138 140 140 136 136 135 139 ...
## $ k               : num   4.2 4.4 3.9 3.7 3.9 3.2 3.4 4.6 NA 5.3 ...
## $ k_abg           : num   4.3 NA 4 3.6 3.8 2.7 3.3 4.5 3.7 4.2 ...
## $ glucose_abg     : num   9.5 NA 6.3 4.9 5.5 NA 5.3 7.8 4.9 10.7 ...
## $ hb_abg          : num   NA NA NA NA NA 65 NA NA NA NA ...
## $ hb             : num  130 166 102 101 123 66 90 93 NA 117 ...
## $ wbc             : num  23.6 8.6 6.6 14 18.4 2.8 8.2 11.1 NA 14.2 ...
## $ neutrophil      : num   NA NA NA NA NA 1.8 NA NA NA NA ...
## $ platelets       : num  314 338 109 150 185 164 313 95 NA 272 ...
```

```

## $ organism      : chr  NA NA NA NA ...
## $ crp           : num  1 12 21 NA 55 NA 3 195 NA 23 ...
## $ fluid_balance : num  NA NA NA NA NA NA NA NA NA NA ...
## $ glucose_lab   : num  NA NA NA NA NA NA NA NA NA NA ...
## $ sao2_abg      : num  99 NA 100 95 99 88 100 100 99 100 ...
## $ pao2_abg      : num  34.8 NA 38 8.6 14.7 40 35.4 17.4 14 60.5 ...
## $ paco2_abg     : num  6.13 NA 3.81 4.34 3.8 3.68 4.66 6.22 3.98 6.59 ...
## $ glucose_bed   : num  NA NA NA NA NA 4.8 NA NA NA NA ...
## $ cvs           : num  NA NA NA NA NA 78 NA NA NA NA ...
## $ lactate       : num  NA NA NA NA NA NA NA NA NA NA ...
## $ level_2_days  : num  0 0 0 0 0 3 0 0 0 0 ...
## $ level_3_days  : num  0 0 0 0 0 0 0 0 0 0 ...
## $ vital_status  : chr   "A" "A" "A" "A" ...
## $ care_level    : num  1 1 1 1 1 1 1 1 1 1 ...
## $ discharge     : chr   "02/01/00" "02/01/00" "03/01/00" "02/01/00" ...
## $ gi_days       : num  NA NA NA NA NA 3 NA NA NA NA ...
## $ neuro_days    : num  NA NA NA NA NA 0 NA NA NA NA ...
## $ resp_days     : num  NA NA NA NA NA 0 NA NA NA NA ...
## $ liver_days    : num  NA NA NA NA NA 0 NA NA NA NA ...
## $ derm_days     : num  NA NA NA NA NA 0 NA NA NA NA ...
## $ basic_cvs_days : num  NA NA NA NA NA 3 NA NA NA NA ...
## $ adv_cvs_dats  : num  NA NA NA NA NA 0 NA NA NA NA ...
## $ renal_days    : num  NA NA NA NA NA 0 NA NA NA NA ...
## $ basic_resp_days : num  NA NA NA NA NA 1 NA NA NA NA ...
## - attr(*, "spec")=
## .. cols(
## ..   patient_id = col_double(),
## ..   admission = col_character(),
## ..   dob = col_character(),
## ..   age_years = col_double(),
## ..   sex = col_character(),
## ..   weight = col_double(),
## ..   height = col_double(),
## ..   lactate_abg = col_double(),
## ..   ph_abg = col_double(),
## ..   hco3_abg = col_double(),
## ..   temp_c = col_double(),
## ..   temp_nc = col_character(),
## ..   urea = col_double(),
## ..   creatinine = col_double(),
## ..   na = col_double(),
## ..   na_abg = col_double(),
## ..   k = col_double(),
## ..   k_abg = col_double(),
## ..   glucose_abg = col_double(),
## ..   hb_abg = col_double(),
## ..   hb = col_double(),
## ..   wbc = col_double(),
## ..   neutrophil = col_double(),
## ..   platelets = col_double(),
## ..   organism = col_character(),
## ..   crp = col_double(),
## ..   fluid_balance = col_double(),
## ..   glucose_lab = col_double(),

```

```
## .. sao2_abg = col_double(),
## .. pao2_abg = col_double(),
## .. paco2_abg = col_double(),
## .. glucose_bed = col_double(),
## .. cvs = col_double(),
## .. lactate = col_double(),
## .. level_2_days = col_double(),
## .. level_3_days = col_double(),
## .. vital_status = col_character(),
## .. care_level = col_double(),
## .. discharge = col_character(),
## .. gi_days = col_double(),
## .. neuro_days = col_double(),
## .. resp_days = col_double(),
## .. liver_days = col_double(),
## .. derm_days = col_double(),
## .. basic_cvs_days = col_double(),
## .. adv_cvs_dats = col_double(),
## .. renal_days = col_double(),
## .. basic_resp_days = col_double()
## .. )
```

- Reports the format of each variable in R.
- You can therefore check vectors before running functions. This would prevent you, for example, from trying to run a mean on a character vector

Co-ordinates

You can also use code in the form of coordinates to help you look at specific items within your **data frame**.

- For example:

```
cchic[25, 5]
```

```
## # A tibble: 1 x 1
##   sex
##   <chr>
## 1 F
```

This is the value of the 5th variable on row 25.

\$ to review column

You can extract a specific variable using \$.

- Enter the `data_frame_name$variable_name`
- For example

```
cchic$weight
```

```
##   [1]  50  65  70  85  50  65  50  95  70  60  50  65  55  90 100  55  50
##  [18]  50  60  50  80  65  50  50  60  75  60  50  60  55  75  60  95  60
##  [35]  75  75  50  70  65  60  55  65  70  80  70  60  55  95  65  80  60
##  [52]  70  90  65  65  70  70 115  50  95  80 135  70 110  75 105  65  65
##  [69]  75  80  55  75  65 140  65  90  75  90  75  75  60  75  60  55  85
##  [86]  60  70  55  90  50  75  70  90  95 145  75  60  70  80 115  65  60
## [103]  50  65 100  70  50  80  75  65  70  75  85 125 115  65  65  55  75
## [120]  85  90  60  60  55  65  55  90  80 135  65  80  75  70 130  80  75
```

```

## [137] 150 80 150 115 65 60 80 60 60 60 80 95 125 60 100 55 60
## [154] 50 75 50 65 70 150 75 70 60 80 65 50 90 55 55 95 80
## [171] 95 55 90 80 110 90 65 55 85 65 100 55 70 75 60 135 70
## [188] 60 65 60 75 65 85 115 100 70 85 70 65 125 80 75 70 65
## [205] 70 120 80 85 150 70 120 60 55 55 75 70 75 95 65 70 105
## [222] 75 130 150 100 50 75 65 85 105 80 95 65 130 55 90 90 50
## [239] 85 100 90 85 75 115 50 50 70 55 150 75 90 75 90 95 70
## [256] 110 65 80 100 80 80 65 75 80 60 90 75 95 75 80 75 90
## [273] 95 80 70 85 70 105 80 70 55 70 75 80 80 95 75 90 150
## [290] 90 65 70 60 60 85 135 125 85 105 85 90 75 85 70 95 60
## [307] 80 75 70 70 115 85 95 80 75 60 65 70 100 70 85 65 85
## [324] 110 120 75 125 75 75 50 70 100 60 60 95 95 75 95 125 50
## [341] 60 65 70 65 105 70 90 70 90 60 70 65 85 60 60 50 75
## [358] 70 70 80 70 50 75 60 50 65 150 70 85 70 55 65 120 75
## [375] 65 60 105 70 55 70 95 65 70 70 100 60 75 65 70 75 50
## [392] 115 50 85 90 85 70 130 50 130 50 65 95 125 65 60 65 65
## [409] 60 75 80 100 90 70 65 95 50 110 65 145 75 100 115 95 50
## [426] 65 65 95 60 70 80 70 60 55 90 70 90 90 80 90 60 55
## [443] 110 65 65 90 50 75 65 55 90 60 70 100 50 55 70 75 50
## [460] 115 60 60 75 100 60 100 80 55 150 110 90 50 80 50 110 60
## [477] 65 65 80 115 80 60 70 105 105 65 70 75 80 75 85 140 70
## [494] 120 85 100 150 80 95 95 65 100 60 70 65 55 65 95 75 70
## [511] 80 85 100 75 65 70 60 70 50 110 75 110 120 95 65 90 55
## [528] 50 100 70 75 90 55 70 80 80 85 95 80 70 65 100 90 85
## [545] 120 90 100 55 80 70 65 70 90 50 130 75 60 85 90 65 70
## [562] 65 70 60 65 120 120 75 90 50 65 65 65 50 80 85 85 90
## [579] 70 75 75 60 70 80 95 110 90 85 65 70 65 75 60 80 55
## [596] 85 110 70 75 50 75 115 80 65 85 60 75 95 70 80 100 50
## [613] 80 65 125 65 55 60 70 100 85 55 60 60 75 100 75 90 50
## [630] 95 100 80 60 65 60 85 65 65 95 85 70 80 55 80 50 50
## [647] 100 75 100 90 85 95 55 50 80 105 70 75 115 60 95 125 75
## [664] 140 75 80 75 70 65 50 75 75 75 65 100 55 50 75 65 90
## [681] 60 90 95 85 60 80 105 75 70 70 100 75 90 95 75 65 80
## [698] 50 85 95 95 80 85 80 80 70 105 80 50 70 80 70 80 60
## [715] 60 95 90 70 75 90 65 100 75 50 50 70 85 95 110 50 75
## [732] 70 90 50 70 65 60 60 95 150 75 70 65 70 110 90 85 90
## [749] 65 70 115 50 50 85 80 75 65 65 120 90 105 70 80 60 70
## [766] 95 70 75 70 60 60 50 100 60 85 80 70 65 75 65 80 90
## [783] 90 85 75 80 55 70 70 50 65 70 80 90 70 90 55 100 50
## [800] 70 60 80 70 90 50 70 70 80 85 70 80 70 95 55 75 75
## [817] 150 140 70 50 70 55 50 60 50 80 55 75 55 70 60 65 65
## [834] 65 80 75 105 50 90 80 90 75 70 70 85 80 60 65 65 100
## [851] 75 50 65 70 90 75 60 80 50 80 50 70 105 80 90 95 100
## [868] 80 50 60 65 95 60 75 80 50 50 50 50 65 70 50 65 70
## [885] 85 65 65 70 90 105 70 90 65 55 75 70 90 50 100 75 80
## [902] 95 80 60 75 70 70 80 65 130 100 90 80 100 85 65 95 65
## [919] 55 120 80 70 60 95 65 75 70 85 95 60 80 55 85 65 50
## [936] 70 65 65 70 75 65 80 95 65 105 75 50 80 75 60 55 100
## [953] 90 55 80 90 70 50 50 50 85 85 60 60 60 75 85 100 60
## [970] 50 90 65 60 115 70 80 85 75 80 105 60 55 60 75 85 50
## [987] 75 50 85 65 90 75 95 75 70 60 85 65 50 95 90 65 70
## [1004] 70 65 80 80 95 75 55 95

```

This lists all of the data in the weight variable.

Description Functions

Some packages contain functions that help describe the whole data frame. These normally describe the type of each variable, and may include summary statistics such as the mean, or the range of data values.

Examples include: - `Desc()` from `DescTools` package. - This function also outputs plots for each variable. - `Describe()` from `Hmisc` package.

To use these you have to install the appropriate packages

Exercises

1. What are the variable formats in `cchic`?
2. Display the `discharge` vector in `cchic`.
3. How many men and women are in the database?
4. How many survived and how many died?
5. What does the function `ls()` do?
 - Use it to see how many vectors contain information about “temp”

Solutions

1. What types of variables do you have in the `cchic` data frame?

```
str(cchic)
```

2. Display the `discharge` vector from `cchic`

```
cchic$discharge
```

3. How many men and women are in the database?

```
table(cchic$sex)
```

```
##  
##   F   M  
## 449 562
```

4. How many survived and how many died?

```
table(cchic$vital_status)
```

```
##  
##   A   D  
## 908 103
```

5. What does the function `ls()` do?

```
ls(cchic, pattern = "temp")
```

```
## [1] "temp_c" "temp_nc"
```

It lists all variable names with the word `temp` in them.

Addendum: Importing from Google Sheets

Googlesheets are spreadsheets which allow for collaboration and live-updating.

It is possible to load and use the data in a googlesheet in R. For this you need the `googlesheets` package.

```
install.packages("googlesheets")  
library(googlesheets)
```

Then you can have a look at the files in your google sheets account with the function `gs_ls()`. You will see a tibble of the list of files, here is an example of what that can look like:

```
# A tibble: 3 × 10  
  sheet_title author perm version updated  
  <chr>      <chr> <chr> <chr>    <dtm>  
1      rct-clean datascibc rw new 2016-11-15 15:16:00  
2      rct-dirty datascibc rw new 2016-11-15 13:54:25  
3 rct-dirty-20161203 datascibc rw new 2016-11-15 13:00:33  
# ... with 5 more variables: sheet_key <chr>, ws_feed <chr>,  
# alternate <chr>, self <chr>, alt_key <chr>
```

- The first time you run this you will be asked to authenticate.
- A new browser will open and you will be asked to sign-in to your google account
- A code will then be displayed, which you will have to input into your console.
- Behind the scenes, R now saves a hidden file into your working directory.
- The next time you run your script, as long as you haven't moved your code to a new directory, it won't need to ask for authentication again.

Then, as before, use `read` commands in R to import your data as a tibble.

```
file_name <- gs_title("googlesheet_title")  
data_frame_name <- gs_read("file_name")
```

Workshop 4 - Data Wrangling.

Introduction


What is Data Wrangling?

The term data wrangling describes the process of transforming your raw data into other formats, which can then be used for analysis. Analysis can include summary counts, plots and statistical tests.

Data Wrangling includes:

- Cleaning Data
- Unifying complex and messy data
- Converting one form of raw data into other variables

Data wrangling is a step in the data pipeline. The term data pipeline refers to the processes your raw data is subjected to in order for you to reach your end output with your data (this could be a presentation, a journal article, a report etc).

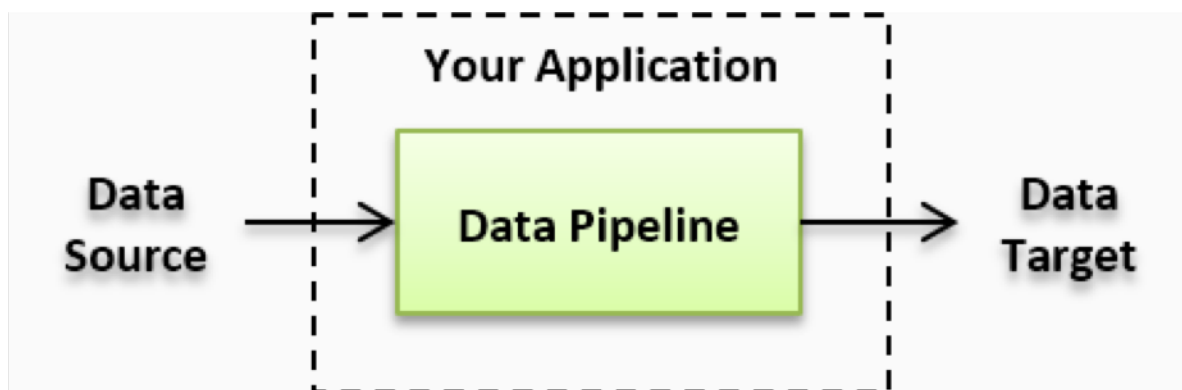

Data wrangling with dplyr

You do not need the dplyr package to wrangle your data but it uses intuitive grammar that simplifies data wrangling/manipulation.

```
# You only need to do this once  
install.packages("dplyr")
```

```
# You need to do this each time you open R  
library(dplyr)
```

The main concept in dplyr, is of piping your data with the code `%>%`. 'Piping' here refers to taking the object to left of the code and applying more commands to it. This is not the same as the term data pipeline.

With the pipe function, `%>%`, you can essentially do the following:

```
data_frame_name %>% [select certain patients/rows] %>% [function]
```

The keyboard shortcuts for the pipe are: - `Cmd + Shift + M` (Mac) - `Ctrl + Shift + M` (Windows)


Common dplyr functions

- `filter()`
- `select()`
- `group_by()`
- `summarise()`

Filter

This functions allows you to select rows based on the criteria you specify.

Subset Data Frame Rows in R



```
cchic %>%  
  filter(age_years >= 65)
```

```
## # A tibble: 493 x 48  
##   patient_id admission dob   age_years sex   weight height lactate_abg  
##         <dbl> <chr>   <chr>     <dbl> <chr>   <dbl>  <dbl>    <dbl>  
## 1           3 01/01/00 01/0~      70 F      50    145      1.4  
## 2          13 01/01/00 01/0~      70 F     110    160      0.7  
## 3          20 01/01/00 01/0~      70 F      75    155      1.2  
## 4          26 01/01/00 01/0~      70 M     110    175      1.2  
## 5          27 01/01/00 01/0~      70 M     120    170      5.9  
## 6          28 01/01/00 01/0~      70 F      95    155        1  
## 7          29 01/01/00 01/0~      70 F      65    165      1.6  
## 8          30 01/01/00 01/0~      70 M      90    190      1.2  
## 9          32 01/01/00 01/0~      70 F      55    155        3  
## 10         35 01/01/00 01/0~      70 M      50    175      NA  
## # ... with 483 more rows, and 40 more variables: ph_abg <dbl>,  
## #   hco3_abg <dbl>, temp_c <dbl>, temp_nc <chr>, urea <dbl>,  
## #   creatinine <dbl>, na <dbl>, na_abg <dbl>, k <dbl>, k_abg <dbl>,  
## #   glucose_abg <dbl>, hb_abg <dbl>, hb <dbl>, wbc <dbl>,  
## #   neutrophil <dbl>, platelets <dbl>, organism <chr>, crp <dbl>,  
## #   fluid_balance <dbl>, glucose_lab <dbl>, sao2_abg <dbl>,  
## #   pao2_abg <dbl>, paco2_abg <dbl>, glucose_bed <dbl>, cvs <dbl>,  
## #   lactate <dbl>, level_2_days <dbl>, level_3_days <dbl>,  
## #   vital_status <chr>, care_level <dbl>, discharge <chr>, gi_days <dbl>,  
## #   neuro_days <dbl>, resp_days <dbl>, liver_days <dbl>, derm_days <dbl>,  
## #   basic_cvs_days <dbl>, adv_cvs_dats <dbl>, renal_days <dbl>,  
## #   basic_resp_days <dbl>
```

You can then create a whole other data frame to work with a subset of data:

```
elder_cchic <- cchic %>%  
  filter(age_years >= 65)
```

Select

This allows you to select only certain columns, that you can also use to create a separate data frame if you wanted.

Select Data Frame Columns in R



```
cchic %>%  
  select(sex)
```

```
## # A tibble: 1,011 x 1  
##   sex  
##   <chr>  
## 1 M  
## 2 M  
## 3 M  
## 4 F  
## 5 M  
## 6 F  
## 7 F  
## 8 M  
## 9 M  
## 10 M  
## # ... with 1,001 more rows
```

This gives you just the variable named `sex` for all patients.

Filter and select together

You can also use `filter()` and `select()` together but be careful about the order as you will not be able to `filter()` according to a variable if it has been inadvertently removed by a `select()` command.

```
cchic %>%  
  filter(age_years >= 65) %>%  
  select(sex)
```

```
## # A tibble: 493 x 1  
##   sex  
##   <chr>  
## 1 F  
## 2 F  
## 3 F  
## 4 M  
## 5 M  
## 6 F  
## 7 F  
## 8 M  
## 9 F  
## 10 M  
## # ... with 483 more rows
```

The group by and summarise functions.

`group_by()` breaks down a dataset into specified groups of rows. When you then apply operations on the resulting object they'll be automatically applied "by group". Most importantly, all this is achieved by using the same exact syntax you'd use with an ungrouped object.

You can use the `summarise()` function to apply a summary statistic to a vector.

```
cchic %>%
  group_by(sex) %>%
  summarise(mean_urea = mean(urea, na.rm = TRUE))

## # A tibble: 2 x 2
##   sex    mean_urea
##   <chr>      <dbl>
## 1 F          6.95
## 2 M         10.1

# Some summary statistic functions do not work with missing values, so you need to add the
# `is.na` argument to remove these.
```

Using the pipe with other functions

Piped data can be piped on to be used in almost any function in R, for example:

```
cchic %>%
  filter(is.na(age_years) == FALSE, age_years >= 65) %>%
  select(sex) %>%
  head()

## # A tibble: 6 x 1
##   sex
##   <chr>
## 1 F
## 2 F
## 3 F
## 4 M
## 5 M
## 6 F
```

Gives you the first 6 rows of the dataset of gender for patients older than 65.

```
cchic %>%
  filter(age_years >= 65) %>%
  select(sex) %>%
  is.na() %>%
  sum()
```

```
## [1] 0
```

Counts missing values in gender for those above 65. Gender does not appear to have missing values for these patients.

Favourite Data Tidying ‘Recipes’

1. Rename a variable
2. Creating new columns
3. Extract numbers
4. Manipulate strings
5. Manipulate dates
6. Columns to rows and back again
7. Deleting variables.

1. Renaming a variable

You can do this with `rename()`.

The variable called `na` is very confusing, because missing values are represented as `NA` in R.

```
cchic <- cchic %>%  
  rename(sodium = na)
```

2. Creating new columns

You can do this with the `mutate()` function.

```
cchic <- cchic %>%  
  mutate(bmi = (weight / (height / 100)^2))
```

You have created the new variable `bmi`. You can also use the `mutate()` function to change the vector type of a column.

```
cchic <- cchic %>%  
  mutate(gender = as.factor(sex))
```

3. Extracting numbers

You will need the `readr` package for this. The `parse_number()` function is useful when two different vector types have been recorded in the same column e.g. `37.2c` or `270mls`.

(Parsing a value is essentially analysing a string or text into its components)

```
install.packages("readr")
```

```
library(readr)
```

Let's look at the non-central temperature variable.

```
str(cchic$temp_nc)
```

```
## chr [1:1011] NA NA NA NA NA NA NA NA NA NA NA NA "36.7c" NA NA NA ...
```

Notice that the variable is structured as a character, because the unit has been recorded with it. We should remove the unit.

```
cchic$temp_nc <-  
  parse_number(cchic$temp_nc)  
  
head(cchic$temp_nc)
```

```
## [1] NA NA NA NA NA NA
```

4. Manipulate strings

You will need the `stringr` library.

```
install.packages("stringr")
```

```
library(stringr)
```

```
test_gender <- c("f", "F", "M", "f")
```

Notice that `female` is coded in 2 different ways

We can change all of the letters to uppercase.

```
test_gender <- str_to_upper(test_gender)
test_gender
```

```
## [1] "F" "F" "M" "F"
```

You can also use the `str_to_lower()` function to change the letters to lowercase.

5. Manipulate dates

R treats dates as characters unless you tell it not to. You can use the `lubridate` package to manipulate dates.

You can extract each of the components from a standard date vector (days, months, years). You will need the `lubridate` package.

```
install.packages("lubridate")
```

```
library(lubridate)
```

Converting characters to dates.

```
test_dates <- c("02-01-12", "03-04-15", "15-06-02")
# Since the dates are in a date-month-year format, we use the dmy function.
test_dates <- dmy(test_dates)
test_dates
```

```
## [1] "2012-01-02" "2015-04-03" "2002-06-15"
```

Extracting components of dates.

If the dates are in date format, we can extract components of dates.

- Extracting years:

```
cchic_year_born <- year(dmy(cchic$dob))
head(cchic_year_born)
```

```
## [1] 1980 1980 1980 1980 1980 1980
```

- Extracting days.

```
cchic_discharge_days <- day(dmy(cchic$discharge))
head(cchic_discharge_days)
```

```
## [1] 2 2 3 2 2 3
```


Date intervals

There may be times when you are interested in computing the difference between two dates e.g. length of stay (discharge date – admission date). There are two main ways to do this with lubridate, both of which will compute a time difference in days.

- Quicker way - Calculate difference, telling R that both components are dates.

```
cchic <-  
  cchic %>%  
    mutate(los = (dmy(discharge) - dmy(admission)))  
# You have now added a new variable to your data frame and can recall it.  
head(cchic$los)
```

```
## Time differences in days
```

```
## [1] 1 1 2 1 1 2
```

- Alternatively - Converting both vectors to date form, then calculating difference.

```
cchic$discharge <- dmy(cchic$discharge)  
cchic$admission <- dmy(cchic$admission)  
cchic_los_test <- cchic$discharge - cchic$admission  
# This time, we just saved the vector in a separate object - not the data frame.
```

6. Columns to rows.

You may want to do this to your data if you are interested in creating time series data from multiple columns into a single row.

The conversion looks like this.

patient_id	temp_c	temp_nc
1	37.5	37.2
2	36.5	NA
3	38.2	36.7
4	36.2	36.7
5	37.3	NA
6	36.5	37
7	NA	35.6
8	37.7	NA



patient_id	temperature	temp_point
1	37.5	c
1	37.2	nc
2	36.5	c
2	NA	nc
3	38.2	c
3	36.7	nc
4	36.2	c
4	36.7	nc

This is how you convert the data.


```
library(tidyr)  
  
cchic_long <- cchic %>%  
  gather(  
    "temp_point", "temperature",  
    temp_c:temp_nc  
  )
```

Look at the what the new variables contain.

A major benefit of creating time series data is that it is easier to plot the data and visualise any trends. Let's do a quick example - we will learn how to plot graphs later on.

```
library(ggplot2)
cchic_long %>%
  ggplot(aes(
    x = temp_point, y =
      as.numeric(temperature)
  )) +
  geom_boxplot()
```

Warning: Removed 860 rows containing non-finite values (stat_boxplot).

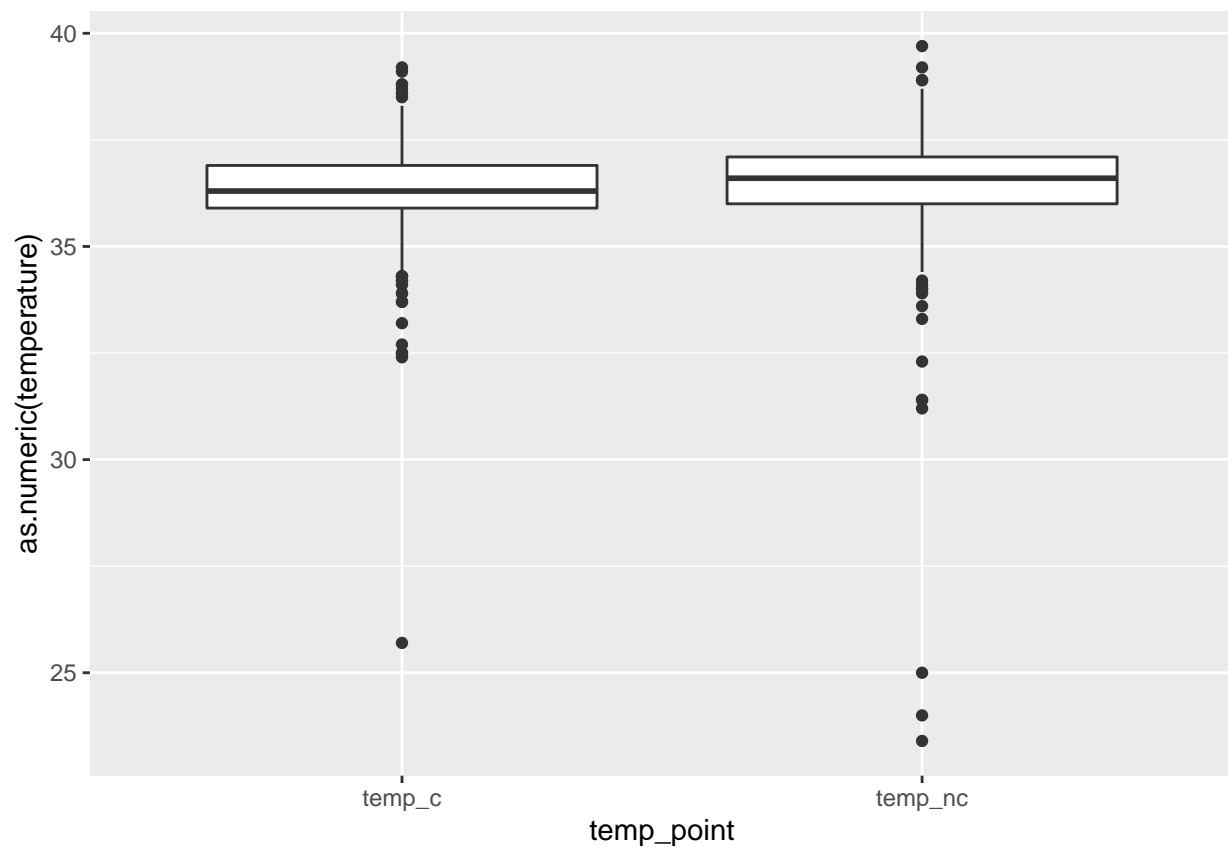

7. Deleting variables.

You can use the `select()` function here too, but with a `-` before the column name you want to remove.

The `lactate` variable is mostly empty. Let's remove it.

```
cchic %>%
  select(-lactate)

## # A tibble: 1,011 x 50
##   patient_id admission dob age_years sex weight height lactate_abg
##   <dbl> <date> <chr> <dbl> <chr> <dbl> <dbl> <dbl>
## 1      22 2000-01-01 01/0~      20 M      50    145      1.3
## 2      36 2000-01-01 01/0~      20 M      65    175      NA
## 3      57 2000-01-01 01/0~      20 M      70    175      3.4
## 4      58 2000-01-01 01/0~      20 F      85    170      2.5
## 5      64 2000-01-01 01/0~      20 M      50    150      0.6
## 6      68 2000-01-01 01/0~      20 F      65    170      1.1
## 7      80 2000-01-01 01/0~      20 F      50    145      NA
## 8      96 2000-01-01 01/0~      20 M      95    190      NA
## 9     124 2000-01-01 01/0~      20 M      70    170      NA
## 10    125 2000-01-01 01/0~      20 M      60    160      NA
## # ... with 1,001 more rows, and 42 more variables: ph_abg <dbl>,
## #   hco3_abg <dbl>, temp_c <dbl>, temp_nc <dbl>, urea <dbl>,
## #   creatinine <dbl>, sodium <dbl>, na_abg <dbl>, k <dbl>, k_abg <dbl>,
## #   glucose_abg <dbl>, hb_abg <dbl>, hb <dbl>, wbc <dbl>,
## #   neutrophil <dbl>, platelets <dbl>, organism <chr>, crp <dbl>,
## #   fluid_balance <dbl>, glucose_lab <dbl>, sao2_abg <dbl>,
## #   pao2_abg <dbl>, paco2_abg <dbl>, glucose_bed <dbl>, cvs <dbl>,
## #   level_2_days <dbl>, level_3_days <dbl>, vital_status <chr>,
## #   care_level <dbl>, discharge <date>, gi_days <dbl>, neuro_days <dbl>,
## #   resp_days <dbl>, liver_days <dbl>, derm_days <dbl>,
## #   basic_cvs_days <dbl>, adv_cvs_dats <dbl>, renal_days <dbl>,
## #   basic_resp_days <dbl>, bmi <dbl>, gender <fct>, los <drtn>
```

Remember to tell R that you want to keep these changes to the dataframe.

```
cchic <- cchic %>%
  select(-lactate)
```

Exercises

1. How many patients weigh more than 70kg?
 - Hint- look at the `n()` function.
2. Outcome of patients who were 60 years or older?
 - What is the mean length of stay of patients who are 60 years or older?
 - How many of these patients were discharged alive?
 - Hint - the variable `vital_status` indicates if the patient was alive or dead on discharge.

Solutions

1. How many patients weigh more than 70kg?

```
cchic %>%  
  filter(weight > 70) %>%  
  summarise(number = n())
```

2. Outcome of patients who were 60 years or older.

```
# Mean length of stay  
cchic %>%  
  filter(age_years >= 60) %>%  
  summarise(los = mean(los))
```

```
## # A tibble: 1 x 1  
##   los  
##   <drtn>  
## 1 NA days
```

```
# Number of people alive at discharge  
cchic %>%  
  filter(age_years >= 60) %>%  
  select(vital_status) %>%  
  table()
```

```
## .  
##   A    D  
## 603  80
```

Workshop 5 - Visualising data

Introduction

According to Edward Tufte, “excellence in statistical graphics consists of complex ideas communication with clarity, precision and efficiency”.

Plotting data allows you to:

1. Explore the data
2. Tell a story (convey a message)
3. Use colour

1. Exploring data

These graphs give you a good idea of how the data is distributed.

- Bar charts for discrete variables
- Histograms for continuous variables
 - Be mindful of the number of bins you choose; too many and you lose the ‘signal’ and too few and you can’t appreciate the ‘signal’.
 - Can also be used to approximate distributions
- Scatterplots can reveal outliers that may not be obvious from looking at the dataframe.


2. Storytelling

- Pie charts are not useful if you are demonstrating more than 2 categories.
- 3D generally has no advantage over 2D

3. Using colour

- Try and use colour mindfully (not just so things look pretty!)


Colour can be used to clarify/strengthen your message:

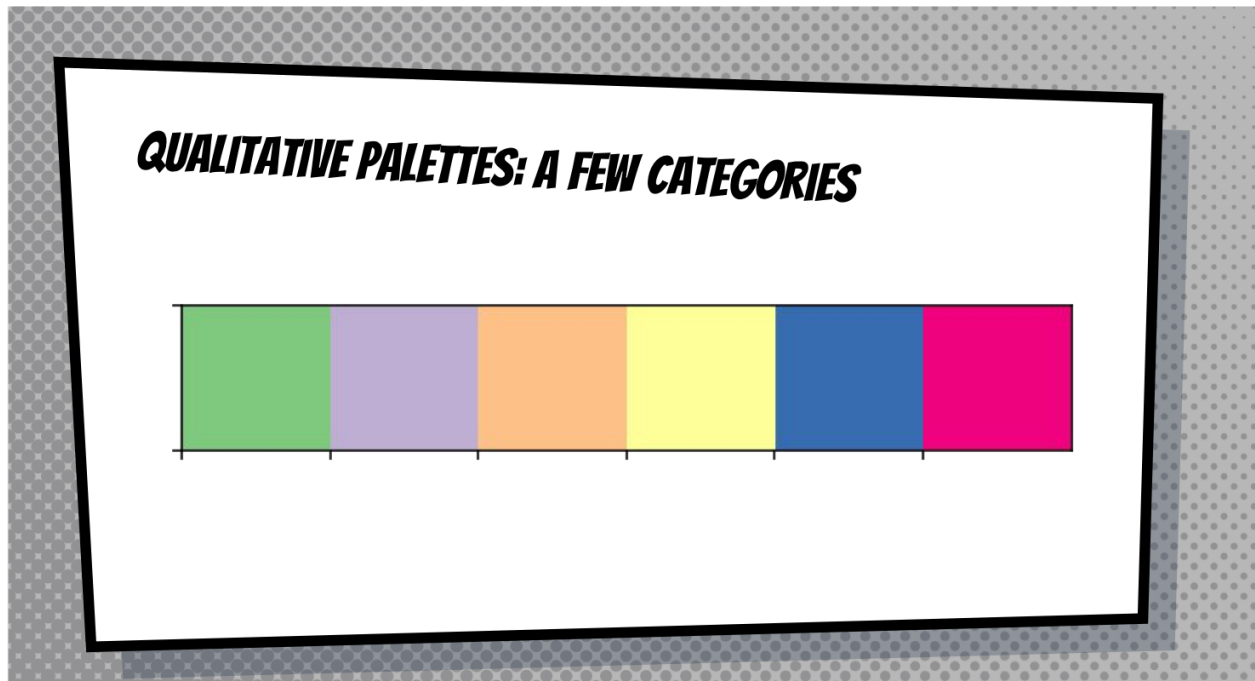

SEQUENTIAL PAlettes: EMPHASISE HIGH VALUES



DIVERGING PAlettes: EMPHASISE LOWS AND HIGHS



Also remember that gender and colour blindness can affect perceived intensity of colour.

- Men:
 - Yellows/greens look similar
- 8% suffer from red/green colour blindness
- Women:
 - Blues look dark
 - 0.5% suffer from red/green colour blindness

ggplot2

ggplot2 is an R library that allows us to easily make publication quality plots. It is based on the “Grammar of Graphics” which describes a vocabulary for creating plots from data.

Just like you had to become familiar with the syntax for piping data with dplyr, ggplot has its own syntax. In general, you need to tell the function `ggplot()` what data to use and then how to present it (what geom). The term geom refers to the type of plot and needs to be given mapping aesthetics. Mapping aesthetics refer to the variables the `geom_function()` will use to create a specific plot.

A ggplot command generally looks like this.

```
ggplot(data = date_frame_name) +  
  style_of_plot(mapping = aes(x = vector_name1, y = vector_name2))
```

You can also add arguments to the style of plot making the package very versatile for presenting data in lots of different ways. These include changing the size of features on the graph, or splitting the data into groups.

```
ggplot(data = date_frame_name) +  
  style_of_plot(mapping = aes(x = vector_name1, y = vector_name2) +  
    other_arguments)
```

The syntax examples above are to help you grasp the arguments available for the `ggplot()` function. `ggplot()` also allows for flexibility in how to code for these arguments, as you will see below. You are still essentially telling R to do the same thing. Once you start to use `ggplot()` more you will develop your own personal preference on how you would like to code your `ggplot()` arguments.

Creating a scatter plot

We worked through exercises during the workshop, practicing different arguments for the `geom_point()` function. This essentially creates a dot plot for your data.


```
library(ggplot2)
```

Load the `cchic` dataset and explore the variables you have. Ensure you have included the variable `los`, which you created in the last workshop.

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = age_years, y = los))
```

```
## Don't know how to automatically pick scale for object of type difftime. Defaulting to continuous.
```

```
## Warning: Removed 56 rows containing missing values (geom_point).
```

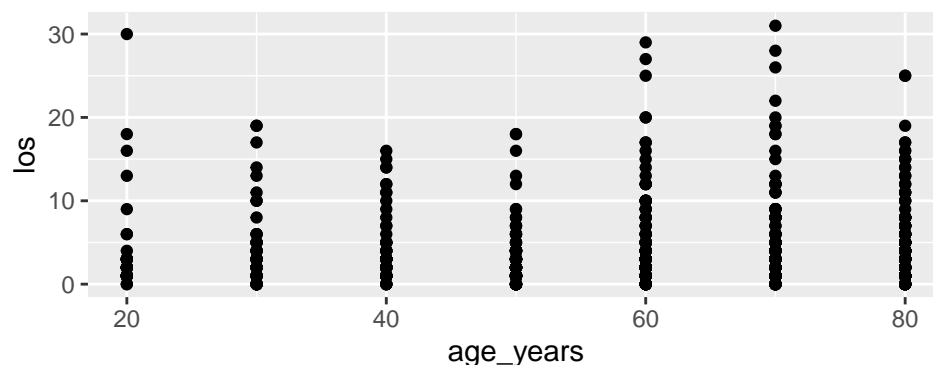


We can use a different colour based on whether the patient survived. We can also use shape and size of the point in the same way.

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = age_years, y = los, color = vital_status))
```

Don't know how to automatically pick scale for object of type difftime. Defaulting to continuous.

Warning: Removed 56 rows containing missing values (geom_point).

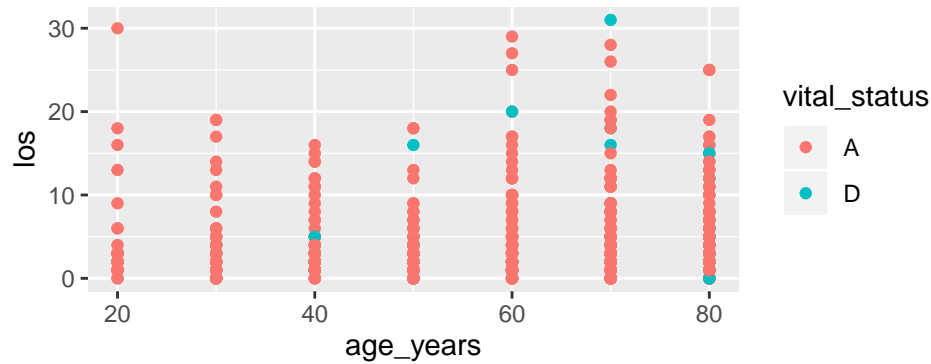


You can also combine different aesthetics

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = age_years, y = los, size = vital_status, shape = sex))
```

Don't know how to automatically pick scale for object of type difftime. Defaulting to continuous.

Warning: Using size for a discrete variable is not advised.


Warning: Removed 56 rows containing missing values (geom_point).

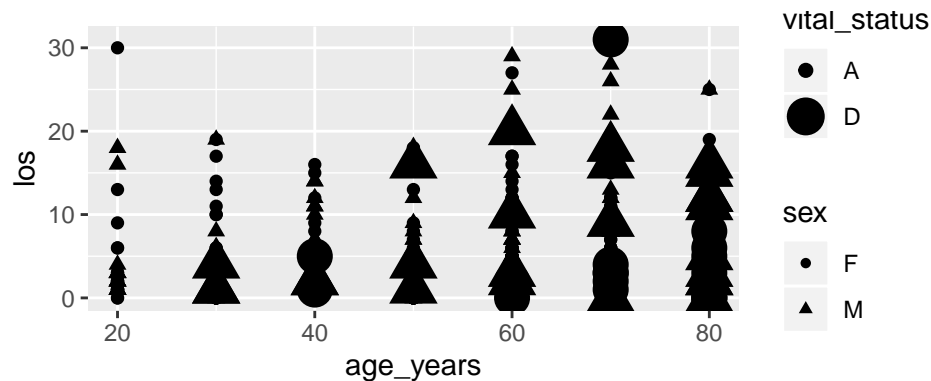

Spot the difference in plot outputs with the following commands


```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = age_years, y = sodium), color = "blue")
```

Warning: Removed 264 rows containing missing values (geom_point).

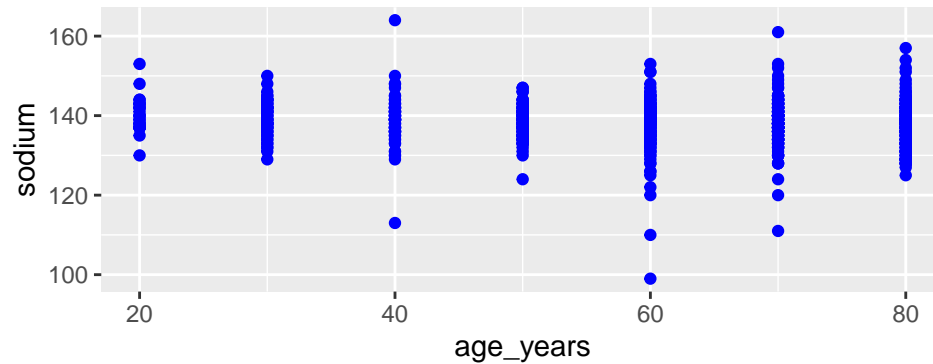

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = age_years, y = sodium, color = "blue"))
```

Warning: Removed 264 rows containing missing values (geom_point).

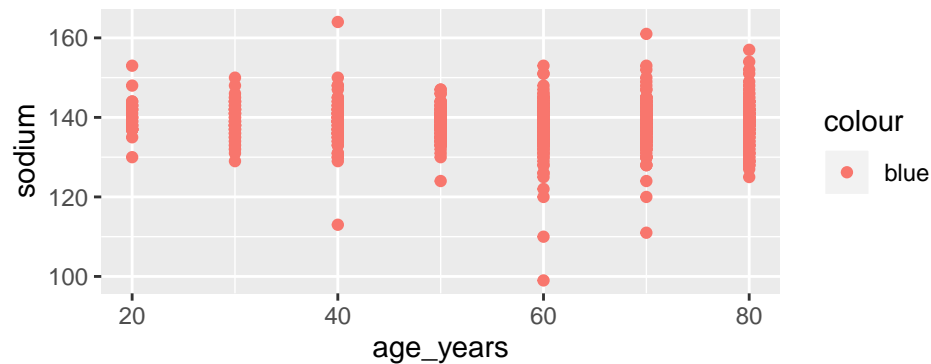


Can you figure out why this happened? Look at the code and the help pages. Remember that syntax is important!

You can split your graph up using facets.

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = weight, y = los)) +  
  facet_wrap(~sex, nrow = 2)
```

Don't know how to automatically pick scale for object of type difftime. Defaulting to continuous.

Warning: Removed 56 rows containing missing values (geom_point).

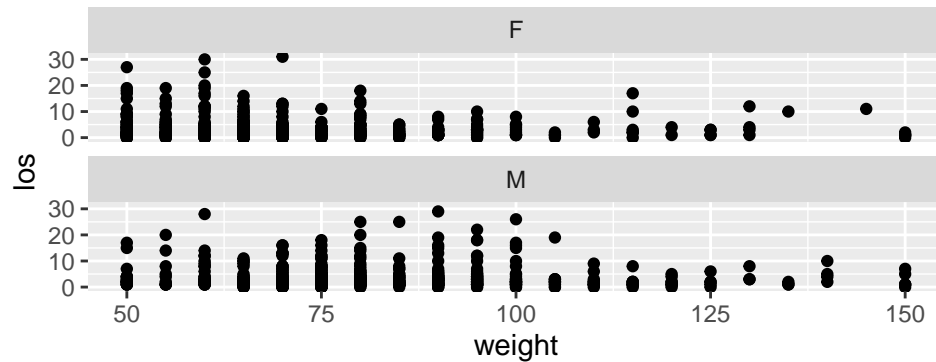


Look at this graph.

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = age_years, y = los))
```

Don't know how to automatically pick scale for object of type difftime. Defaulting to continuous.

Warning: Removed 56 rows containing missing values (geom_point).

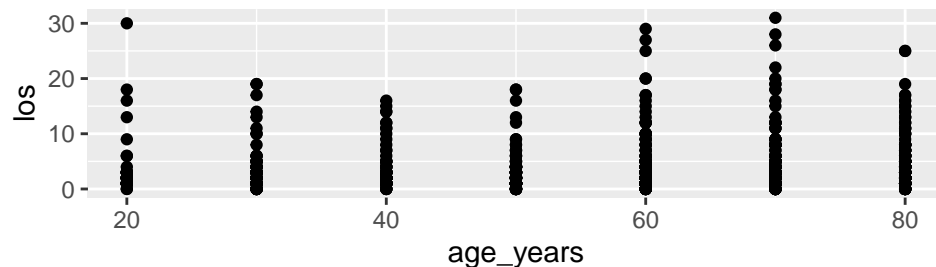


We should be able to see more data points in this graph. The problem is that a lot of the points are plotted on top of each other. We can use the `jitter` command to move the points a bit so that they are all visible.

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = age_years, y = los), position = "jitter")
```

Don't know how to automatically pick scale for object of type difftime. Defaulting to continuous.


Warning: Removed 56 rows containing missing values (geom_point).

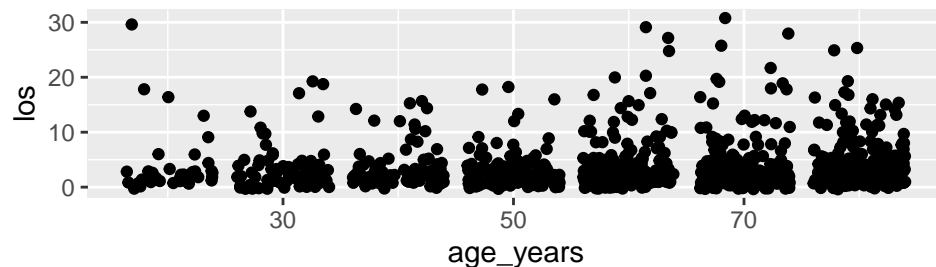

Creating a line graph


`geom_smooth()` allows you to create a line graph. We can also work through different examples of the arguments you can give `geom_smooth()` to help visualise your data.

```
ggplot(data = cchic) +  
  geom_smooth(mapping = aes(x = sao2_abg, y = pao2_abg))  
  
## `geom_smooth()` using method = 'gam' and formula 'y ~ s(x, bs = "cs")'  
## Warning: Removed 213 rows containing non-finite values (stat_smooth).
```

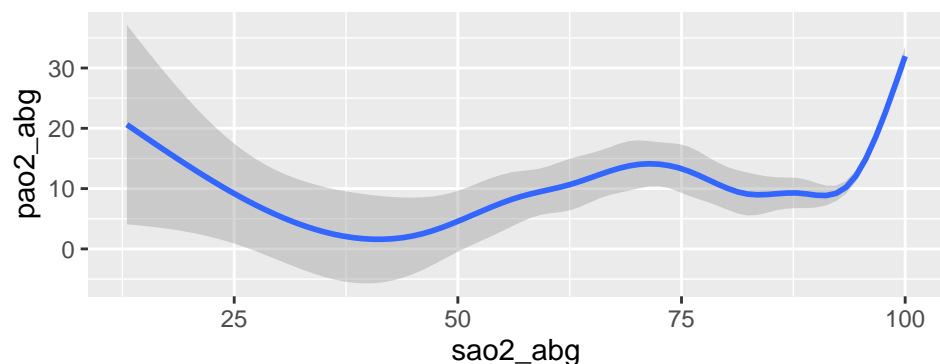


Using linetypes to convey differences

```
ggplot(data = cchic) +  
  geom_smooth(mapping = aes(x = sao2_abg, y = pao2_abg, linetype = sex))  
  
## `geom_smooth()` using method = 'loess' and formula 'y ~ x'  
## Warning: Removed 213 rows containing non-finite values (stat_smooth).
```

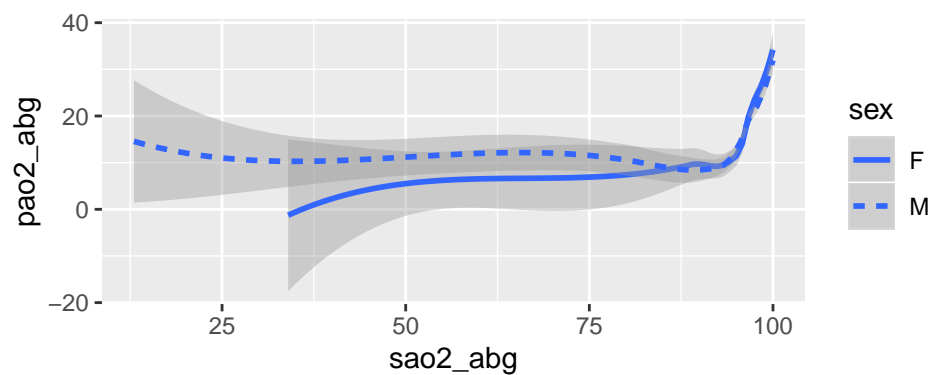

Combining multiple geoms in one chart

```
ggplot(data = cchic) +  
  geom_point(mapping = aes(x = sao2_abg, y = pao2_abg, colour = sex)) +  
  geom_smooth(mapping = aes(x = sao2_abg, y = pao2_abg))  
  
## `geom_smooth()` using method = 'gam' and formula 'y ~ s(x, bs = "cs")'  
## Warning: Removed 213 rows containing non-finite values (stat_smooth).  
## Warning: Removed 213 rows containing missing values (geom_point).
```

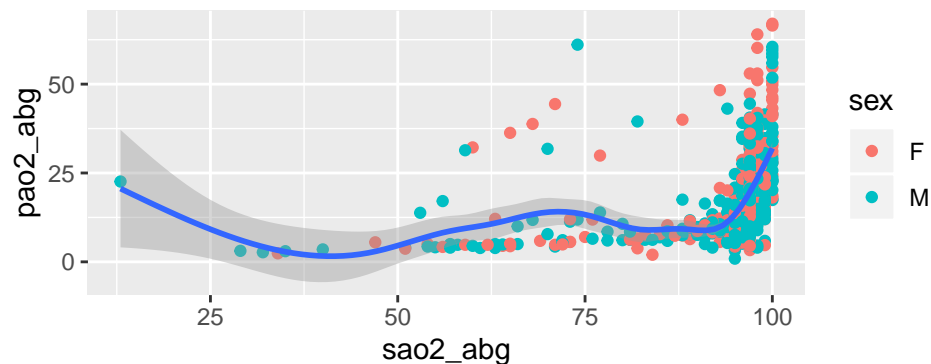


Creating a bar chart.

Some plots allow you to visualise the raw data (such as the scatter plots above) but other geoms allow conduct a statistical transformation (e.g. counts, proportions) before presenting you the data.

`geom_bar()` and `stat_count()` are both interchangeable, and both create bar charts.

You can also change the labelling on the y-axis, so that you demonstrate proportion of all admissions in `cchic` and not just the raw count.


```
ggplot(data = cchic) +  
  geom_bar(mapping = aes(x = care_level, y = ..prop.., group = 1))  
  
## Warning: Removed 103 rows containing non-finite values (stat_count).
```

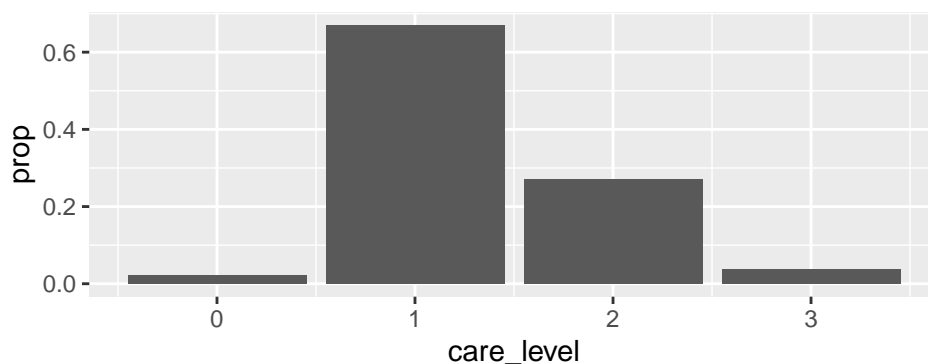

Just like with plots that allowed you to visualise the raw data, you can also provide aesthetic arguments to bar charts and histograms to include a second vector.

```
ggplot(data = cchic) +  
  geom_bar(mapping = aes(x = care_level, fill = sex))
```


```
## Warning: Removed 103 rows containing non-finite values (stat_count).
```

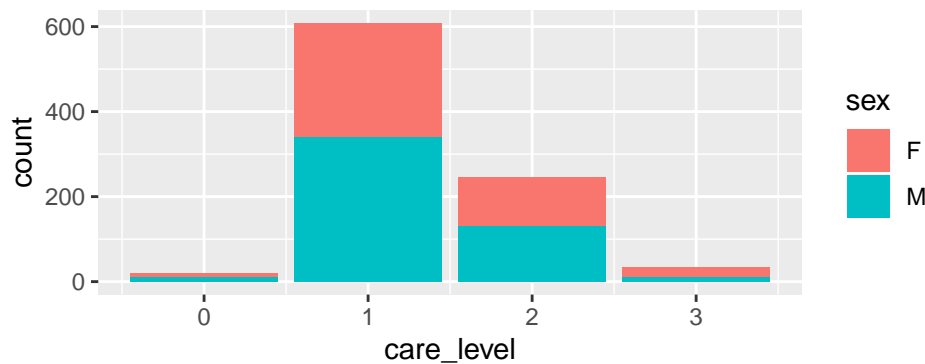

What does this show? You can also use proportions to try and better visualise the relationship between these two vectors, this is done with the position argument.

```
ggplot(data = cchic) +  
  geom_bar(mapping = aes(x = care_level, fill = sex), position = "fill")
```


Warning: Removed 103 rows containing non-finite values (stat_count).

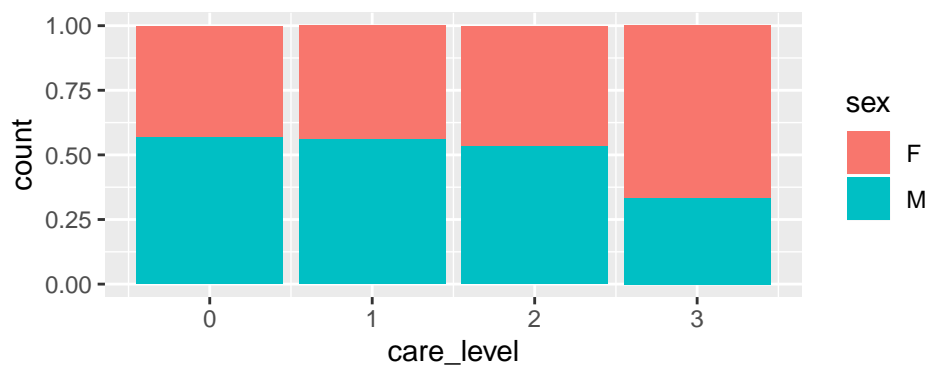

The position argument can also be used to compare the two vectors as if combining two bar charts.

```
ggplot(data = cchic) +  
  geom_bar(mapping = aes(x = care_level, fill = sex), position = "dodge")
```

Warning: Removed 103 rows containing non-finite values (stat_count).

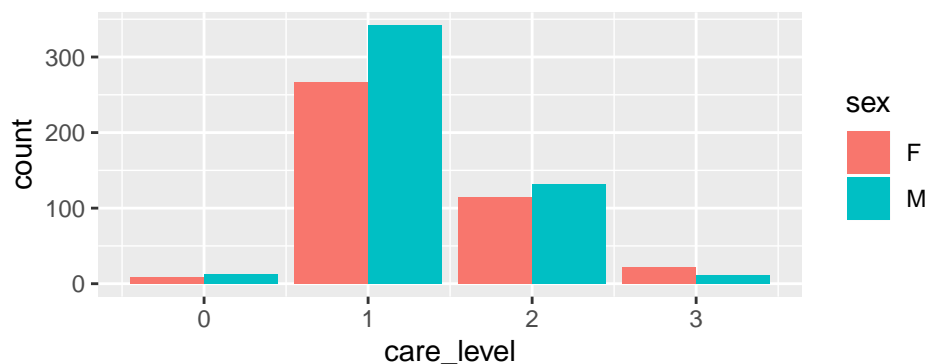


Cheat sheet.

Available here:

<https://www.rstudio.com/wp-content/uploads/2015/03/ggplot2-cheatsheet.pdf>

But also searchable with “ggplot cheat sheet”. Contains command prompts for more than 30 different types of data visualisation plots. It is also useful as a resource for inspiration on how to present your data.

There are many different resources advising you on how to present your data (including the one below) but remember the important points above!

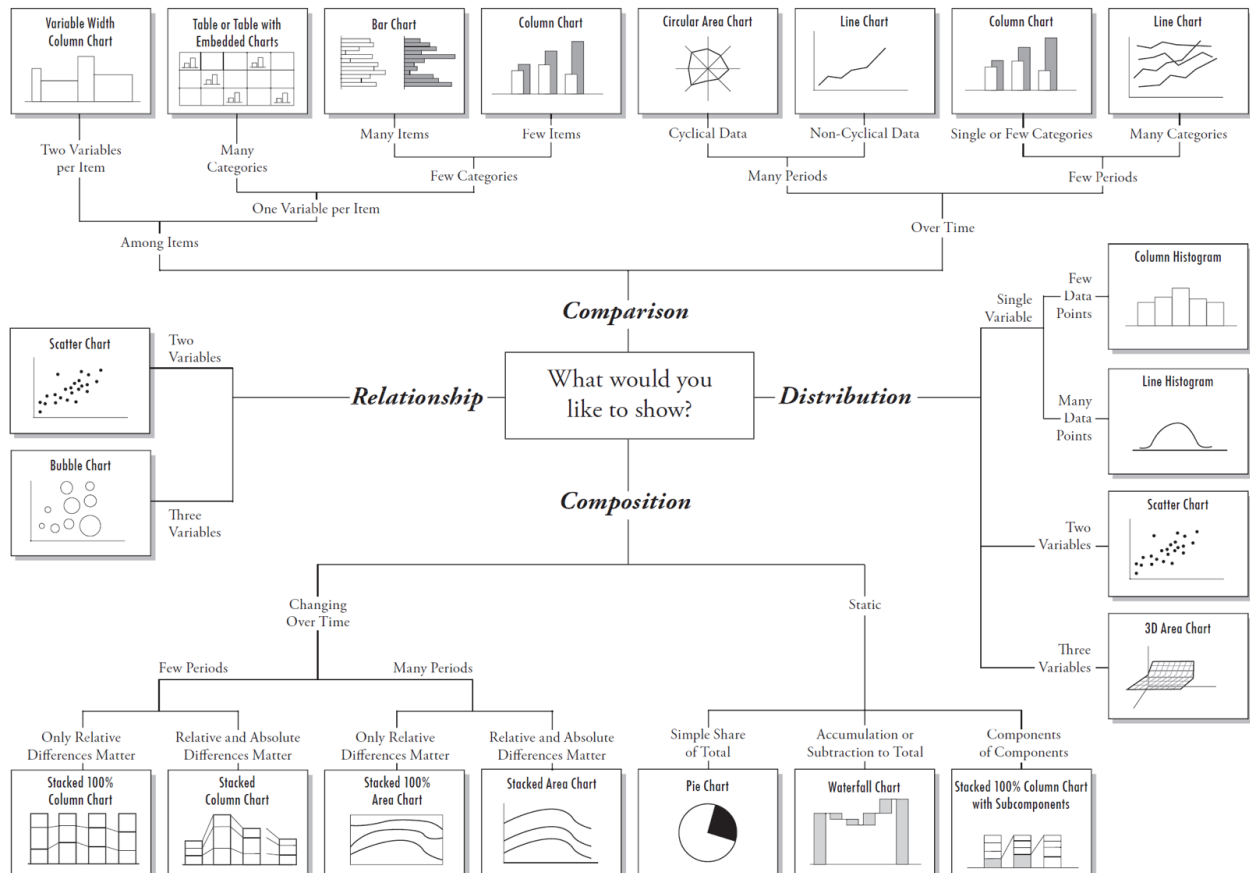

Workshop 6 - Basic Statistics

Introduction

In general, research often seeks to answer a question about a large population (e.g. all of London, all of the UK) by collecting data on a small proportion (UCH ITU admissions, London hospital admissions). This means that many variables are collected for each member which leads to several thousands and sometimes millions of data points existing in a database. Presenting a whole database as part of an article is illogical and cumbersome. So, we can use R to not only conduct our descriptive statistics (summary statistics that describe the raw data) and inferential statistics (exploring relationships between variables e.g. gender and survival from ITU), but, the code we use is also a record of how we have manipulated the raw data (very handy for those pesky reviewer queries!).

However, in order to know which descriptive and inferential methods to use on your data, it is important to understand the principles underlying the different types of data.

Notice – this workshop and handout is aimed at covering the basics to allow you to have a meaningful understanding of the code used in R. We will NOT be covering statistical theory in depth, nor discussing the formulas for the tests covered.

Types of data

Data can be:

- Continuous
- Discrete
 - Nominal
 - Ordinal
 - Interval

Continuous data


Examples of continuous variables are age, weight and height.

These can be from numbers with 0 decimal points (d.p.) to an infinite number of d.p. (it is up to you to decide a sensible number).

Data distributions (how the number of each value is distributed in the variable) can be described as known models of distributions (parametric), nor in a way that isn't known (non-parametric). Plotting your continuous variables can help you decide what distribution it is. You can plot a histogram using `ggplot2` like this.

```
ggplot(data = cchic, aes(x = age_years)) +  
  geom_histogram()
```


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

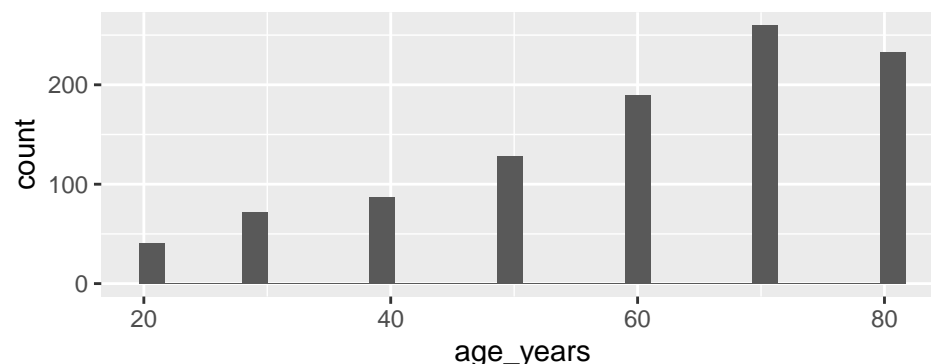

Normal distribution


There are tests of normality that can be conducted to check whether your variable is “normal”, but is outside the remit of this workshop. Essentially some of the rules of a normal distribution are that:

- Mean = mode = median
- It is unimodal (has one peak)
- It is symmetric (the distribution looks the same either side of that peak)
- The extremes of the distribution are asymptotic (approach the x-axis)

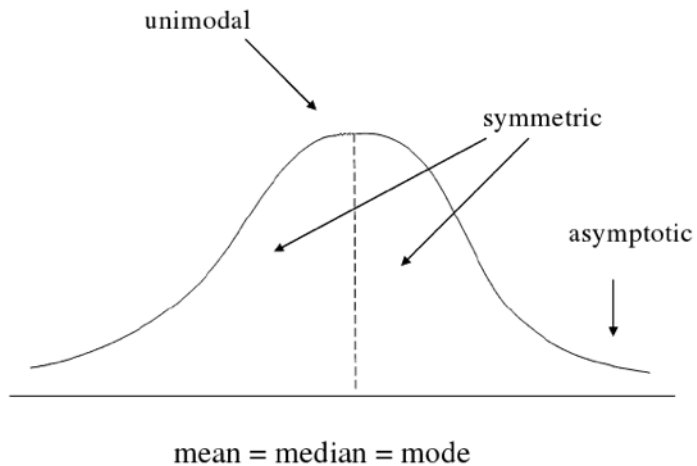

Non-normal distribution

For simplicity continuous variables are said to have a non-parametric distribution if they do not meet all the above criteria. They can also include distributions which: - Are skewed (left, right) - Have more than one peak (e.g. bimodal)

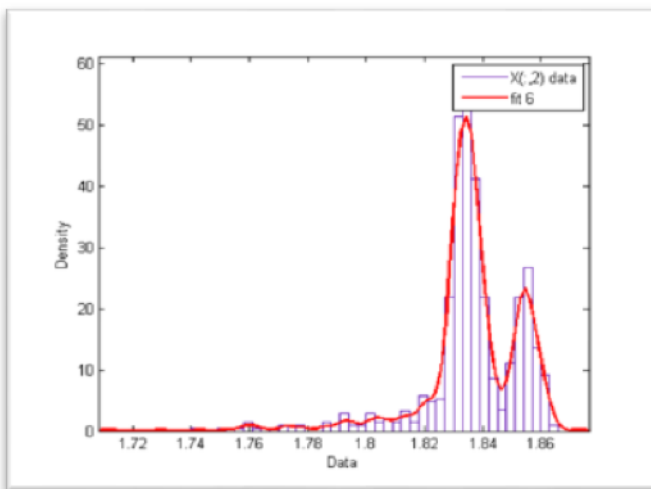

Discrete data

Refers to data with categories:

- Nominal
- Ordinal
- Interval

Nominal data refers to data types with distinct categories that have no order between these categories e.g. hair colour, type of antibiotic etc.

Ordinal data refers to data where there is an order to the categories e.g. level of ITU care where Level 1 < Level 2 < Level 3 in terms of intensity of resources. But, the difference between these categories is either not quantifiable OR equal e.g. Is the difference between Level 1 and 2 care the same as the difference between Level 2 and Level 3? (No).

Interval data has both an order and the differences between the categories is equal e.g. time (the difference between 1 day and 2 days is the same as that between 3 days and 4 days).

Describing Data


Why does it matter what type of data you are working with? Because it affects what summary statistics you use to describe them (and also analyse them with inferential methods).

Normally distributed data.

You might notice that the `height` variable in `cchic` appears to have a normal distribution.

```
ggplot(data = cchic, aes(x = height)) +  
  geom_histogram()
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

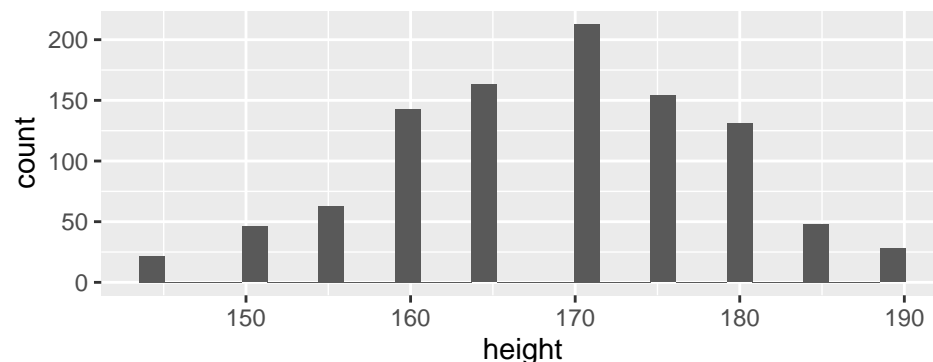

The best way to describe normally distributed data is by reporting its mean and standard deviation. The mean (average) is the sum of all values in a variable divided by the number of values. The standard deviation is a description of the spread of values in a variable (distributions may have similar means but very different spreads).

```
# Note that we remove missing values.  
mean(cchic$height, na.rm = TRUE)
```

```
## [1] 168.7141
```

```
sd(cchic$height)
```


```
## [1] 10.04832
```

More on standard deviation

To help convey the impact of difference in standard deviation we ran the following code for dummy distributions in the workshop.


```
dummy_1 <- rnorm(1000, mean = 10, sd = 0.5)
# ggplot only accepts dataframes.
dummy_1 <- as.data.frame(dummy_1)
ggplot(dummy_1, aes(x = dummy_1)) +
  geom_histogram()
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

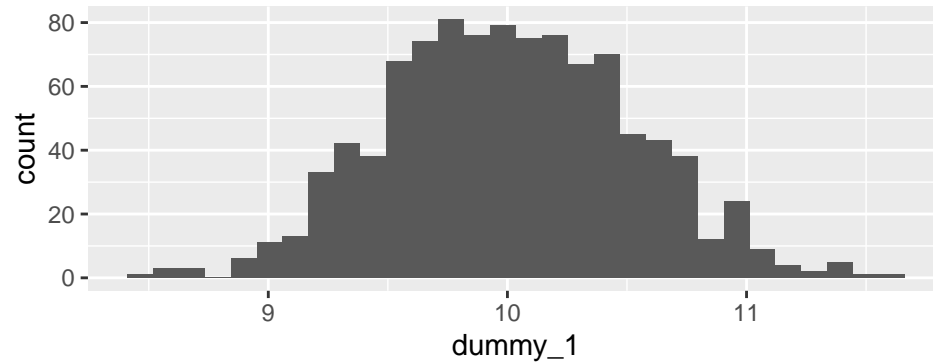

```
dummy_2 <- rnorm(1000, mean = 10, sd = 20)
dummy_2 <- as.data.frame(dummy_2)
ggplot(dummy_2, aes(x = dummy_2)) +
  geom_histogram()
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

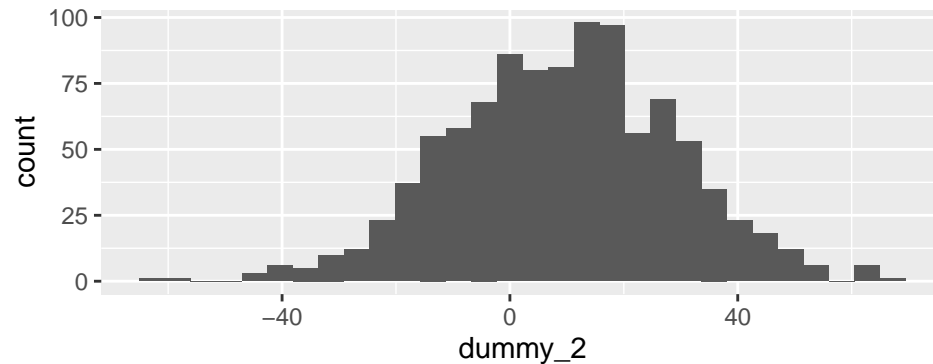


Do you notice the wider spread of data in the plot of data with the higher standard deviation?

Non-normal data

You may have noticed that the distribution for `age_years` in the `cchic` data is skewed; is it left or right skewed?

```
ggplot(cchic, aes(x = age_years)) +  
  geom_histogram()
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

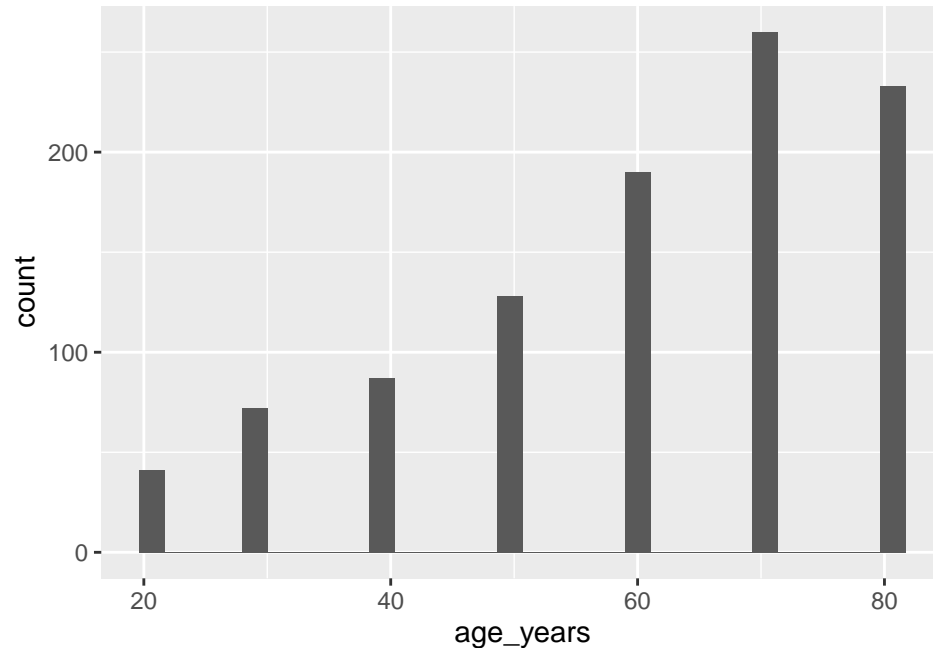

It's left! But either way the traditional way of describing this distribution is to report its median (very middle value, if there are two then the average of these) and the interquartile range (IQR, the difference between then 25th and 75th highest value in the distribution).

```
median(cchic$age_years)
```

```
## [1] 60
```

```
IQR(cchic$age_years)
```

```
## [1] 20
```

The IQR is, in a way, analogous to SD as it is also reporting spread of the distribution of data values in a variable.

Describing Discrete/Categorical data

These can be described using frequencies, proportions or percentages.

- Frequencies

```
table(cchic$care_level)
```

```
##  
##    0    1    2    3  
## 21 608 246  33
```

- Proportions

```
care <- table(cchic$care_level)  
prop.table(care)
```

```
##  
##           0           1           2           3  
## 0.02312775 0.66960352 0.27092511 0.03634361
```

- Percentage

```
prop.table(care) * 100
```


```
##  
##           0           1           2           3  
## 2.312775 66.960352 27.092511 3.634361
```

Note - `summary(data_frame_name)` will report the mean, median, standard deviation and IQR for all numeric variables in the specified data frame.


Inferential statistics

Inferential statistics refer to tests which are used to compare distributions or values between two or more variables to see if there is a meaningful difference.

Traditionally we use the p-value to communicate the probability of the observed, or more extreme result, arising by chance if both distributions were from the same population (i.e. no difference in populations). P-values < 0.05 are deemed significant, although we argue that p-value results $0.03 - 0.049$ should be deemed as requiring further testing.

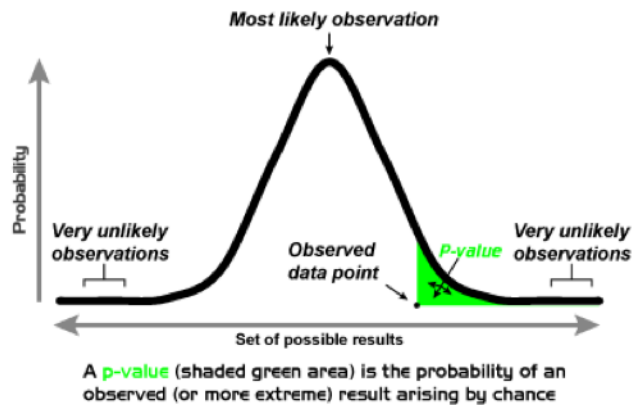

Depending on your project you may be looking for either a statistically significant difference or not (e.g. a non-inferiority study).

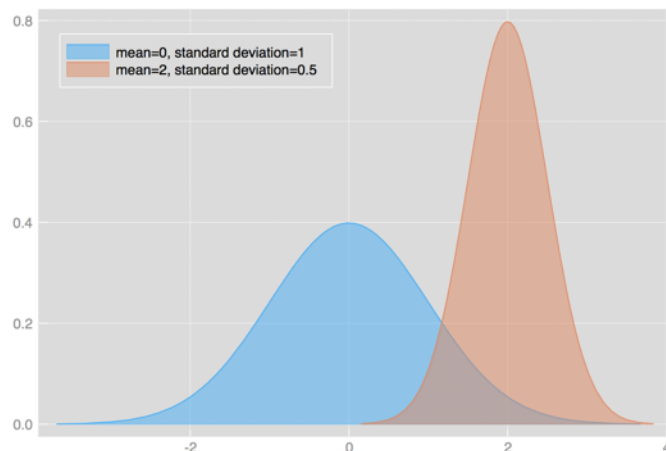

In general, we like to advocate a meaningful analysis where you consider the following (prior to plugging in your numbers to a function that will attempt to spit out a result): - What is your hypothesis? Then, what is your alternate hypothesis - What type of variable (data type) do you have? - What are the assumptions of the test you are using? Do your data and your hypothesis meet these assumptions?

Comparing means

Let's compare the height between men and women in the `cchic` database. (We already know that using `mean()` was the best way to describe height, as the distribution appears to be normal).

```
cchic %>%  
  group_by(sex) %>%  
  summarise(av.height = mean(height, na.rm = TRUE))
```

```
## # A tibble: 2 x 2  
##   sex    av.height  
##   <chr>    <dbl>  
## 1 F        162.  
## 2 M        174.
```

Let's start with our hypothesis:

Null hypothesis - There is no difference in mean height between men and women

Alternate hypothesis - There is a difference in mean height between men and women

The t-test is commonly used to compare the means of two different populations. There are two versions; paired and independent.

The assumptions of a t-test are generally the following:

- One independent categorical variable with 2 groups and One dependent continuous variable
- The dependent variable is approximately normally distributed in each group
- The observations are independent of each other
- Independent: assumes equal variance in groups

Before looking at the code below, try conducting a t-test on differences in mean height between men and women, after looking at the help page with `?t.test`. Remember, to use any function your input data must fit the limits of the argument.

```
t.test(height ~ sex, data = cchic)
```

```
##  
## Welch Two Sample t-test  
##  
## data: height by sex  
## t = -25.441, df = 971.49, p-value < 2.2e-16  
## alternative hypothesis: true difference in means is not equal to 0  
## 95 percent confidence interval:  
## -13.58394 -11.63838  
## sample estimates:  
## mean in group F mean in group M  
## 161.7038 174.3149
```

Comparing counts

As we saw above we can create a table to describe discrete data. Here is one demonstrating frequency values for gender differences in survival.

```
table(cchic$sex, cchic$vital_status)
```

```
##
##      A   D
## F 411  38
## M 497  65
```

To assess whether these differences are significant we, again, start with a hypothesis.

Null hypothesis - There is no difference in survival between men and women

Alternate hypothesis - There is a difference in survival between men and women

The chi-squared test is often used for comparing counts and has the following assumptions:

1. Data in cells should be frequencies or counts NOT percentages
2. Levels/Categories are mutually exclusive – here being alive/dead applies
3. Each subject contributes to one cell – can either be male/female and alive/dead
4. Independent study groups
5. 2 categorical variables
6. Values in each cell should be >5 (Otherwise the Fishers test is recommended)

```
# Changing the character vector to a factor one so that it works with the function.
cchic <- cchic %>%
  mutate(gender = as.factor(sex))
# Doing the test.
chisq.test(cchic$gender, cchic$vital_status)
```

```
##
## Pearson's Chi-squared test with Yates' continuity correction
##
## data:  cchic$gender and cchic$vital_status
## X-squared = 2.2976, df = 1, p-value = 0.1296
```

In general, it is a good idea to read the help pages of each new function as you start your R journey. This may seem tiresome but will get you used to the syntax of the help pages and help speed up your learning of new functions.

Comparing non-normal or skewed distributions

Commonly this employs the use of the Wilcoxon Rank or Mann Whitney U test, which are both rank sum tests. In general, the use of non-parametric tests are recommended when any of the following apply:

- Level of measurement is nominal or ordinal
- Unequal sample sizes
- Skewed data
- Unequal variance
- Continuous data collapsed into small number of categories

We could compare length of stay (`los`) between men and women.


First, we need to look at the distribution of the continuous variable, `los`. Does the distribution look approximately normal?

```
ggplot(cchic, aes(x = los)) +  
  geom_histogram()
```

```
## Don't know how to automatically pick scale for object of type difftime. Defaulting to continuous.
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
## Warning: Removed 56 rows containing non-finite values (stat_bin).
```

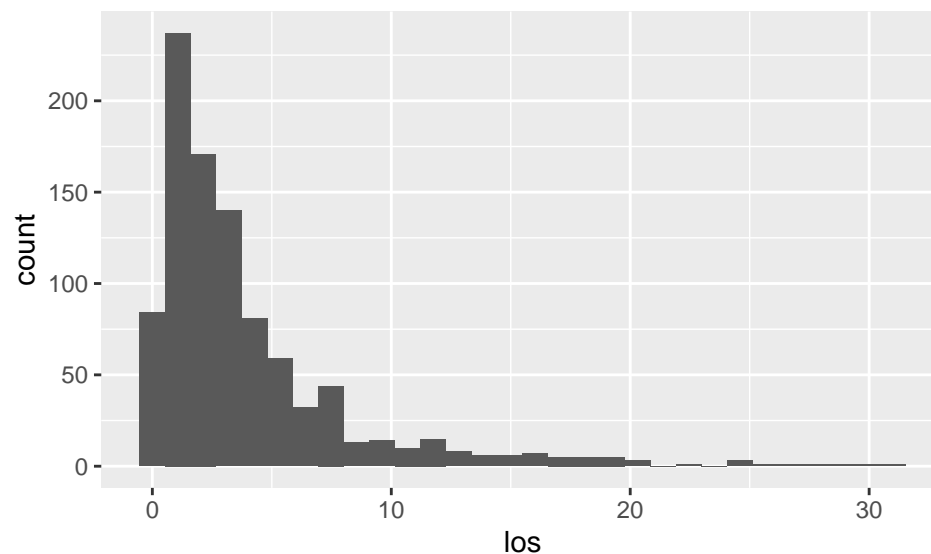

We need to change `los` to a numeric vector, to let us run tests using it.

```
cchic <- cchic %>%  
  mutate(los = as.factor(los))  
  
cchic <- cchic %>%  
  mutate(los_num = as.numeric(los))
```


Let's compute descriptive statistics.

```
# Descriptive statistics for males
cchic %>%
  filter(sex == "M") %>%
  select(los_num) %>%
  summary()
```

```
##      los_num
## Min.   : 1.000
## 1st Qu.: 2.000
## Median : 3.000
## Mean   : 4.836
## 3rd Qu.: 5.000
## Max.   :27.000
## NA's   :39
```

```
# Descriptive statistics for females.
cchic %>%
  filter(sex == "F") %>%
  select(los_num) %>%
  summary()
```

```
##      los_num
## Min.   : 1.000
## 1st Qu.: 2.000
## Median : 3.500
## Mean   : 4.808
## 3rd Qu.: 6.000
## Max.   :29.000
## NA's   :17
```

What do you notice?

Comparing the distributions

In order to compare these distributions, look up the help page for Mann-Whitney. Remember to use “??” if it is not recognised as a function of any of the current packages you have loaded. Also use Stack Overflow or your internet search engine if you are struggling. Read the help page and ensure that your input vectors meet the limits of the arguments for the function `wilcox.test()`.


```
wilcox.test(los_num ~ sex, data = cchic)
```

```
##
## Wilcoxon rank sum test with continuity correction
##
## data:  los_num by sex
## W = 111366, p-value = 0.702
## alternative hypothesis: true location shift is not equal to 0
```

Workshop 7 - Writing functions

Introduction

Up to this point, we have been using functions written by others. We can also write our own functions to carry out operations we need to compute frequently.

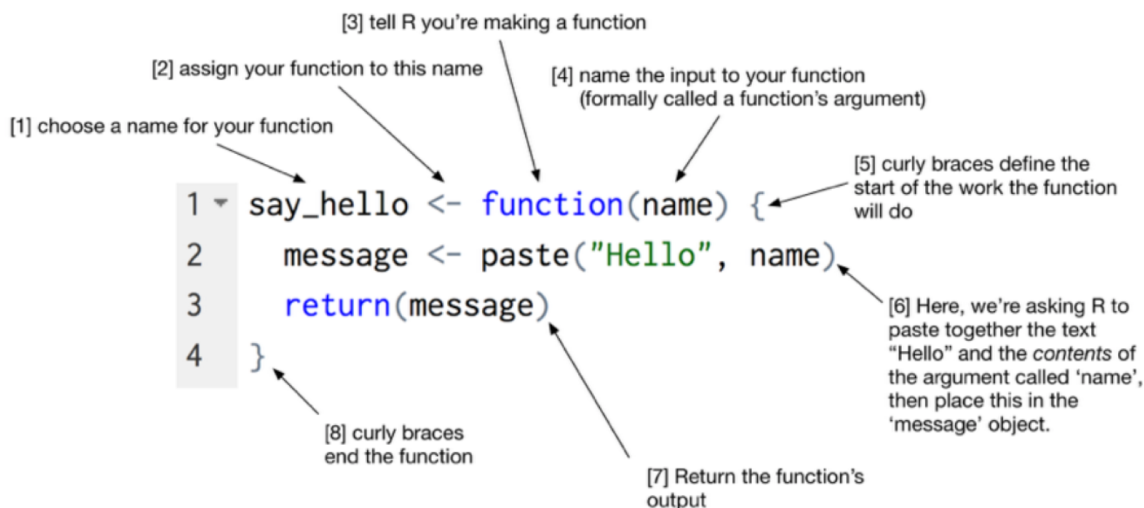

Write a function

Try writing this function for yourself.

```
say_hello <- function(name) {  
  message <- paste("Hello", name)  
  return(message)  
}
```

```
say_hello("cheryl")
```

```
## [1] "Hello cheryl"
```

Use this function with your own name.

Let's try writing another function.

```
BMI <- function(height, weight) {  
  x <- weight / (height^2)  
  return(x)  
}
```

```
# Try calculating your own BMI  
BMI(height = 1.60, weight = 60)
```

```
## [1] 23.4375
```

Now write a function to calculate your body surface area.

Where, BSA =

$$\sqrt{(weight(kg) * height(cm)) / 3600}$$

Then test your function.

```
BSA <- function(height, weight) {  
  x <- sqrt((weight * height) / 3600)  
  return(x)  
}
```

```
BSA(height = 175, weight = 80)
```

```
## [1] 1.972027
```