


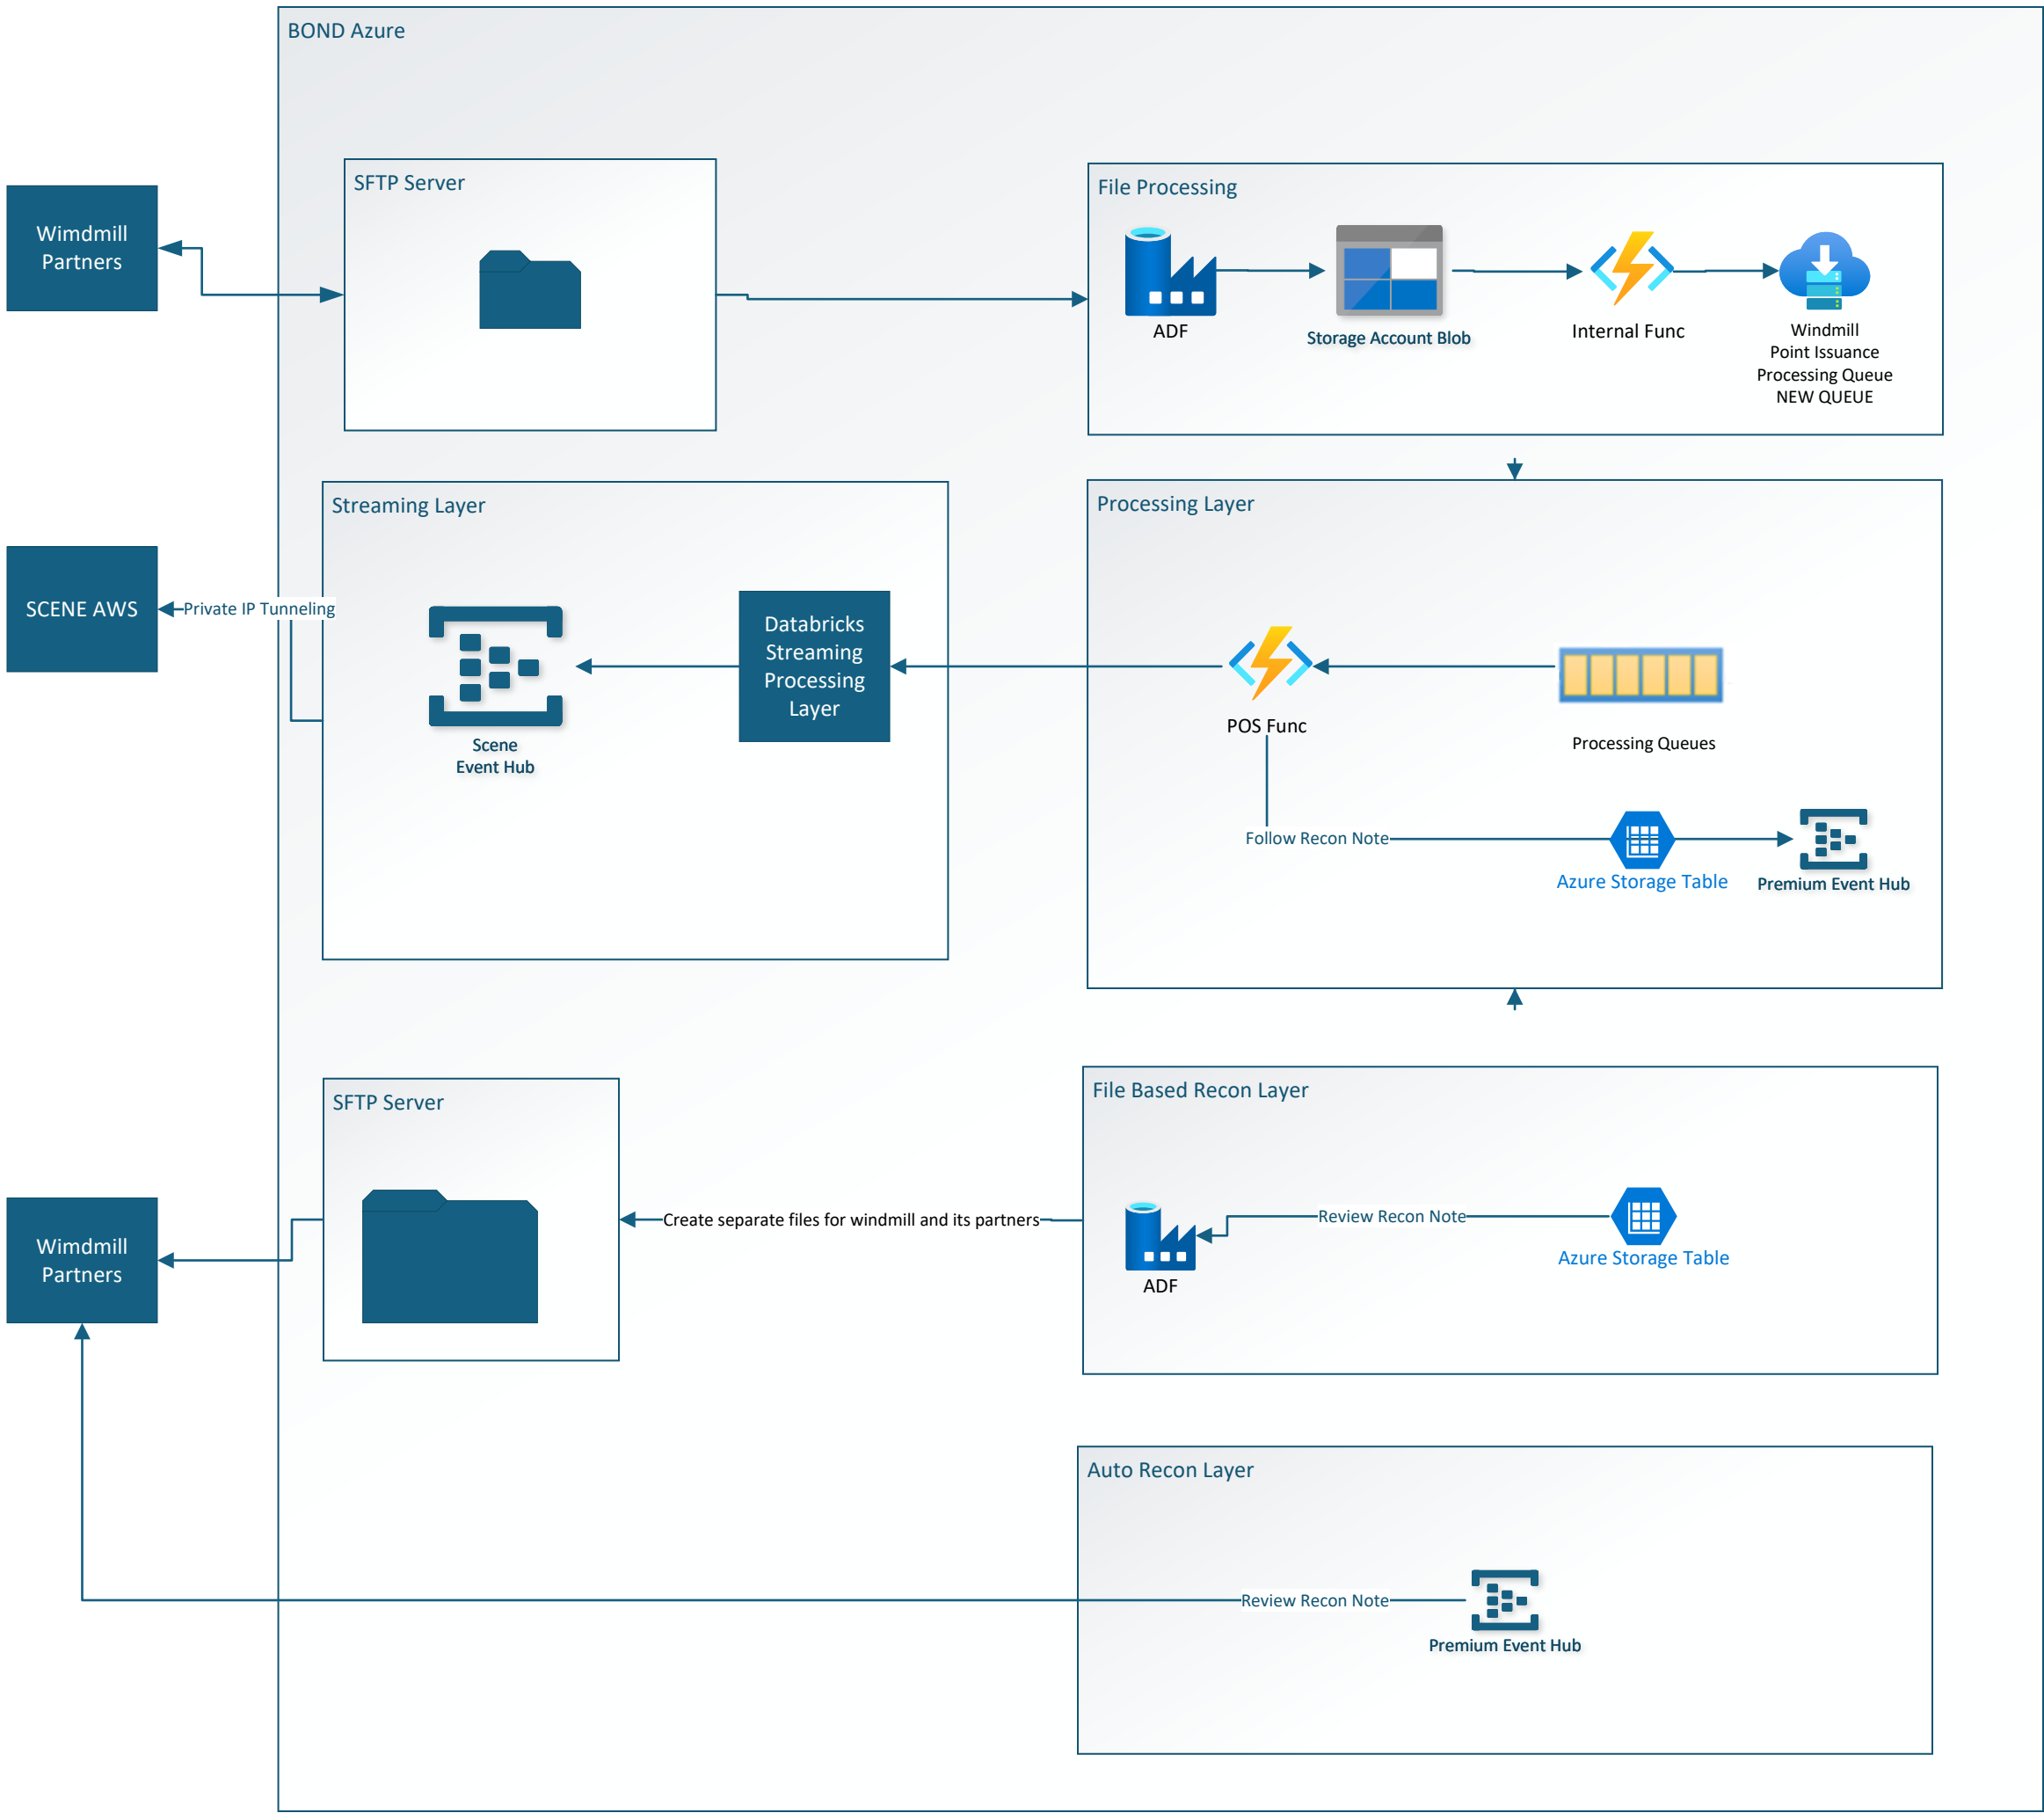

Recon Note:
Success and Failure both will be stored to Storage table and EventHub
And both are control by Env variable
StorageTableRecon: true
EventHubRecon: true
If value is true respectively then and then we store there

Storage table:
Table will be seprate by partner and branch
partition key:
Windmil: TransactionDate
WindmillPartner: Filename

So if windmil and their partner cant consume it from eventhub then
EventHubRecon will be false and StorageTableRecon will be true and
And they will keep receiving file as it mentioned in File based Recon Layer

And whenever they decide to automatically consume recon events then "EventHubRecon" set this to true and "StorageTableRecon" to false and event will flow to EventHub automatically where windmill already set as a consumer