



a

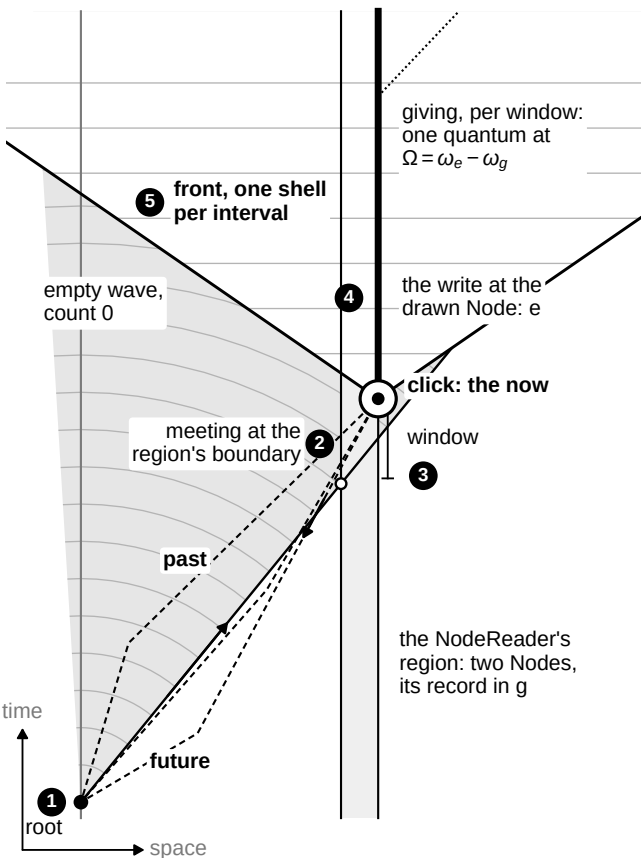


b

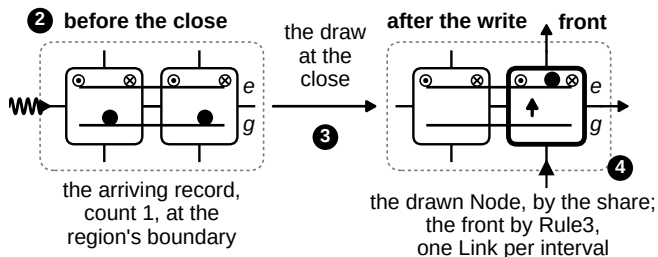

c

the hole at the drawn Node, one level per face



$W_{\text{rec}} = (\text{the laid share} + \text{count div } 2) \text{ div count}$

$dQ = w(x - v)(x - b)$, per face:
face 1: one quantum exactly, at the root nearest v , where $w(v - b)^2 \geq 4 W_{\text{rec}}$; else the most it can, $w(v - b)^2/4$, at the midpoint
face 2: the rest hole to 0, the levels and the remainder, where the share $O + C/2 \leq W_{\text{rec}}$; the record's count down by one

d

the ledger

	before	after
the arriving record's count	1	0
its levels and remainder at the drawn Node	v, b, r	0, 0, 0
the NodeReader's record, its parts g / e	1 / 0	0 / 1

the click line, the NodeReader's report, the only measurement: the window's index, the NodeReader, the family and the part, the count before and after, the NodeReader's own clock; no Node

the declaration in the NodeReader's file: its seed; its Nodes, two or more, connected; its own record with the parts g and e and the lifetime where declared