

dirtreex – Examples Gallery

This document walks through the full feature surface of the **dirtreex** package. Each numbered entry shows (a) the raw source code exactly as you would write it, and (b) the rendered result produced by that code. The examples are self-contained: copy any snippet into a preamble with `\usepackage{dirtreex}` and it will compile.

Contents

1	Basics	3
1.1	Default tree	3
1.2	Empty comments and empty subtrees	3
1.3	Single-node tree	3
1.4	Multi-line comment	3
2	Font size	5
2.1	Tiny font	5
2.2	Large font	5
3	Elbow shape	6
3.1	Sharp elbows (default)	6
3.2	Rounded elbows, radius 3pt	6
3.3	Rounded elbows, radius 6pt	6
3.4	Extreme radius (clamped to <code>0.5\baselineskip</code>)	7
4	Frame (the box family)	8
4.1	No frame (<code>box=false</code>)	8
4.2	Rounded corners (uniform)	8
4.3	Coloured border and background	8
4.4	HTML hex colour + thick border	8
4.5	Four independent corner radii	9
4.6	Uniform margin (single value)	9
4.7	Asymmetric margin (four values, T/R/B/L)	9

5	Global line style	11
5.1	Thin blue lines	11
5.2	Thick red lines	11
6	Per-entry overrides	12
6.1	Line colour override	12
6.2	Line width override	12
6.3	Elbow radius override	12
6.4	Combined overrides (colour + width + elbow)	13
7	Deep nesting	14
7.1	Six-level tree	14
7.2	Eight-level tree with a shallow sibling	14
8	Multiple trees	16
8.1	Two trees in sequence	16
9	Page-break behaviour	17
9.1	Default cross-page rendering	17
9.2	Cross-page with rounded elbows and per-entry colours	19
9.3	Break offsets (<code>box break at</code> / <code>tree break at</code>)	21
9.4	Asymmetric break offsets (two values)	23
9.5	Bare tree (<code>box=false</code>) across a page break	25
9.6	Bare tree with <code>tree break at</code> pull-back	27
9.7	<code>pagebreak=false</code> (tree spills past the page)	29
10	Multi-page mega-project	31
11	Verbatim names	36
11.1	Top-level verbatim file	36
11.2	Nested <code>vermdir</code> containing <code>verbfile</code>	36
11.3	Mixed normal and verbatim siblings	36
11.4	Pipe (<code> </code>) in the path — alternative delimiter	37

1 Basics

1.1 Default tree

```
\begin{dirtreex}
  \dir{project}{root directory}{
    \dir{src}{source code}{
      \file{main.py}{entry point}
      \file{util.py}{helpers}
    }
    \file{README.md}{documentation}
  }
\end{dirtreex}
```

```
project/ ..... root directory
├── src/ ..... source code
│   ├── main.py ..... entry point
│   └── util.py ..... helpers
└── README.md ..... documentation
```

1.2 Empty comments and empty subtrees

```
\begin{dirtreex}
  \dir{root}{}{
    \file{a.txt}{with comment}
    \file{b.txt}{}
    \dir{empty-dir}{}{}
    \dir{has-comment}{no children}{}
  }
\end{dirtreex}
```

```
root/
├── a.txt ..... with comment
├── b.txt
├── empty-dir/
└── has-comment/ ..... no children
```

1.3 Single-node tree

```
\begin{dirtreex}
  \file{lonely.txt}{a single node is legal}
\end{dirtreex}
```

```
lonely.txt ..... a single node is legal
```

1.4 Multi-line comment

```
\begin{dirtreex}
  \dir{project}{top-level}{
    \file{Makefile}{
```

```

    build script\\
    three lines of commentary\\
    stay aligned in a rectangle%
}
\file{README.md}{single line}
}
\end{dirtreex}

```

```

project/.....top-level
├─ Makefile ..... build script
                        three lines of commentary
                        stay aligned in a rectangle
├─ README.md ..... single line

```

2 Font size

2.1 Tiny font

```
\begin{dirtreex}[fontsize=\tiny]
  \dir{project}{rendered at tiny}{
    \file{a.txt}{file A}
    \file{b.txt}{file B}
    \dir{sub}{subdirectory}{\file{c.txt}{}}
  }
\end{dirtreex}
```

```
project/..... rendered at tiny
├── a.txt..... file A
├── b.txt..... file B
└── sub/.....subdirectory
    └── c.txt
```

2.2 Large font

```
\begin{dirtreex}[fontsize=\large]
  \dir{project}{rendered at large}{
    \file{a.txt}{file A}
    \dir{sub}{subdirectory}{\file{b.txt}{}}
  }
\end{dirtreex}
```

```
project/..... rendered at large
├── a.txt..... file A
└── sub/.....subdirectory
    └── b.txt
```

3 Elbow shape

3.1 Sharp elbows (default)

```
\begin{dirtreex}[elbow radius=0pt]
  \dir{sharp}{right-angle connectors}{
    \file{a.txt}{}
    \dir{sub1}{subdir 1}{
      \file{b.txt}{}
      \dir{sub2}{subdir 2}{\file{c.txt}{} }
    }
    \file{d.txt}{}
  }
\end{dirtreex}
```

```
sharp/ ..... right-angle connectors
├ a.txt
├ sub1/ ..... subdir 1
│   ├── b.txt
│   └ sub2/ ..... subdir 2
│       └ c.txt
└ d.txt
```

3.2 Rounded elbows, radius 3pt

```
\begin{dirtreex}[elbow radius=3pt]
  \dir{round3}{rounded 3pt}{
    \file{a.txt}{}
    \dir{sub1}{subdir 1}{
      \file{b.txt}{}
      \dir{sub2}{subdir 2}{\file{c.txt}{} }
    }
    \file{d.txt}{}
  }
\end{dirtreex}
```

```
round3/ ..... rounded 3pt
├ a.txt
├ sub1/ ..... subdir 1
│   ├── b.txt
│   └ sub2/ ..... subdir 2
│       └ c.txt
└ d.txt
```

3.3 Rounded elbows, radius 6pt

```
\begin{dirtreex}[elbow radius=6pt]
  \dir{round6}{rounded 6pt}{
    \file{a.txt}{}
    \dir{sub1}{subdir 1}{
      \file{b.txt}{}
      \dir{sub2}{subdir 2}{\file{c.txt}{} }
    }
    \file{d.txt}{}
  }
```

```

}
\end{dirtreex}

```

```

round6/ ..... rounded 6pt
├── a.txt
├── sub1/ ..... subdir 1
│   ├── b.txt
│   └── sub2/ ..... subdir 2
│       └── c.txt
└── d.txt

```

3.4 Extreme radius (clamped to 0.5\baselineskip)

The package clamps the requested elbow radius against half the baseline skip (and against the line width), so an oversized value silently degrades to the largest legible arc rather than overrunning the column.

```

\begin{dirtreex}[elbow radius=10pt]
  \dir{round10}{requested 10pt -- clamped}{
    \file{a.txt}{}
    \dir{sub1}{subdir 1}{
      \file{b.txt}{}
      \dir{sub2}{subdir 2}{\file{c.txt}{}
    }
    \file{d.txt}{}
  }
\end{dirtreex}

```

```

round10/ ..... requested 10pt – clamped
├── a.txt
├── sub1/ ..... subdir 1
│   ├── b.txt
│   └── sub2/ ..... subdir 2
│       └── c.txt
└── d.txt

```

4 Frame (the box family)

4.1 No frame (box=false)

```
\begin{dirtreex}[box=false]
  \dir{bare}{no border, no padding}{
    \file{a.txt}{}
    \dir{sub}{}{\file{b.txt}{} }
  }
\end{dirtreex}
```

bare/ no border, no padding
├ a.txt
└ sub/
 └ b.txt

4.2 Rounded corners (uniform)

```
\begin{dirtreex}[
  box={true, corners=6pt, border color=black,
        background color=white, margin=6pt}]
  \dir{rounded-frame}{corners=6pt}{
    \file{a.txt}{}
    \dir{sub}{}{\file{b.txt}{} }
  }
\end{dirtreex}
```

rounded-frame/ corners=6pt
├ a.txt
└ sub/
 └ b.txt

4.3 Coloured border and background

```
\begin{dirtreex}[
  box={true, corners=3pt, border color=purple,
        border width=1pt, background color=purple!5}]
  \dir{colored}{purple border, lavender fill}{
    \file{a.txt}{}
    \file{b.txt}{}
  }
\end{dirtreex}
```

colored/ purple border, lavender fill
├ a.txt
└ b.txt

4.4 HTML hex colour + thick border

```
\definecolor{brand}{HTML}{2C7BE5}
\begin{dirtreex}[
```



```

box={true, corners=4pt, border color=brand,
      border width=1.5pt,
      background color=brand!8}]
\dir{hex-color}{\#2C7BE5 accent}{
  \file{main.ts}{}
  \file{style.css}{}
}
\end{dirtreex}

```

```

hex-color/ ..... #2C7BE5 accent
├─ main.ts
└─ style.css

```

4.5 Four independent corner radii

```

\begin{dirtreex}[
  box={true, corners={8pt, 0pt, 8pt, 0pt},
        border color=teal, background color=teal!5,
        margin=6pt}]
\dir{corners}{TL, TR, BR, BL = 8, 0, 8, 0}{
  \file{a.txt}{}
  \file{b.txt}{}
}
\end{dirtreex}

```

```

corners/ ..... TL, TR, BR, BL = 8, 0, 8, 0
├─ a.txt
└─ b.txt

```

4.6 Uniform margin (single value)

```

\begin{dirtreex}[
  box={margin=18pt, border color=black,
        background color=gray!5}]
\dir{padded}{18pt margin on every side}{
  \file{a.txt}{}
  \file{b.txt}{}
}
\end{dirtreex}

```

```

padded/ ..... 18pt margin on every side
├─ a.txt
└─ b.txt

```

4.7 Asymmetric margin (four values, T/R/B/L)

```

\begin{dirtreex}[
  box={margin={2pt, 30pt, 16pt, 4pt},
        border color=orange, background color=orange!8}]

```

```
\dir{asymmetric}{T=2, R=30, B=16, L=4}{  
  \file{a}{}  
  \file{b}{}  
}  
\end{dirtreex}
```

```
asymmetric/..... T=2, R=30, B=16, L=4  
├ a  
└ b
```

5 Global line style

5.1 Thin blue lines

```
\begin{dirtreex}[  
  line color=blue!70!black, line width=0.3pt,  
  box={true, border color=blue!70!black,  
    background color=blue!5, margin=6pt}]  
  \dir{blue-thin}{0.3pt blue}{  
    \file{a.py}{}  
    \dir{sub}{}{  
      \file{b.py}{}  
      \file{c.py}{}  
    }  
    \file{d.py}{}  
  }  
\end{dirtreex}
```

blue-thin/ 0.3pt blue

```
graph LR  
  root["blue-thin/ ..... 0.3pt blue"]  
  root --- a["a.py"]  
  root --- sub["sub/"]  
  root --- d1["d.py"]  
  root --- d2["d.py"]  
  sub --- b["b.py"]  
  sub --- c["c.py"]
```

5.2 Thick red lines

```
\begin{dirtreex}[  
  line color=red!70!black, line width=1pt,  
  box={true, border color=red!80!black,  
    border width=2pt, background color=red!5,  
    margin=6pt}]  
  \dir{red-thick}{1pt red on 2pt frame}{  
    \file{a.py}{}  
    \dir{sub}{}{\file{b.py}{}  
  }  
\end{dirtreex}
```

red-thick/ 1pt red on 2pt frame

```
graph LR  
  root["red-thick/ ..... 1pt red on 2pt frame"]  
  root --- a["a.py"]  
  root --- sub["sub/"]  
  root --- d1["d.py"]  
  root --- d2["d.py"]  
  sub --- b["b.py"]  
  sub --- c["c.py"]
```

6 Per-entry overrides

6.1 Line colour override

```
\begin{dirtreex}
  \dir{root}{global black}{
    \file[line color=red]{error.log}{red}
    \file{normal.txt}{inherits black}
    \dir[line color=blue]{src}{blue branch}{
      \file{main.py}{inherits blue}
      \file[line color=green!60!black]{test.py}{green}
    }
    \dir[line color=orange]{build}{orange branch}{
      \file{output.bin}{inherits orange}
    }
    \file[line color=purple]{Makefile}{purple}
  }
\end{dirtreex}
```

```
root/.....global black
├── error.log.....red
├── normal.txt.....inherits black
├── src/.....blue branch
│   ├── main.py.....inherits blue
│   └── test.py.....green
├── build/.....orange branch
│   └── output.bin.....inherits orange
└── Makefile.....purple
```

6.2 Line width override

```
\begin{dirtreex}
  \dir{root}{default 0.4pt}{
    \file[line width=1.2pt]{important.txt}{1.2pt}
    \file{normal.txt}{default}
    \file[line width=0.2pt]{minor.txt}{0.2pt}
  }
\end{dirtreex}
```

```
root/.....default 0.4pt
├── important.txt .....1.2pt
├── normal.txt .....default
└── minor.txt .....0.2pt
```

6.3 Elbow radius override

```
\begin{dirtreex}[elbow radius=5pt]
  \dir{root}{global 5pt}{
    \file{a.txt}{5pt (inherited)}
    \file[elbow radius=0pt]{b.txt}{sharp (0pt)}
    \file[elbow radius=10pt]{c.txt}{large (10pt)}
    \dir[elbow radius=0pt]{sharp-dir}{sharp}{
      \file{inside.txt}{5pt (inherited)}
    }
  }
\end{dirtreex}
```

```

}
\end{dirtreex}

```

```

root/.....global 5pt
├ a.txt ..... 5pt (inherited)
├ b.txt ..... sharp (0pt)
├ c.txt ..... large (10pt)
└ sharp-dir/.....sharp
  └ inside.txt..... 5pt (inherited)

```

6.4 Combined overrides (colour + width + elbow)

```

\begin{dirtreex}[elbow radius=3pt]
\dir{project}{root}{
  \dir[line color=blue]{src}{source}{
    \file[line color=red, line width=1.2pt]{app.py}{
      red, 1.2pt%
    }
    \file[line color=green!60!black,
      elbow radius=0pt]{new.py}{green, sharp}
  }
  \file[line color=purple, line width=0.8pt,
    elbow radius=2pt]{Makefile}{
    purple 0.8pt 2pt%
  }
}
\end{dirtreex}

```

```

project/.....root
├ src/.....source
│   ├── app.py..... red, 1.2pt
│   └ new.py ..... green, sharp
└ Makefile..... purple 0.8pt 2pt

```

7 Deep nesting

7.1 Six-level tree


```
\begin{dirtreex}[elbow radius=2pt]
  \dir{L0}{depth 0}{
    \dir{L1}{depth 1}{
      \dir{L2}{depth 2}{
        \dir{L3}{depth 3}{
          \dir{L4}{depth 4}{
            \dir{L5}{depth 5}{
              \file{leaf.txt}{bottom}
            }
          }
        }
      }
    }
  }
\end{dirtreex}
```

```
L0/ ..... depth 0
└ L1/ ..... depth 1
  └ L2/ ..... depth 2
    └ L3/ ..... depth 3
      └ L4/ ..... depth 4
        └ L5/ ..... depth 5
          └ leaf.txt ..... bottom
```

7.2 Eight-level tree with a shallow sibling

Mixing a deep branch and a shallow sibling shows that the per-depth column stride is uniform: every level contributes one connector slot, and the shallow sibling sits at the right offset without any manual spacing.

```
\begin{dirtreex}[elbow radius=2pt]
  \dir{L0}{depth 0}{
    \dir{L1}{}{
      \dir{L2}{}{
        \dir{L3}{}{
          \dir{L4}{}{
            \dir{L5}{}{
              \dir{L6}{}{
                \dir{L7}{depth 7}{
                  \file{leaf.txt}{deepest}
                }
              }
            }
          }
        }
      }
    }
  }
  \file{shallow.txt}{level-1 sibling}
}
\end{dirtreex}
```

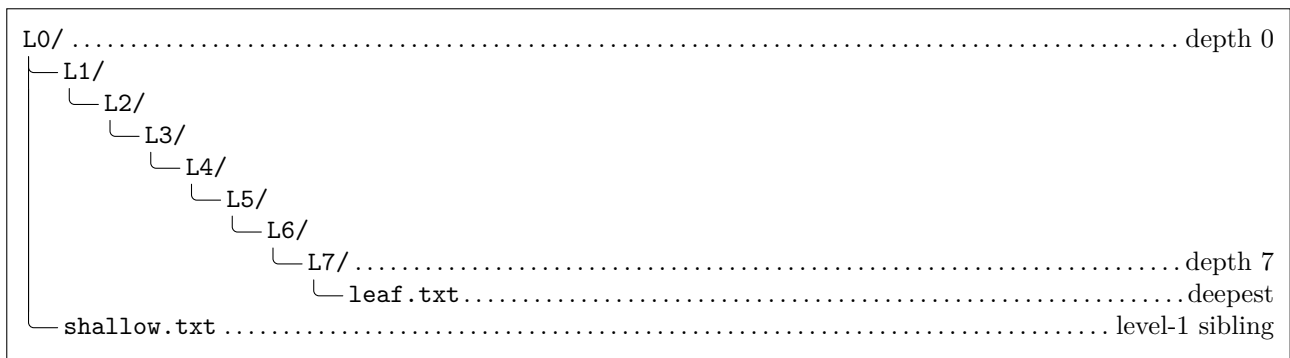

8 Multiple trees

8.1 Two trees in sequence

```
\begin{dirtreex}[box={border color=blue!60!black,  
                    background color=blue!5}]  
  \dir{first-tree}{}{  
    \file{a.txt}{}  
    \file{b.txt}{}  
  }  
\end{dirtreex}  
  
\bigskip  
  
\begin{dirtreex}[box={border color=red!60!black,  
                    background color=red!5}]  
  \dir{second-tree}{}{  
    \file{x.py}{}  
    \file{y.py}{}  
  }  
\end{dirtreex}
```

```
first-tree/  
├ a.txt  
└ b.txt
```

```
second-tree/  
├ x.py  
└ y.py
```



9 Page-break behaviour

The examples below all need enough content to overflow onto a second page. They are placed after intentional vertical filler so the tree must split at least once; in real documents the break is driven by whatever natural layout pushes the tree close to a page boundary.

The black line outlines the content area, while the red and blue lines indicate where the box and directory tree should break, respectively.

9.1 Default cross-page rendering

```
\begin{dirtreex}[
  box={true, border color=black,
    background color=white, margin=6pt}]
\dir{project}{long tree}{
  \dir{src}{source code}{
    \file{a.py}{}\file{b.py}{}\file{c.py}{}
    \file{d.py}{}\file{e.py}{}\file{f.py}{}
    \file{g.py}{}\file{h.py}{}\file{i.py}{}
    \file{j.py}{}
  }
  \dir{tests}{test suite}{
    \file{test-a.py}{}\file{test-b.py}{}
    \file{test-c.py}{}\file{test-d.py}{}
    \file{test-e.py}{}
  }
  \dir{docs}{documentation}{
    \file{intro.md}{}\file{api.md}{}
    \file{tutorial.md}{}\file{changelog.md}{}
  }
  \file{Makefile}{}
  \file{setup.py}{}
  \file{README.md}{}
  \file{LICENSE}{}
}
\end{dirtreex}
```

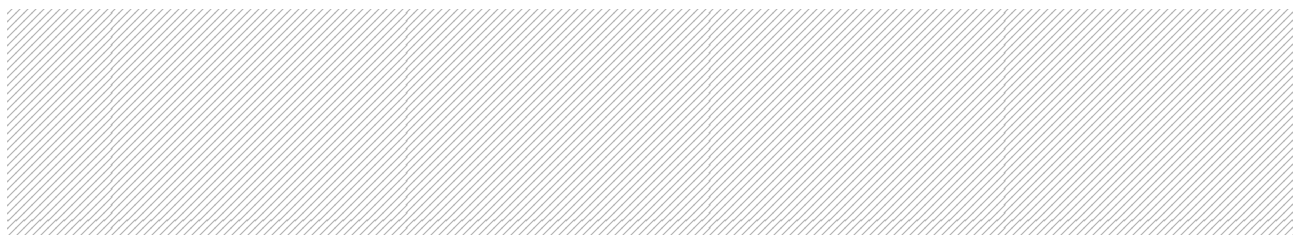


```
project/ ..... long tree
├── src/ ..... source code
│   ├── a.py
│   ├── b.py
│   ├── c.py
│   ├── d.py
│   ├── e.py
│   ├── f.py
│   ├── g.py
│   ├── h.py
│   ├── i.py
│   └── j.py
```

```
— tests/ ..... test suite
  |— test-a.py
  |— test-b.py
  |— test-c.py
  |— test-d.py
  |— test-e.py
— docs/ ..... documentation
  |— intro.md
  |— api.md
  |— tutorial.md
  |— changelog.md
— Makefile
— setup.py
— README.md
— LICENSE
```

9.2 Cross-page with rounded elbows and per-entry colours

```
\begin{dirtreex}[
  elbow radius=3pt,
  box={true, corners=4pt, border color=black,
    background color=white, margin=6pt}]
\dir{project}{colour across a page break}{
  \dir[line color=red]{red-branch}{red}{
    \file{r1.py}{}\file{r2.py}{}\file{r3.py}{}
    \file{r4.py}{}\file{r5.py}{}\file{r6.py}{}
    \file{r7.py}{}\file{r8.py}{}\file{r9.py}{}
    \file{r10.py}{}
  }
  \dir[line color=blue]{blue-branch}{blue}{
    \file{b1.py}{}\file{b2.py}{}\file{b3.py}{}
    \file{b4.py}{}\file{b5.py}{}
  }
  \dir[line color=green!60!black]{green-branch}{green}{
    \file{g1.py}{}\file{g2.py}{}\file{g3.py}{}
  }
}
\end{dirtreex}
```

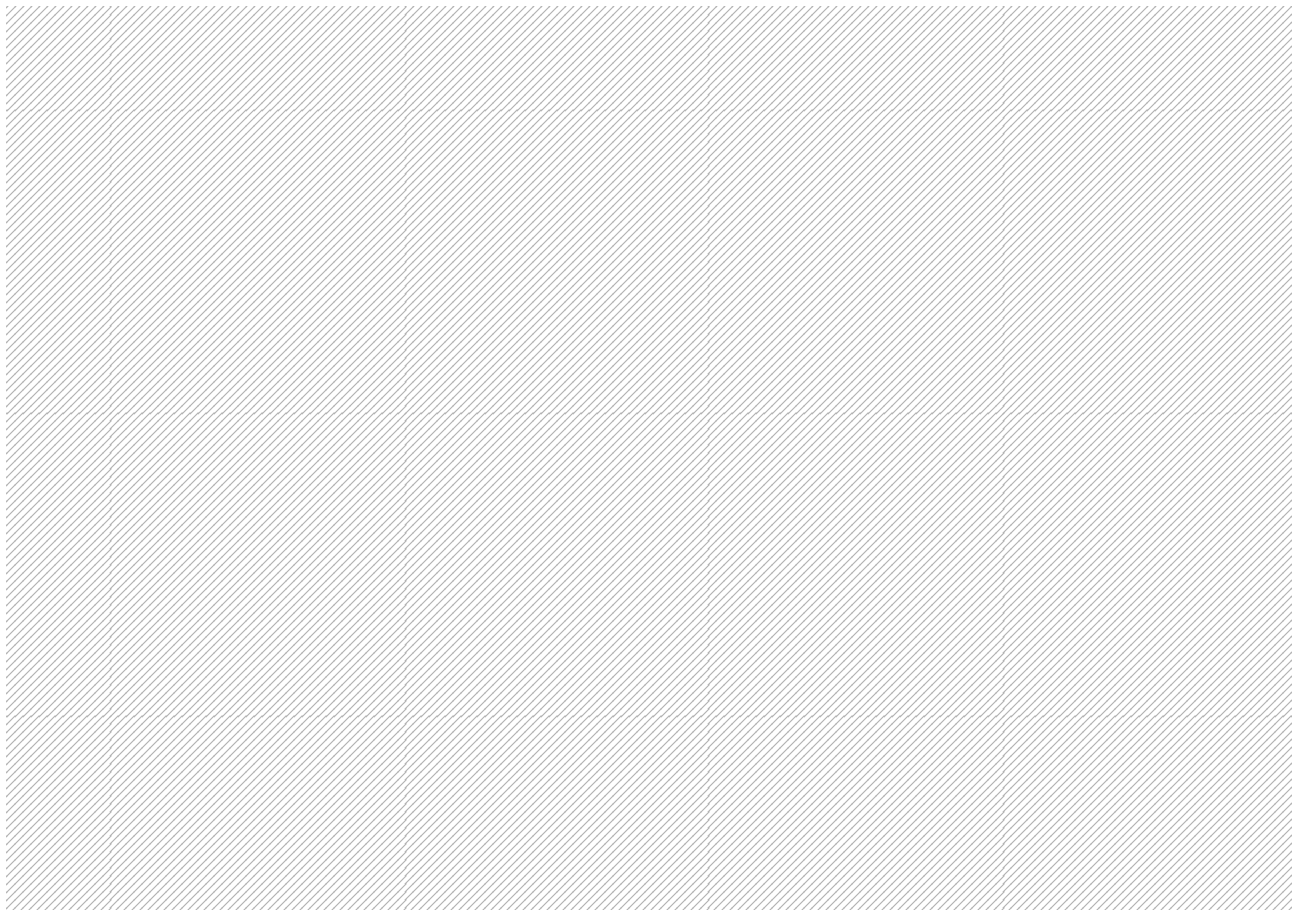

```
project/.....colour across a page break
├── red-branch/.....red
│   ├── r1.py
│   ├── r2.py
│   ├── r3.py
│   ├── r4.py
│   └── r5.py
```

- └ r6.py
- └ r7.py
- └ r8.py
- └ r9.py
- └ r10.py

└ blue-branch/ blue


- └ b1.py
- └ b2.py
- └ b3.py
- └ b4.py
- └ b5.py

└ green-branch/ green

- └ g1.py
- └ g2.py
- └ g3.py

9.3 Break offsets (box break at / tree break at)

```
\begin{dirtreex}[
  box={true, corners=4pt, border color=blue!60!black,
    background color=blue!5, margin=6pt},
  pagebreak={true, box break at=1em,
    tree break at=2em}]
\dir{offsets}{box pulls back 4pt, tree pulls back 2pt}{
  \dir{src}{}{
    \file{a.py}{}\file{b.py}{}\file{c.py}{}
    \file{d.py}{}\file{e.py}{}\file{f.py}{}
    \file{g.py}{}\file{h.py}{}
  }
  \dir{docs}{}{
    \file{x.md}{}\file{y.md}{}\file{z.md}{}
  }
}
\end{dirtreex}
```

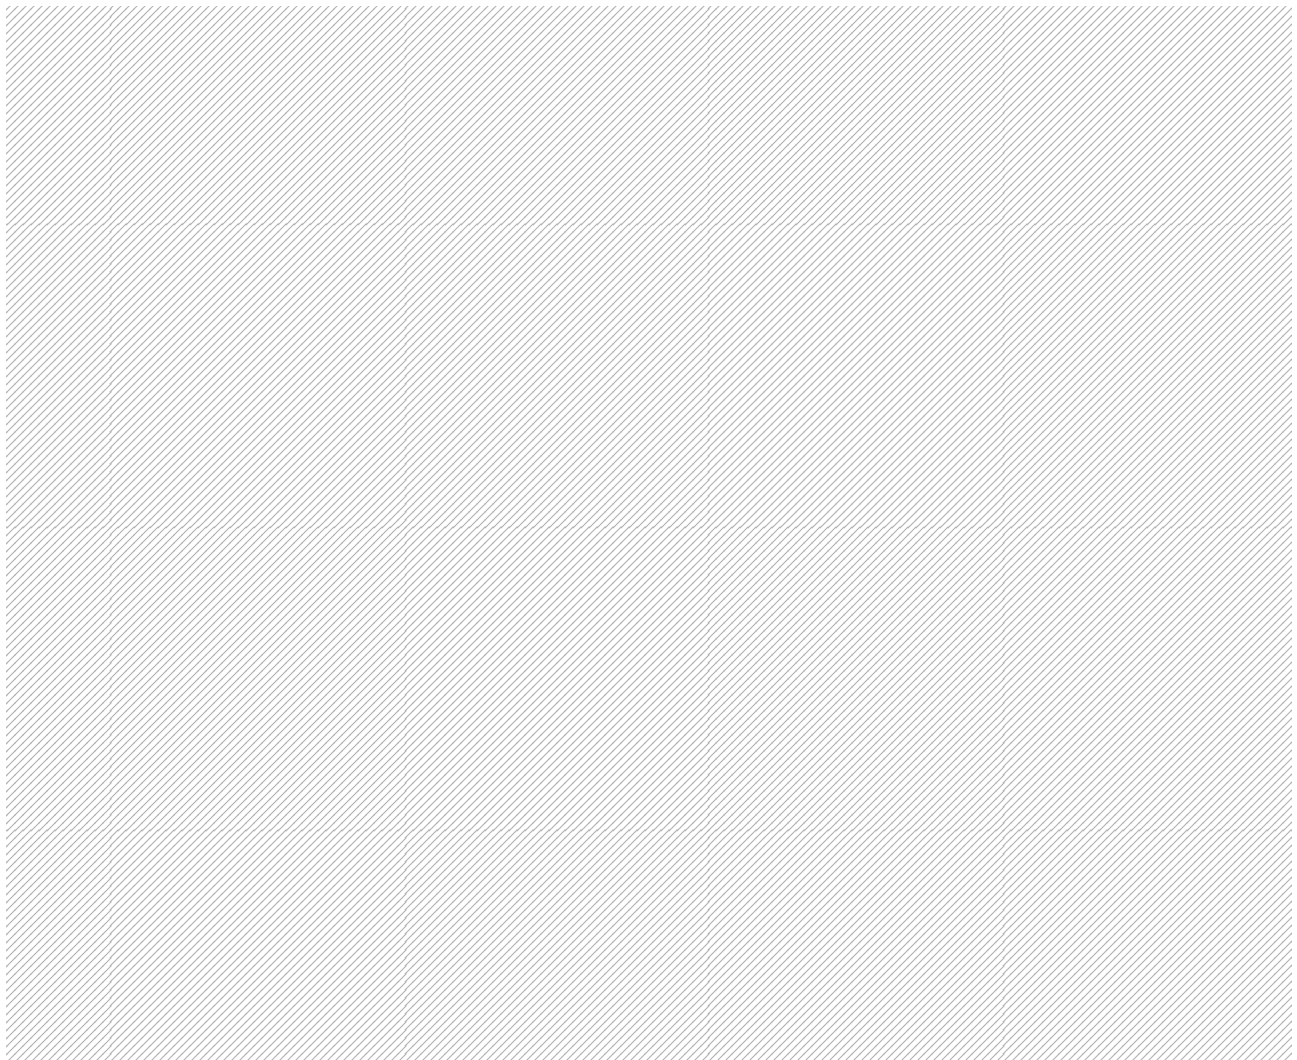


```
offsets/ ..... box pulls back 1em, tree pulls back 2em
├─ src/
│   ├── a.py
│   ├── b.py
│   └─ c.py
```

```
|  
|— d.py  
|— e.py  
|— f.py  
|— g.py  
|— h.py  
| docs/  
|— x.md  
|— y.md  
|— z.md
```

9.4 Asymmetric break offsets (two values)

```
\begin{dirtreex}[
  box={true, corners=4pt, border color=purple!60!black,
    background color=purple!5, margin=6pt},
  pagebreak={true, box break at={2em, 1em},
    tree break at={4em, 3em}}]
\dir{asym}{first-piece-bottom=2em and 4em, next-piece-top=1em and 3em}{
  \dir{src}{}{
    \file{a.py}{}\file{b.py}{}\file{c.py}{}
    \file{d.py}{}\file{e.py}{}\file{f.py}{}
    \file{g.py}{}\file{h.py}{}
  }
  \dir{lib}{}{
    \file{x.py}{}\file{y.py}{}
  }
}
\end{dirtreex}
```

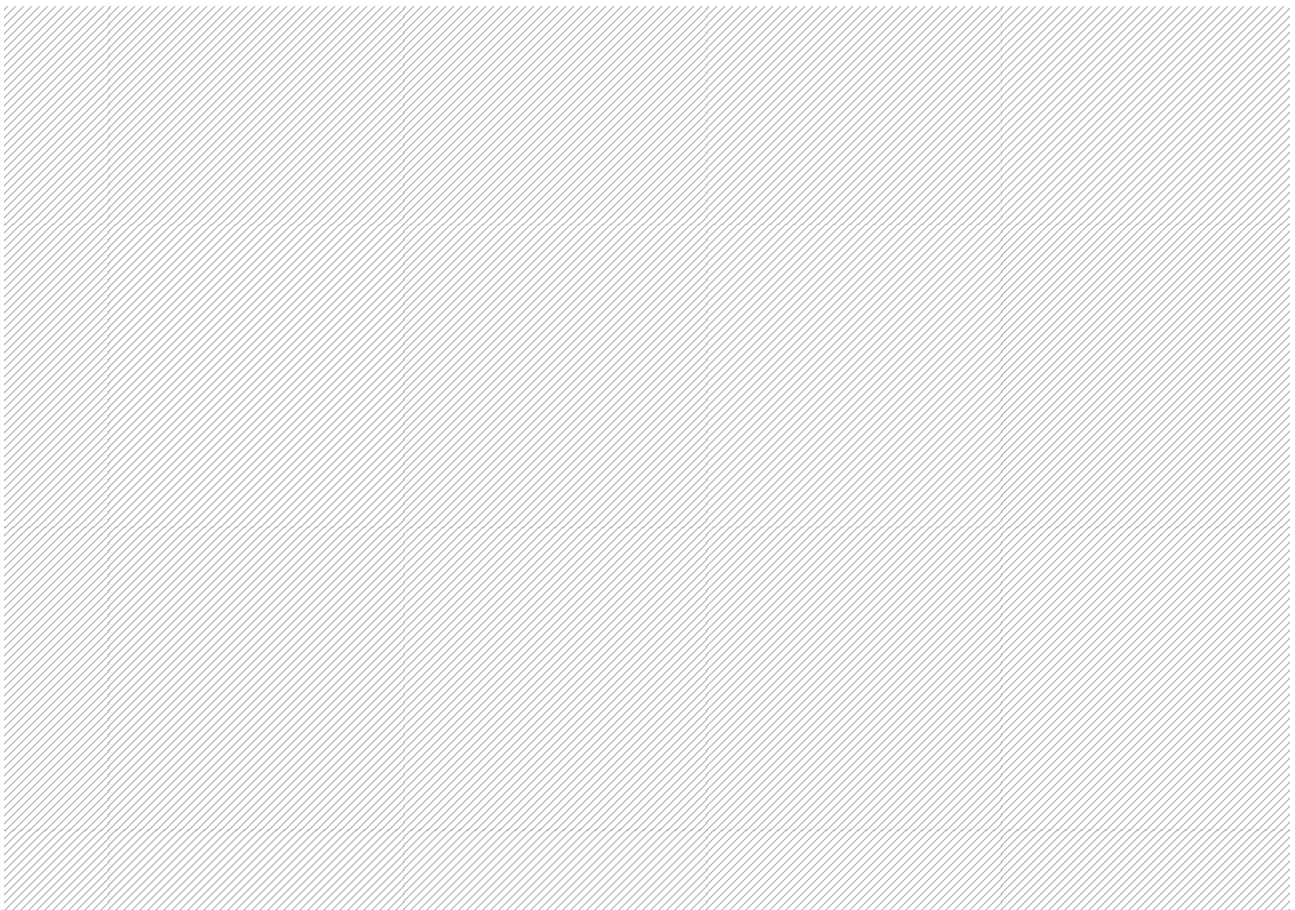


```
asym/ ..... first-piece-bottom=2em and 4em, next-piece-top=1em and 3em
├─ src/
│   ├── a.py
│   ├── b.py
│   ├── c.py
│   ├── d.py
│   └── e.py
```

```
|  
|— f.py  
|— g.py  
|— h.py  
|— lib/  
|— x.py  
|— y.py
```


9.5 Bare tree (box=false) across a page break

With `box=false` there is no frame to draw, but the tree's own extension columns still need to stay coherent across the break: every active `|` continues to the page bottom, then resumes at the top of the continuation page so descendants under a parent on the previous page remain visually attached. `box break` at is ignored when the frame is off (there is no torn edge to pull back).

```
\begin{dirtreex}[box=false]
  \dir{bare-cross}{no frame, tree still breaks}{
    \dir{src}{}{
      \file{a.py}{}\file{b.py}{}\file{c.py}{}
      \file{d.py}{}\file{e.py}{}\file{f.py}{}
      \file{g.py}{}\file{h.py}{}\file{i.py}{}
    }
    \dir{tests}{}{
      \file{t1.py}{}\file{t2.py}{}\file{t3.py}{}
      \file{t4.py}{}
    }
    \file{README.md}{}\file{LICENSE}{}
  }
\end{dirtreex}
```

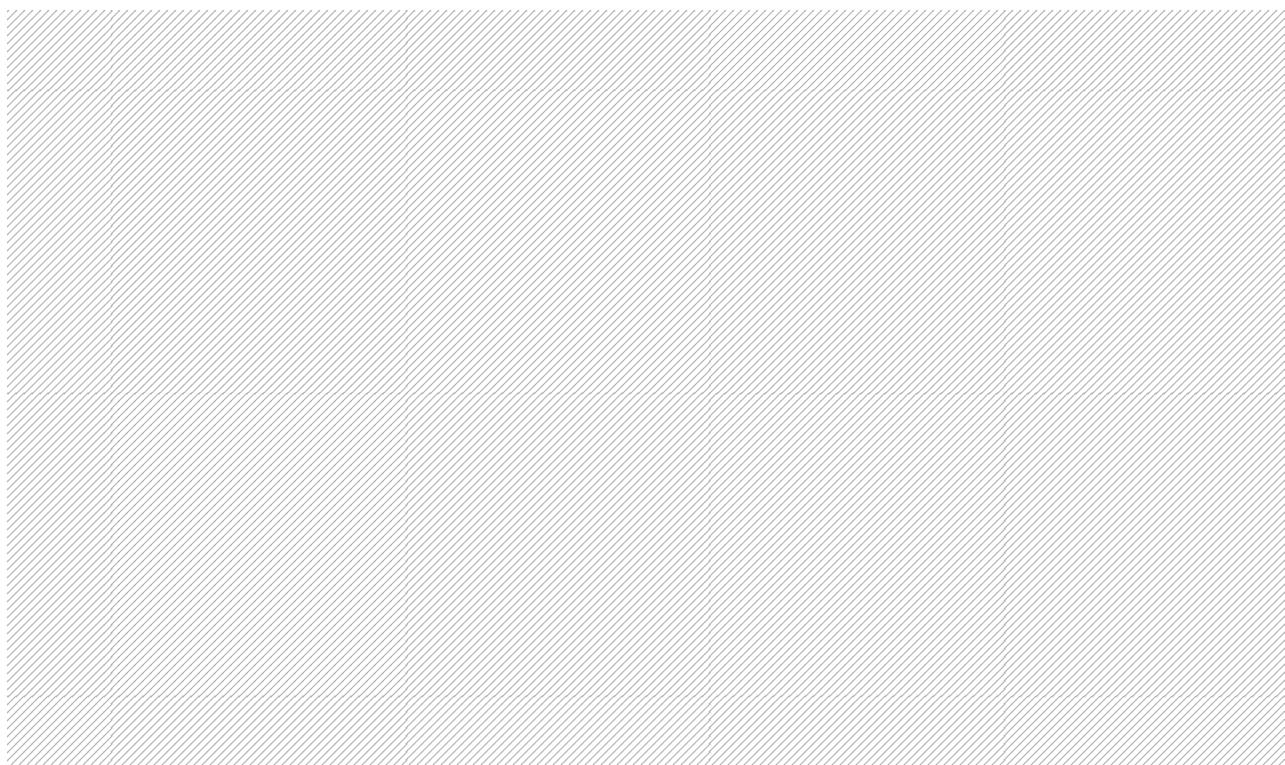

bare-cross/no frame, tree still breaks


```
— src/
  — a.py
  — b.py
  — c.py
  — d.py
  — e.py
  — f.py
  — g.py
  — h.py
  — i.py
— tests/
```

```
├── t1.py
├── t2.py
├── t3.py
├── t4.py
├── README.md
└── LICENSE
```

9.6 Bare tree with tree break at pull-back

Even without a frame, `tree break at` still applies: the tree extension columns retract from the page edge by the configured distance on each side of the break. Setting it asymmetrically lets the bottom of the first piece and the top of the second piece pull back by different amounts.

```
\begin{dirtreex}[
  box=false,
  pagebreak={true, tree break at={2em, 4em}}]
\dir{bare-pullback}{first-piece-bottom=2em, next-piece-top=4em}{
  \dir{src}{}{
    \file{a.py}{}\file{b.py}{}\file{c.py}{}
    \file{d.py}{}\file{e.py}{}\file{f.py}{}
    \file{g.py}{}\file{h.py}{}
  }
  \dir{docs}{}{
    \file{x.md}{}\file{y.md}{}\file{z.md}{}
  }
}
\end{dirtreex}
```

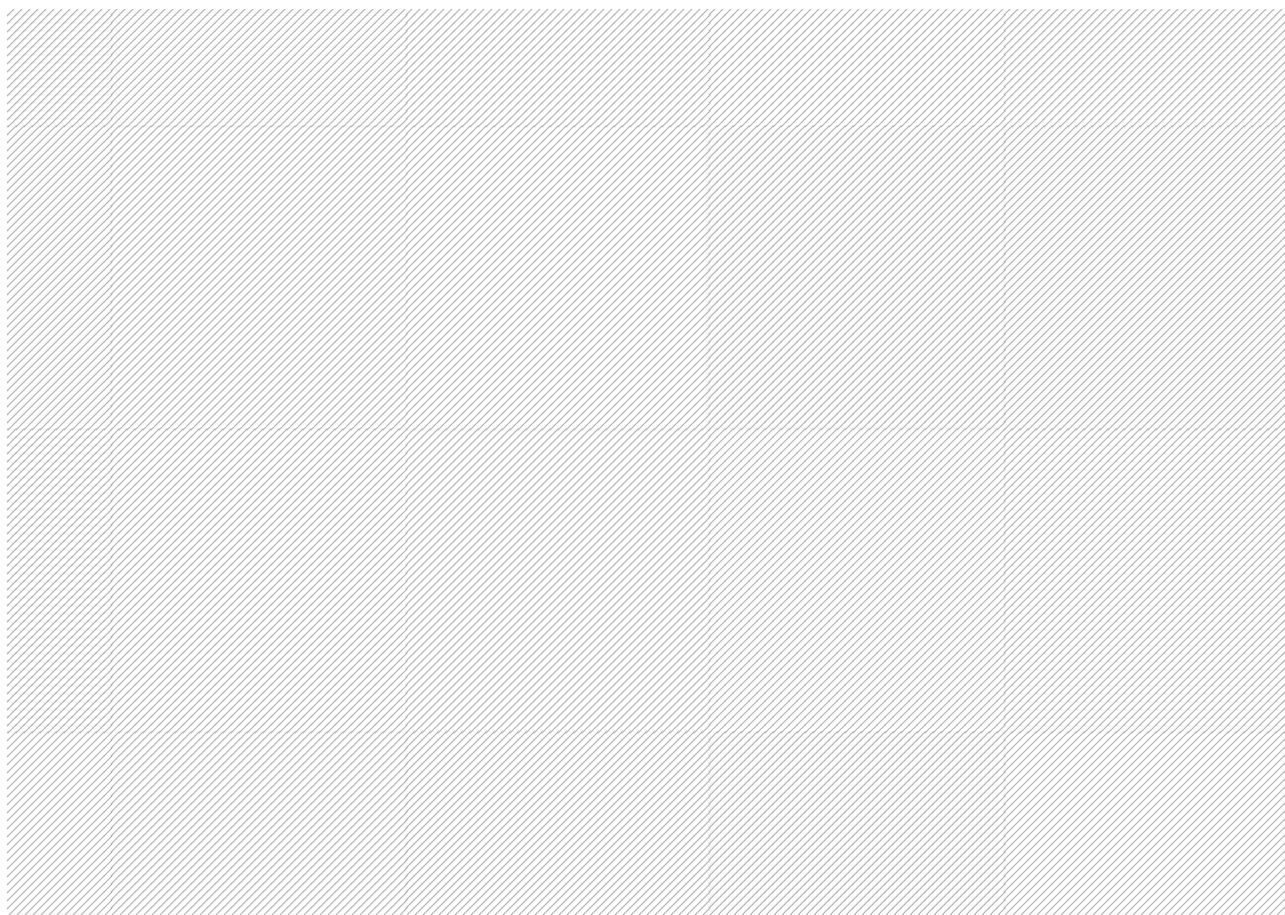

bare-pullback/ first-piece-bottom=2em, next-piece-top=4em


```
├─ src/
│   ├── a.py
│   ├── b.py
│   ├── c.py
│   ├── d.py
│   └── e.py
```

```
├── f.py
├── g.py
├── h.py
└── docs/
    ├── x.md
    ├── y.md
    └── z.md
```

9.7 pagebreak=false (tree spills past the page)

With `pagebreak=false` the frame refuses to break; a tall tree simply overflows past the page boundary (it is never truncated). This example uses a small filler so the spillover is visible.

```
\begin{dirtreex}[
  pagebreak={false},
  box={true, border color=black!50,
    background color=black!3, margin=6pt}]
\dir{no-break}{overflows past page bottom}{
  \file{a.txt}{}\file{b.txt}{}\file{c.txt}{}
  \file{d.txt}{}\file{e.txt}{}\file{f.txt}{}
  \file{g.txt}{}\file{h.txt}{}\file{i.txt}{}
  \file{j.txt}{}
}
\end{dirtreex}
```

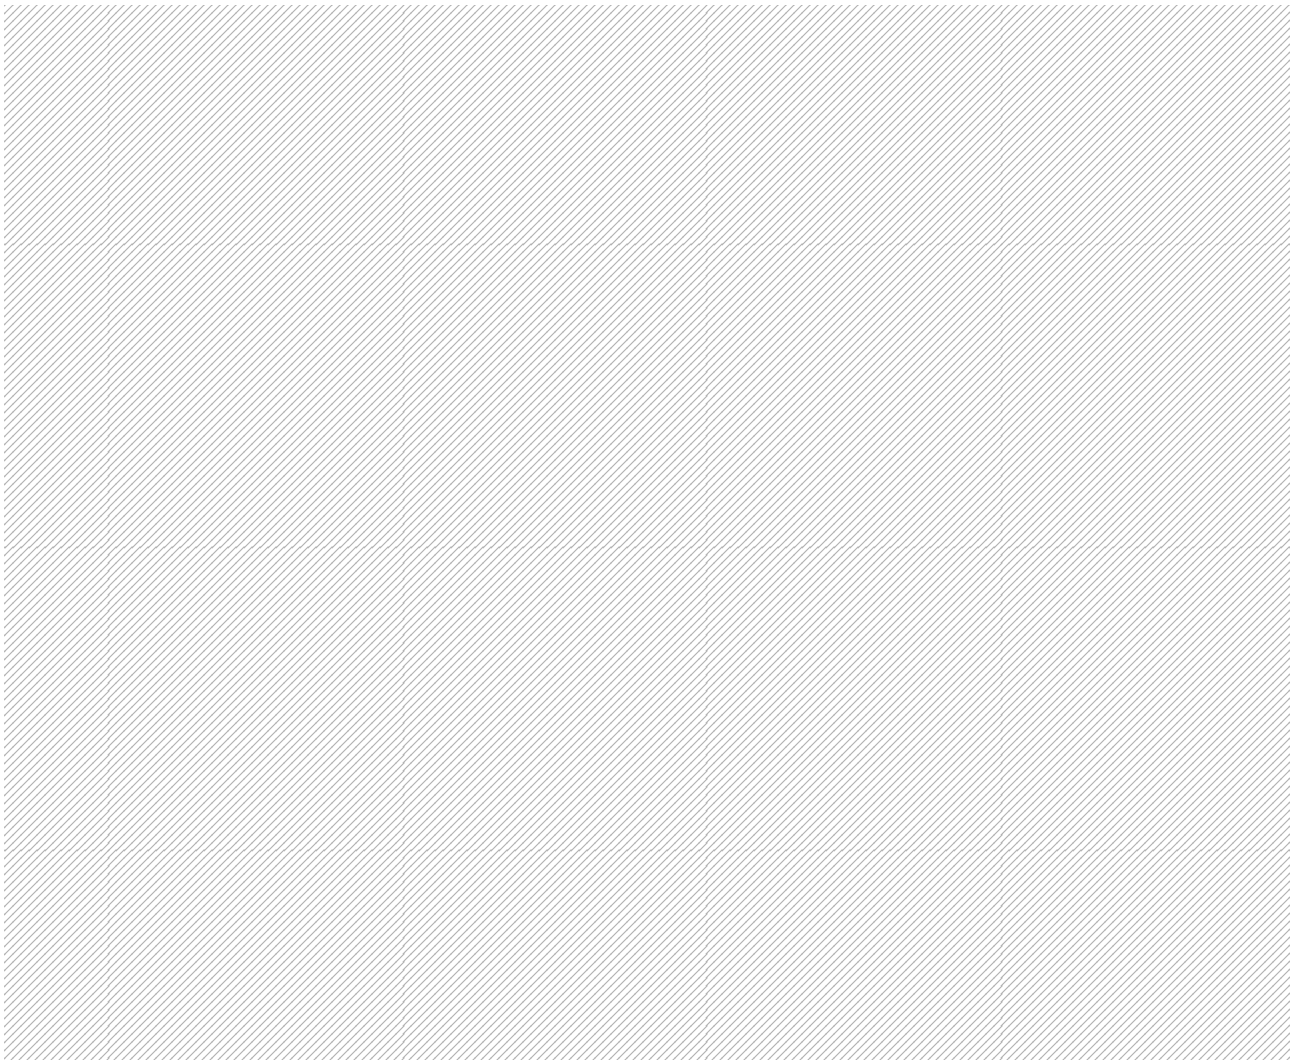

no-break/.....overflows past page bottom
— a.txt
— b.txt
— c.txt
— d.txt
— e.txt
— f.txt
— g.txt
— h.txt
— i.txt
— j.txt

10 Multi-page mega-project

A realistic tree large enough to span three or more pages. It exercises every cross-page mechanic at once: per-branch colours, nested directory depth, mixed leaf and subtree siblings, and the `|` extension columns continuing across two consecutive breaks. Each top-level branch carries its own `line color` override, which the package threads through every active column on every continuation page.

```
\begin{dirtreex}[
  fontsize=\small, elbow radius=3pt, line color=black,
  box={true, corners=0pt, border color=blue!60,
    border width=0.5pt, background color=blue!2,
    margin=6pt}]
\dir{mega-project}{mega-project root}{
  \dir[line color=blue]{backend}{backend services}{
    \dir{api}{API layer}{
      \file{server.py}{HTTP server}
      \file{middleware.py}{middleware}
      \file{auth.py}{authentication}
      \file{rate\_limiter.py}{rate limiter}
      \dir{routes}{routes}{
        \file{users.py}{user routes}
        \file{projects.py}{project routes}
        \file{tasks.py}{task routes}
        \file{reports.py}{report routes}
        \file{admin.py}{admin routes}
        \file{webhooks.py}{webhook routes}
      }
      \dir{schemas}{schemas}{
        \file{user.py}{user schema}
        \file{project.py}{project schema}
        \file{task.py}{task schema}
        \file{report.py}{report schema}
      }
    }
  }
  \dir{services}{service layer}{
    \file{user\_service.py}{user service}
    \file{project\_service.py}{project service}
    \file{task\_service.py}{task service}
    \file{notification\_service.py}{notifications}
    \file{email\_service.py}{email service}
    \file{cache\_service.py}{cache service}
  }
  \dir{database}{database layer}{
    \file{connection.py}{connection mgmt}
    \file{migrations.py}{migrations}
    \dir{models}{ORM models}{
      \file{user.py}{users table}
      \file{project.py}{projects table}
      \file{task.py}{tasks table}
      \file{audit\_log.py}{audit log table}
    }
    \dir{repositories}{repositories}{
      \file{user\_repo.py}{user repo}
      \file{project\_repo.py}{project repo}
      \file{task\_repo.py}{task repo}
    }
  }
  \dir{utils}{utilities}{
    \file{logger.py}{logging}
    \file{config.py}{config}
    \file{helpers.py}{helpers}
    \file{validators.py}{validators}
    \file{crypto.py}{crypto utils}
  }
}
```

```

}
\dir[line color=teal]{frontend}{frontend app}{
  \dir{src}{source}{
    \dir{components}{components}{
      \dir{common}{common}{
        \file{Button.tsx}{button}
        \file{Input.tsx}{input}
        \file{Modal.tsx}{modal}
        \file{Table.tsx}{table}
        \file{Pagination.tsx}{pagination}
        \file{Loading.tsx}{loading}
        \file{ErrorBoundary.tsx}{error boundary}
      }
    }
    \dir{layout}{layout}{
      \file{Header.tsx}{header}
      \file{Sidebar.tsx}{sidebar}
      \file{Footer.tsx}{footer}
      \file{MainContent.tsx}{main content}
    }
    \dir{pages}{pages}{
      \file{Dashboard.tsx}{dashboard}
      \file{ProjectList.tsx}{project list}
      \file{ProjectDetail.tsx}{project detail}
      \file{TaskBoard.tsx}{task board}
      \file{UserProfile.tsx}{user profile}
      \file{Settings.tsx}{settings}
      \file{Login.tsx}{login}
      \file{Register.tsx}{register}
    }
  }
}
\dir{hooks}{custom hooks}{
  \file{useAuth.ts}{auth hook}
  \file{useApi.ts}{api hook}
  \file{useWebSocket.ts}{websocket hook}
  \file{useLocalStorage.ts}{local storage hook}
}
\dir{stores}{stores}{
  \file{authStore.ts}{auth state}
  \file{projectStore.ts}{project state}
  \file{uiStore.ts}{ui state}
}
\dir{utils}{utilities}{
  \file{api.ts}{api client}
  \file{format.ts}{format}
  \file{validation.ts}{form validation}
}
\file{App.tsx}{app entry}
\file{index.tsx}{render entry}
\file{router.tsx}{router config}
}
\file{package.json}{dependencies}
\file{tsconfig.json}{typescript config}
\file{vite.config.ts}{vite config}
}
\dir[line color=orange]{devops}{devops \& deployment}{
  \dir{docker}{docker config}{
    \file{Dockerfile.backend}{backend image}
    \file{Dockerfile.frontend}{frontend image}
    \file{docker-compose.yml}{compose file}
    \file{docker-compose.dev.yml}{dev compose}
  }
}
\dir[line color=green]{k8s}{k8s config}{
  \file{deployment.yaml}{deployment}
  \file{service.yaml}{service}
  \file{ingress.yaml}{ingress}
  \file{configmap.yaml}{configmap}
}

```



```

    \file{secret.yaml}{secret}
    \file{hpa.yaml}{horizontal autoscaler}
  }
  \dir{ci}{CI}{
    \file{.gitlab-ci.yml}{gitlab ci}
    \file{Jenkinsfile}{jenkins pipeline}
  }
  \dir{monitoring}{monitoring}{
    \file{prometheus.yml}{prometheus config}
    \file{grafana-dashboard.json}{grafana dashboard}
    \file{alertmanager.yml}{alert rules}
  }
}
\file{README.md}{project readme}
\file{LICENSE}{license}
\file{.gitignore}{git ignore rules}
\file{Makefile}{build script}
}
\end{dirtreex}

```

```

mega-project/ ..... mega-project root
├── backend/ ..... backend services
│   ├── api/ ..... API layer
│   │   ├── server.py ..... HTTP server
│   │   ├── middleware.py ..... middleware
│   │   ├── auth.py ..... authentication
│   │   ├── rate_limiter.py ..... rate limiter
│   │   ├── routes/ ..... routes
│   │   │   ├── users.py ..... user routes
│   │   │   ├── projects.py ..... project routes
│   │   │   ├── tasks.py ..... task routes
│   │   │   ├── reports.py ..... report routes
│   │   │   ├── admin.py ..... admin routes
│   │   │   └── webhooks.py ..... webhook routes
│   │   ├── schemas/ ..... schemas
│   │   │   ├── user.py ..... user schema
│   │   │   ├── project.py ..... project schema
│   │   │   ├── task.py ..... task schema
│   │   │   └── report.py ..... report schema
│   ├── services/ ..... service layer
│   │   ├── user_service.py ..... user service
│   │   ├── project_service.py ..... project service
│   │   ├── task_service.py ..... task service
│   │   ├── notification_service.py ..... notifications
│   │   ├── email_service.py ..... email service
│   │   └── cache_service.py ..... cache service
│   ├── database/ ..... database layer
│   │   ├── connection.py ..... connection mgmt
│   │   ├── migrations.py ..... migrations
│   │   ├── models/ ..... ORM models
│   │   │   ├── user.py ..... users table
│   │   │   ├── project.py ..... projects table
│   │   │   ├── task.py ..... tasks table
│   │   │   └── audit_log.py ..... audit log table
│   │   └── repositories/ ..... repositories
│   │       ├── user_repo.py ..... user repo
│   │       ├── project_repo.py ..... project repo
│   │       └── task_repo.py ..... task repo
│   └── utils/ ..... utilities

```

logger.py	logging
config.py	config
helpers.py	helpers
validators.py	validators
crypto.py	crypto utils
frontend/	frontend app
src/	source
components/	components
common/	common
Button.tsx	button
Input.tsx	input
Modal.tsx	modal
Table.tsx	table
Pagination.tsx	pagination
Loading.tsx	loading
ErrorBoundary.tsx	error boundary
layout/	layout
Header.tsx	header
Sidebar.tsx	sidebar
Footer.tsx	footer
MainContent.tsx	main content
pages/	pages
Dashboard.tsx	dashboard
ProjectList.tsx	project list
ProjectDetail.tsx	project detail
TaskBoard.tsx	task board
UserProfile.tsx	user profile
Settings.tsx	settings
Login.tsx	login
Register.tsx	register
hooks/	custom hooks
useAuth.ts	auth hook
useApi.ts	api hook
useWebSocket.ts	websocket hook
useLocalStorage.ts	local storage hook
stores/	stores
authStore.ts	auth state
projectStore.ts	project state
uiStore.ts	ui state
utils/	utilities
api.ts	api client
format.ts	format
validation.ts	form validation
App.tsx	app entry
index.tsx	render entry
router.tsx	router config
package.json	dependencies
tsconfig.json	typescript config
vite.config.ts	vite config
devops/	devops & deployment
docker/	docker config
Dockerfile.backend	backend image
Dockerfile.frontend	frontend image
docker-compose.yml	compose file
docker-compose.dev.yml	dev compose
k8s/	k8s config
deployment.yaml	deployment

service.yaml	service
ingress.yaml	ingress
configmap.yaml	configmap
secret.yaml	secret
hpa.yaml	horizontal autoscaler
ci/	CI
.gitlab-ci.yml	gitlab ci
Jenkinsfile	jenkins pipeline
monitoring/	monitoring
prometheus.yml	prometheus config
grafana-dashboard.json	grafana dashboard
alertmanager.yml	alert rules
README.md	project readme
LICENSE	license
.gitignore	git ignore rules
Makefile	build script

11 Verbatim names

These examples use the verbatim variants `\verbatim` / `\verbfile`. The path argument is read under `xparse`'s `v` specifier; catcodes inside the chosen delimiters are set to 12 (“other”), so common dangerous bytes survive as literal glyphs.

11.1 Top-level verbatim file

A single `\verbfile` with an underscore and a dollar sign in the name:

```
\begin{dirtreex}
  \verbfile|app_${STAGE}.toml|{environment-templated config}
\end{dirtreex}
```

```
app_${STAGE}.toml ..... environment-templated config
```

11.2 Nested verbatim containing verbatim file

A `\verbfile` or `\verbatim` nested inside another `\verbatim`'s children block works because the children block is a live TeX group — the inner `v` argument reads its delimiter pair directly from the source, with no intervening tokenisation step.

```
\begin{dirtreex}
  \verbatim|src/data_${data root with dollar in name}|{
    \verbfile|users_2026-01.parquet|{snapshot}%
    \verbfile|conf{prod}.yaml|{production config}%
  }
\end{dirtreex}
```

```
src/data_${data root with dollar in name}
├─ users_2026-01.parquet ..... snapshot
└─ conf{prod}.yaml ..... production config
```

11.3 Mixed normal and verbatim siblings

`\dir` / `\file` (normal-catcode names) and `\verbatim` / `\verbfile` (verbatim names) coexist freely inside the same children block.

```
\begin{dirtreex}
  \dir{project}{root}{%
    \dir{src}{source}{%
      \file{main.py}{}%
      \verbfile|loader_$.py|{verbatim sibling}%
    }%
    \verbatim|cfg_|{verbatim dir sibling}{%
      \file{default.yaml}{}%
    }%
  }
\end{dirtreex}
```

```

project/ ..... root
├─ src/ ..... source
│   ├── main.py
│   └─ loader_$.py ..... verbatim sibling
└─ cfg_%/ ..... verbatim dir sibling
    └─ default.yaml

```

11.4 Pipe (|) in the path — alternative delimiter

The default delimiter shown above is |, but *any* non-letter, non-space character may be chosen. Pick one that does not appear in the path. Below, + and / are used as delimiters so a literal | survives in the name:

```

\begin{dirtreex}
  \dir{shell-pipelines}{names that contain a literal |}{%
    \verbfile+a|b|c+{+ as delimiter}%
    \verbfile/ps aux | grep python/{/ as delimiter}%
    \verbdir!logs|archive!{! as delimiter}{%
      \verbfile=out|err.log={= as delimiter, file inside}%
    }%
  }
\end{dirtreex}

```

```

shell-pipelines/ ..... names that contain a literal |
├─ a|b|c ..... + as delimiter
├─ ps aux | grep python ..... / as delimiter
└─ logs|archive/ ..... ! as delimiter
    └─ out|err.log ..... = as delimiter, file inside

```

A delimiter *collision* corrupts silently rather than erroring: `\verbfile|a|b|{c}` takes `|a|` as the name and `b` as the comment, leaving `|{c}` as stray tokens. Pick a delimiter that never appears in the names you intend to write.