



UNIVERSITY
of
INFORMATION TECHNOLOGY

5.2

Table Cell Features

Using `<td>` with `rowspan` and `colspan`

Header 1	Header 2	Header 3
cell 1	cell 2	cell 3
Vertically merged 3 cells	cell 4	cell 5
	cell 6	cell 7
	cell 8	cell 9
Horizontally merged 3 cells		

Use `rowspan`

Use `colspan`



colspan Attribute Example

```

<!DOCTYPE html>
<html>
<head><title>colspan Attribute Example</title></head>
<body>
  <table border="1">
    <tr>
      <th colspan="2">Class</th>
    </tr>
    <tr>
      <td>Mg Mg</td>    <td>A</td>
    </tr>
    <tr>
      <td>Ma Ma</td>    <td>B</td>
    </tr>
  </table>
</body>
</html>

```

colspan Attribute Example		×	+
←	→	↻	ⓘ file:///C:/Users/Administrator/E
Class			
Mg Mg	A		
Ma Ma	B		



rowspan Attribute Example

```
<!DOCTYPE html>
<html>
<head><title>rowspan Attribute Example </title></head>
<body>
<table border="1">
  <tr>
    <th>Name</th> <th>Class</th> <th>Year</th>
  </tr>
  <tr>
    <td>Mg Mg</td> <td>A</td> <td rowspan="2">First Year</td>
  </tr>
  <tr>
    <td>Ma Ma</td> <td>B</td>
  </tr>
</table>
</body>
</html>
```

A screenshot of a web browser window titled "rowspan Attribute Example". The address bar shows a local file path. The rendered table is displayed below the browser controls. The table has three columns: Name, Class, and Year. The first row contains "Mg Mg", "A", and "First Year". The second row contains "Ma Ma", "B", and "First Year". A red dashed box highlights the "First Year" cell in the second row, indicating it is part of a rowspan=2 structure.

Name	Class	Year
Mg Mg	A	First Year
Ma Ma	B	First Year

<th> scope Attribute

- ❑ The scope attribute specifies whether a **header cell** is a header for which column, row, or group of columns or group of rows.
- ❑ It has no visual effect in ordinary web browsers but can be used by screen readers.


e.g.

Day	Classes		
	Schedule		Topic
	From	To	
Monday	8:00 am	10:00 am	HTML
			CSS
Tuesday	8:00 am	9:00 am	Myanmar
	9:00 am	9:30 am	English
	9:40 am	10:00 am	
Wednesday	8:00 am	10:00 am	Maths



scope Attribute Example

```
<table border=1>
  <tr>
    <th scope="col">Class</th>
    <th scope="col">Name</th>
    <th scope="col">Year</th>
  </tr>
  <tr>
    <th scope="row">A</th>
    <td>Mg Mg</td>
    <td>First Year</td>
  </tr>
  <tr>
    <th scope="row">B</th>
    <td>Ma Ma</td>
    <td>First Year</td>
  </tr>
  <tr>
    <th scope="row">A</th>
    <td>Ei Ei</td>
    <td>Second Year</td>
  </tr>
</table>
```

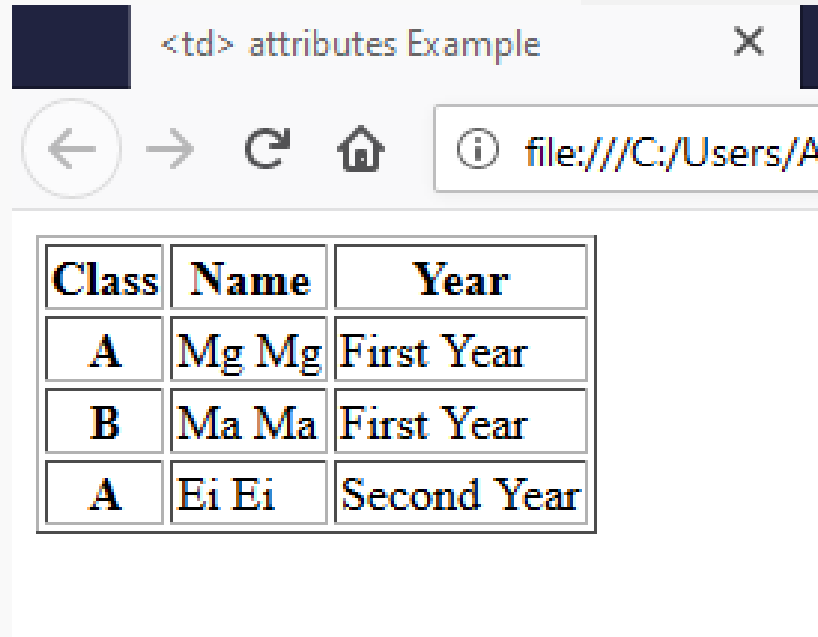

Class	Name	Year
A	Mg Mg	First Year
B	Ma Ma	First Year
A	Ei Ei	Second Year



<th> id Attribute with <td> headers attribute

- ❑ The headers attribute is used to indicate which headers correspond to which cells.
- ❑ Although <th> element defines a cell as header of table cells, the exact nature is specified by the **scope** and **headers** attributes.
- ❑ Table cell values associate with their corresponding headers
 - <th> tag **id** attribute
 - <td> tag **headers** attribute



headers Attribute Example

```

<table border="1">
  <tr>
    <th id="class">Class</th>
    <th id="name">Name</th>
    <th id="year">Year</th>
  </tr>
  <tr>
    <th id="A">A</th>
    <td headers="A Name">Mg Mg</td>
    <td headers="A Year">First Year</td>
  </tr>
  <tr>
    <th id="B">B</th>
    <td headers="B Name">Ma Ma</td>
    <td headers="B Year">First Year</td>
  </tr>
  <tr>
    <th id="C">C</th>
    <td headers="C Name">Ei Ei</td>
    <td headers="C Year">Second Year</td>
  </tr>
</table>

```

Class	Name	Year
A	Mg Mg	First Year
B	Ma Ma	First Year
C	Ei Ei	Second Year

<th><td> Element Attributes

Attribute	Value	Description
align	left right center justify	Text in the cell is aligned.
bgcolor	Color name/ value	A cell color is specified.
colspan	<td colspan="2">...</td>	A cell should span across more than one column.
rowspan	<td rowspan="2">...</td>	A cell should span across more than one row.
scope	<th scope="..">...</th>	The scope of the table header cell contents (row or column); may be access by screen readers.
headers	<td headers="..">...</td>	Use to indicate which headers correspond to that cell

5.2.1

Lets practice!

Create the following table on your web page.

- It needs to use not only various table elements but also corresponding attributes such as rowspan, colspan, align, bgcolor, etc.
- Also, set the id and header attributes for screen readers.

Day	Classes		
	Schedule		Topic
	From	To	
Monday	8:00 am	10:00 am	HTML
			CSS
Tuesday	8:00 am	9:00 am	Myanmar
	9:00 am	9:30 am	English
	9:40 am	10:00 am	
Wednesday	8:00 am	10:00 am	Maths



Summary

Lecture 5.2: Table Cell Features

- ✓ Using `<td>` with `rowspan` and `colspan`
- ✓ `<th>` `scope` Attribute
- ✓ `<th>` `id` Attribute with `<td>` `headers` attribute
- ✓ `<th>``<td>` Element Attributes

