


C - 2

$$f(x)$$




argumentos →

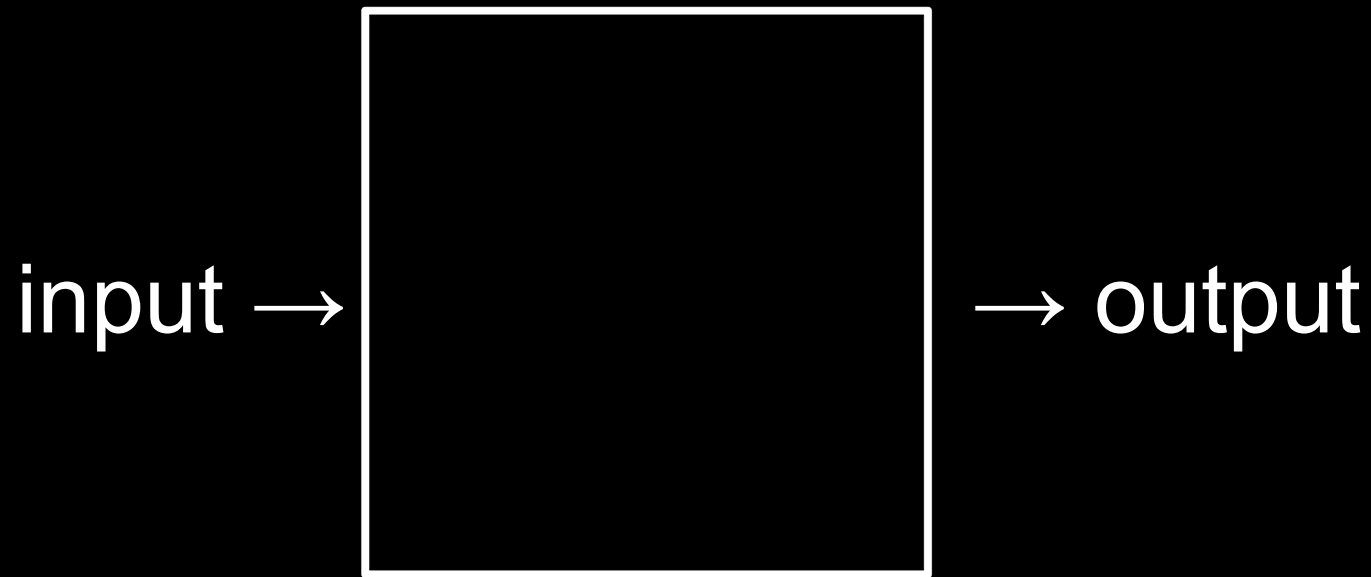



função

→ retorno

hello, world

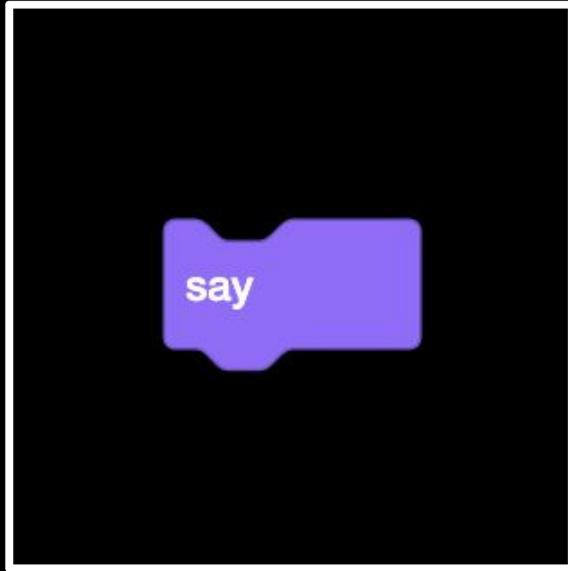

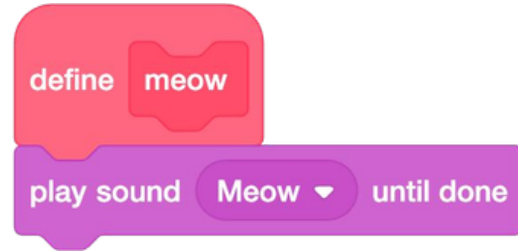

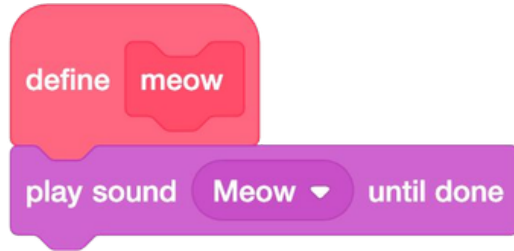



```
void meow(void)
{
    printf("meow\n");
}
```





```
int main(void)
{
    for (int i = 0; i < 3; i++)
    {
        meow();
    }
}
```

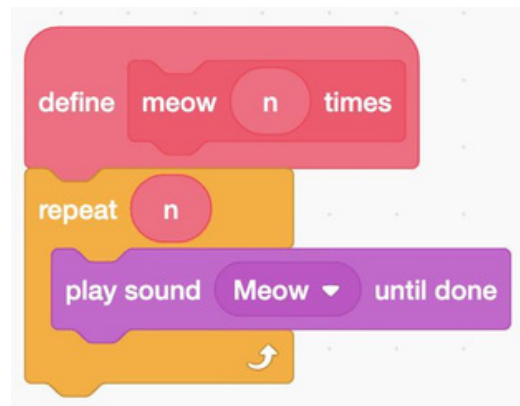

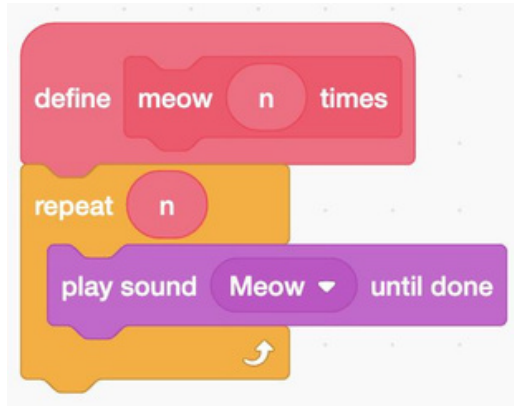

```
void meow(int n)
{
    for (int i = 0; i < n; i++)
    {
        printf("meow\n");
    }
}
```





```
int main(void)
{
    meow(3);
}
```

bibliotecas

libraries

libs

header files

stdio.h

documentação

Manuais

manual.cs50.io

manual.cs50.io/#stdio.h

manual.cs50.io/3/printf

cs50.h

manual.cs50.io/#cs50.h

get_char

get_double

get_float

get_int

get_long

get_string

...

escopo

boas práticas

modularidade

legibilidade

