# SSO troubleshooting on the CluedIn side March 2022

Tuesday, 22 March 2022 12:36 PM

### **Purpose**

How to turn on extra information and where to look if your SSO implementation requires troubleshooting.

### **Journal**

```
[16:04:59 INF] HTTP GET /api/external/challenge?scheme=aad&organizationId=af22cbcd -9cf2-47d4-bd8f-
fe9e1b151bb8&returnUrl=%2Fauth%2Fconnect%2Fauthorize%3Fclient_id%3Dssoorg1%26redirect_uri%3Dhttps%253A%252F%252Fssoorg1.k1.cluedin.me%252Fssocallback%26response_type%3Dcode%26scope%3Dopenid%
2530Arc32rks32rsSoorgl.Kl.Cluedin.mex32rsSocdlidack&2oresponse_typex30code&2oscopex30openidx
2520profile%2520ServerApiForUI%2520offline_access%26state%30F2c253a89ce84a5e9ff66ba612f75e76%
26code_challenge%3DbvxUPj11LyZD_lpAdMk5jh7kVFrX2tg0Vj_jnBmWs38%26code_challenge_method%3DS256%
26response_mode%3Dquery responded 200 in 172.3105 ms
[16:05:22 ERR] Exception occurred while processing message.
Microsoft.IdentityModel.Tokens.SecurityTokenInvalidAudienceException: IDX10214: Audience validation
failed. Audiences: '[PII is hidden. For more details, see https://aka.ms/IdentityModel/PII.]'. Did not
match: validationParameters.ValidAudience: '[PII is hidden. For more details, see
https://aka.ms/IdentityModel/PII.]' or validationParameters.ValidAudiences: '[PII is hidden. For more
details, see https://aka.ms/IdentityModel/PII.]'.
  at Microsoft.IdentityModel.Tokens.Validators.ValidateAudience(IEnumerable`1 audiences,
SecurityToken securityToken, TokenValidationParameters validationParameters)
at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateAudience(IEnumerable`1
audiences, JwtSecurityToken jwtToken, TokenValidationParameters validationParameters)
at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityToken
jwtToken, TokenValidationParameters validationParameters)
      at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateToken(String token,
TokenValidationParameters validationParameters, SecurityToken& validatedToken) at <a href="Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.ValidateToken">Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.ValidateToken</a> (String
idToken, AuthenticationProperties properties, TokenValidationParameters validationParameters
JwtSecurityToken& jwt)
Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.HandleRemoteAuthenticateAsync()
[16:05:22 ERR] HTTP POST /signin-oidc responded 500 in 92.4015 ms
System.Exception: An error was encountered while handling the remote login.
---> Microsoft.IdentityModel.Tokens.SecurityTokenInvalidAudienceException: IDX10214: Audience
validation failed. Audiences: '[PII is hidden. For more details, see <a href="https://aka.ms/IdentityModel/PII.">https://aka.ms/IdentityModel/PII.</a>'. Did not match: validationParameters.ValidAudience: '[PII is hidden. For more details, see <a href="https://aka.ms/IdentityModel/PII.">https://aka.ms/IdentityModel/PII.</a>' or
validationParameters.ValidAudiences: '[PII is hidden. For more details, see
https://aka.ms/IdentityModel/PII.]'
      at Microsoft.IdentityModel.Tokens.Validators.ValidateAudience(IEnumerable`1 audiences,
SecurityToken securityToken, TokenValidationParameters validationParameters) at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateAudience(IEnumerable`1
audiences, JwtSecurityToken jwtToken, TokenValidationParameters validationParameters) at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityToken
jwtToken, TokenValidationParameters validationParameters)
at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateToken(String token,
TokenValidationParameters validationParameters, SecurityToken& validatedToken)
at Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.ValidateToken(String
idToken, AuthenticationProperties properties, TokenValidationParameters validationParameters, JwtSecurityToken& jwt)
Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.HandleRemoteAuthenticateAsync()
         -- End of inner exception stack trace -
The key error string is
            Microsoft.IdentityModel.Tokens.SecurityTokenInvalidAudienceException: IDX10214: Audience
            also the key method is
                                            Core.Authentication.OpenIdConnect.OpenIdConnectHandler.ValidateToken
```

so, time to troubleshoot SSO issues

https://stackoverflow.com/questions/52843166/securitytokeninvalidaudienceexceptionidx10214-audience-validation-failed

"As far as I know, this error clearly states that audience that came in your SAML-token is different from the value in your Startup configuration."


from the code it looks like that ShowPII will help us... which we can do by changing our environment from production to development:

```
Reserved Organi... Utility Tests.cs
     Startup.cs → X HttpHeaderMiddleware.cs
                                                                           container.config

▼ CluedIn.AuthenticationServer.Startup

                                                                            ▼ Configure(IApp
    services.AddTransient<IUserAccountBuilder, UserAccountBuilder>();
    services.AddTransient<IUserProfileBuilder, UserProfileBuilder>();
    services.AddTransient<IEventSink, UserLoggedInEventSink>();
    services.AddTransient<ICustomTokenRequestValidator, ClientCredentialsTokenValidator</pre>
public void Configure(IApplicationBuilder app, IWebHostEnvironment env, ILogger<Startup)</pre>
    app. UseForwardedHeaders();
    if (!env.IsProduction())
        logger.LogWarning("Authentication: Environment is [{environment}] so PII inform
        IdentityModelEventSource.ShowPII = true;
        app. UseSwagger("CluedIn Authentication API V1");
        logger.LogWarning("Authentication: Swagger support enabled in [{environment}]",
    if (!string.IsNullOrEmpty(CertificatePath) && !string.IsNullOrEmpty(CertificatePass
               1 8 1 Z0 11 11 11 11 11 11
                                                  111 1 1 1
```

to see debug for the server - update all **production** strings to **development** in the live config map

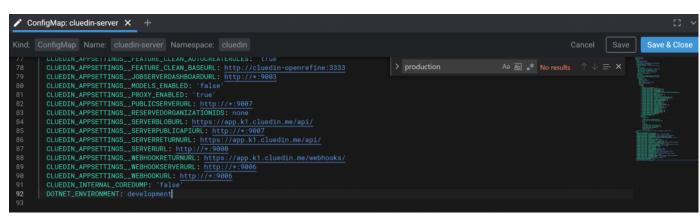

confirmed debug is now on 🖒

now let's login again



#### SIGN IN USING SINGLE SIGN-ON

or use CluedIn account login

#### watch logs

```
rudi@RudiWin10MBP MINGW64 /c/rudi.harris/k8s/cluedin/apac-demo
$ kubectl logs -f --since=1m -l role=main
```

```
[04:54:48 INF] Request starting HTTP/1.1 GET http://app.k1.cluedin.me/.well-known/openid-
[04:54:48 INF] CORS policy execution successful.
[04:54:48 DBG] Request Details: {"Headers": {"Accept": "*/*", "Accept-Encoding": "gzip,
deflate, br", "Accept-Language": "en-GB,en-US;q=0.9,en;q=0.8", "Host":
"app.k1.cluedin.me", "Referer": "https://ssoorg1.k1.cluedin.me/, "User-Agent":
"Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko)
Chrome/99.0.4844.82 Safari/537.36", "Origin": "https://ssoorg1.k1.cluedin.me", "sec-ch-ua": "\" Not A;Brand\";v=\"99\", \"Chromaium\";v=\"99\", \"Google Chrome\";y=\"99\", "sec-
ch-ua-mobile": "?0", "sec-ch-ua-platform": "\"Windows\"", "sec-fetch-site": "same-site",
"sec-fetch-mode": "cors", "sec-fetch-dest": "empty", "X-Original-Proto": "http", "X-
Original-For": "[::ffff:10.244.4.10]:49916"}, "Scheme": "https", "Host": {"Value":
"app.k1.cluedin.me", "HasValue": true, "Host": "app.k1.cluedin.me", "Port": null, "$type":
"HostString"}, "Path": {"Value": "/.well-known/openid-configuration", "HasValue": true,
"$type": "PathString"}}
[04:54:48 DBG] Proxy enabled - updated request path base to /auth
    [04:54:48 INF] CORS policy execution successful.
    [04:54:48 DBG] Proxy enabled - updated request path base to /auth
[04:54:48 WRN] CorsPolicyService did not allow origin: https://ssoorgl.kl.cluedin.me
[04:54:48 INF] No CORS policy found for the specified request.
   [04:54:48 INF] NO CORS policy Tourid for the Specific request.

[04:54:48 INF] Invoking IdentityServer endpoint:

IdentityServer4.Endpoints.DiscoveryEndpoint for /.well-known/openid-configuration

[04:54:48 INF] HTTP GET /.well-known/openid-configuration responded 200 in 12.3854 ms

[04:54:48 INF] Request finished in 13.2859ms 200 application/json; charset=UTF-8
    [04:54:49 INF] Request starting HTTP/1.1 GET
   http://app.k1.cluedin.me/api/external/challenge?
   scheme=aad&organizationId=af22cbcd-9cf2-47d4-bd8f-fe9e1b151bb8&returnUrl=%2Fauth%
    2Fconnect%2Fauthorize%3Fclient id%3Dssoorg1%26redirect uri%3Dhttps%253A%252F%
   252Fssoorg1.k1.cluedin.me%252Fssocallback%26response type%3Dcode%26scope%3Dopenid% 2520profile%2520ServerApiForUI%2520offline access%26state%
 2520profile%2520ServerApiForUI%2520offline access%26state%
3D41ef7e61ce1e4292ab9a3e86c530de0f%26code challenge%3DduFsv7e0h4
wwz2bd8p05z1WcfdFF1VC8k2z8PTZoV0%26code challenge method%3D5256%26response mode%3Dquery
[04:54:49 DBG] Request Details: {"Headers": {"Accept":
"text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/
";q=0.8,application/signed-exchange;v=b3;q=0.9", "Accept-Encoding": "gzip, deflate, br",
"Accept-Language": "en-GB,en-U5;q=0.9,en;q=0.8", "Cookie": "mp_
52e5e0805583e8a410f1ed50d8e0c049_mixpanel=%7B%22distinct_id%22%3A%20%
2217faff6b21c55e-06b638fb8eb36c-977la3f-168000-17faff6b21dfb0%22%2C%22%2ddevice_id%22%3A%
20%217faff6b21c55e-06b638fb8eb36c-977la3f-168000-17faff6b21dfb0%22%2C%22%2ddevice_id%22%3A%
  20%2217faff6b21c55e-06b638fb8eb36c-9771a3f-168000-17faff6b21dfb0%22%2C%22% 24initial_referrer%22%3A%20%22https%3A%2F%2Fcluedin.k2.cluedin.me%2Flogout%22%2C%22%
24initial_referrer%22%3A%20%22https%3A%2F%2Fcluedin.k2.cluedin.me%2Flogout%22%2C%22%
24initial_referring_domain%22%3A%20%22cluedin.k2.cluedin.me%22%7D", "Host":
"app.k1.cluedin.me", "Referer": "https://ssoorg1.k1.cluedin.me/", "User-Agent":
"Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko)
Chrome/99.0.4844.82 Safari/537.36", "Upgrade-Insecure-Requests": "1", "sec-ch-ua": "\" Not
A;Brand\";v=\"99\", \"Chromium\";v=\"99\", \"Google Chrome\";v=\"99\", "sec-ch-ua": "\" nobile": "?0", "sec-ch-ua-platform": "\"Windows\"", "sec-fetch-site": "same-site", "sec-fetch-mode": "navigate", "sec-fetch-user": "?1", "sec-fetch-dest": "document", "X-Original-Proto": "http", "X-Original-For": "[::ffff:10.244.4.10]:49916"), "Scheme":
"https", "Host": {"Value": "app.k1.cluedin.me", "HasValue": true, "Hoststring"), "Path": {"Value": "/api/external/challenge", "HasValue": true, "$type": "PathString"}}
[04:54:49 INF] Executing endpoint
'CluedIn.AuthenticationServer.Controllers.ExternalController.Challenge
(CluedIn.AuthenticationServer)'
    (CluedIn.AuthenticationServer)
    [04:54:49 INF] Route matched with {action = "Challenge", controller = "External"}. 
Executing controller action with signature Microsoft.AspNetCore.Mvc.IActionResult
  Challenge(System.String, System.String, System.Guid) on controller
```

```
{\tt CluedIn.AuthenticationServer.Controllers.ExternalControllers.}
   (CluedIn.AuthenticationServer).
 [04:54:49 DBG] Creating challenge request: /auth/api/external {".redirect": "/auth/api/external", "returnUrl": "/auth/connect/authorize?client_id=ssoorg1
&redirect_uri=https%3A%2F%2Fssoorg1.k1.cluedin.me%
   2Fssocallback&response_type=code&scope=openid%20profile%20ServerApiForUI%
 20offline_access&state=41ef7e61ce1e4292ab9a3e86c530de0fRcode_challenge=duFsv7e0h4
_wWz2bd8p0SzlWCfdFF1VC8k2z8PTZoV0&code_challenge_method=S256&response_mode=query",
"scheme": "aad", "organizationId": "af22cbcd-9cf2-47d4-bd8f-fe9e1b151bb8"}
[04:54:49 INF] Executing ChallengeResult with authentication schemes (["aad"]).
[04:54:49 INF] AuthenticationScheme: aad was challenged.
 [04:54:49 INF] Executed action CluedIn.AuthenticationServer.Controllers.ExternalController.Challenge
   (CluedIn.AuthenticationServer) in 143.4346ms
  [04:54:49 INF] Executed endpoint 'CluedIn.AuthenticationServer.Controllers.ExternalController.Challenge
   (CluedIn.AuthenticationServer)'
[04:54:49 INF] HTTP GET /api/external/challenge?
 scheme=aad&organizationId=af22cbcd-9cf2-47d4-bd8f-fe9e1b151bb8&returnUrl=%2Fauth% 2Fconnect%2Fauthorize%3Fclient_id%3Dssoorg1%26redirect_uri%3Dhttps%253A%252F% 252Fssoorg1.k1.cluedin.me%252Fssocallback%26response_type%3Dcode%26scope%3Dopenid%
 2520profile%2520ServerApiForUI%2520offline_access%26state% 3D41ef7e61ce1e4292ab9a3e86c530de0f%26code_challenge%3DduFsv7e0h4
      wWz2bd8p0SzlWCfdFF1VC8k2z8PTZoV0%26code_challenge_method%3DS256%26response_mode%3Dquery
 responded 200 in 155.9216 ms
[04:54:49 INF] Request finished in 162.3215ms 200 text/html;charset=UTF-8
   [04:54:49 INF] Request starting HTTP/1.1 POST <a href="http://app.k1.cluedin.me/signin-oidc">http://app.k1.cluedin.me/signin-oidc</a> application/x-www-form-urlencoded 2443
 application/x-www-form-urlencoded 2443
[04:54:49 INF] CORS policy execution successful.
[04:54:49 DBG] Request Details: {"Headers": {"Cache-Control": "max-age=0", "Content-Type":
"application/x-www-form-urlencoded", "Accept":
"text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/
*;q=0.8,application/signed-exchange;v=b3;q=0.9", "Accept-Encoding": "gzip, deflate, br",
"Accept-Language": "en-GB,en-U5;q=0.9,en;q=0.8", "Cookie":
".AspNetCore.OpenIdConnect.Nonce.CfDJ8NgEuV7SUohMvT3uSLSDKmfV4WoEUeLNEu0633AUQ-
xZASmPoyxihMyStR7nHxVtHefmzAQr-VCfKor0DaCZTTNXmgFY0bvRweIT7xHi5UcT5ZUlgkd4PD1vTgT1ep-
RXI ny4270xyhB1MJ4AY27xphp3MMOTI EngHkekbepOJTm wnl8fsilu27i57[GF74270rT]ic3G11xB 4h3
 q8XLnv4Ý2oXyhR1MH2HAzVzpbPo3MqOILFngHKekDgQQJfw_rM18fsUAZjS7LGFZ4z2QrILic3GJtxB_db3
_WnSFIdE64o_cGRtJXExm-dFaUvX8NebVc6RuXXw6ltKTppDQPhoa-
 d0cKl3Jam0BMOz3Bc=N; .AspNetCore.Correlation.aad.MK8QViEeCIiCH1P85KBM5nZ600Cij7uqUiAZz2-2B -o=N; mp_52e5e0805583e8a410f1ed50d8e0c049_mixpanel=%7B%22distinct_id%22%3A%20%
   2217faff6b21c55e-06b638fb8eb36c-9771a3f-168000-17faff6b21dfb0%22%2C%22%24device_id%22%3A%
 20%2217faff6b21c55e-06b638fb8eb36c-9771a3f-168000-17faff6b21dfb0%22%2C%22% 24initial_referrer%22%3A%20%22https%3A%2F%2Fcluedin.k2.cluedin.me%2Flogout%22%2C%22%
24initial_referrer%22%3A%20%22https%3A%2F%2Fcluedin.k2.cluedin.me%2Flogout%22%2C%22%
24initial_referring_domain%22%3A%20%22cluedin.k2.cluedin.me%2Z%7D", "Host":
"app.k1.cluedin.me", "Referer": "https://login.microsoftonline.com/", "User-Agent":
"Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko)
Chrome/99.0.4844.82 Safari/537.36", "Upgrade-Insecure-Requests": "1", "Origin":
"https://login.microsoftonline.com", "Content-Length": "2443", "sec-ch-ua": "\" Not
A;Brand\";v=\"99\", \"Chromium\";v=\"99\", \"Google Chrome\";y=\"99\","sec-ch-ua-
mobile": "?0", "sec-ch-ua-platform": "\"Windows\"", "sec-fetch-site": "cross-site", "sec-
fetch-mode": "navigate", "sec-fetch-dest": "document", "X-Original-Proto": "http", "X-
Original-Foro": "[::ffff:10.244.4.10]:49916"}, "Scheme": "https", "Host": {"Value":
"app.k1.cluedin.me", "HasValue": true, "Host": "app.k1.cluedin.me", "Port": null, "$type":
"HostString"}, "Path": {"Value": "/signin-oidc", "HasValue": true, "$type": "PathString"}}
[04:54:49 DBG] Proxy enabled - updated request path to /auth/signin-oidc
[04:54:49 INF] No CORS policy found for the specified request.
[04:54:49 ERR] Exception occurred while processing message.
[04:54:49 INF] NO COAS POILTY TOURD TO THE SPECIFIED PEQUEST.

[04:54:49 ERR] Exception occurred while processing message.

Microsoft.IdentityModel.Tokens.SecurityTokenInvalidAudienceException: IDX10214: Audience validation failed. Audiences: '233dc94b-57a2-4e91-aa36-5567d8441f4b'. Did not match: validationParameters.ValidAudience: '{233dc94b-57a2-4e91-aa36-5567d8441f4b}' or validationParameters.ValidAudiences: 'null'.
               at\ \texttt{Microsoft.IdentityModel.Tokens.Validators.ValidateAudience(IEnumerable`1\ audiences, \texttt{Microsoft.IdentityModel.Tokens.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Validators.Val
 SecurityToken securityToken, TokenValidationParameters validationParameters)
 System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateAudience(IEnumerable`1 audiences, JwtSecurityToken jwtToken, TokenValidationParameters validationParameters)
  System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTo
  ken jwtToken, TokenValidationParameters validationParameters)
               at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateToken(String token,
  TokenValidationParameters validationParameters, SecurityToken& validatedToken)
 {\tt Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.ValidateToken(Strings)} \\
 g idToken, AuthenticationProperties properties, TokenValidationParameters
   validationParameters, JwtSecurityToken& jwt)
  Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.HandleRemoteAuthent
   icateAsync()
   [04:54:49 INF] Error from RemoteAuthentication: IDX10214: Audience validation failed.
 Audiences: '233dc94b-57a2-4e91-aa36-5567d8441f4b'. Did not match: validationParameters.ValidAudiences: '{233dc94b-57a2-4e91-aa36-5567d8441f4b}' or validationParameters.ValidAudiences: 'null'..
ValidationParameters.ValidAudiences: 'null'..

[04:54:49 ERR] HTTP POST /signin-oidc responded 500 in 17.7561 ms

System.Exception: An error was encountered while handling the remote login.

---> Microsoft.IdentityModel.Tokens.SecurityTokenInvalidAudienceException: IDX10214:

Audience validation failed. Audiences: '233dc94b-57a2-4e91-aa36-5567d8441f4b'. Did not match: validationParameters.ValidAudience: '{233dc94b-57a2-4e91-aa36-5567d8441f4b}' or validationParameters.ValidAudiences: 'null'.

at Microsoft.IdentityModel.Tokens.ValidationParameters.ValidationParameters.

SognityTokens.GeographyTokens.Tokens.ValidationParameters.ValidationParameters.
 SecurityToken securityToken, TokenValidationParameters validationParameters)
              at
 System. Identity Model. Tokens. Jwt. Jwt Security Token Handler. Validate Audience (IE numerable`1000 and 1000 and 100
 audiences, \ {\tt JwtSecurityToken} \ jwt{\tt Token}, \ {\tt TokenValidationParameters} \ validation{\tt Parameters})
  System. Identity Model. Tokens. {\tt Jwt.JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(JwtSecurityTokenPayload(J
 ken jwtToken, TokenValidationParameters validationParameters)
at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateToken(String token,
 TokenValidationParameters validationParameters, SecurityToken& validatedToken)
 {\tt Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.ValidateToken(Stringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstringstring
 g idToken, Authentication
Properties properties, Token
Validation
Parameters validation
Parameters, JwtSecurity
Token& jwt)
 \label{lem:microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.HandleRemoteAuthent} \\
 icateAsync()
```

```
--- End of inner exception stack trace ---
                                        at Microsoft.AspNetCore.Authentication.RemoteAuthenticationHandler
                                1.HandleRequestAsync()
                                Identity Server 4. Hosting. Federated Sign 0 ut. Authentication Request Handler Wrapper. Handle Request Handler Management Federated Sign 0 ut. Authentication Request Handler Wrapper. Handle Request Handler Management Federated Sign 0 ut. Authentication Request Handler Wrapper. Handle Request Handle Re
                                        context)
                                       at IdentityServer4.Hosting.BaseUrlMiddleware.Invoke(HttpContext context) at CluedIn.Server.Common.WebApi.HttpHeaderMiddleware.InvokeAsync(HttpContext context)
                                in D:\a\1\s\Code\Server.Common.WebApi\HttpHeaderMiddleware.cs:line 83
                                at Serilog.AspNetCore.RequestLoggingMiddleware.Invoke(HttpContext httpContext) [04:54:49 ERR] An unhandled exception has occurred while executing the request.
                                System.Exception: An error was encountered while handling the remote login.
                                ---> Microsoft.IdentityModel.Tokens.SecurityTokenInvalidAudienceException: IDX10214: Audience validation failed. Audiences: '233dc94b-57a2-4e91-aa36-5567d8441f4b'. Did not
                                match: validationParameters.ValidAudience: '{233dc94b-57a2-4e91-aa36-5567d8441f4b}' or
validationParameters.ValidAudiences: 'null'.
   at Microsoft.IdentityModel.Tokens.Validators.ValidateAudience(IEnumerable`1 audiences,
                                SecurityToken securityToken, TokenValidationParameters validationParameters)
                                audiences, JwtSecurityToken jwtToken, TokenValidationParameters validationParameters)
                                System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateTokenPayload(JwtSecurityTo
                                ken jwtToken, TokenValidationParameters validationParameters)
                                        at System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.ValidateToken(String token,
                                TokenValidationParameters validationParameters, SecurityToken& validatedToken
                                Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.ValidateToken(Strin
                                g idToken, AuthenticationProperties properties, TokenValidationParameters
                                validationParameters, JwtSecurityToken& jwt)
                                {\tt Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectHandler.HandleRemoteAuthent}
                               icateAsync()
--- End of inner exception stack trace --
                                        at Microsoft.AspNetCore.Authentication.RemoteAuthenticationHandler
                                1.HandleRequestAsync()
                                Identity Server 4. Hosting. Federated Sign Out. Authentication Request Handler Wrapper. Handle Request Authentication Request Handler Wrapper. Handler Request Regulation Request Handler Wrapper. Handler Request Regulation Regulat
                                Async()
                                        \hbox{at Microsoft.} Asp \hbox{NetCore.} Authentication. Authentication \verb|Middleware.Invoke| (\verb|HttpContext|) at Microsoft. Asp \verb|NetCore.Authentication| Authentication| Authent
                                context)
                                        at IdentityServer4.Hosting.BaseUrlMiddleware.Invoke(HttpContext context)
                                at CluedIn.Server.Common.WebApi.HttpHeaderMiddleware.InvokeAsync(HttpContext context) in D:\a\1\s\Code\Server.Common.WebApi\HttpHeaderMiddleware.cs:line 83
                                        at \ Serilog. Asp NetCore. Request Logging Middleware. Invoke (HttpContext\ httpContext)
                                        at CorrelationId.CorrelationIdMiddleware.Invoke(HttpContext context,
                                ICorrelationContextFactory correlationContextFactory)
                                        at\ \texttt{Microsoft.AspNetCore.Diagnostics.DeveloperExceptionPageMiddleware.Invoke(HttpContext)} \\
                                 [04:54:49 INF] Request finished in 36.5275ms 500 text/html; charset=utf-8
SSO - wrong valid audience fixed!
analysing the log this bit appears key
                [04:54:49 ERR] Exception occurred while processing message.
               Microsoft.IdentityModel.Tokens.SecurityTokenInvalidAudienceExcep
                tion: IDX10214: Audience validation failed.
                Audiences:
                                 '233dc94b-57a2-4e91-aa36-5567d8441f4b'.
                Did not match: validationParameters.ValidAudience:
                                 '{233dc94b-57a2-4e91-aa36-5567d8441f4b}'
                                or validationParameters.ValidAudiences: 'null'.
                            at
               Microsoft.IdentityModel.Tokens.Validators.ValidateAudience(IEnum
                erable`1 audiences, SecurityToken securityToken,
                TokenValidationParameters validationParameters)
                System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.Validate
                Audience(IEnumerable`1 audiences, JwtSecurityToken jwtToken,
                TokenValidationParameters validationParameters)
```

System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.Validate

System.IdentityModel.Tokens.Jwt.JwtSecurityTokenHandler.Validate

Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectH

TokenPayload(JwtSecurityToken jwtToken,

at


TokenValidationParameters validationParameters)

Token(String token, TokenValidationParameters

validationParameters, SecurityToken& validatedToken)

```
andler.ValidateToken(String idToken, AuthenticationProperties
properties, TokenValidationParameters validationParameters,
JwtSecurityToken& jwt)
    at
Microsoft.AspNetCore.Authentication.OpenIdConnect.OpenIdConnectH
andler.HandleRemoteAuthenticateAsync()
[04:54:49 INF] Error from RemoteAuthentication: IDX10214:
Audience validation failed. Audiences: '233dc94b-57a2-4e91-
aa36-5567d8441f4b'. Did not match:
validationParameters.ValidAudience: '{233dc94b-57a2-4e91-
aa36-5567d8441f4b}' or validationParameters.ValidAudiences:
'null'..
[04:54:49 ERR] HTTP POST /signin-oidc responded 500 in 17.7561
ms
```

same story on the webpage



# An unhandled exception occurred while processing the request.


SecurityTokenInvalidAudienceException: IDX10214: Audience validation failed. Audiences: '233dc94b-57a2-4e91-aa36-5567d8441f4b', Did not match: validationParameters.ValidAudience: '{233dc94b-57a2-4e91-aa36-5567d8441f4b}' or validationParameters.ValidAudiences: 'null'.

Microsoft.IdentityModel.Tokens.Validators.ValidateAudience(IEnumerable<string> audiences, SecurityToken securityToken, TokenValidationParameters validationParameters)

and our original sql change was


so let's login to the database and remove the  $\{\}$  around that






restart server pod and retest

we can login!!!

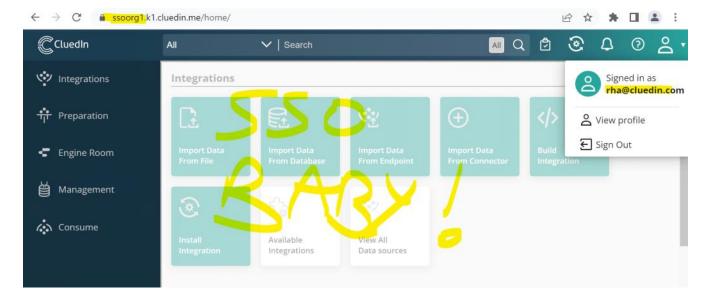

## observe



VIEW ALL USERS