What streaming static weights over PCIe costs

Decode C1 as % of throughput without streaming · x: share of static weights read from host RAM

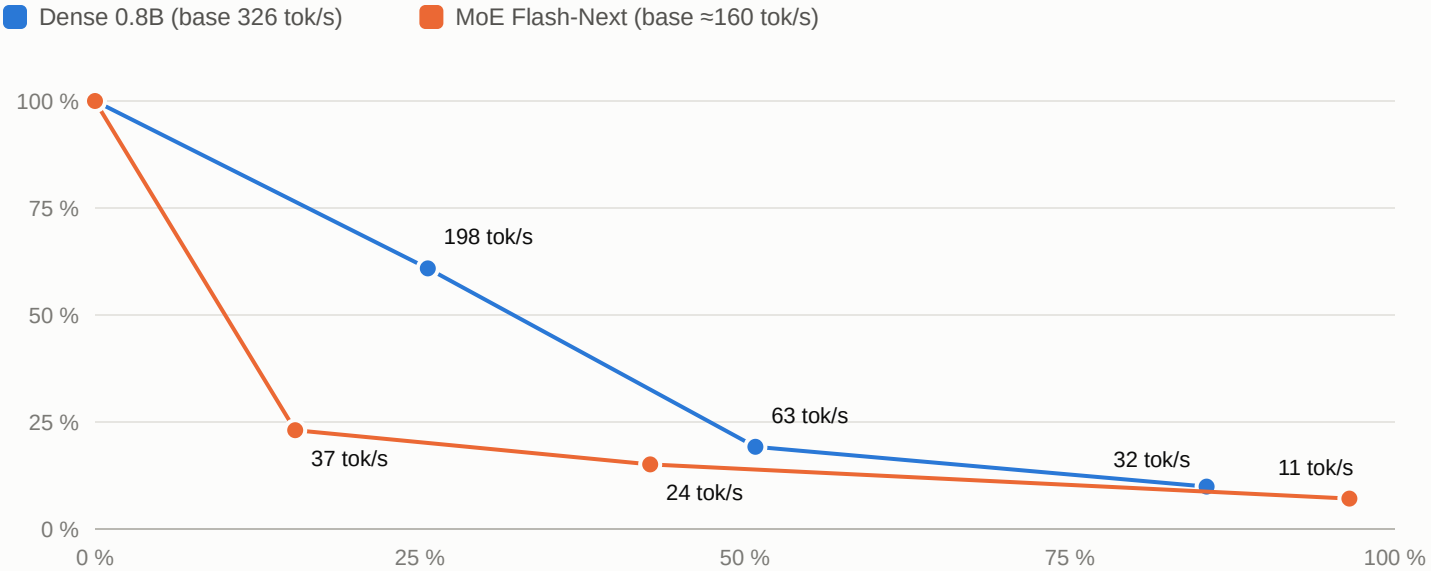

PCIe ≈ 28 GB/s vs. 600–870 GB/s from VRAM. Output stays bit-identical; streamed weights move back onto the card as soon as VRAM frees up (measured: full throughput again after 1–2 s).