


Going live

The complete step-by-step guide: Amazon Bedrock, Supabase, Stripe and your domain

Written so that anyone can follow it — no technical background needed. Every step says **where to click**, **what to type**, and **how you know it worked**.

For	CodeIQ Holdings Ltd · ContractIQ Platform
Build	v13 (19 September 2026) — the version that uses Amazon Bedrock
Time	About four hours, which you can spread over a day or two
Cost to set up	Pennies. Nothing costs real money until real customers use it

Do the parts in this order

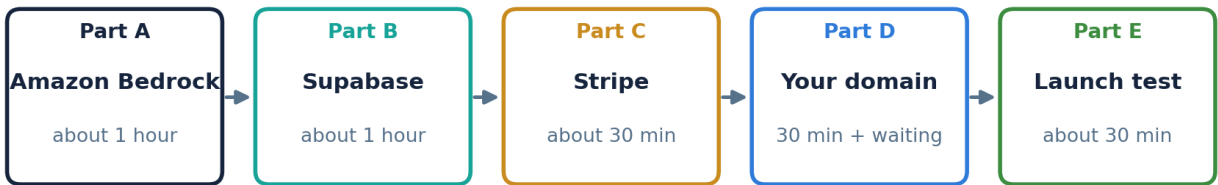

The one rule that matters most

Secret keys go into Supabase and nowhere else — into **Edge Functions** → **Secrets**, and once (step B6) into the database's own locked safe. Never into the website, a document, an email, a screenshot or a chat message — not even to Claude. If a secret key is ever seen anywhere else, treat it as stolen: delete it and make a new one.

Before you start


What you'll have at the end

contractiqplatform.co.uk will be live. People can sign up with a six-digit code, upload contracts, run AI analysis that happens in the UK and Europe, ask Cedric questions, and pay by card. The ten founding places will count down on the pricing page by themselves.

Do you still need Supabase? Yes.

Amazon Bedrock is **only the AI brain**. It reads text and answers — then forgets. It cannot remember a single contract, it has no logins, it cannot count credits and it cannot take a payment. Supabase does all of those things. You could rebuild them on Amazon, but it would take weeks and cost more. So the plan is: **keep Supabase for everything, and use Bedrock only for the AI.**

How ContractIQ fits together — and why you still need Supabase

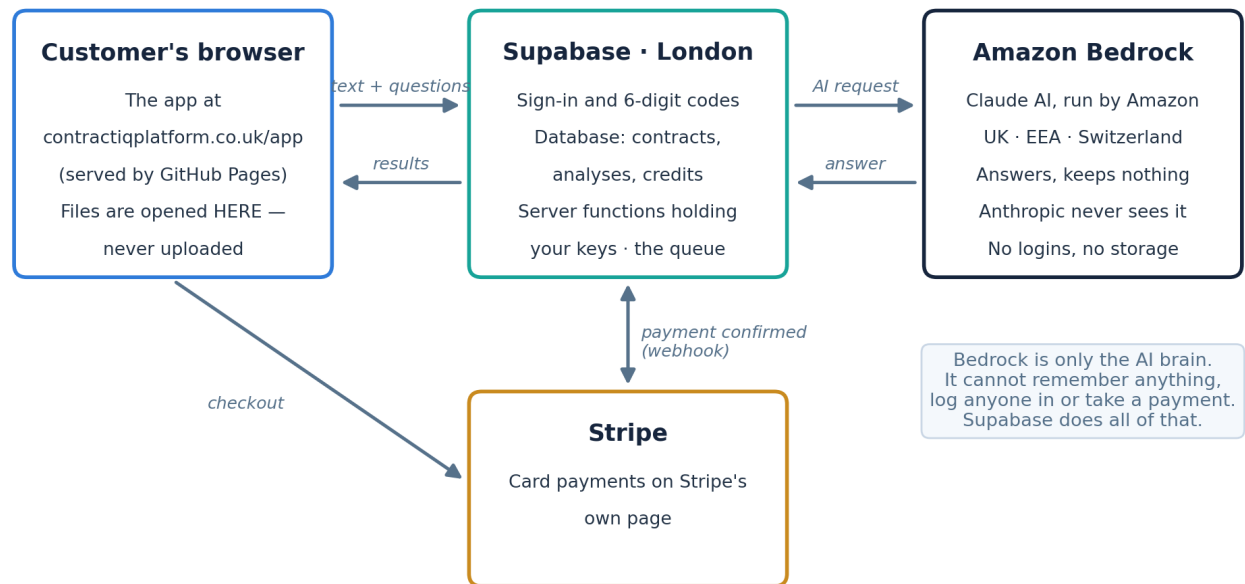

Piece	What it does	Who runs it
The website and app	What customers see at contractiqplatform.co.uk. Documents are opened inside the customer's browser — the original file is never uploaded.	GitHub Pages (free)
Supabase	Sign-in, the database (contracts, analyses, credits), the small server programs that hold your keys, and the background queue.	Supabase, in London
Amazon Bedrock	Runs Anthropic's Claude AI inside Amazon's data centres in the UK, EEA and Switzerland. Keeps nothing. Anthropic never sees your customers' text.	Amazon Web Services
Stripe	Takes card payments on its own secure page and tells Supabase when someone has paid.	Stripe

What you need to hand

- Your laptop, and your phone (for security codes).
- The **company bank card** for CodeIQ Holdings Ltd (AWS needs a card on file; it will charge pennies).
- Logins for: **IONOS** (where the domain is registered), **GitHub**, **Supabase**, **Stripe**, and the **info@** mailbox.
- The **v13 folder** (ContractIQ_v13) from your September folder.
- A password manager, or a notebook kept somewhere safe, for the passwords you create today.

Good to know

The screens on these websites change from time to time. If a button's wording is slightly different from this guide, look for the **bold** words — they're what matters. If you really can't find something, stop and ask rather than guess.

Words you'll meet

Word	What it actually means
AWS	Amazon Web Services — Amazon's cloud. Bedrock is one of its services.
Amazon Bedrock	The AWS service that runs AI models (including Claude) for you.
Region	Where in the world a service runs. For you: Europe (London), code eu-west-2.
IAM	AWS's area for logins and permissions. You'll make a login for the app that can do one thing only.
Access key	A username-and-password pair for a program, not a person. Two parts: an ID and a secret.
Edge Function	A small program that runs on Supabase's servers. Nothing to do with the Microsoft Edge browser.
Secret	A value (like a key) stored safely in Supabase, which the Edge Functions can read and nobody else can.
SQL Editor	A page in Supabase where you paste a script and press Run to set up the database.
Extension	An optional add-on for the database. You'll switch three on.
Vault	Supabase's safe inside the database, for the one value the database itself needs.
Cron	A timer. It wakes the background worker every few seconds when there's work.
Webhook	A message one service sends another automatically — Stripe telling Supabase "this person has paid".
DNS	The internet's address book. You'll add entries so your domain points at your site.
Publishable key vs secret key	Supabase has both. The publishable one (sb_publishable_...) is meant to be public. The secret one (sb_secret_...) must never leave Supabase.

Part A · Amazon Bedrock

About an hour. At the end, Amazon will run Claude for you in the UK and Europe, and you'll have one locked-down key for the app to use.

A1 Create your AWS account

1. Go to **aws.amazon.com** and click **Create an AWS Account**.
2. Email: use a company address you'll keep, e.g. **info@codeiqholdings.co.uk**. Account name: **CodeIQ Holdings Ltd**.
3. When asked, choose a **Business** account and enter the company details: CodeIQ Holdings Ltd, 103 Battalion Drive, Northampton NN4 6RX.
4. Add the **company card**. Verify your phone number with the code AWS sends.
5. Choose the **Basic support** plan (it's free).

You'll know it worked when

You can sign in at console.aws.amazon.com and you see the AWS home screen.

A2 Protect the main login with a phone code (MFA)

1. Top-right, click your account name → **Security credentials**.
2. Under **Multi-factor authentication (MFA)** click **Assign MFA device** → choose **Authenticator app**.
3. Scan the QR code with an authenticator app on your phone (Google Authenticator or Microsoft Authenticator), then type the two codes it shows.

Why

This login can spend money on the company card. A password on its own isn't enough protection.

A3 Set a spending alarm

1. In the search bar at the top, type **Budgets** and open it.
2. Click **Create budget** → **Use a template** → **Monthly cost budget**.
3. Budget amount: **50** (US dollars). Email: your address. Click **Create budget**.

Good to know

Testing costs a few pence. Ten founding members using every credit would cost roughly £50–£90 a month in AI. The alarm emails you long before anything surprising happens.

A4 Switch to London

Top-right, next to your name, there's a region menu. Choose **Europe (London) eu-west-2**. Check it still says London whenever you're working in Bedrock.

A5 Switch on Claude

1. Search **Bedrock** and open **Amazon Bedrock**.
2. In the left menu open **Model catalog**, find **Claude Sonnet 5** by Anthropic, and click it.
3. If a form asks for **use case details**, fill it in:

Field	What to put
Company name	CodeIQ Holdings Ltd
Company website	https://contractiqplatform.co.uk
Intended users	External (your business customers)
Industry	Legal / professional services (or Other: procurement software)
Use case	AI-assisted contract analysis for business procurement teams: summarising contracts and answering questions about them.

Good to know

This form goes to Anthropic once. It describes **your business** — never any customer's data. Access is normally granted straight away.

A6 One quick test (never with a real contract)

1. In Bedrock's left menu open **Playgrounds** → **Chat**.
2. Click **Select model** → **Anthropic** → **Claude Sonnet 5**. Where it asks about inference or throughput, choose the **cross-region profile that starts with EU** (eu.anthropic.claude-sonnet-5).
3. Type: **Say hello in one sentence.** and click **Run**.

You'll know it worked when

You get a one-line reply. If you get an access error instead, wait 15 minutes — the first use takes a little while to finish switching on — and try again.

A7 Make sure AWS keeps no copies

Bedrock → left menu → **Settings** → **Model invocation logging** must be **off** (unticked). If it's on, switch it off and save.

Why

If it were on, AWS would save every prompt into your account's logs — exactly what your Legal Centre promises doesn't happen.

A8 Make a locked-down login for the app

1. Search **IAM** and open it. Left menu → **Users** → **Create user**.
2. User name: **contractiq-bedrock**. Do **not** tick console access. Click **Next**, then **Next** again (skip permissions for now), then **Create user**.
3. Click the new user → **Permissions** tab → **Add permissions** → **Create inline policy** → click the **JSON** tab.
4. Delete everything in the box. On your Mac, open **aws** → **contractiq-bedrock-eu-only.json** from the v13 folder in TextEdit, copy it all, and paste it in. (It's also printed below — copying from the file is safer.)
5. Replace **YOUR_ACCOUNT_ID** in **both** places with your 12-digit AWS account number (top-right menu, under your name — type it without dashes).
6. Click **Next**, name the policy **contractiq-bedrock-eu-only**, click **Create policy**.

aws/contractiq-bedrock-eu-only.json — replace YOUR_ACCOUNT_ID twice

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "EuProfileOnly",
      "Effect": "Allow",
      "Action": "bedrock:InvokeModel",
      "Resource":
        "arn:aws:bedrock:eu-west-2:YOUR_ACCOUNT_ID:inference-profile/eu.anthropic.claude-sonnet-5"
    },
    {
      "Sid": "ModelOnlyThroughEuProfile",
      "Effect": "Allow",
      "Action": "bedrock:InvokeModel",
      "Resource":
        "arn:aws:bedrock:eu-*::foundation-model/anthropic.claude-sonnet-5*",
      "Condition": {
        "StringLike": {
          "bedrock:InferenceProfileArn":
            "arn:aws:bedrock:eu-west-2:YOUR_ACCOUNT_ID:inference-profile/eu.anthropic.claude-sonnet-5"
        }
      }
    }
  ]
}
```

Why

This login can do **one thing**: ask Claude a question through the EU route, from London. If it ever leaked, nobody could use it to touch anything else in your AWS account — or to send data outside Europe.

A9 Create the key for Supabase

1. Still on the **contractiq-bedrock** user → **Security credentials** tab → **Access keys** → **Create access key**.
2. Choose **Application running outside AWS** → **Next** → description: **Supabase anthropic-proxy** → **Create access key**.
3. You'll see an **Access key ID** (starts AKIA...) and a **Secret access key**. The secret is shown **once only**.

Stop and check

Keep this page open and do step **B5** now, in another browser tab, so the two values go straight into Supabase Secrets.

If you must download the .csv file instead, delete it (and empty the Bin) as soon as B5 is done.

Part B · Supabase

About an hour. This builds the database, switches on the security rules, and connects Supabase to Bedrock.

B1 Check your project is in London

Open **supabase.com** → your project → **Project Settings** → **General** (the region may be shown under **Infrastructure**). It must say **West EU (London)** or **eu-west-2**.

- **It says London?** Go to B2.
- **It says anywhere else?** Create a new project: **New project** → name **contractiq** → a strong database password (save it) → Region **West EU (London)** → **Create**. Then give Claude the new **Project URL** and **publishable key** (Project Settings → API Keys) so the website can be pointed at it — or run `python3 set_project.py <URL> <publishable key>` in the v13 folder. Nobody has real data yet, so moving now costs nothing.

Why

Your Legal Centre tells customers their data is held in the UK. This step is what makes that true.

B2 Switch on three extensions

Database → **Extensions**. Search for each of these and switch it on: **pg_cron**, **pg_net**. Check **supabase_vault** is already on (it usually is).

B3 Run the six setup scripts, in order

1. Open **SQL Editor** → **New query**.
2. On your Mac, open the first file from the table below in **TextEdit** (right-click → Open With → TextEdit). Press **Cmd+A** then **Cmd+C**.
3. In Supabase, click in the query box, press **Cmd+V**, then click **Run** (bottom right). Wait for **Success**.
4. Repeat for each file, in order. Use a **new query** each time.

Order	File (in the v13 folder → supabase)	What it does
1	SETUP.sql	The main database and its security rules
2	MIGRATION_003_founding.sql	The ten free founding places
3	MIGRATION_004_credits_and_billing.sql	Credits and Stripe
4	MIGRATION_005_rollover_and_naming.sql	Unused credits roll over
5	MIGRATION_006_revision_window.sql	Free re-runs within 30 days
6	MIGRATION_007_bedrock_and_data_safety.sql	New. Locks the back-office functions, deletes queued text after use, Zero-Retention, Sandbox 100 credits

Order	File (in the v13 folder → supabase)	What it does
-------	-------------------------------------	--------------

Good to know

Lines saying **NOTICE: ... does not exist, skipping** are normal — the script is tidying up.

If you see a **red error**, stop. Read it, and ask Claude. Every file is safe to run again.

Never run the files starting **TEST_** — they're for testing on a laptop, not your real project.

If you ever run an earlier file again later, **run MIGRATION_007 again straight after it** — the earlier files would otherwise undo some of its protections.

Check it worked — open **supabase** → **STEP_B3_check.sql**, copy it into a new query and Run:

supabase/STEP_B3_check.sql

```
select
  (select credits_included from plan_catalogue where plan = 'sandbox') as sandbox_credits,
  (select count(*) from information_schema.columns
    where table_name = 'accounts'
      and column_name in ('data_region', 'zero_retention')) as new_columns,
  has_function_privilege('anon', 'billing_apply_credits(uuid,int,text)', 'execute')
  as anyone_can_add_credits;
```

You'll know it worked when

One row: **100 · 2 · false**. (The last one proves nobody on the internet can give themselves free credits.)

B4 Put the four server programs in place (Edge Functions)

For each row below: **Edge Functions** → **Deploy a new function** → **Via Editor** → type the **name exactly** → delete the sample code → paste the whole file from the v13 folder → **Deploy**. Then open the function's **Details** (or settings) and set **Enforce JWT verification** as shown.

Name (type exactly)	Paste this file	Enforce JWT verification
anthropic-proxy	supabase/functions/anthropic-proxy/index.ts	ON
job-worker	supabase/functions/job-worker/index.ts	OFF (it checks its own key)
create-checkout-session	supabase/functions/create-checkout-session/index.ts	OFF
stripe-webhook	supabase/functions/stripe-webhook/index.ts	OFF

Careful

If a function with the same name already exists, open it and replace its code instead of making a second one. A typo in the name breaks the app with a "not found" error.

B5 Add the secrets

Edge Functions → **Secrets** → add each name and value. Names must match exactly (capitals and underscores).

Name	Value	Where it comes from
AWS_ACCESS_KEY_ID	AKIA...	Step A9
AWS_SECRET_ACCESS_KEY	the long secret	Step A9 (shown once)

Name	Value	Where it comes from
ALLOWED_ORIGIN	https://contractiqplatform.co.uk	Type exactly — no slash at the end, no /app
STRIPE_SECRET_KEY	sk_test_...	Step C2
STRIPE_WEBHOOK_SECRET	whsec_...	Step C3

If there's a secret called **ANTHROPIC_API_KEY**, **delete it**. The app doesn't use Anthropic's own service any more.

Good to know

You don't add the Supabase keys themselves — the functions are given those automatically.

B6 Turn on the background worker

When a signed-in customer clicks **Run AI analysis**, the work goes into a queue and a background worker does it — so they can close the tab. Without this step, analyses sit on **Queued** for ever.

1. Find your **Project URL** (Project Settings → **API** or **Data API**) — it looks like `https://abcdefghijkl.supabase.co`.
2. Find your **secret key**: Project Settings → **API Keys** → **Secret keys** → reveal and copy the one starting `sb_secret_`.
3. Open **supabase** → **STEP_B6_background_worker.sql** in TextEdit, copy it all into a new SQL Editor query, replace the two CAPITALISED parts with your values, and click **Run**.

supabase/STEP_B6_background_worker.sql — change the two capitalised parts

```
select vault.create_secret(
  'https://YOUR-PROJECT.supabase.co/functions/v1/job-worker',
  'job_worker_url');

select vault.create_secret(
  'sb_secret_YOUR_SECRET_KEY',
  'service_role_key');

select cron.schedule('contractiq-dispatch', '10 seconds', $$select dispatch_jobs($$);
select cron.schedule('contractiq-maintenance', '* * * * *', $$select maintenance_tick($$);
select cron.schedule('contractiq-holds', '* /15 * * * *', $$select reap_stale_holds($$);
```

Why

This is the only other place the secret key goes. It's stored encrypted in your own database's safe (the Vault) and never leaves it. The worker checks it to be sure the wake-up call really came from your database.

Check it a minute later:

```
select jobname, status, start_time from cron.job_run_details order by start_time desc limit 10;
```

You'll know it worked when

You see rows with status **succeeded**, a few seconds apart.

B7 Sign-in settings

- **Authentication** → **URL Configuration** → Site URL:
`https://contractiqplatform.co.uk/app/` → add the same to **Redirect URLs**, plus
`https://www.contractiqplatform.co.uk/app/`.
- **Authentication** → **Sign In / Providers** → **Email** → **Confirm email: ON**.
- **Authentication** → **Email Templates** → **Confirm signup** → replace
`{{ .ConfirmationURL }}` with `{{ .Token }}`, and change the text to: **Your ContractIQ code is {{ .Token }}**. Save.

Why

Company email systems often "click" links in emails to scan them, which uses the link up before your customer sees it. A six-digit code can't be used up that way.

B8 Your own email sender (before the founding members sign up)

Supabase's built-in email only sends a handful of messages an hour — ten founding members signing up in one evening would get stuck. Connect your own sender. Resend is simple and free at this size:

1. Create an account at **resend.com** → **Domains** → **Add domain** → `contractiqplatform.co.uk`.
2. Resend shows three DNS records. Add them at IONOS the same way as step D4 (Type, Host and Value exactly as shown). Wait until Resend says **Verified**.
3. Resend → **API Keys** → **Create API key** (sending access). Copy it.
4. Supabase → **Authentication** → **Emails** → **SMTP Settings** → enable custom SMTP: Host `smtp.resend.com` · Port `465` · Username `resend` · Password: the Resend API key · Sender email `no-reply@contractiqplatform.co.uk` · Sender name **ContractIQ**. Save.
5. Tell Claude which email provider you chose, so the orange gap in the Legal Centre's sub-processor list can be filled in.

Part C · Stripe

About 30 minutes. Do everything in **test mode** first — no real money moves until launch day. You don't need to create products or prices in Stripe: the app creates them from the prices in your database.

C1 Turn on test mode

In the Stripe dashboard, switch on **Test mode** (or open your **Sandbox**) — the toggle is at the top. Everything in C2–C5 happens there.

C2 Copy the test secret key

Developers → **API keys** → **Secret key** (starts `sk_test_`) → **Reveal** → copy. Put it in Supabase Secrets as `STRIPE_SECRET_KEY` (step B5).

C3 Tell Stripe where to send payment news (webhook)

1. **Developers** → **Webhooks** → **Add endpoint** (Stripe may call this **Add destination** → **Webhook endpoint**).
2. Endpoint URL: `https://YOUR-PROJECT.supabase.co/functions/v1/stripe-webhook`
3. Select these five events, then add the endpoint:

```
checkout.session.completed  
invoice.payment_succeeded  
invoice.payment_failed  
customer.subscription.deleted  
customer.subscription.updated
```

On the endpoint's page, find **Signing secret** → **Reveal** → copy (starts `whsec_`). Put it in Supabase Secrets as `STRIPE_WEBHOOK_SECRET`.

C4 Test the connection

On the endpoint page click **Send test event**. Then in Supabase's SQL Editor run:

```
select id, type, received_at from stripe_events order by received_at desc limit 5;
```

You'll know it worked when

Stripe shows **200** for the test event and the query shows a row. A **400 "signature verification failed"** means the signing secret was copied wrongly — copy it again.

C5 Test a purchase (after Part D, when the site is live)

1. On your site: **Pricing** → **Choose Growth** → fill in the checkout page.
2. On Stripe's page use card **4242 4242 4242 4242**, any future date, any three digits, any postcode.
3. You land on the success page. **Sign up with the same email address** you paid with.

You'll know it worked when

The app opens on **Growth** with **500 credits**.

C6 Launch day only: switch to real money

Do this only once the Legal Centre has been checked by a solicitor and your insurance is in place. The founding offer is free, so you can launch it before this step.

1. Finish Stripe's account activation: company details, the **CodeIQ Holdings Ltd** business bank account, and ID.
2. Switch test mode **off**. Copy the **live** secret key (sk_live_...) and replace STRIPE_SECRET_KEY in Supabase.
3. Create the same webhook again in live mode (C3), and replace STRIPE_WEBHOOK_SECRET with the new live signing secret.
4. Add one more Supabase secret: STRIPE_ALLOW_LIVE = true. (Until this exists, the app refuses a live key — a safety catch.)

Part D · Your domain

About 30 minutes, then some waiting while the internet catches up. If contractiqplatform.co.uk already shows your site from GitHub Pages, skip to **D6**.

D1 Put the site on GitHub

1. At **github.com**, click **New repository**. Name: **contractiq-site**. **Public** is fine — there are no secrets in these files. Click **Create repository**.
2. In Finder, open the v13 folder and press **Cmd+Shift+.** (full stop) so hidden files show. You should see **.nojekyll**.
3. On GitHub click **uploading an existing file**. Drag in **everything inside** the v13 folder (not the folder itself). Click **Commit changes**.
4. Check **.nojekyll** is in the file list. If not: **Add file** → **Create new file** → name it **.nojekyll** → **Commit**.

D2 Switch on GitHub Pages

Repository **Settings** → **Pages** → Source: **Deploy from a branch** → Branch: **main**, folder **/ (root)** → **Save**. After a minute your site is at <https://YOUR-GITHUB-NAME.github.io/contractiq-site/>.

D3 Tell GitHub your domain

Still in **Settings** → **Pages** → **Custom domain**: type **contractiqplatform.co.uk** → **Save**.

D4 Point the domain at GitHub (IONOS)

1. Sign in to **IONOS** → **Domains & SSL** → click **contractiqplatform.co.uk** → **DNS**.
2. If there are existing **A** or **AAAA** records for **@** pointing somewhere else (such as an IONOS parking page), delete them. **Leave any MX records alone** — they're for email.
3. Add the records below. Save.

Type	Host name	Points to
A	@	185.199.108.153
A	@	185.199.109.153
A	@	185.199.110.153
A	@	185.199.111.153
CNAME	www	YOUR-GITHUB-NAME.github.io

D5 Turn on the padlock (HTTPS)

Back in GitHub **Settings** → **Pages**, wait until it says the DNS check was successful (minutes to a few hours). Then tick **Enforce HTTPS**.

You'll know it worked when

<https://contractiqplatform.co.uk> opens your homepage with a padlock in the address bar.

D6 Updating the site later

Repository → **Add file** → **Upload files** → drag in the changed files, keeping them in the same folders (for example `app/index.html` goes in the **app** folder). GitHub replaces files with the same name. The easiest way is to drag the whole contents of the new version folder again.

Careful

If you ever change the address people use (for example to the `.com`), change `ALLOWED_ORIGIN` in Supabase Secrets and the **Site URL** in step B7 to match — otherwise every analysis fails with an "origin not allowed" message.

Part E · The launch test

About 30 minutes. Don't skip this — it's how you find out it works before a customer does.

E1 Stop your own test from using a founding place

SQL Editor → run this first, so your test account doesn't take one of the ten places (it's also in **supabase** → **STEP_E_launch_test.sql**):

```
update founding_offer set offer_open = false where id = 1;
```

E2 Work through the checks

#	Do this	You should see
1	Open https://contractiqplatform.co.uk	Your homepage, with a padlock
2	Open /app/ → create an account with a real email	An email from no-reply@contractiqplatform.co.uk with a six-digit code; entering it opens your workspace
3	Load a sample portfolio → open a contract → Run AI analysis	"Queued", then within about two minutes "Analysis complete" — and the Cost, Risk, Compliance and Insights tabs all filled in
4	Ask Cedric a question about that contract	A sensible answer within a few seconds
5	Supabase → Edge Functions → anthropic-proxy → Logs	A line containing route:bedrock/eu and fn:eu-west-2. No contract text — ever
6	Supabase → Edge Functions → job-worker → Logs	A line starting job ... done with route:bedrock/eu
7	Test purchase (step C5)	The account moves to Growth with 500 credits
8	The next day: AWS → Billing	A few cents under Amazon Bedrock / AWS Marketplace

E3 Tidy up

- Re-open the founding offer:

```
update founding_offer set offer_open = true where id = 1;
```

- At **console.anthropic.com** → **API keys**, delete the old key. From now on, Anthropic receives nothing from ContractIQ.
- Legal Centre: send Claude the three orange items — **VAT position**, **email provider**, and confirmation the Supabase region is **London** — so they can be filled in and published.
- Put a reminder in your calendar for **90 days' time**: "Rotate the AWS key" (see Appendix C).

You'll know it worked when

Every check passed. ContractIQ is live, the AI runs in the UK and Europe, and nothing your customers upload is kept by the AI provider.

If something goes wrong

Most problems show a clear message in the app. First place to look: Supabase → **Edge Functions** → the function → **Logs**.

What you see	What it usually is	Fix
"The Amazon keys are not reaching the AI function"	A secret is missing or misspelt	Check AWS_ACCESS_KEY_ID and AWS_SECRET_ACCESS_KEY in Secrets (B5)
"Amazon Bedrock refused the request (access denied)"	The IAM policy, the use-case form, or an old key	Re-check A5, A8 (both YOUR_ACCOUNT_ID replaced?) and A9
"Bedrock does not recognise the model"	Wrong region or model secret	Delete any BEDROCK_... secrets — the defaults are right
"Origin not allowed" (403)	ALLOWED_ORIGIN doesn't match the address bar	Exactly <code>https://contractiqplatform.co.uk</code> — no slash at the end
"Your session has expired" (401)	Signed in too long ago	Sign out and in. Never switch JWT off on anthropic-proxy
Analysis stays on "Queued"	Background worker not running	Redo B2 (pg_net, pg_cron) and B6; check job-worker's JWT is OFF
Paid, but still on Sandbox	Webhook or email mismatch	C3/C4; the buyer must sign up with the email they paid with
No code email arrives	Built-in email limit	Finish B8 (your own sender)
Pricing page shows no founding banner	Places have gone, or the counter can't reach Supabase	Check the founding_offer row; ask Claude to check pricing.html points at your project

Appendices

A · What the AI costs

Claude Sonnet 5 on Amazon Bedrock's EU route: \$2.20 per million tokens sent and \$11 per million tokens produced (a token is roughly three-quarters of a word; the price is the list price plus 10% for keeping data in Europe). At about \$1.34 to the pound, before VAT:

Action	Typical cost to you	What the customer pays (Growth)
One contract analysis (10 credits)	about £0.26 (≈ £0.18 once the cache helps)	£1.58
One question to Cedric (2 credits)	about £0.04 (much less for a follow-up within 5 minutes)	£0.32
Ten founding members using every credit	about £50–£90 a month	nothing (free for six months)

There's no monthly fee for Bedrock — you pay only for what's used. AWS adds 20% VAT, which you can reclaim only if CodeIQ registers for VAT. Your profit model (PROFIT_SCENARIOS.md) now uses these real figures: breakeven is about **20 customers** rather than 12.

B · A customer in the United States

By default everyone — including US customers — uses the EU route. That's lawful, and European rules are stricter, so it isn't a downgrade. Only if a US customer **insists** on US processing:

1. Add a second inline policy to the **contractiq-bedrock** IAM user, copied from **aws** → **contractiq-bedrock-us-addition.json** (replace YOUR_ACCOUNT_ID twice).
2. In Supabase's SQL Editor: update accounts set data_region = 'us' where id = 'THEIR-ACCOUNT-ID' ;
3. Record it on their Order Form. Tell them Amazon's US route covers the **US and Canada**, not the US only.

Their contracts are still stored in London. Full US hosting means a second Supabase project in the US — only worth it for an Enterprise customer who pays for it.

C · Every 90 days: change the AWS key

1. IAM → Users → **contractiq-bedrock** → Security credentials → **Create access key** (you can have two at once).
2. Put the new ID and secret into Supabase Secrets, replacing the old values.
3. Run one analysis to check it works, then go back to IAM and **Delete** the old key.

D · Emergency only: switching back to Anthropic

If Amazon Bedrock were down for hours, you could add two secrets — AI_PROVIDER = anthropic and a new ANTHROPIC_API_KEY — and the app would use Anthropic's own service instead. **That breaks the promises in your Legal Centre** (data would go to the US, and be kept for up to 30 days), so it's for an emergency measured in hours, you should tell customers, and you remove both secrets as soon as Bedrock is back.

E · What changed in v13 (for your records)

- AI moved from Anthropic's own service to **Amazon Bedrock, EU route, called from London**. The code refuses the worldwide route.
- The background queue now runs **all five analysis stages** (it used to run one and charge for five).
- The background worker checks its own key, so it works with Supabase's new key style.
- **Back-office database functions are locked** — before this, anyone with the public key could have given themselves credits or a free plan.
- Queued document text is **deleted** when the job finishes; a job can't write onto another workspace's contract.
- **Zero-Retention** is now a real, saved, per-workspace setting, enforced by the database.
- Re-runs within 30 days are free however the analysis was run, and can't be faked by a modified app.
- Sandbox is **100 credits**; Legal Centre is **version 1.1**; security, features, pricing and about pages corrected to match the code.

Good to know

These documents and settings were checked against the code with automated tests, but they are not legal advice. Have a solicitor read the Legal Centre before you take payment.