

✓ hello 1

Pipeline

Branch: master [↗](#)

Commit: ac09cd6

🕒 12s

🕒 3 minutes ago

No changes

Branch indexing



Steps Greeting

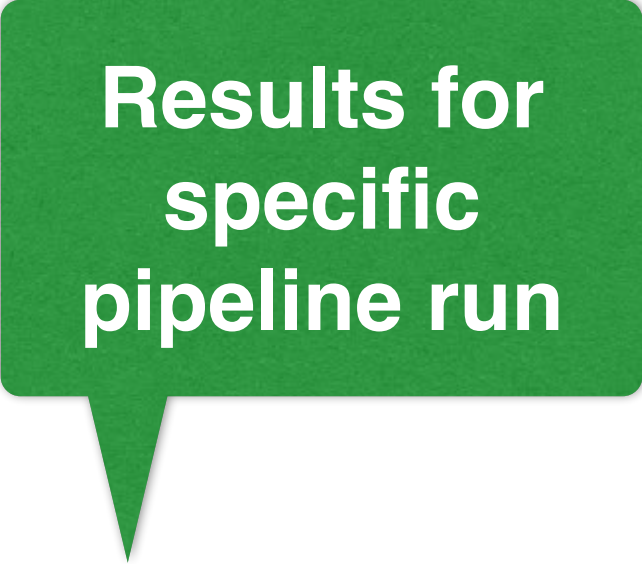
✓ > General SCM

✓ ▾ Hello CodeMash! — Print Message

1

Hello CodeMash!

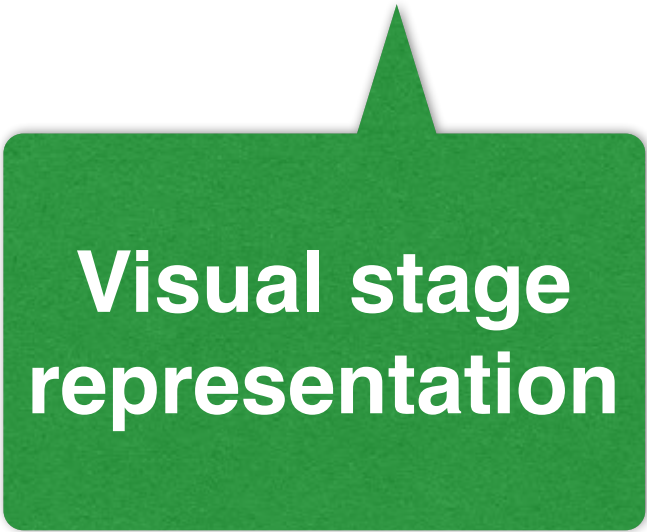
Let it Flow

A green speech bubble with a white drop shadow, pointing downwards. It contains the text "Results for specific pipeline run" in white, bold, sans-serif font.

**Results for
specific
pipeline run**

A green speech bubble with a white border and a drop shadow, pointing towards the top-left corner. The text is centered within the bubble.

**Source control
branch for
pipeline**

A green callout box with a pointed top and rounded bottom corners, containing white text.

**Visual stage
representation**

A green speech bubble with a white border and a drop shadow, pointing towards the bottom-left corner. The text inside is white and bold.

**Steps in
selected stage**

Let it Flow

Results for
specific
pipeline run

✓ hello 1

Pipeline

Branch: master [🔗](#)

🕒 12s

No changes

Commit: ac09cd6

🕒 3 minutes ago

Branch indexing

Source control
branch for
pipeline



Visual stage
representation

Steps in
selected stage

Steps Greeting

✓ > General SCM

✓ ▾ Hello CodeMash! — Print Message

1 Hello CodeMash!

Under the Surface

Branch indexing

22:04:56 Connecting to <https://api.github.com> using code/***** (GitHub Access Token)

Obtained Jenkinsfile from ac09cd6e7dfedf63a4805cbf4dff2dd7ad11bba6

[Pipeline] node

Running on [Jenkins](#) in /var/jenkins_home/workspace/hello_master-S5SPWIGFXXITAWCEWPMNPHVOSHGL7DTAUPVUXG

[Pipeline] {

[Pipeline] stage

[Pipeline] { (Declarative: Checkout SCM)

[Pipeline] checkout

Cloning the remote Git repository

Cloning with configured refspecs honoured and without tags

Cloning repository <https://github.com/CodeMashJenkins/hello.git>

> git init /var/jenkins_home/workspace/hello_master-S5SPWIGFXXITAWCEWPMNPHVOSHGL7DTAUPVUXG

Fetching upstream changes from <https://github.com/CodeMashJenkins/hello.git>

> git --version # timeout=10

using GIT_ASKPASS to set credentials GitHub Access Token

> git fetch --no-tags --progress <https://github.com/CodeMashJenkins/hello.git> +refs/heads,

> git config remote.origin.url <https://github.com/CodeMashJenkins/hello.git> # timeout=10

> git config --add remote.origin.fetch +refs/heads/master:refs/remotes/origin/master # timeout=10

> git config remote.origin.url <https://github.com/CodeMashJenkins/hello.git> # timeout=10

Fetching without tags

Fetching upstream changes from <https://github.com/CodeMashJenkins/hello.git>

using GIT_ASKPASS to set credentials GitHub Access Token

> git fetch --no-tags --progress <https://github.com/CodeMashJenkins/hello.git> +refs/heads,