

### Where do you store your code?



Bitbucket Cloud



Bitbucket Server



GitHub



GitHub Enterprise



Git


#### **Connect to Github**

Jenkins needs an access key to authorize itself with Github. Create an access key here.

Your Github access token


Connect


## Create a Pipeline Job

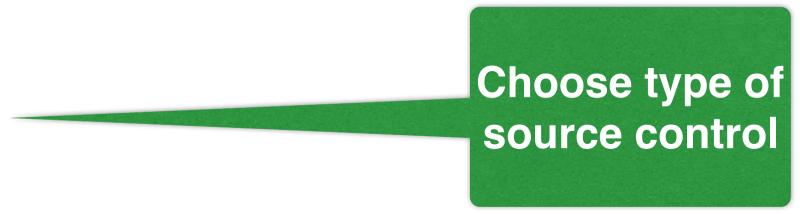

Follow link to create access token on GitHub (only necessary first time)

### Create a Pipeline Job

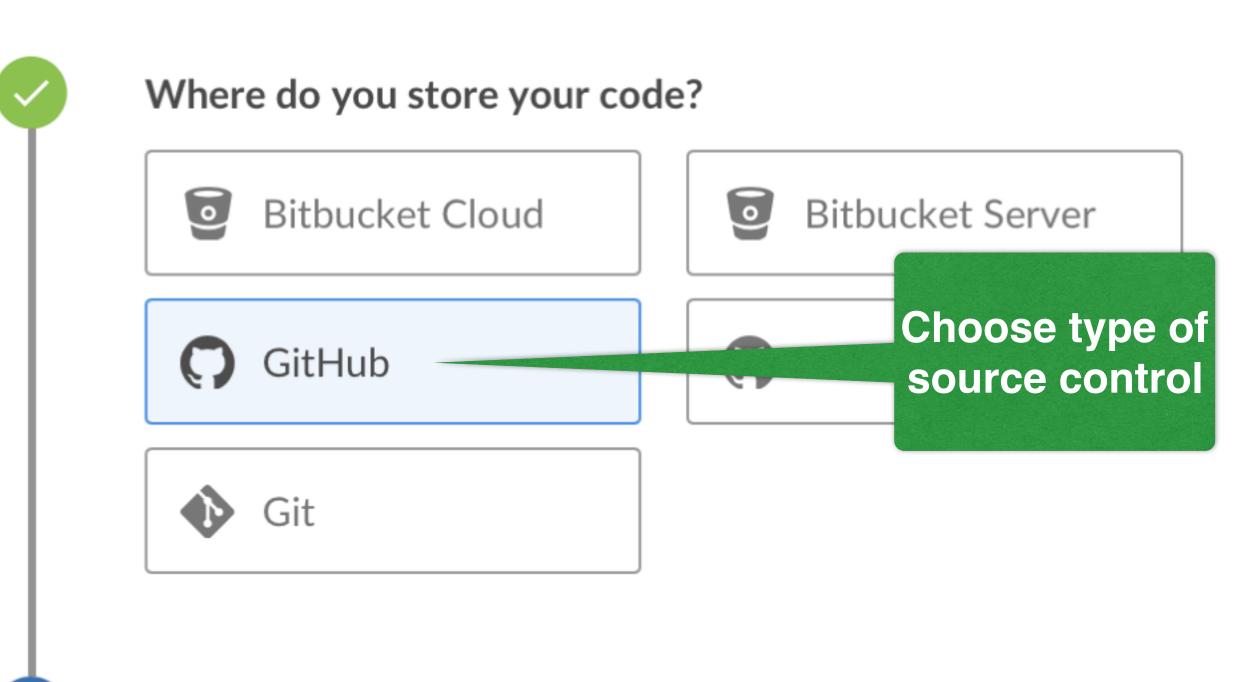

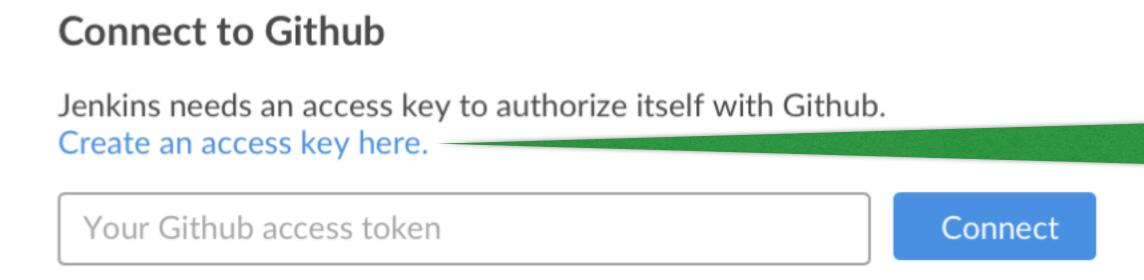

Follow link to create access token on GitHub (only necessary first time)

# Create a Pipeline Job

### New personal access token

Personal access tokens function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.

#### **Token description**

CodeMash Jenkins

What's this token for?

### GitHub

#### Select scopes

Scopes define the access for personal tokens. Read more about OAuth scopes.

✓ repo
 ✓ repo:status
 ✓ repo\_deployment
 ✓ public\_repo
 ✓ repo:invite
 Full control of private repositories
 Access commit status
 Access deployment status
 Access public repositories
 Access repository invitations

 delete\_repo
 Delete repositories

 admin:gpg\_key
 Full control of user gpg keys (Developer Preview)

 write:gpg\_key
 Write user gpg keys

 read:gpg\_key
 Read user gpg keys

Generate token

Cancel