


Code

AS

Pipeline

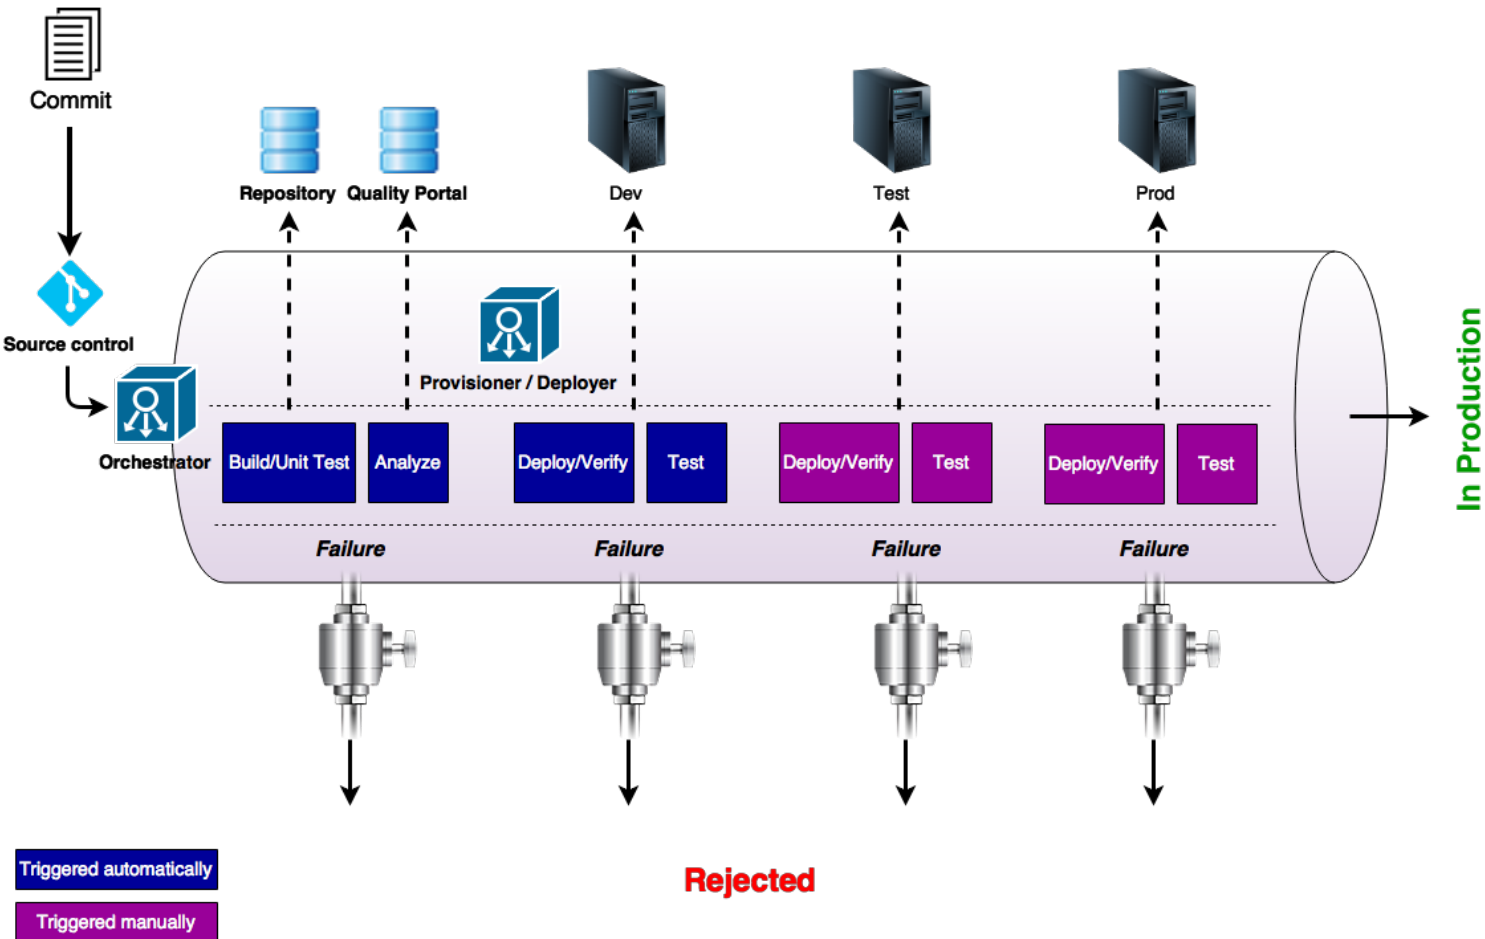

```
pipeline
{
    agent
    {
        label 'demo'
    }

    stages
    {
        stage('Build')
        {
            steps
            {
                dir('UCD Demo Service/ucd-demo-
                {
                    runMvn 'package'
                }
            }
        }

        stage('Publish')
        {
```

Two

Favors

Disstinct