

New personal access token

Personal access tokens function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Token description

CodeMash Jenkins

What's this token for?

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#).

<input checked="" type="checkbox"/> repo	Full control of private repositories
<input checked="" type="checkbox"/> repo:status	Access commit status
<input checked="" type="checkbox"/> repo_deployment	Access deployment status
<input checked="" type="checkbox"/> public_repo	Access public repositories
<input checked="" type="checkbox"/> repo:invite	Access repository invitations

☐ **delete_repo** Delete repositories

☐ **admin:gpg_key** Full control of user gpg keys ([Developer Preview](#))

☐ write:gpg_key Write user gpg keys

☐ read:gpg_key Read user gpg keys

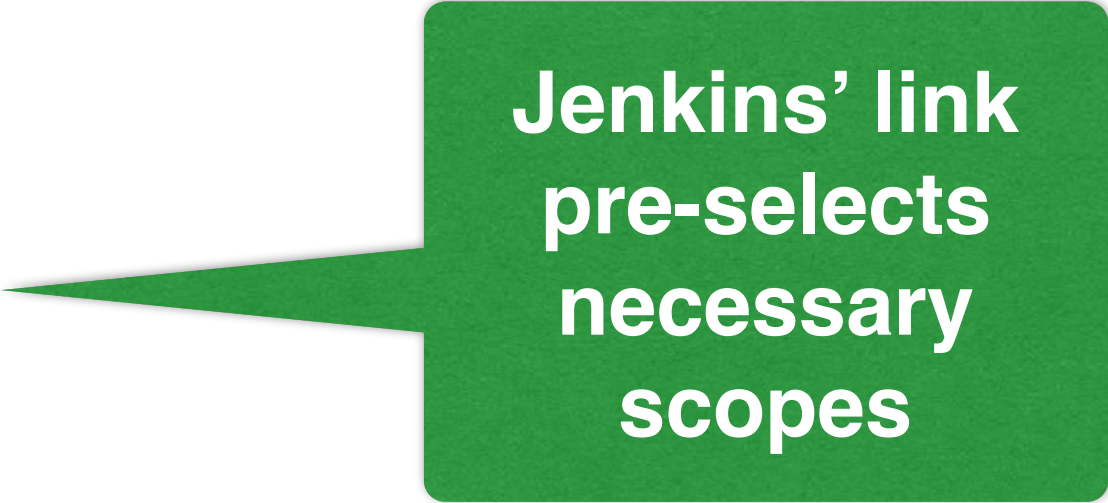
Generate token

Cancel

Create a Pipeline Job



**Provide a
description**

A green callout box with a pointed left side, containing white text.

**Jenkins' link
pre-selects
necessary
scopes**



Hit “Go”

GitHub

Create a Pipeline Job

New personal access token

Personal access tokens function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Token description

CodeMash Jenkins

What's this token for?

Provide a
description

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#).

- | | |
|---|--------------------------------------|
| <input checked="" type="checkbox"/> repo | Full control of private repositories |
| <input checked="" type="checkbox"/> repo:status | Access commit status |
| <input checked="" type="checkbox"/> repo_deployment | Access deployment status |
| <input checked="" type="checkbox"/> public_repo | Access public repositories |
| <input checked="" type="checkbox"/> repo:invite | Access repository invitations |

Jenkins' link
pre-selects
necessary
scopes

GitHub

Hit "Go"

Generate token

[Cancel](#)

Create a Pipeline Job

Personal access tokens

Generate new token

Revoke all

Tokens you have generated that can be used to access the [GitHub API](#).

Make sure to copy your new personal access token now. You won't be able to see it again!

© 2010 Pearson Education, Inc. or its affiliate(s). All rights reserved.



Edit

Delete

GitHub