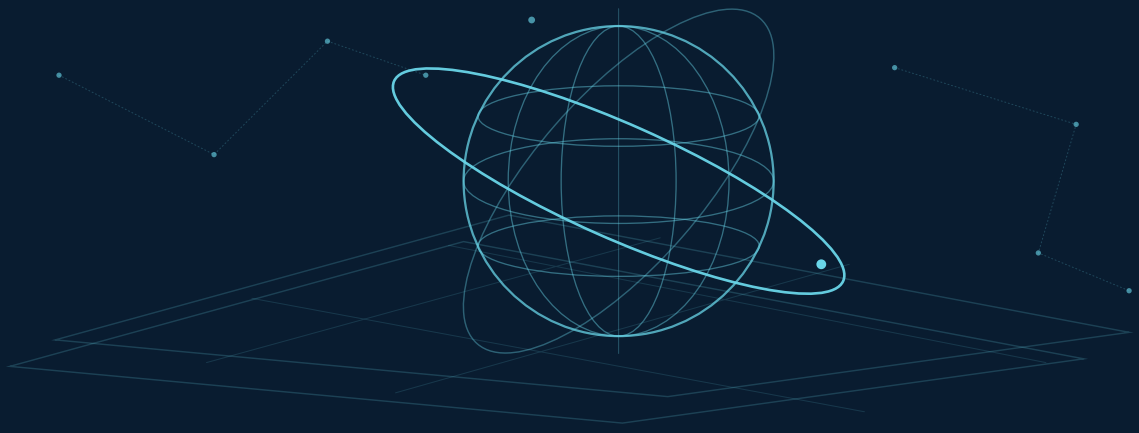


SPECIFICATION

Task board — create, complete, and list

Synthetic L1 reference for Atlas Specifications

DOC-TASK-BOARD

Revision 3 / draft / Stable-v1.0.0

Document	DOC-TASK-BOARD	Revision	3
Status	draft	Language	en
Atlas version	Stable-v1.0.0	Profile version	Stable-v1.0.0
Translator	1.0.0	Created	2026-10-25
Updated	2026-10-25		

Authors

Identity / name	Contract	Description / details
Douglas de Oliveira Alkimim		Role: Specification author

Keywords: Atlas; OAL L1; task board; synthetic example

Context, scope, and evidence

This synthetic board demonstrates the Atlas L1 contract for creating, completing, and listing Tasks. It does not implement a business application or assert independent stakeholder validation.

Origin: SRC-TASK-BRIEF is the versioned teaching baseline. The three goals, rules, authorization policy and quality obligations are didactic design choices. No Needs-to-L1 derivation, interview, or named human approval is claimed.

Out of scope: editing titles, deleting Tasks, multiple boards, anonymous access, storage technology, authentication mechanisms, transport protocols, screens, and quantitative response-time targets.

Actor

Identity / name	Contract	Description / details
ACT-BOARD-MEMBER Board member		Kind: role Description: An external person acting as a member of the selected board; concrete caller identity and permissions are resolved separately.

Type

Identity / name	Contract	Description / details
TYP-TASK-STATUS Task status		Definition: Lifecycle state of a Task. Constraints: Exactly open or completed. Examples: open; completed

Entities and canonical rules

Entities own meaning and validity; they have no collaborators.

ENTITY ENT-TASK

Name Task

Meaning

A unit of work retained in one board. Its identity and title survive completion. The entity owns data validity and state-transition rules; it has no tool or use-case dependency.

Identity

Description

Tasks with exactly equal task identifiers in the same board are the same task.

Fields: FLD-TASK-ID

Fields

Identity / name	Contract	Description / details
FLD-TASK-ID Task identifier	Type: text Cardinality: 1 Required: true	Description: Identity within this board. Constraints: Non-empty, non-whitespace text; equality is exact and case-sensitive. Examples: Valid: TASK001; Invalid:
FLD-TASK-TITLE Title	Type: text Cardinality: 1 Required: true	Description: The work to be remembered. Constraints: At least one non-whitespace character; retain the original text. Examples: Valid: Review Atlas; Invalid:
FLD-TASK-STATUS Status	Type: task-status Cardinality: 1 Required: true	Description: Lifecycle state. Constraints: One of open or completed. Examples: Valid: open; Invalid: deleted
FLD-TASK-REVISION Revision	Type: integer Cardinality: 1 Required: true	Description: Concurrency token for a retained Task. Constraints: A non-negative integer, increased by one for each successful completion. Examples: Valid: 0; Invalid: -1

Relationships: none

States

Identity / name	Contract	Description / details
ST-TASK-OPEN Open		Description: Work is still pending.
ST-TASK-COMPLETED Completed		Description: Work has been completed; the task remains retained.

Transitions

Identity / name	Contract	Description / details
TRN-TASK-COMPLETE Complete	From: ST-TASK-OPEN To: ST-TASK-COMPLETED	Description: Preserve identity and title; change status to completed. The store increments revision after the conditional write succeeds.

Validations

VLD-TASK-ID

Name Task identifier Scope field

Statement

A task identifier is non-empty text, preserved exactly.

Inputs

Identity / name	Contract	Description / details
Candidate	Source: input	Meaning: A task identifier is non-empty text, preserved exactly.

Conditions

Identity / name	Contract	Description / details
C-TASK-ID-1 The candidate is text containing at least one non-whitespace character.		Meaning: The candidate is text containing at least one non-whitespace character.


Results

Identity / name	Contract	Description / details
	Outcome: pass	Description: All stated conditions hold. No normalization or persistence occurs.
	Outcome: fail	Description: At least one stated condition fails. Preserve prior state.

Flow GRAPH-VLD-TASK-ID

Task identifier

GRAPH-VLD-TASK-ID

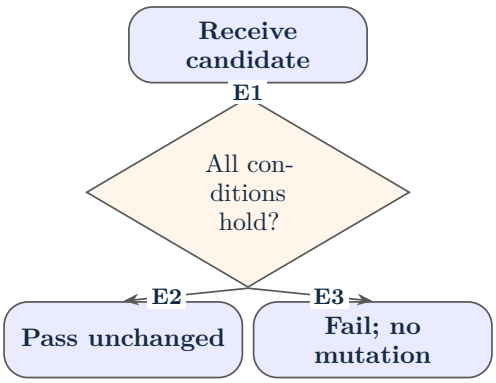

Key	Edge identity and label
E1	E-VLD-TASK-ID-1
E2	E-VLD-TASK-ID-2 — yes
E3	E-VLD-TASK-ID-3 — no

`VLD-TASK-NEW`

Name New task validity Scope entity

Statement

A new Task has a valid identifier, a meaningful title, open status, and revision zero.

Inputs

Identity / name	Contract	Description / details
Candidate	Source: input	Meaning: A new Task has a valid identifier, a meaningful title, open status, and revision zero.

Conditions

Identity / name	Contract	Description / details
C-TASK-NEW-1 The task identifier satisfies VLD-TASK-ID.		Meaning: The task identifier satisfies VLD-TASK-ID.
C-TASK-NEW-2 The title is text with at least one non-whitespace character.		Meaning: The title is text with at least one non-whitespace character.
C-TASK-NEW-3 The status is open.		Meaning: The status is open.
C-TASK-NEW-4 The revision is the integer zero.		Meaning: The revision is the integer zero.

Identity / name	Contract	Description / details


Results

Identity / name	Contract	Description / details
	Outcome: pass	Description: All stated conditions hold. No normalization or persistence occurs.
	Outcome: fail	Description: At least one stated condition fails. Preserve prior state.

Flow GRAPH-VLD-TASK-NEW

New task validity

GRAPH-VLD-TASK-NEW

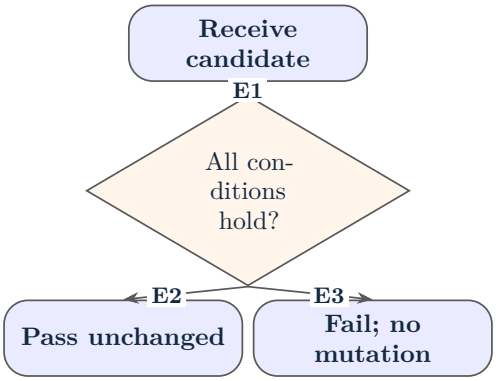

Key	Edge identity and label
E1	E-VLD-TASK-NEW-1
E2	E-VLD-TASK-NEW-2 — yes
E3	E-VLD-TASK-NEW-3 — no

VLD-TASK-COMPLETE

Name Completion transition Scope transition

Statement

A ready Task may transition from open to completed; a completed Task cannot be completed again.

Inputs

Identity / name	Contract	Description / details
Candidate	Source: state	Meaning: A ready Task may transition from open to completed; a completed Task cannot be completed again.

Conditions

Identity / name	Contract	Description / details
C-TASK-COMPLETE-1 The current state is ST-TASK-OPEN.		Meaning: The current state is ST-TASK-OPEN.


Results

Identity / name	Contract	Description / details
	Outcome: pass	Description: All stated conditions hold. No normalization or persistence occurs.
	Outcome: fail	Description: At least one stated condition fails. Preserve prior state.

Flow GRAPH-VLD-TASK-COMPLETE

Completion transition

GRAPH-VLD-TASK-COMPLETE

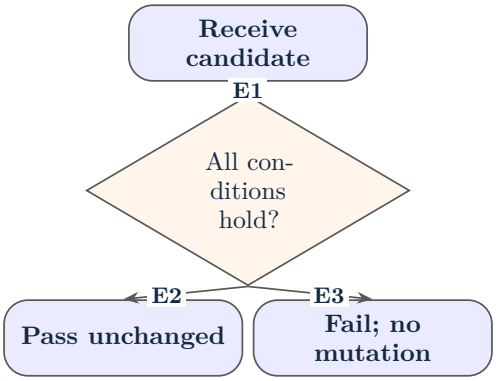

Key	Edge identity and label
E1	E-VLD-TASK-COMPLETE-1
E2	E-VLD-TASK-COMPLETE-2 — yes
E3	E-VLD-TASK-COMPLETE-3 — no

Examples

EX-TASK-OPEN

Kind valid

Description

A valid new Task.

Data

```
{
"task_id": "TASK001",
"title": "Review Atlas",
"status": "open",
"revision": 0
}
```

EX-TASK-COMPLETED

Kind valid

Description

A retained Task after one completion.

Data

```
{
"task_id": "TASK001",
"title": "Review Atlas",
"status": "completed",
"revision": 1
}
```

EX-TASK-INVALID

Kind invalid

Description

An empty title violates entity validity.

Data

```
{
"task_id": "TASK001",
"title": "",
"status": "open",
"revision": 0
}
```

Assumptions: ASM-TASK-SINGLE-BOARD

Open issues: none

Abstract tool contracts

Tools consume ready entities and define atomicity, failure distinctions and persistence uncertainty without selecting implementations.

TOOL TOL-TASK-STORE

Name Task store

Purpose

An abstract retention and retrieval capability. This specification chooses no database, protocol, framework, SQL syntax, route, or concrete adapter.

Operations

OP-TASK-CREATE

Name Retain a new Task

Purpose

Atomically insert one ready open Task if its identifier is absent.

Inputs

Identity / name	Contract	Description / details
Task	Type: ENT-TASK Required: true	Meaning: Ready Task after VLD-TASK-NEW; revision zero.
Board	Type: resolved-board Required: true	Meaning: The board bound to trusted caller context.

Conditions

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

All operations act on the board resolved in the trusted caller context. A caller supplies no untrusted substitute for that board binding.

Results

Identity / name	Contract	Description / details
Created Task	Type: ENT-TASK	Meaning: The retained Task, with its exact title and identifier. Guarantees: A successful result confirms retention at revision zero.

Effects

One Task is added on success.

Failures

Identity / name	Contract	Description / details
DUPLICATE_ID		Meaning: The identifier is already retained in this board. Consumer distinction: This outcome is not applied: the store guarantees that this operation made no change.

Code STORE_UNAVAILABLE

Meaning

The capability could not confirm the requested result.

Consumer distinction

For a write, return write_outcome=not_applied only with evidence no write occurred; otherwise return write_outcome=unknown. Unknown is neither success nor proof of no change, and must not be automatically retried. A read failure returns no usable snapshot and changes no task.

Guarantees

Uniqueness check and insertion are atomic. A duplicate does not overwrite an existing Task.

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

OP-TASK-LOAD

Name Read one Task

Purpose

Return a ready Task and its observed revision by exact identifier.

Inputs

Identity / name	Contract	Description / details
Task identifier	Type: text Required: true	Meaning: Identifier already checked against VLD-TASK-ID.
Board	Type: resolved-board Required: true	Meaning: The authorized board.

Conditions

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

All operations act on the board resolved in the trusted caller context. A caller supplies no untrusted substitute for that board binding.

Results

Identity / name	Contract	Description / details
Task	Type: ENT-TASK	Meaning: A ready Task hydrated from one retained record. Guarantees: Its revision describes the same observed record as its fields.

Effects

No task is changed.

Failures

Identity / name	Contract	Description / details
NOT_FOUND		Meaning: No task with this identifier exists in this board at read time. Consumer distinction: Distinct from unavailable or malformed storage.

Code STORE_UNAVAILABLE

Meaning

The capability could not confirm the requested result.

Consumer distinction

For a write, return write_outcome=not_applied only with evidence no write occurred; otherwise return write_outcome=unknown. Unknown is neither success nor proof of no change, and must not be automatically retried. A read failure returns no usable snapshot and changes no task.

Identity / name	Contract	Description / details
STORE_INVALID_STATE		Meaning: A stored record could not be hydrated through the canonical Task validity rules. Consumer distinction: Do not return a malformed ready Task, an empty success, or a partial list. Report the integrity failure; no task is changed by the read.

Guarantees

No write occurs. Not-found is a confirmed absence, not a masked read error.

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

OP-TASK-COMPLETE

Name Retain a completion

Purpose

Atomically replace the observed Task with a ready completed Task only if its revision still matches.

Inputs

Identity / name	Contract	Description / details
Task	Type: ENT-TASK Required: true	Meaning: Ready Task after the entity's open-to-completed transition; identity/title unchanged.
Expected revision	Type: integer Required: true	Meaning: Revision returned by OP-TASK-LOAD.
Board	Type: resolved-board Required: true	Meaning: The authorized board.

Conditions

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

All operations act on the board resolved in the trusted caller context. A caller supplies no untrusted substitute for that board binding.

Results

Identity / name	Contract	Description / details
Completed Task	Type: ENT-TASK	Meaning: The retained completed Task. Guarantees: Revision is expected_revision+1; identity and title are unchanged.

Effects

Status becomes completed and revision increases once on success.

Failures

Identity / name	Contract	Description / details
NOT_FOUND		Meaning: The observed Task is no longer present at conditional-write time. Consumer distinction: This outcome is not applied: the store guarantees that this operation made no change.
VERSION_CONFLICT		Meaning: The retained revision differs from the expected revision. Consumer distinction: This outcome is not applied: the store guarantees that this operation made no change.

Code STORE_UNAVAILABLE

Meaning

The capability could not confirm the requested result.

Consumer distinction

For a write, return write_outcome=not_applied only with evidence no write occurred; otherwise return write_outcome=unknown. Unknown is neither success nor proof of no change, and must not be automatically retried. A read failure returns no usable snapshot and changes no task.

Guarantees

Existence/revision comparison and replacement are atomic; no lost update is reported as success.

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

OP-TASK-LIST

Name Read the board

Purpose

Return one consistent snapshot of all Tasks in the authorized board.

Inputs

Identity / name	Contract	Description / details
Board	Type: resolved-board Required: true	Meaning: The authorized board.

Conditions

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

All operations act on the board resolved in the trusted caller context. A caller supplies no untrusted substitute for that board binding.

Results

Identity / name	Contract	Description / details
Tasks	Type: list[ENT-TASK]	Meaning: Ready Tasks ordered by exact identifier using Unicode code-point order. Guarantees: Each matching Task appears exactly once; an empty successful list means the board was empty at the snapshot instant.

Effects

No task is changed.

Failures

Code STORE_UNAVAILABLE

Meaning

The capability could not confirm the requested result.

Consumer distinction

For a write, return write_outcome=not_applied only with evidence no write occurred; otherwise return write_outcome=unknown. Unknown is neither success nor proof of no change, and must not be automatically retried. A read failure returns no usable snapshot and changes no task.

Identity / name	Contract	Description / details
STORE_INVALID_ STATE		Meaning: A stored record could not be hydrated through the canonical Task validity rules. Consumer distinction: Do not return a malformed ready Task, an empty success, or a partial list. Report the integrity failure; no task is changed by the read.

Guarantees

No partial list is returned as a complete snapshot. Concurrent later changes need not appear in this snapshot.

A Task input is already valid according to ENT-TASK. Tools consume ready entities and do not repeat entity-invariant validation. Loading raw records uses the canonical entity construction/hydration boundary once; this is not duplicate validation of a ready Task.

Use cases and acceptance

Each case declares actor context, functional behavior, flow links, quality obligations, and acceptance criteria.

USE CASE UC-TASK-CREATE

Name Create task

Objective

Remember one new unit of work in the board.

Actors

Actor ACT-BOARD-MEMBER Permission task.create

Description

Initiating actor: board member. Require the caller to be resolved to a principal with task.create for this board; a role name supplied as business input is insufficient.

Trigger

The board member (ACT-BOARD-MEMBER) requests: create task.

Context

Required caller context: resolved principal identifier, selected board identifier, authenticated status, granted case permissions, issuer, and validity status. The context originates from a trusted identity-and-permission authority configured for the application; claims in the task request are untrusted and cannot supply authorization.

The trust assumption is ASM-TASK-IDENTITY. Authentication is required; its mechanism and token/channel encoding belong to later design. Authorization is reevaluated for this invocation, and composed invocations would preserve the same principal and board context.

The actor is a role. The caller is the concrete principal for this request. Neither is an accountable human author for a Needs-to-L1 derivation.

Inputs

Identity / name	Contract	Description / details
Task identifier	Type: text Required: true	Meaning: Requested stable task identifier.
Title	Type: text Required: true	Meaning: The work to remember.

Entry conditions

Requests may arrive with invalid or missing authorization context; the case's denial path remains defined. No downstream effect occurs before authorization succeeds.

Entities

Entity ENT-TASK

Validations: VLD-TASK-NEW

Purpose

Use the canonical Task meaning and rules. Tools receive ready entities; no repeated validation of ready entity invariants is required.

Tools

Tool	TOL-TASK-STORE	Operation	OP-TASK-CREATE

Purpose

Use the declared capability and handle every stated observable outcome.

Calls: none

Outcomes

OUT-TASK-CREATE-DENIED

Kind refusal

Description

The caller context is absent, unresolved, expired, or lacks this case's permission for this board.

Effects

No tool call, no write, and no disclosure of task existence or content.

OUT-TASK-CREATE-CREATED

Kind success

Description

The retained Task is returned.

Effects

Exactly one open Task at revision zero is retained.

OUT-TASK-CREATE-INVALID

Kind refusal

Description

The new-task validity rule failed.

Effects

No store invocation or state change.

OUT-TASK-CREATE-DUPLICATE

Kind refusal

Description

The identifier was already retained.

Effects

No change to that Task.

OUT-TASK-CREATE-UNAVAILABLE

Kind failure

Description

Storage did not confirm creation; report write_outcome.

Effects

not_applied guarantees no write; unknown leaves final retention state unresolved.

Functional requirements

RF-TASK-CREATE-AUTH

Statement

Resolve the initiating board member and require task.create for the selected board in trusted caller context. Missing, unresolved, expired, or insufficient context is denied before any entity application or tool call. No anonymous execution is permitted. Origin: SRC-TASK-BRIEF.

Scope case

Applies to: UC-TASK-CREATE

Flow references: N-TASK-CREATE-AUTH, N-TASK-CREATE-DENIED, E-TASK-CREATE-DENIED, E-TASK-CREATE-ALLOWED

RF-TASK-CREATE-DATA

Statement

After authorization, construct a new Task from task_id and title with status open and revision zero, applying VLD-TASK-NEW. An invalid candidate is refused before storage; preserve input text exactly.

Scope case

Applies to: UC-TASK-CREATE

Flow references: N-TASK-CREATE-VALIDATE, N-TASK-CREATE-VALID, N-TASK-CREATE-INVALID, E-TASK-CREATE-2

RF-TASK-CREATE-RETAIN

Statement

Pass the ready Task and authorized board to OP-TASK-CREATE once. Only a confirmed result returns the retained identifier, title, open status, and revision zero.

Scope operation

Applies to: UC-TASK-CREATE, OP-TASK-CREATE

Flow references: N-TASK-CREATE-STORE, N-TASK-CREATE-CREATED, E-TASK-CREATE-3, E-TASK-CREATE-6

RF-TASK-CREATE-DUPLICATE

Statement

Map DUPLICATE_ID to duplicate-identifier refusal. Preserve the existing Task and do not choose a replacement identifier silently.

Scope case

Applies to: UC-TASK-CREATE

Flow references: N-TASK-CREATE-DUPLICATE, E-TASK-CREATE-4

RF-TASK-CREATE-FAILURE

Statement

On STORE_UNAVAILABLE, report write_outcome supplied by the tool. Distinguish not_applied from unknown; never infer no change or success from an absent confirmation and do not retry automatically.

Scope operation

Applies to: UC-TASK-CREATE, OP-TASK-CREATE

Flow references: N-TASK-CREATE-UNAVAILABLE, E-TASK-CREATE-5

Nonfunctional requirements

RNF-TASK-CREATE-RETENTION

Scope system

Applies to: UC-TASK-CREATE, OP-TASK-CREATE, UC-TASK-LIST

Statement

A confirmed creation remains readable after a normal store restart. Origin: SRC-TASK-BRIEF (synthetic teaching brief).

Verifiable criterion

After a confirmed create and normal restart, a successful list returns the Task with unchanged fields exactly once.

Verification

Exercise create, restart the chosen persistence implementation normally, then list. This repository supplies the contract, not that implementation.

References: SRC-TASK-BRIEF

Applicability

Applies under the explicitly stated case and tool conditions. This is an obligation for a future implementation, not a measured claim about this repository.

Flows

Main GRAPH-TASK-CREATE

Subflows: none

Flow text

Resolve trusted context first. Deny missing, unresolved, expired, or insufficient permission before validation and storage (RF-TASK-CREATE-AUTH).

Apply VLD-TASK-NEW to input data once. Refuse invalid input without tool access (RF-TASK-CREATE-DATA).

Pass the ready Task to OP-TASK-CREATE. Confirm only on its success; map duplicate and unavailable outcomes explicitly (RF-TASK-CREATE-RETAIN, RF-TASK-CREATE-DUPLICATE, RF-TASK-CREATE-FAILURE).

Acceptance criteria

AC-TASK-CREATE-AUTH

Statement

Try absent context, an unresolved identity, an expired context, and a member lacking this permission. Every attempt is denied before tool invocation, with no task state or existence disclosed.

Verifies: RF-TASK-CREATE-AUTH

AC-TASK-CREATE-SUCCESS

Statement

With trusted create permission and unused TASK001 / Review Atlas, receive the exact open Task at revision zero; a later successful list includes it once.

Verifies: RF-TASK-CREATE-DATA, RF-TASK-CREATE-RETAIN, RNF-TASK-CREATE-RETENTION

AC-TASK-CREATE-INVALID

Statement

An empty title or whitespace-only identifier is refused before OP-TASK-CREATE is invoked.

Verifies: RF-TASK-CREATE-DATA

AC-TASK-CREATE-DUPLICATE

Statement

Creating TASK001 twice retains the first Task unchanged and returns duplicate-identifier refusal on the second attempt.

Verifies: RF-TASK-CREATE-DUPLICATE

AC-TASK-CREATE-UNKNOWN

Statement

Inject a write with lost confirmation. The case reports unknown; it does not claim no write, report success, or initiate a retry.

Verifies: RF-TASK-CREATE-FAILURE

Traceability

Identity / name	Contract	Description / details
TRC-TASK-CREATE-ORIGIN	Source: SRC-TASK-BRIEF	Targets: RF-TASK-CREATE-AUTH; RF-TASK-CREATE-DATA; RF-TASK-CREATE-RETAIN; RF-TASK-CREATE-DUPLICATE; RF-TASK-CREATE-FAILURE; RNF-TASK-CREATE-RETENTION Note: Synthetic requirements selected for this teaching example; not evidence of stakeholder approval.
TRC-TASK-CREATE-AC-1	Source: AC-TASK-CREATE-AUTH	Targets: RF-TASK-CREATE-AUTH Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.

Identity / name	Contract	Description / details
TRC-TASK-CREATE-AC-2	Source: AC-TASK-CREATE-SUCCESS	Targets: RF-TASK-CREATE-DATA; RF-TASK-CREATE-RETAIN; RNF-TASK-CREATE-RETENTION Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-CREATE-AC-3	Source: AC-TASK-CREATE-INVALID	Targets: RF-TASK-CREATE-DATA Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-CREATE-AC-4	Source: AC-TASK-CREATE-DUPLICATE	Targets: RF-TASK-CREATE-DUPLICATE Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-CREATE-AC-5	Source: AC-TASK-CREATE-UNKNOWN	Targets: RF-TASK-CREATE-FAILURE Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.


Assumptions: ASM-TASK-SINGLE-BOARD, ASM-TASK-IDENTITY

Sources: SRC-TASK-BRIEF, SRC-TASK-OAL

Open issues: none

Create task

GRAPH-TASK-CREATE

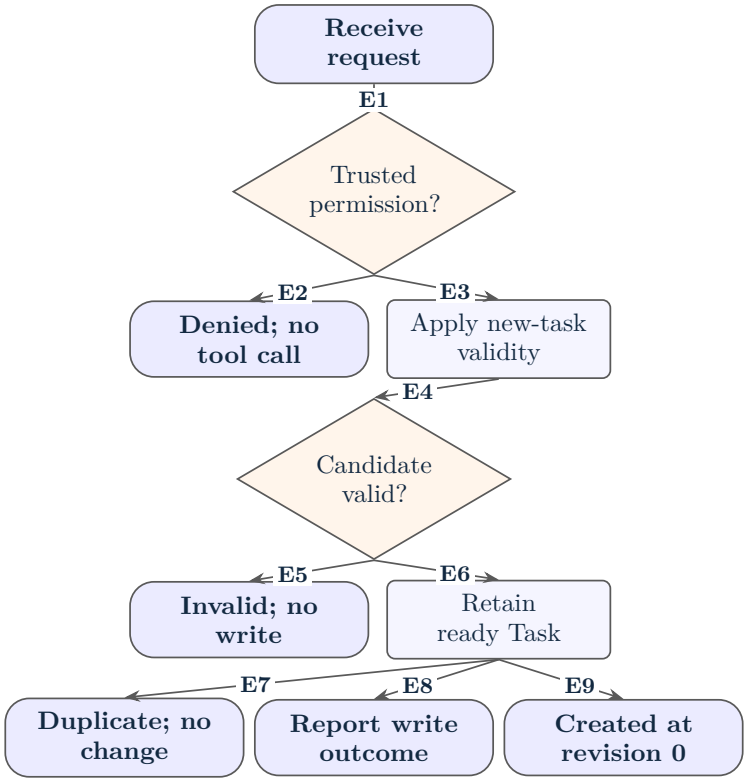

Key	Edge identity and label
E1	E-TASK-CREATE-START
E2	E-TASK-CREATE-DENIED — missing / unresolved / insufficient
E3	E-TASK-CREATE-ALLOWED — authorized
E4	E-TASK-CREATE-1
E5	E-TASK-CREATE-2 — fail
E6	E-TASK-CREATE-3 — pass
E7	E-TASK-CREATE-4 — DUPLICATE_ID
E8	E-TASK-CREATE-5 — STORE_UNAVAILABLE
E9	E-TASK-CREATE-6 — confirmed

USE CASE `UC-TASK-COMPLETE`

Name Complete task

Objective

Mark an existing open Task completed without losing a competing change.

Actors

Actor ACT-BOARD-MEMBER Permission task.complete

Description

Initiating actor: board member. Require the caller to be resolved to a principal with task.complete for this board; a role name supplied as business input is insufficient.

Trigger

The board member (ACT-BOARD-MEMBER) requests: complete task.

Context

Required caller context: resolved principal identifier, selected board identifier, authenticated status, granted case permissions, issuer, and validity status. The context originates from a trusted identity-and-permission authority configured for the application; claims in the task request are untrusted and cannot supply authorization.

The trust assumption is ASM-TASK-IDENTITY. Authentication is required; its mechanism and token/channel encoding belong to later design. Authorization is reevaluated for this invocation, and composed invocations would preserve the same principal and board context.

The actor is a role. The caller is the concrete principal for this request. Neither is an accountable human author for a Needs-to-L1 derivation.

Inputs

Identity / name	Contract	Description / details
Task identifier	Type: text Required: true	Meaning: Exact identifier to complete.

Entry conditions

Requests may arrive with invalid or missing authorization context; the case's denial path remains defined. No downstream effect occurs before authorization succeeds.

Entities

Entity ENT-TASK

Validations: VLD-TASK-ID, VLD-TASK-COMPLETE

Purpose

Use the canonical Task meaning and rules. Tools receive ready entities; no repeated validation of ready entity invariants is required.

Tools

Tool	TOL-TASK-STORE	Operation	OP-TASK-LOAD

Purpose

Use the declared capability and handle every stated observable outcome.

Tool	TOL-TASK-STORE	Operation	OP-TASK-COMPLETE

Purpose

Use the declared capability and handle every stated observable outcome.

Calls: none

Outcomes

`OUT-TASK-COMPLETE-DENIED`

Kind refusal

Description

The caller context is absent, unresolved, expired, or lacks this case's permission for this board.

Effects

No tool call, no write, and no disclosure of task existence or content.

`OUT-TASK-COMPLETE-COMPLETED`

Kind success

Description

Return the confirmed completed Task.

Effects

Status changes once; revision increases by one, title/identifier unchanged.

`OUT-TASK-COMPLETE-INVALID`

Kind refusal

Description

Identifier is invalid.

Effects

No store access.

`OUT-TASK-COMPLETE-MISSING`

Kind refusal

Description

Task absence was confirmed at read or write time.

Effects

This invocation makes no write.

OUT-TASK-COMPLETE-ALREADY

Kind refusal

Description

Task was already completed.

Effects

No completion write.

OUT-TASK-COMPLETE-CONFLICT

Kind refusal

Description

The Task changed after the observed read.

Effects

This invocation does not overwrite the competing change.

OUT-TASK-COMPLETE-STORAGE

Kind failure

Description

Storage was unavailable or returned invalid stored state.

Effects

Read failures make no change. For a write, not_applied guarantees no change and unknown leaves the final state unresolved.

Functional requirements

RF-TASK-COMPLETE-AUTH

Statement

Resolve the initiating board member and require task.complete for the selected board in trusted caller context. Missing, unresolved, expired, or insufficient context is denied before any entity application or tool call. No anonymous execution is permitted. Origin: SRC-TASK-BRIEF.

Scope case

Applies to: UC-TASK-COMPLETE

Flow references: N-TASK-COMPLETE-AUTH, N-TASK-COMPLETE-DENIED, E-TASK-COMPLETE-DENIED, E-TASK-COMPLETE-ALLOWED

RF-TASK-COMPLETE-ID

Statement

After authorization, apply VLD-TASK-ID to the supplied identifier; refuse invalid input before tool access.

Scope case

Applies to: UC-TASK-COMPLETE

Flow references: N-TASK-COMPLETE-ID, N-TASK-COMPLETE-VALID, N-TASK-COMPLETE-INVALID, E-TASK-COMPLETE-2

RF-TASK-COMPLETE-LOAD

Statement

Read a ready Task and its observed revision with OP-TASK-LOAD. A confirmed NOT_FOUND is a refusal without write, distinct from unavailable or malformed storage.

Scope operation

Applies to: UC-TASK-COMPLETE, OP-TASK-LOAD

Flow references: N-TASK-COMPLETE-LOAD, N-TASK-COMPLETE-MISSING, E-TASK-COMPLETE-3, E-TASK-COMPLETE-4

RF-TASK-COMPLETE-TRANSITION

Statement

Apply VLD-TASK-COMPLETE to the ready Task's current state. If already completed, refuse without writing. Otherwise produce a ready completed Task preserving identifier/title; do not repeat validation of its established invariants.

Scope case

Applies to: UC-TASK-COMPLETE

Flow references: N-TASK-COMPLETE-TRANSITION, N-TASK-COMPLETE-ALLOWED, N-TASK-COMPLETE-ALREADY, E-TASK-COMPLETE-6, E-TASK-COMPLETE-8

RF-TASK-COMPLETE-WRITE

Statement

Call OP-TASK-COMPLETE with the completed Task and observed revision. Confirm only its successful result. NOT_FOUND or VERSION_CONFLICT refuses with no write by this operation; never overwrite a competing change.

Scope operation

Applies to: UC-TASK-COMPLETE, OP-TASK-COMPLETE

Flow references: N-TASK-COMPLETE-MISSING, N-TASK-COMPLETE-STORE, N-TASK-COMPLETE-CONFLICT, N-TASK-COMPLETE-DONE, E-TASK-COMPLETE-9, E-TASK-COMPLETE-10, E-TASK-COMPLETE-11, E-TASK-COMPLETE-13

RF-TASK-COMPLETE-FAILURE

Statement

Propagate read unavailable/invalid-state failures without a write. On a write's STORE_UNAVAILABLE preserve not_applied versus unknown; do not claim completion or retry automatically.

Scope operation

Applies to: UC-TASK-COMPLETE, OP-TASK-LOAD, OP-TASK-COMPLETE

Flow references: N-TASK-COMPLETE-ERROR, E-TASK-COMPLETE-5, E-TASK-COMPLETE-12

Nonfunctional requirements

RNF-TASK-COMPLETE-ATOMICITY

Scope operation

Applies to: UC-TASK-COMPLETE, OP-TASK-COMPLETE

Statement

Concurrent completion must not lose an update or report two writes for the same observed revision. Origin: SRC-TASK-BRIEF (synthetic teaching brief).

Verifiable criterion

For two conditional writes using the same observed revision, at most one is confirmed; the other returns conflict or an accurately classified failure.

Verification

Coordinate concurrent attempts at the conditional-write boundary and inspect confirmed revisions and outcomes.

References: SRC-TASK-BRIEF

Applicability

Applies under the explicitly stated case and tool conditions. This is an obligation for a future implementation, not a measured claim about this repository.

Flows

Main GRAPH-TASK-COMPLETE

Subflows: none

Flow text

Authorize trusted caller context first (RF-TASK-COMPLETE-AUTH). Validate the identifier, then load a ready Task (RF-TASK-COMPLETE-ID, RF-TASK-COMPLETE-LOAD).

Refuse a confirmed absence; report a read failure without attempting a write. Apply the entity's transition to the ready Task; refuse already-completed state (RF-TASK-COMPLETE-TRANSITION).

Conditionally retain the completed Task with its observed revision. Distinguish success, concurrent conflict, confirmed absence, and unavailable-write outcome (RF-TASK-COMPLETE-WRITE, RF-TASK-COMPLETE-FAILURE).

Acceptance criteria

AC-TASK-COMPLETE-AUTH

Statement

Try absent context, an unresolved identity, an expired context, and a member lacking this permission. Every attempt is denied before tool invocation, with no task state or existence disclosed.

Verifies: RF-TASK-COMPLETE-AUTH

AC-TASK-COMPLETE-SUCCESS

Statement

For TASK001 open at revision zero, completion returns the same identifier/title, completed status and revision one; later listing reflects that state.

Verifies: RF-TASK-COMPLETE-TRANSITION, RF-TASK-COMPLETE-WRITE

AC-TASK-COMPLETE-MISSING

Statement

A confirmed absent identifier produces not-found without calling OP-TASK-COMPLETE.

Verifies: RF-TASK-COMPLETE-LOAD

AC-TASK-COMPLETE-INVALID

Statement

An empty or whitespace-only identifier is refused before load or completion tools are invoked.

Verifies: RF-TASK-COMPLETE-ID

AC-TASK-COMPLETE-ALREADY

Statement

A ready completed Task produces already-completed refusal and no write; its revision remains unchanged.

Verifies: RF-TASK-COMPLETE-TRANSITION

AC-TASK-COMPLETE-CONFLICT

Statement

Change the retained revision between load and completion. Return VERSION_CONFLICT, preserving the competing state.

Verifies: RF-TASK-COMPLETE-WRITE, RNF-TASK-COMPLETE-ATOMICITY

AC-TASK-COMPLETE-UNKNOWN

Statement

Lose the completion confirmation after issuing a write. Return unknown without success/no-change claims or automatic retry.

Verifies: RF-TASK-COMPLETE-FAILURE

Traceability

TRC-TASK-COMPLETE-ORIGIN

Source SRC-TASK-BRIEF

Targets: RF-TASK-COMPLETE-AUTH, RF-TASK-COMPLETE-ID, RF-TASK-COMPLETE-LOAD, RF-TASK-COMPLETE-TRANSITION, RF-TASK-COMPLETE-WRITE, RF-TASK-COMPLETE-FAILURE, RNF-TASK-COMPLETE-ATOMICITY

Note

Synthetic requirements selected for this teaching example; not evidence of stakeholder approval.

Identity / name	Contract	Description / details
TRC-TASK-COMPLETE-AC-1	Source: AC-TASK-COMPLETE-AUTH	Targets: RF-TASK-COMPLETE-AUTH Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-COMPLETE-AC-2	Source: AC-TASK-COMPLETE-SUCCESS	Targets: RF-TASK-COMPLETE-TRANSITION; RF-TASK-COMPLETE-WRITE Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-COMPLETE-AC-3	Source: AC-TASK-COMPLETE-MISSING	Targets: RF-TASK-COMPLETE-LOAD Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-COMPLETE-AC-4	Source: AC-TASK-COMPLETE-INVALID	Targets: RF-TASK-COMPLETE-ID Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-COMPLETE-AC-5	Source: AC-TASK-COMPLETE-ALREADY	Targets: RF-TASK-COMPLETE-TRANSITION Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-COMPLETE-AC-6	Source: AC-TASK-COMPLETE-CONFLICT	Targets: RF-TASK-COMPLETE-WRITE; RNF-TASK-COMPLETE-ATOMICITY Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-COMPLETE-AC-7	Source: AC-TASK-COMPLETE-UNKNOWN	Targets: RF-TASK-COMPLETE-FAILURE Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.


Assumptions: ASM-TASK-SINGLE-BOARD, ASM-TASK-IDENTITY

Sources: SRC-TASK-BRIEF, SRC-TASK-OAL

Open issues: none

Complete task

GRAPH-TASK-COMPLETE

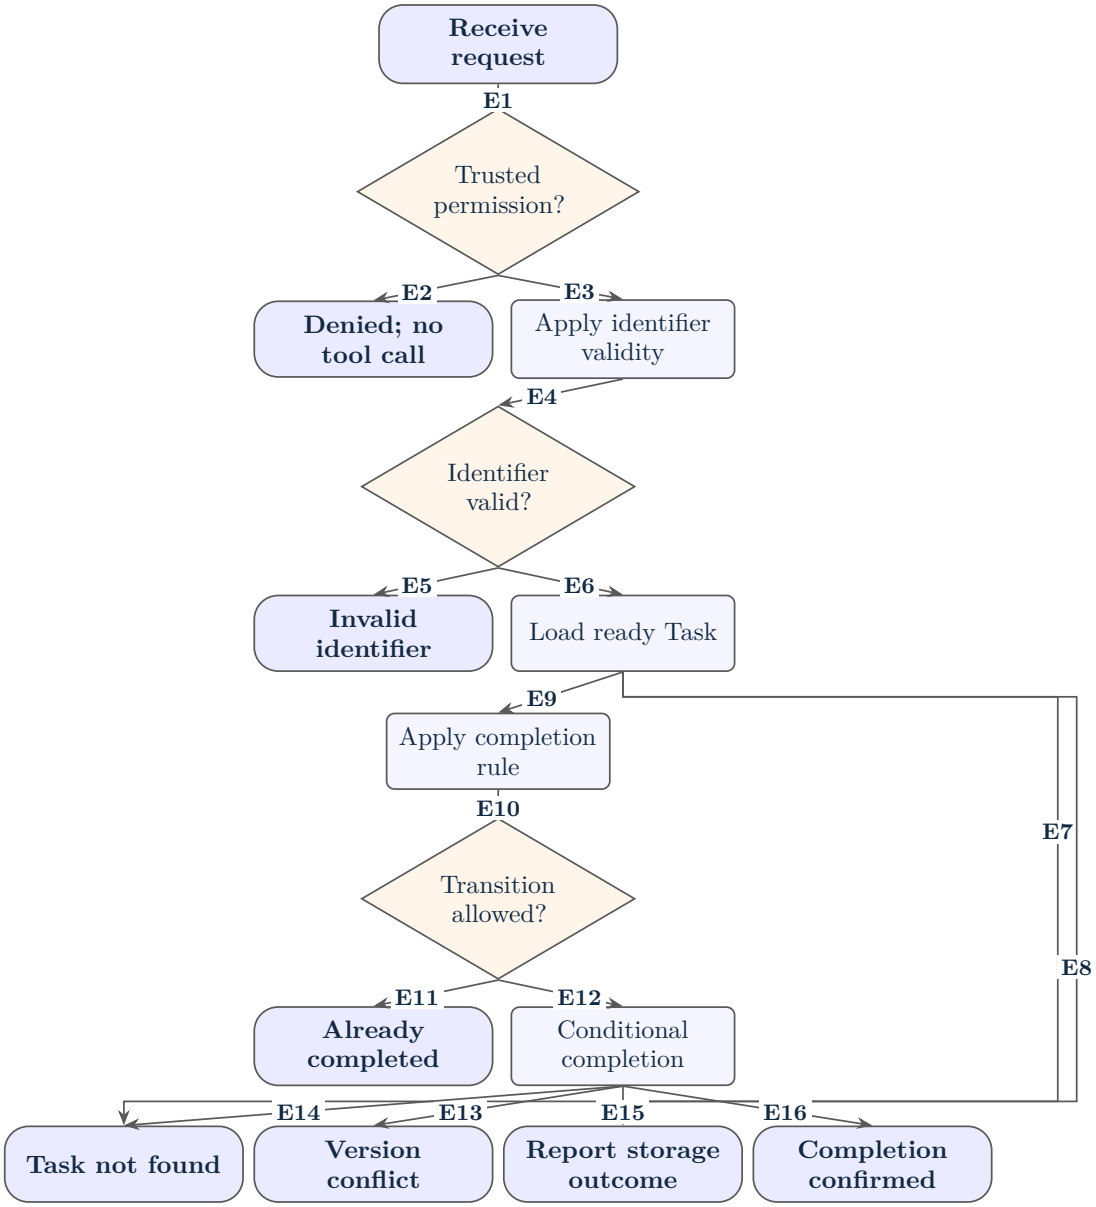

Key	Edge identity and label
E1	E-TASK-COMPLETE-START
E2	E-TASK-COMPLETE-DENIED — missing / unresolved / insufficient
E3	E-TASK-COMPLETE-ALLOWED — authorized
E4	E-TASK-COMPLETE-1
E5	E-TASK-COMPLETE-2 — fail
E6	E-TASK-COMPLETE-3 — pass
E7	E-TASK-COMPLETE-4 — NOT_FOUND
E8	E-TASK-COMPLETE-5 — unavailable / invalid state
E9	E-TASK-COMPLETE-6 — ready Task
E10	E-TASK-COMPLETE-7
E11	E-TASK-COMPLETE-8 — fail
E12	E-TASK-COMPLETE-9 — pass

Key	Edge identity and label
E13	E-TASK-COMPLETE-10 — VERSION_CONFLICT
E14	E-TASK-COMPLETE-11 — NOT_FOUND
E15	E-TASK-COMPLETE-12 — STORE_UNAVAILABLE
E16	E-TASK-COMPLETE-13 — confirmed

USE CASE `UC-TASK-LIST`

Name List tasks

Objective

Observe all current Tasks in the authorized board without changing them.

Actors

Actor ACT-BOARD-MEMBER Permission task.list

Description

Initiating actor: board member. Require the caller to be resolved to a principal with task.list for this board; a role name supplied as business input is insufficient.

Trigger

The board member (ACT-BOARD-MEMBER) requests: list tasks.

Context

Required caller context: resolved principal identifier, selected board identifier, authenticated status, granted case permissions, issuer, and validity status. The context originates from a trusted identity-and-permission authority configured for the application; claims in the task request are untrusted and cannot supply authorization.

The trust assumption is ASM-TASK-IDENTITY. Authentication is required; its mechanism and token/channel encoding belong to later design. Authorization is reevaluated for this invocation, and composed invocations would preserve the same principal and board context.

The actor is a role. The caller is the concrete principal for this request. Neither is an accountable human author for a Needs-to-L1 derivation.

Inputs: none

Entry conditions

Requests may arrive with invalid or missing authorization context; the case's denial path remains defined. No downstream effect occurs before authorization succeeds.

Entities

Entity ENT-TASK

Validations: none

Purpose

Use the canonical Task meaning and rules. Tools receive ready entities; no repeated validation of ready entity invariants is required.

Tools

Tool TOL-TASK-STORE Operation OP-TASK-LIST

Purpose

Use the declared capability and handle every stated observable outcome.

Calls: none

Outcomes

OUT-TASK-LIST-DENIED

Kind refusal

Description

The caller context is absent, unresolved, expired, or lacks this case's permission for this board.

Effects

No tool call, no write, and no disclosure of task existence or content.

OUT-TASK-LIST-LISTED

Kind success

Description

Return the complete ordered snapshot, including an empty list for a confirmed empty board.

Effects

No task changes.

OUT-TASK-LIST-STORAGE

Kind failure

Description

The requested snapshot could not be obtained or contained invalid stored state.

Effects

No task changes; no usable complete list is claimed.

Functional requirements

RF-TASK-LIST-AUTH

Statement

Resolve the initiating board member and require task.list for the selected board in trusted caller context. Missing, unresolved, expired, or insufficient context is denied before any entity application or tool call. No anonymous execution is permitted. Origin: SRC-TASK-BRIEF.

Scope case

Applies to: UC-TASK-LIST

Flow references: N-TASK-LIST-AUTH, N-TASK-LIST-DENIED, E-TASK-LIST-DENIED, E-TASK-LIST-ALLOWED

RF-TASK-LIST-SNAPSHOT

Statement

After authorization, call OP-TASK-LIST for the trusted board. Return every ready Task exactly once in the declared identifier order, preserving title, state, and revision. A confirmed empty snapshot is a successful empty list. Do not revalidate ready entities.

Scope case

Applies to: UC-TASK-LIST, OP-TASK-LIST

Flow references: N-TASK-LIST-READ, N-TASK-LIST-RETURN, E-TASK-LIST-2

RF-TASK-LIST-FAILURE

Statement

Report unavailable or invalid-state retrieval as a failure, preserving its distinction. Do not return an empty or partial success and make no task changes.

Scope operation

Applies to: UC-TASK-LIST, OP-TASK-LIST

Flow references: N-TASK-LIST-FAIL, E-TASK-LIST-1

Nonfunctional requirements

RNF-TASK-LIST-CONSISTENCY

Scope operation

Applies to: UC-TASK-LIST, OP-TASK-LIST

Statement

The list represents one consistent snapshot of the authorized board. Origin: SRC-TASK-BRIEF (synthetic teaching brief).

Verifiable criterion

Every returned Task belongs to the same board snapshot, appears exactly once, and has mutually consistent fields/revision; no read changes a Task.

Verification

Exercise listing alongside concurrent changes, verify against the chosen store's snapshot guarantee, and inspect before/after write counters.

References: SRC-TASK-BRIEF

Applicability

Applies under the explicitly stated case and tool conditions. This is an obligation for a future implementation, not a measured claim about this repository.

RNF-TASK-LIST-RETENTION

Reference to RNF-TASK-CREATE-RETENTION Scope system

Applies to: UC-TASK-LIST, OP-TASK-LIST

References: SRC-TASK-BRIEF

Applicability

The canonical confirmed-retention obligation defined in creation also applies when listing after a normal store restart.

Flows

Main GRAPH-TASK-LIST

Subflows: none

Flow text

Resolve and authorize caller context before retrieving any Task (RF-TASK-LIST-AUTH).

Read one complete snapshot with OP-TASK-LIST and return the ready Tasks unchanged. An empty successful snapshot means confirmed emptiness (RF-TASK-LIST-SNAPSHOT).

Report retrieval failure as failure, never as an empty or partial successful list (RF-TASK-LIST-FAILURE).

Acceptance criteria

AC-TASK-LIST-AUTH

Statement

Try absent context, an unresolved identity, an expired context, and a member lacking this permission. Every attempt is denied before tool invocation, with no task state or existence disclosed.

Verifies: RF-TASK-LIST-AUTH

AC-TASK-LIST-CONTENT

Statement

Given open TASK002 and completed TASK001, return TASK001 then TASK002 with exact fields, once each, with no state or revision changed.

Verifies: RF-TASK-LIST-SNAPSHOT, RNF-TASK-LIST-CONSISTENCY

AC-TASK-LIST-EMPTY

Statement

A successful consistent read of an empty authorized board returns an empty list and changes no task state or revision; an unavailable store instead returns failure, never a falsely empty success.

Verifies: RF-TASK-LIST-SNAPSHOT, RF-TASK-LIST-FAILURE, RNF-TASK-LIST-CONSISTENCY

AC-TASK-LIST-INTEGRITY

Statement

If hydration finds an invalid stored Task, report STORE_INVALID_STATE without publishing a partial successful list.

Verifies: RF-TASK-LIST-FAILURE

Traceability

Identity / name	Contract	Description / details
TRC-TASK-LIST-ORIGIN	Source: SRC-TASK-BRIEF	Targets: RF-TASK-LIST-AUTH; RF-TASK-LIST-SNAPSHOT; RF-TASK-LIST-FAILURE; RNF-TASK-LIST-CONSISTENCY; RNF-TASK-LIST-RETENTION Note: Synthetic requirements selected for this teaching example; not evidence of stakeholder approval.

Identity / name	Contract	Description / details
TRC-TASK-LIST-AC-1	Source: AC-TASK-LIST-AUTH	Targets: RF-TASK-LIST-AUTH Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-LIST-AC-2	Source: AC-TASK-LIST-CONTENT	Targets: RF-TASK-LIST-SNAPSHOT; RNF-TASK-LIST-CONSISTENCY Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-LIST-AC-3	Source: AC-TASK-LIST-EMPTY	Targets: RF-TASK-LIST-SNAPSHOT; RF-TASK-LIST-FAILURE Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-LIST-AC-4	Source: AC-TASK-LIST-INTEGRITY	Targets: RF-TASK-LIST-FAILURE Note: Acceptance criterion states an observable obligation, not a claim that a task application has been tested.
TRC-TASK-LIST-RETENTION	Source: RNF-TASK-LIST-RETENTION	Targets: RNF-TASK-CREATE-RETENTION; AC-TASK-CREATE-SUCCESS Note: One canonical integration criterion covers confirmed creation and subsequent listing after a normal restart; no duplicate full requirement is authored.


Assumptions: ASM-TASK-SINGLE-BOARD, ASM-TASK-IDENTITY

Sources: SRC-TASK-BRIEF, SRC-TASK-OAL

Open issues: none

List tasks

GRAPH-TASK-LIST

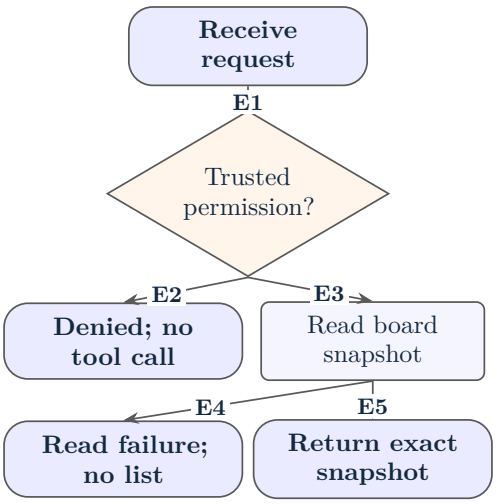

Key	Edge identity and label
E1	E-TASK-LIST-START
E2	E-TASK-LIST-DENIED — missing / unresolved / insufficient
E3	E-TASK-LIST-ALLOWED — authorized
E4	E-TASK-LIST-1 — unavailable / invalid state
E5	E-TASK-LIST-2 — complete snapshot

Illustrative interaction mapping

The mappings below show which inputs/results cross the interaction boundary. They are explanatory examples, not a choice of an L4 channel.

BOUNDARY `BND-TASK-ILLUSTRATION`

Name	Channel-independent interaction illustration	Modality	other

Purpose

Origin: SRC-TASK-BRIEF. This is an illustrative mapping of domain inputs/outcomes. A later solution may select an L4 channel; such a selection must not retroactively become a stakeholder L1 requirement.

Audience

Authorized board members.

Interactions

`INT-TASK-CREATE`

Name	Create task

Description

Illustrative interaction mapping only. No web route, screen, command syntax, or protocol is a normative L1 requirement.

Use case	UC-TASK-CREATE

Trigger

The board member (ACT-BOARD-MEMBER) requests: create task.

Input mapping

Source	request.task_identifier	Target	UC-TASK-CREATE.input.task_identifier

Meaning

Requested stable task identifier.

Source	request.title	Target	UC-TASK-CREATE.input.title

Meaning

The work to remember.

Result mapping

Source	OUT-TASK-CREATE-DENIED	Target	result.out-task-create-denied

Meaning

The caller context is absent, unresolved, expired, or lacks this case's permission for this board.

Source	OUT-TASK-CREATE-CREATED	Target	result.out-task-create-created

Meaning

The retained Task is returned.

Source	OUT-TASK-CREATE-INVALID	Target	result.out-task-create-invalid

Meaning

The new-task validity rule failed.

Source	OUT-TASK-CREATE-DUPLICATE	Target	result.out-task-create-duplicate

Meaning

The identifier was already retained.

Source	OUT-TASK-CREATE-UNAVAILABLE	Target	result.out-task-create-unavailable

Meaning

Storage did not confirm creation; report write_outcome.

Requirement refs: RF-TASK-CREATE-AUTH, RF-TASK-CREATE-DATA, RF-TASK-CREATE-RETAIN, RF-TASK-CREATE-DUPLICATE, RF-TASK-CREATE-FAILURE

Resources: none

Examples: none

`INT-TASK-COMPLETE`

Name Complete task

Description

Illustrative interaction mapping only. No web route, screen, command syntax, or protocol is a normative L1 requirement.

Use case UC-TASK-COMPLETE

Trigger

The board member (ACT-BOARD-MEMBER) requests: complete task.

Input mapping

Source	request.task_identifier	Target	UC-TASK-COMPLETE.input.task_identifier

Meaning

Exact identifier to complete.

Result mapping

Source	OUT-TASK-COMPLETE-DENIED	Target	result.out-task-complete-denied

Meaning

The caller context is absent, unresolved, expired, or lacks this case's permission for this board.

Source	OUT-TASK-COMPLETE-COMPLETED	Target	result.out-task-complete-completed

Meaning

Return the confirmed completed Task.

Source	OUT-TASK-COMPLETE-INVALID	Target	result.out-task-complete-invalid

Meaning

Identifier is invalid.

Source	OUT-TASK-COMPLETE-MISSING	Target	result.out-task-complete-missing

Meaning

Task absence was confirmed at read or write time.

Source	OUT-TASK-COMPLETE-ALREADY	Target	result.out-task-complete-already

Meaning

Task was already completed.

Source	OUT-TASK-COMPLETE-CONFLICT	Target	result.out-task-complete-conflict

Meaning

The Task changed after the observed read.

Source	OUT-TASK-COMPLETE-STORAGE	Target	result.out-task-complete-storage

Meaning

Storage was unavailable or returned invalid stored state.

Requirement refs: RF-TASK-COMPLETE-AUTH, RF-TASK-COMPLETE-ID, RF-TASK-COMPLETE-LOAD, RF-TASK-COMPLETE-TRANSITION, RF-TASK-COMPLETE-WRITE, RF-TASK-COMPLETE-FAILURE

Resources: none

Examples: none

INT-TASK-LIST

Name List tasks

Description

Illustrative interaction mapping only. No web route, screen, command syntax, or protocol is a normative L1 requirement.

Use case UC-TASK-LIST

Trigger

The board member (ACT-BOARD-MEMBER) requests: list tasks.

Input mapping: none

Result mapping

Source	OUT-TASK-LIST-DENIED	Target	result.out-task-list-denied

Meaning

The caller context is absent, unresolved, expired, or lacks this case's permission for this board.

Source	OUT-TASK-LIST-LISTED	Target	result.out-task-list-listed

Meaning

Return the complete ordered snapshot, including an empty list for a confirmed empty board.

Source	OUT-TASK-LIST-STORAGE	Target	result.out-task-list-storage

Meaning

The requested snapshot could not be obtained or contained invalid stored state.

Requirement refs: RF-TASK-LIST-AUTH, RF-TASK-LIST-SNAPSHOT, RF-TASK-LIST-FAILURE

Resources: none

Examples: none

Assumptions: none

Sources: SRC-TASK-BRIEF

Open issues: none

Appendix: graphs

Identity / name	Contract	Description / details
GRAPH-VLD-TASK-ID	validation	VLD-TASK-ID; Figure
GRAPH-VLD-TASK-NEW	validation	VLD-TASK-NEW; Figure
GRAPH-VLD-TASK-COMPLETE	validation	VLD-TASK-COMPLETE; Figure
GRAPH-TASK-CREATE	use_case	UC-TASK-CREATE; Figure
GRAPH-TASK-COMPLETE	use_case	UC-TASK-COMPLETE; Figure
GRAPH-TASK-LIST	use_case	UC-TASK-LIST; Figure

Graph `GRAPH-VLD-TASK-ID`

Task identifier

Kind: flow

Nodes

Identity / name	Contract	Description / details
N-VLD-TASK-ID-START	Type: start	Label: Receive candidate Requirement refs: none
N-VLD-TASK-ID-CHECK	Type: decision	Label: All conditions hold? Requirement refs: none
N-VLD-TASK-ID-PASS	Type: result	Label: Pass unchanged Requirement refs: none
N-VLD-TASK-ID-FAIL	Type: refusal	Label: Fail; no mutation Requirement refs: none

Edges

Identity / name	Contract	Description / details
E-VLD-TASK-ID-1	From: N-VLD-TASK-ID-START To: N-VLD-TASK-ID-CHECK	Requirement refs: none
E-VLD-TASK-ID-2	From: N-VLD-TASK-ID-CHECK To: N-VLD-TASK-ID-PASS	Requirement refs: none Label: yes
E-VLD-TASK-ID-3	From: N-VLD-TASK-ID-CHECK To: N-VLD-TASK-ID-FAIL	Requirement refs: none Label: no

Notes

The entity owns these conditions. Applying them needs no collaborator.

Topology of GRAPH-VLD-TASK-ID:
Nodes:
- N-VLD-TASK-ID-START (start)
- N-VLD-TASK-ID-CHECK (decision)
- N-VLD-TASK-ID-PASS (result)
- N-VLD-TASK-ID-FAIL (refusal)

Edges:
- E-VLD-TASK-ID-1: N-VLD-TASK-ID-START -> N-VLD-TASK-ID-CHECK
- E-VLD-TASK-ID-2: N-VLD-TASK-ID-CHECK -> N-VLD-TASK-ID-PASS
- E-VLD-TASK-ID-3: N-VLD-TASK-ID-CHECK -> N-VLD-TASK-ID-FAIL

Figure: GRAPH-VLD-TASK-ID

Graph `GRAPH-VLD-TASK-NEW`

New task validity

Kind: flow

Nodes

Identity / name	Contract	Description / details
N-VLD-TASK-NEW-START	Type: start	Label: Receive candidate Requirement refs: none
N-VLD-TASK-NEW-CHECK	Type: decision	Label: All conditions hold? Requirement refs: none
N-VLD-TASK-NEW-PASS	Type: result	Label: Pass unchanged Requirement refs: none
N-VLD-TASK-NEW-FAIL	Type: refusal	Label: Fail; no mutation Requirement refs: none

Edges

Identity / name	Contract	Description / details
E-VLD-TASK-NEW-1	From: N-VLD-TASK-NEW-START To: N-VLD-TASK-NEW-CHECK	Requirement refs: none
E-VLD-TASK-NEW-2	From: N-VLD-TASK-NEW-CHECK To: N-VLD-TASK-NEW-PASS	Requirement refs: none Label: yes
E-VLD-TASK-NEW-3	From: N-VLD-TASK-NEW-CHECK To: N-VLD-TASK-NEW-FAIL	Requirement refs: none Label: no

Notes

The entity owns these conditions. Applying them needs no collaborator.

Topology of GRAPH-VLD-TASK-NEW:
Nodes:
- N-VLD-TASK-NEW-START (start)
- N-VLD-TASK-NEW-CHECK (decision)
- N-VLD-TASK-NEW-PASS (result)
- N-VLD-TASK-NEW-FAIL (refusal)

Edges:
- E-VLD-TASK-NEW-1: N-VLD-TASK-NEW-START -> N-VLD-TASK-NEW-CHECK
- E-VLD-TASK-NEW-2: N-VLD-TASK-NEW-CHECK -> N-VLD-TASK-NEW-PASS
- E-VLD-TASK-NEW-3: N-VLD-TASK-NEW-CHECK -> N-VLD-TASK-NEW-FAIL

Figure: GRAPH-VLD-TASK-NEW

Graph `GRAPH-VLD-TASK-COMPLETE`

Completion transition

Kind: flow

Nodes

Identity / name	Contract	Description / details
N-VLD-TASK-COMPLETE-START	Type: start	Label: Receive candidate Requirement refs: none
N-VLD-TASK-COMPLETE-CHECK	Type: decision	Label: All conditions hold? Requirement refs: none
N-VLD-TASK-COMPLETE-PASS	Type: result	Label: Pass unchanged Requirement refs: none
N-VLD-TASK-COMPLETE-FAIL	Type: refusal	Label: Fail; no mutation Requirement refs: none

Edges

Identity / name	Contract	Description / details
E-VLD-TASK-COMPLETE-1	From: N-VLD-TASK-COMPLETE-START To: N-VLD-TASK-COMPLETE-CHECK	Requirement refs: none
E-VLD-TASK-COMPLETE-2	From: N-VLD-TASK-COMPLETE-CHECK To: N-VLD-TASK-COMPLETE-PASS	Requirement refs: none Label: yes
E-VLD-TASK-COMPLETE-3	From: N-VLD-TASK-COMPLETE-CHECK To: N-VLD-TASK-COMPLETE-FAIL	Requirement refs: none Label: no

Notes

The entity owns these conditions. Applying them needs no collaborator.

Topology of GRAPH-VLD-TASK-COMPLETE:
Nodes:
- N-VLD-TASK-COMPLETE-START (start)
- N-VLD-TASK-COMPLETE-CHECK (decision)
- N-VLD-TASK-COMPLETE-PASS (result)
- N-VLD-TASK-COMPLETE-FAIL (refusal)

Edges:
- E-VLD-TASK-COMPLETE-1: N-VLD-TASK-COMPLETE-START -> N-VLD-TASK-COMPLETE-CHECK
- E-VLD-TASK-COMPLETE-2: N-VLD-TASK-COMPLETE-CHECK -> N-VLD-TASK-COMPLETE-PASS
- E-VLD-TASK-COMPLETE-3: N-VLD-TASK-COMPLETE-CHECK -> N-VLD-TASK-COMPLETE-FAIL

Figure: GRAPH-VLD-TASK-COMPLETE

Graph `GRAPH-TASK-CREATE`

Create task

Kind: flow

Nodes

Identity / name	Contract	Description / details
N-TASK-CREATE-START	Type: start	Label: Receive request Requirement refs: none
N-TASK-CREATE-AUTH	Type: decision	Label: Trusted permission? Requirement refs: RF-TASK-CREATE-AUTH
N-TASK-CREATE-DENIED	Type: refusal	Label: Denied; no tool call Requirement refs: RF-TASK-CREATE-AUTH
N-TASK-CREATE-VALIDATE	Type: validation	Label: Apply new-task validity Requirement refs: RF-TASK-CREATE-DATA Call: Kind: validation; Identifier: VLD-TASK-NEW
N-TASK-CREATE-VALID	Type: decision	Label: Candidate valid? Requirement refs: RF-TASK-CREATE-DATA

Identity / name	Contract	Description / details
N-TASK-CREATE-INVALID	Type: refusal	Label: Invalid; no write Requirement refs: RF-TASK-CREATE-DATA
N-TASK-CREATE-STORE	Type: operation	Label: Retain ready Task Requirement refs: RF-TASK-CREATE-RETAIN Call: Kind: operation; Identifier: OP-TASK-CREATE
N-TASK-CREATE-DUPLICATE	Type: refusal	Label: Duplicate; no change Requirement refs: RF-TASK-CREATE-DUPLICATE
N-TASK-CREATE-UNAVAILABLE	Type: failure	Label: Report write outcome Requirement refs: RF-TASK-CREATE-FAILURE
N-TASK-CREATE-CREATED	Type: result	Label: Created at revision 0 Requirement refs: RF-TASK-CREATE-RETAIN

Edges

Identity / name	Contract	Description / details
E-TASK-CREATE-START	From: N-TASK-CREATE-START To: N-TASK-CREATE-AUTH	Requirement refs: none
E-TASK-CREATE-DENIED	From: N-TASK-CREATE-AUTH To: N-TASK-CREATE-DENIED	Requirement refs: RF-TASK-CREATE-AUTH Label: missing / unresolved / insufficient
E-TASK-CREATE-ALLOWED	From: N-TASK-CREATE-AUTH To: N-TASK-CREATE-VALIDATE	Requirement refs: RF-TASK-CREATE-AUTH Label: authorized
E-TASK-CREATE-1	From: N-TASK-CREATE-VALIDATE To: N-TASK-CREATE-VALID	Requirement refs: none
E-TASK-CREATE-2	From: N-TASK-CREATE-VALID To: N-TASK-CREATE-INVALID	Requirement refs: RF-TASK-CREATE-DATA Label: fail
E-TASK-CREATE-3	From: N-TASK-CREATE-VALID To: N-TASK-CREATE-STORE	Requirement refs: RF-TASK-CREATE-RETAIN Label: pass
E-TASK-CREATE-4	From: N-TASK-CREATE-STORE To: N-TASK-CREATE-DUPLICATE	Requirement refs: RF-TASK-CREATE-DUPLICATE Label: DUPLICATE_ID

Identity / name	Contract	Description / details
E-TASK-CREATE-5	From: N-TASK-CREATE-STORE To: N-TASK-CREATE-UNAVAILABLE	Requirement refs: RF-TASK-CREATE-FAILURE Label: STORE_UNAVAILABLE
E-TASK-CREATE-6	From: N-TASK-CREATE-STORE To: N-TASK-CREATE-CREATED	Requirement refs: RF-TASK-CREATE-RETAIN Label: confirmed

Topology of GRAPH-TASK-CREATE:
Nodes:
- N-TASK-CREATE-START (start)
- N-TASK-CREATE-AUTH (decision)
- N-TASK-CREATE-DENIED (refusal)
- N-TASK-CREATE-VALIDATE (validation)
- N-TASK-CREATE-VALID (decision)
- N-TASK-CREATE-INVALID (refusal)
- N-TASK-CREATE-STORE (operation)
- N-TASK-CREATE-DUPLICATE (refusal)
- N-TASK-CREATE-UNAVAILABLE (failure)
- N-TASK-CREATE-CREATED (result)

Edges:
- E-TASK-CREATE-START: N-TASK-CREATE-START -> N-TASK-CREATE-AUTH
- E-TASK-CREATE-DENIED: N-TASK-CREATE-AUTH -> N-TASK-CREATE-DENIED
- E-TASK-CREATE-ALLOWED: N-TASK-CREATE-AUTH -> N-TASK-CREATE-VALIDATE
- E-TASK-CREATE-1: N-TASK-CREATE-VALIDATE -> N-TASK-CREATE-VALID
- E-TASK-CREATE-2: N-TASK-CREATE-VALID -> N-TASK-CREATE-INVALID
- E-TASK-CREATE-3: N-TASK-CREATE-VALID -> N-TASK-CREATE-STORE
- E-TASK-CREATE-4: N-TASK-CREATE-STORE -> N-TASK-CREATE-DUPLICATE
- E-TASK-CREATE-5: N-TASK-CREATE-STORE -> N-TASK-CREATE-UNAVAILABLE
- E-TASK-CREATE-6: N-TASK-CREATE-STORE -> N-TASK-CREATE-CREATED

Figure: GRAPH-TASK-CREATE

Graph `GRAPH-TASK-COMPLETE`

Complete task

Kind: flow

Nodes

Identity / name	Contract	Description / details
N-TASK-COMPLETE-START	Type: start	Label: Receive request Requirement refs: none
N-TASK-COMPLETE-AUTH	Type: decision	Label: Trusted permission? Requirement refs: RF-TASK-COMPLETE-AUTH
N-TASK-COMPLETE-DENIED	Type: refusal	Label: Denied; no tool call Requirement refs: RF-TASK-COMPLETE-AUTH
N-TASK-COMPLETE-ID	Type: validation	Label: Apply identifier validity Requirement refs: RF-TASK-COMPLETE-ID Call: Kind: validation; Identifier: VLD-TASK-ID

Identity / name	Contract	Description / details
N-TASK-COMPLETE-VALID	Type: decision	Label: Identifier valid? Requirement refs: RF-TASK-COMPLETE-ID
N-TASK-COMPLETE-INVALID	Type: refusal	Label: Invalid identifier Requirement refs: RF-TASK-COMPLETE-ID
N-TASK-COMPLETE-LOAD	Type: operation	Label: Load ready Task Requirement refs: RF-TASK-COMPLETE-LOAD Call: Kind: operation; Identifier: OP-TASK-LOAD
N-TASK-COMPLETE-MISSING	Type: refusal	Label: Task not found Requirement refs: RF-TASK-COMPLETE-LOAD; RF-TASK-COMPLETE-WRITE
N-TASK-COMPLETE-TRANSITION	Type: validation	Label: Apply completion rule Requirement refs: RF-TASK-COMPLETE-TRANSITION Call: Kind: validation; Identifier: VLD-TASK-COMPLETE
N-TASK-COMPLETE-ALLOWED	Type: decision	Label: Transition allowed? Requirement refs: RF-TASK-COMPLETE-TRANSITION
N-TASK-COMPLETE-ALREADY	Type: refusal	Label: Already completed Requirement refs: RF-TASK-COMPLETE-TRANSITION
N-TASK-COMPLETE-STORE	Type: operation	Label: Conditional completion Requirement refs: RF-TASK-COMPLETE-WRITE Call: Kind: operation; Identifier: OP-TASK-COMPLETE
N-TASK-COMPLETE-CONFLICT	Type: refusal	Label: Version conflict Requirement refs: RF-TASK-COMPLETE-WRITE
N-TASK-COMPLETE-ERROR	Type: failure	Label: Report storage outcome Requirement refs: RF-TASK-COMPLETE-FAILURE
N-TASK-COMPLETE-DONE	Type: result	Label: Completion confirmed Requirement refs: RF-TASK-COMPLETE-WRITE

Edges

Identity / name	Contract	Description / details
E-TASK-COMPLETE-START	From: N-TASK-COMPLETE-START To: N-TASK-COMPLETE-AUTH	Requirement refs: none

Identity / name	Contract	Description / details
E-TASK-COMPLETE-DENIED	From: N-TASK-COMPLETE-AUTH To: N-TASK-COMPLETE-DENIED	Requirement refs: RF-TASK-COMPLETE-AUTH Label: missing / unresolved / insufficient
E-TASK-COMPLETE-ALLOWED	From: N-TASK-COMPLETE-AUTH To: N-TASK-COMPLETE-ID	Requirement refs: RF-TASK-COMPLETE-AUTH Label: authorized
E-TASK-COMPLETE-1	From: N-TASK-COMPLETE-ID To: N-TASK-COMPLETE-VALID	Requirement refs: none
E-TASK-COMPLETE-2	From: N-TASK-COMPLETE-VALID To: N-TASK-COMPLETE-INVALID	Requirement refs: RF-TASK-COMPLETE-ID Label: fail
E-TASK-COMPLETE-3	From: N-TASK-COMPLETE-VALID To: N-TASK-COMPLETE-LOAD	Requirement refs: RF-TASK-COMPLETE-LOAD Label: pass
E-TASK-COMPLETE-4	From: N-TASK-COMPLETE-LOAD To: N-TASK-COMPLETE-MISSING	Requirement refs: RF-TASK-COMPLETE-LOAD Label: NOT_FOUND
E-TASK-COMPLETE-5	From: N-TASK-COMPLETE-LOAD To: N-TASK-COMPLETE-ERROR	Requirement refs: RF-TASK-COMPLETE-FAILURE Label: unavailable / invalid state
E-TASK-COMPLETE-6	From: N-TASK-COMPLETE-LOAD To: N-TASK-COMPLETE-TRANSITION	Requirement refs: RF-TASK-COMPLETE-TRANSITION Label: ready Task
E-TASK-COMPLETE-7	From: N-TASK-COMPLETE-TRANSITION To: N-TASK-COMPLETE-ALLOWED	Requirement refs: none
E-TASK-COMPLETE-8	From: N-TASK-COMPLETE-ALLOWED To: N-TASK-COMPLETE-ALREADY	Requirement refs: RF-TASK-COMPLETE-TRANSITION Label: fail

Identity / name	Contract	Description / details
E-TASK-COMPLETE-9	From: N-TASK-COMPLETE-ALLOWED To: N-TASK-COMPLETE-STORE	Requirement refs: RF-TASK-COMPLETE-WRITE Label: pass
E-TASK-COMPLETE-10	From: N-TASK-COMPLETE-STORE To: N-TASK-COMPLETE-CONFLICT	Requirement refs: RF-TASK-COMPLETE-WRITE Label: VERSION_CONFLICT
E-TASK-COMPLETE-11	From: N-TASK-COMPLETE-STORE To: N-TASK-COMPLETE-MISSING	Requirement refs: RF-TASK-COMPLETE-WRITE Label: NOT_FOUND
E-TASK-COMPLETE-12	From: N-TASK-COMPLETE-STORE To: N-TASK-COMPLETE-ERROR	Requirement refs: RF-TASK-COMPLETE-FAILURE Label: STORE_UNAVAILABLE
E-TASK-COMPLETE-13	From: N-TASK-COMPLETE-STORE To: N-TASK-COMPLETE-DONE	Requirement refs: RF-TASK-COMPLETE-WRITE Label: confirmed

Topology of GRAPH-TASK-COMPLETE:
Nodes:
- N-TASK-COMPLETE-START (start)
- N-TASK-COMPLETE-AUTH (decision)
- N-TASK-COMPLETE-DENIED (refusal)
- N-TASK-COMPLETE-ID (validation)
- N-TASK-COMPLETE-VALID (decision)
- N-TASK-COMPLETE-INVALID (refusal)
- N-TASK-COMPLETE-LOAD (operation)
- N-TASK-COMPLETE-MISSING (refusal)
- N-TASK-COMPLETE-TRANSITION (validation)
- N-TASK-COMPLETE-ALLOWED (decision)
- N-TASK-COMPLETE-ALREADY (refusal)
- N-TASK-COMPLETE-STORE (operation)
- N-TASK-COMPLETE-CONFLICT (refusal)
- N-TASK-COMPLETE-ERROR (failure)
- N-TASK-COMPLETE-DONE (result)

Edges:
- E-TASK-COMPLETE-START: N-TASK-COMPLETE-START -> N-TASK-COMPLETE-AUTH
- E-TASK-COMPLETE-DENIED: N-TASK-COMPLETE-AUTH -> N-TASK-COMPLETE-DENIED
- E-TASK-COMPLETE-ALLOWED: N-TASK-COMPLETE-AUTH -> N-TASK-COMPLETE-ID
- E-TASK-COMPLETE-1: N-TASK-COMPLETE-ID -> N-TASK-COMPLETE-VALID
- E-TASK-COMPLETE-2: N-TASK-COMPLETE-VALID -> N-TASK-COMPLETE-INVALID
- E-TASK-COMPLETE-3: N-TASK-COMPLETE-VALID -> N-TASK-COMPLETE-LOAD
- E-TASK-COMPLETE-4: N-TASK-COMPLETE-LOAD -> N-TASK-COMPLETE-MISSING
- E-TASK-COMPLETE-5: N-TASK-COMPLETE-LOAD -> N-TASK-COMPLETE-ERROR
- E-TASK-COMPLETE-6: N-TASK-COMPLETE-LOAD -> N-TASK-COMPLETE-TRANSITION
- E-TASK-COMPLETE-7: N-TASK-COMPLETE-TRANSITION -> N-TASK-COMPLETE-ALLOWED
- E-TASK-COMPLETE-8: N-TASK-COMPLETE-ALLOWED -> N-TASK-COMPLETE-ALREADY
- E-TASK-COMPLETE-9: N-TASK-COMPLETE-ALLOWED -> N-TASK-COMPLETE-STORE

- E-TASK-COMPLETE-10: N-TASK-COMPLETE-STORE -> N-TASK-COMPLETE-CONFLICT
- E-TASK-COMPLETE-11: N-TASK-COMPLETE-STORE -> N-TASK-COMPLETE-MISSING
- E-TASK-COMPLETE-12: N-TASK-COMPLETE-STORE -> N-TASK-COMPLETE-ERROR
- E-TASK-COMPLETE-13: N-TASK-COMPLETE-STORE -> N-TASK-COMPLETE-DONE

Figure: GRAPH-TASK-COMPLETE

Graph `GRAPH-TASK-LIST`

List tasks

Kind: flow

Nodes

Identity / name	Contract	Description / details
N-TASK-LIST-START	Type: start	Label: Receive request Requirement refs: none
N-TASK-LIST-AUTH	Type: decision	Label: Trusted permission? Requirement refs: RF-TASK-LIST-AUTH
N-TASK-LIST-DENIED	Type: refusal	Label: Denied; no tool call Requirement refs: RF-TASK-LIST-AUTH
N-TASK-LIST-READ	Type: operation	Label: Read board snapshot Requirement refs: RF-TASK-LIST-SNAPSHOT Call: Kind: operation; Identifier: OP-TASK-LIST
N-TASK-LIST-FAIL	Type: failure	Label: Read failure; no list Requirement refs: RF-TASK-LIST-FAILURE
N-TASK-LIST-RETURN	Type: result	Label: Return exact snapshot Requirement refs: RF-TASK-LIST-SNAPSHOT

Edges

Identity / name	Contract	Description / details
E-TASK-LIST-START	From: N-TASK-LIST-START To: N-TASK-LIST-AUTH	Requirement refs: none
E-TASK-LIST-DENIED	From: N-TASK-LIST-AUTH To: N-TASK-LIST-DENIED	Requirement refs: RF-TASK-LIST-AUTH Label: missing / unresolved / insufficient
E-TASK-LIST-ALLOWED	From: N-TASK-LIST-AUTH To: N-TASK-LIST-READ	Requirement refs: RF-TASK-LIST-AUTH Label: authorized
E-TASK-LIST-1	From: N-TASK-LIST-READ To: N-TASK-LIST-FAIL	Requirement refs: RF-TASK-LIST-FAILURE Label: unavailable / invalid state
E-TASK-LIST-2	From: N-TASK-LIST-READ To: N-TASK-LIST-RETURN	Requirement refs: RF-TASK-LIST-SNAPSHOT Label: complete snapshot

Topology of GRAPH-TASK-LIST:
Nodes:
- N-TASK-LIST-START (start)
- N-TASK-LIST-AUTH (decision)
- N-TASK-LIST-DENIED (refusal)
- N-TASK-LIST-READ (operation)
- N-TASK-LIST-FAIL (failure)
- N-TASK-LIST-RETURN (result)

Edges:
- E-TASK-LIST-START: N-TASK-LIST-START -> N-TASK-LIST-AUTH
- E-TASK-LIST-DENIED: N-TASK-LIST-AUTH -> N-TASK-LIST-DENIED
- E-TASK-LIST-ALLOWED: N-TASK-LIST-AUTH -> N-TASK-LIST-READ
- E-TASK-LIST-1: N-TASK-LIST-READ -> N-TASK-LIST-FAIL
- E-TASK-LIST-2: N-TASK-LIST-READ -> N-TASK-LIST-RETURN

Figure: GRAPH-TASK-LIST

Appendix: assumptions

ASM-TASK-SINGLE-BOARD

Statement

Synthetic scope assumes one resolved board per invocation and stable task identifiers within that board.

Status open

Affected: ENT-TASK, TOL-TASK-STORE, UC-TASK-CREATE, UC-TASK-COMPLETE, UC-TASK-LIST

ASM-TASK-IDENTITY

Statement

A future application has a trusted identity-and-permission authority that resolves principal, board, grants and validity. This capability is assumed, not implemented or empirically demonstrated here.

Status open

Affected: UC-TASK-CREATE, UC-TASK-COMPLETE, UC-TASK-LIST

Appendix: sources

SRC-TASK-BRIEF

Title	Synthetic task-board teaching brief	Uri	needs.md
Revision	1	Accessed	null

Note

Authored for this repository as a synthetic baseline. It is not an imported stakeholder request, research observation, or independently approved Needs artifact. The repository maintainer must name an accountable person before claiming a real Needs-to-L1 derivation.

SRC-TASK-OAL

Title OAL Alpha-v0.2.0-Alkimim
normative reference

Uri: https://github.com/CodeVaultCommunity/OAL-Open-Analysis-Layers/blob/ced9645dcdb1d1d367ac1b3c913256298255094e/versioning/Alpha-v0.2.0-Alkimim/README.md

Revision ced9645dcdb1d1d367ac1b3c913256298255094e Accessed 2026-10-25

Note

Reference for layer boundaries, caller context, provenance and conformance distinctions. It does not independently supply the synthetic board's product requirements.

Appendix: history

HIST-TASK-BOARD-01

Version 1 Date 2026-10-25

Description

Initial reference example for the first Atlas Specifications edition, Alpha-v0.1.0. This synthetic example demonstrates the model and its representations; it does not assert stakeholder approval or execution of the described business application.

HIST-MIGRATION-STABLE

Version 2 Date 2026-10-25

Description

Explicit editorial migration from Atlas Alpha-v0.1.0 revision 1 to Atlas Stable-v1.0.0 revision 2. Model/profile/envelope and producer identities change; existing concept IDs, domain contracts, authored history and resources are retained. This is not format conversion, a Needs-to-L1 derivation, or new stakeholder approval.

HIST-TASK-BOARD-03

Version 3 Date 2026-10-25

Description

Clarified AC-TASK-LIST-EMPTY to make the existing no-write and consistent-snapshot guarantees explicit for an empty board; added its reference to RNF-TASK-LIST-CONSISTENCY. Source: synthetic SRC-TASK-BRIEF revision 1, choices 7 and 8. No concept is renamed or replaced and no domain behavior is added. Rebuild the generated traceability matrix and reading formats; downstream application artifacts do not exist and have not been verified.
Derived summary: 5 sections; 1 actors; 1 entities; 1 tools; 3 use cases; 1 boundaries; 6 graphs; 0 resources.