

Configuración de un Flujo de Trabajo

Big Data Aplicado

Francisco Pascual Romero
FranciscoP.Romero@uclm.es



Big_Data
Aplicado



Curso Especialización
Inteligencia_Artificial y
Big_Data

Workflow

Principal

```
<workflow-app name='wordcount-wf'
xmlns="uri:oozie:workflow:0.1">
  <start to='wordcount' />
  <action name='wordcount'>
    <map-reduce>
      ...
    </map-reduce>
    <ok to='end' />
    <error to='kill' />
  </action>
</workflow-app>
```



Workflow

Kill/end

```
<kill name='kill'>  
  <message>  
    Something went wrong:  
    ${wf:errorCode('wordcount')}  
  </message>  
</kill/>  
  
<end name='end' />
```



Workflow

Hadoop Config


```
<map-reduce>
  <job-tracker>
    ${jobTracker}
  </job-tracker>
  <name-node>
    ${nameNode}
  </name-node>
  <configuration>
    ...
  </configuration>
</map-reduce>
```



Workflow

MapReduce

```
<property>
  <name>mapred.mapper.class
</name>
  <value>WordCountSimple$Map
</value>
</property>
<property>
  <name>mapred.reducer.class
</name>
  <value>
    WordCountSimple$Reducer
  </value>
</property>
```

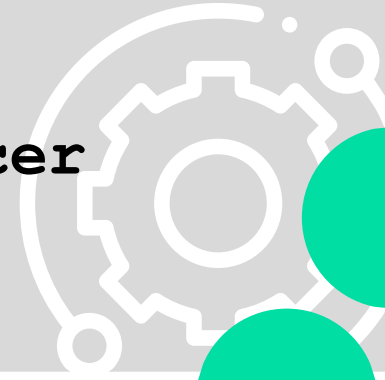

Workflow

Input
Output

```
<property>
  <name>mapred.input.dir
</name>
  <value>${inputDir}
</value>
</property>
<property>
  <name>mapred.output.dir
</name>
  <value>${outputDir}
</value>
</property>
```



Configuración de un Flujo de Trabajo

Big Data Aplicado

Francisco Pascual Romero
FranciscoP.Romero@uclm.es



Big_Data
Aplicado



Curso Especialización
Inteligencia_Artificial y
Big_Data