CHETTINAD VIDYASHRAM

COMPUTER SCIENCE PROJECT

STD XII (2024-25)

NAME:

SECTION:

TITLE:

Chettinad Vidyashram

(Affiliated to Central Board of Secondary Education, New Delhi)
(Chettinad House, R.A.Puram, Chennai – 600 028)

COMPUTER SCIENCE

Certified to be the Bonafide Record of work done by

_____ of Std XII Sec _____

in the Computer Science Lab of the CHETTINAD VIDYASHRAM, CHENNAI, during the year 2024 – 2025.

Date: Teacher-in-charge

REGISTER NO. _____

Submitted for All India Senior Secondary Practical Examination in Computer Science held on _____at Chettinad Vidyashram, Chennai – 600 028.

Principal Internal Examiner External Examiner

ACKNOWLEDGMENT

I would like to express my sincere thanks to Meena Aunty, Principal Mrs. S.Amudhalakshmi for their encouragement and support to work on this project. I am grateful to my Computer Science Teacher Mr._____
and to the Computer Science Department for the constant guidance and support to complete the project.

1 Overview of Python 4
2 Project Description 6
3 Functions used 9
3.1 USER-DEFINED-FUNCTIONS-EXPLAINED: 9
4 TABLES USED 11
4.1 AIIMS 11
4.2 CSE 11
4.3 MBBS 2024 11
4.4 Student 12
5 SOURCE CODE 13
6 Output 70
6.1 Login/Signup 70
6.2 Main window 71
6.3 Profile window 71
6.4 Viewing table (admin mode) 72
6.4.1 Find 73
6.4.2 Add 73
6.4.3 Delete 74
6.4.4 Update 74
7 Conclusion 75
8 Bibliography 77

1 Overview of Python

The Python programming language was created by Guido van Rossum and was first released in 1991. Its development started in the late 1980s. Python was heavily influenced by the ABC language, another language developed at CWI, which was designed for teaching and prototyping. Influences include languages like Modula-3 and concepts from Unix/C programming.

Van Rossum named Python after the British comedy group Monty Python, as he wanted to emphasize that Python was designed to be fun and user-friendly. Python is Easy to use and Free and Open-Source Language. Python is a high-level, interpreted programming language known for its readability and simplicity.

Python is one of the most popular programming languages globally, especially because of its simplicity and powerful libraries for tasks like data science, web development, and artificial intelligence.

The reason for why we chose Python is because of the versatile features that it has

A brief overview of its key features:

Readability: Python's syntax is designed to be clear and easy to read, which makes it accessible to beginners and helps maintain code quality.

Object-Oriented: Python supports object-oriented programming principles, including encapsulation and inheritance which helps in organizing code and reusing components.

Extensive Standard Library: Python comes with a large standard library that provides modules and functions for various tasks, from file I/O to web development.

Dynamic Typing: Variables in Python are not bound to a specific data type, and their types are determined at runtime.

Python can interact with SQL databases in various ways, thanks to several libraries and tools designed to facilitate database connectivity and operations. MySQL is suited for larger, more complex applications. mysql-connector-python and PyMySQL are two popular libraries for connecting Python to MySQL databases. They both provide functionality to execute SQL queries and manage database connections.

create_connection(): Establishes a connection to the MySQL database.

create_table(connection): Creates a table if it does not exist.

insert_data(connection): Inserts data into the table.

fetch_data(connection): Fetches and prints the data from the table.

GUI (Graphical User Interface) is a user-friendly visual interface that allows users to interact with computers, software, or devices through graphical elements such as buttons, icons, menus, and windows, rather than text-based commands

Tkinter is the standard Python library used for creating Graphical User Interfaces (GUIs). It provides a simple way to design and build windows, buttons, menus, text boxes, and other interactive components in Python applications.

Key Features of Tkinter:

- Built-in: Tkinter comes pre-installed with Python, so no additional installations are needed.
- Widgets: Includes various widgets like buttons, labels, text fields, frames, canvases, and more.
- Cross-Platform: Tkinter works on Windows, macOS, and Linux.

Tkinter is a standard Python library used for creating graphical user interfaces (GUIs).

- root = tk.Tk(): This creates the main window.
- label = tk.Label(): A label is added to the window with some text.
- button = tk.Button(): A button is created, and the function on_button_click is called when the button is pressed.
- root.mainloop(): The application enters the main loop, waiting for user input.

2 Project Description

Our project titled "Career Guidance " aims to create an interactive software application that provides personalized career guidance for students or job seekers. It integrates Python's Tkinter library for developing a user-friendly graphical interface and connects to a MySQL database to store and retrieve data related to career options, skill sets, and user preferences.

Below is a detailed description of the project

OBJECTIVE:

The primary objective of the project is to guide users in choosing a suitable career path based on their interests, skills, academic background, and personal preferences. The system provides necessary resources for further exploration. The interface designed by us is designed to assist students in exploring, planning, and achieving their career goals.

It provides personalized guidance and resources to help students make informed decisions about their academic and professional futures.

"Opportunities don't happen, you create them."

Project Features:

- User Login:

Users can create accounts by registering their details, such as name, email, academic qualifications, and interests. If a user is visiting the interface for the first time, user can sign up and create a profile for him/herself and just login for successive times

- Career Options Database:

A database powered by MySQL contains information on various career fields, necessary qualifications.

- Recommendations:

Based on the user's input (background, interests, etc.), the system suggests suitable career paths or further education options.

- Save and Access Information:

Users can save information, view them later, and track them or explore new options over time.

- Administrative Control (Optional):

Administrators can manage the database, add new career paths, and update existing information.

There are two types of logins available –

User and Admin and admin being categorized into two (ADMIN - E and ADMIN - M) where E - stands for Engineering and M for Medical. A user can delete his/her account and make a new one. once after logging in a person can get to know what the various qualifications are necessary.

An Admin can Add, Update, Delete and Search to make changes. The user can search for various information and fulfill his requirements.

Technical Components:

- ✓ **Python and Tkinter:**

Tkinter will be used to create the graphical user interface (GUI), making the application easy to navigate for the user. The GUI will include forms for user input, buttons for submission, and display windows for career suggestions.

- ✓ **MySQL Database:**

The career-related data (such as career options, required skills, and qualifications) will be stored in a MySQL database. Python's mysql-connector module will be used to handle the connection between Python and the database.

- ✓ **MySQL Connectivity:**

The project leverages Python's MySQL libraries to interact with the database, allowing operations such as retrieving career options, storing user data, and updating the database when necessary.

Workflow –

- **User Interface:**

Users interact with the system through the Tkinter-based GUI, entering their information and answering career-related questions.

- Data Storage & Retrieval:

Information is saved in and retrieved from a MySQL database through Python-MySQL connectivity.

- Career Recommendation:

Based on user input, the system matches relevant career options stored in the database and presents them to the user.

- User Feedback:

Users may provide feedback, save suggestions, or explore more career paths based on updated interests.

Technologies Used:

- Programming Language: Python
- GUI Library: Tkinter (for user interface design)
- Database: MySQL (for storing career options and user data)
- Database Connectivity: MySQL Connector for Python

Technologies Involved

- **Python**: This is the programming language used to write the application logic, process user inputs, and interact with the database.
- **Tkinter**: A Python library used to create a GUI (Graphical User Interface). It allows the application to be user-friendly and interactive.
- **MySQL**: The database management system used to store user data, career options, test results, and recommendations. The system uses MySQL connectivity to query the database and retrieve or insert data.
- **MySQL Connector/Python:** A connector used to integrate Python with the MySQL database, enabling the program to execute SQL queries directly from the Python code.

How the Components Work Together:

- **Tkinter GUI:** This provides a simple interface with input forms, buttons, and display panels where users can interact with the system. Users can fill in their details, take assessments, and receive career recommendations through the Tkinter windows.
- **Python Backend:** Python handles the logic behind the scenes. It collects user inputs from the GUI, processes them, runs SQL queries to interact with the MySQL database, and presents the results in the form of recommendations or reports.
- **MySQL Database:** The database stores large amounts of data related to careers, skills, user details, etc. When a user submits their information or requests recommendations, Python uses SQL queries to retrieve relevant information from the database.

Use Cases:

- **For Students:**

Helps students find career paths aligned with their education and interests.

- **For Educational Institutions:**

Can be used by career counselors to suggest career options to students.

3 Functions used

- checklog(): #Checks login detail
- table(nameeng,column,win,width,collwidth=200): #Create a table
- callengwin(nameeng):#Calls engineering window
  - openfindwin():#Opens search window
    - find():
  - opendelwin():#Opens delete window
    - delcon():
      - delrec():
  - openaddwin():#Opens Add window
    - addinfo():
  - openupdwin():#Opens Update window
      - go():
        - updinfo():
- callmedwin(namemed,tabletype=None,x=2400,y=700,collegewidth=200):#Calls Medical Window
- mainwin(nameu):#Opens the main window
  - medical():#Displays buttons that direct to new window
      - openexplore1():
      - openexplore2():
  - engine():#Has buttons that direct to new window
  - callprofilewin():#Calls profile window
    - delacc():#Delete user account
    - select():#Updates the user profile
      - savechange():
- opensignup():#Calls the Sign Up Page
  - subsigninfo():

3.1 USER-DEFINED-FUNCTIONS-EXPLAINED:

1. Table
   a. Accepts Table Name(nameeng) , A list of Fields of table(column),Window Widget(win),Width of column(width), width of college/category column(collwidth)
2. Callmedwin
   a. Accepts Table name(namemed),Accepts the type of content the Table would display(tabletype),size of window(x,y),Width of college/category column(collegewidth)
3. Mainwin
   a. It displays different content according to the user (Student/Admin)
   b. Calls engineering functions(as engine) and medical(as medical) to show various options
   c. Has option to view the user profile(by calling callprofilewin).

4. Callprofilewin
    a. View the profile
    b. Facilitates an option to edit the profile
    c. Delete the account

4 TABLES USED

"aiims","bds2023a","bds2024","bsc2023a","bsc2023b","bsc2024","chemical","cse","eee",

"mbbs2023a","mbbs2023b","mbbs2024","student", 'Mechanical', 'Civil', 'Chemical', 'ECE',

'IT', 'Aerospace', 'Biotechnology'

4.1 AIIMS

This table shows the AIIMS college list and corresponding details like Opening Rank, Closing Rank and its location. Similar tables ('bds2023a','mbbs2023a','bsc2023a')

Field	Type	Null	Key	Default
College	varchar(50)	NO	PRIMARY	
Location	varchar(80)	YES		NULL
OpeningRank	varchar(7)	YES		NULL
ClosingRank	varchar(7)	YES		NULL

4.2 CSE

This table shows the College List and corresponding details like Tier, Target Exam , NIRF_RANK , Required Rank , Course Duration, Course Fee, Average Package, User Review, ExamMonth and Location. Similar Tables ("chemical","cse","eee", 'Mechanical', 'Civil', 'Chemical', 'ECE', 'IT', 'Aerospace', 'Biotechnology')

Field	Type	Null	Key	Default
Tier	varchar(6)	YES		NULL
College	Varchar(30)	NO	PRIMARY	
TargetExam	Varchar(15)	YES		NULL
NIRF_RANK	Varchar(5)	YES		NULL
ReqRank	Varchar(17)	YES		NULL
CourseDuration_Yr	Varchar(3)	YES		NULL
CourseFee_Rs	Varchar(9)	YES		NULL
AvgPackage_LPA	Varchar(6)	YES		NULL
UserReview	Varchar(4)	YES		NULL
ExamMonth	Varchar(18)	YES		NULL
Location	Varchar(80)	YES		NULL

4.3 MBBS 2024

This table shows Category wise Cutoff in terms of percentile and Marks for MBBS in the year 2024.

Similar Tables ("bds2024","bsc2023b","mbbs2023b"," mbbs2024")

Field	Type	Null	Key	Default
Category	Varchar	NO	PRIMARY	
Percentile	Varchar	YES		NULL
Marks	Varchar	YES		NULL

4.4 STUDENT

Stores all the data related to the student which is entered at the SignUp page.

Field	Type	Null	Key	Default
name	varchar(30)	NO	PRIMARY	
Gender	varchar(6)	YES		NULL
Email	varchar(30)	YES		NULL
PhoneNo	varchar(10)	YES		NULL
City	varchar(20)	YES		NULL
State	varchar(20)	YES		NULL
Password	varchar(20)	YES		NULL
Class	varchar(2)	YES		NULL
Age	varchar(2)	YES		NULL
Stream	varchar(15)	YES		NULL

5 SOURCE CODE

```
from tkinter import *
from tkinter import ttk
import tkinter as tk
import mysql.connector as mc
from functools import partial
dcall=mc.connect(host='localhost',user='root',password='MYSQL24kaar=',d
atabase='pycontest')
mspy=dcall.cursor(buffered=True)
def destroy_widget(widget):
    widget.destroy()
def checklog():
    global mode
    mspy.execute('select name,password from student')
    r=mspy.fetchall()
    if enam.get()=='ADMIN-E' and epass.get()=='KASAPR':
        mode=enam.get()
        mainwin('ADMIN-E')
    elif enam.get()=='ADMIN-M' and epass.get()=='KASAPR':
        mode=enam.get()
        mainwin('ADMIN-M')
    else:
        for i in r:
            if i[0]==enam.get() and i[1]==epass.get():#noupperbecause this is
created by user
```

```
            z=enam.get()
            mode='user'
            root.destroy()
            mainwin(nameu=z)
            break
        else:
            err1=Label(root,text='wrong credentials',font=('comic sans ms',13))
            err1.grid(row=0,column=1)
def table(nameeng,column,win,width,collwidth=200):
    style = ttk.Style()# Set up a style object
    style.theme_use("default") # Choose a theme for your application
    # Customize the Treeview heading (column headers)
    style.configure("Treeview.Heading",font=("Comic Sans
MS",20),foreground="Black",background="lightgray")
    # Customize the Treeview rows (entries)# Height of each row
    style.configure("Treeview",font=("Comic Sans MS",
16),rowheight=30,background="Black",foreground="White",fieldbackgroun
d="#4e554d")
    # Customize the selection color
    style.map("Treeview", background=[('selected',
'lightblue')],foreground=[('selected', 'black')])
    mspy.execute("SHOW COLUMNS FROM {}".format(nameeng))#
Define the columns
    # Create the Treeview widget
    tree = ttk.Treeview(win, columns=column, show='headings')
    for i in column:# Format columns
```

```
        if collwidth!=200 and 'college'.upper() == i.upper():
            tree.column(i, width=collwidth)
        else:
            tree.column(i, width=width)
    for j in column:
        tree.heading(j, text=j)
    mspy.execute('select * from {}'.format(nameeng))
    r=mspy.fetchall()
    for k in r:
        valueintable=[]
        for i in k:
            valueintable.append(i)
        tree.insert(", tk.END, values=valueintable)# Insert data in table
    h_scrollbar = ttk.Scrollbar(win, orient="horizontal",
command=tree.xview)
    tree.configure(xscrollcommand=h_scrollbar.set)
    vsb = ttk.Scrollbar(win, orient="vertical", command=tree.yview)
    tree.configure(yscrollcommand=vsb.set)
    h_scrollbar.grid(row=1, column=1, sticky="ew")# Position the Treeview
and Scrollbar using grid
    vsb.grid(row=0, column=0, sticky='ns')
    tree.grid(row=0, column=1, sticky="nsew")
    win.grid_rowconfigure(0, weight=1)
    win.grid_columnconfigure(1, weight=1)
def callengwin(nameeng):
```

```
    engwin=Toplevel()
    engwin.config(bg=backg)
    engwin.geometry('2400x700')
    colexperiment = []
    mspy.execute("SHOW COLUMNS FROM {}".format(nameeng))
    for column in mspy.fetchall():
        colexperiment.append(column[0])
    colexperiment1=list(colexperiment)
    del colexperiment1[1]
    menubar = Menu(engwin)
    engwin.config(menu=menubar)
    file_menu = Menu(menubar, tearoff=0)
    menubar.add_cascade(label="Tools", menu=file_menu)
    def openfindwin():
        findwin=Toplevel()
        findwin.geometry('950x1200')
        findwin.config(bg=backg)
        def find():
            mspy.execute('select * from {}'.format(nameeng))
            z=mspy.fetchall()
            for j in z:
                if j[1].upper().strip()==colent.get().upper():

l1=Label(findwin,bg=backg,fg='white',text='College',font=('comic sans
ms',20))
```

```
l1.place(relx=0.075,rely=0.2,anchor='sw')

e1=Label(findwin,text='{}'.format(j[1]),bg='#ffe5e5',width=20,font=('comic
sans ms',15))
e1.place(relx=0.075,rely=0.2,anchor='nw')

l9=Label(findwin,bg=backg,fg='white',text='User\nReview',font=('comic
sans ms',20))
l9.place(relx=0.62,rely=0.2,anchor='sw')
e9=Label(findwin,text='{}'.format(j[-
3]),bg='#ffe5e5',width=6,font=('comic sans ms',15))
e9.place(relx=0.62,rely=0.2,anchor='nw')
l2=Label(findwin,bg=backg,fg='white',text='Type',font=('comic
sans ms',20))
l2.place(relx=0.45,rely=0.2,anchor='sw')

e2=Label(findwin,text='{}'.format(j[0]),bg='#ffe5e5',width=7,font=('comic
sans ms',15))
e2.place(relx=0.45,rely=0.2,anchor='nw')

l8=Label(findwin,bg=backg,fg='white',text='Avg\nPackage_LPA',font=('co
mic sans ms',20))
l8.place(relx=0.78,rely=0.2 ,anchor='sw')
e8=Label(findwin,text='{}'.format(j[-
4]),bg='#ffe5e5',width=6,font=('comic sans ms',15))
e8.place(relx=0.78,rely=0.2,anchor='nw')

l3=Label(findwin,bg=backg,fg='white',text='ReqRank(ClosingRank)',font=('
comic sans ms',20))
```

```
l3.place(relx=0.075,rely=0.35,anchor='sw')

e3=Label(findwin,text='{}'.format(j[4]),bg='#ffe5e5',width=20,font=('comic sans ms',15))
e3.place(relx=0.075,rely=0.35,anchor='nw')

l4=Label(findwin,bg=backg,fg='white',text='TargetExam',font=('comic sans ms',20))
l4.place(relx=0.5,rely=0.35,anchor='sw')

e4=Label(findwin,text='{}'.format(j[2]),bg='#ffe5e5',width=12,font=('comic sans ms',15))
e4.place(relx=0.5,rely=0.35,anchor='nw')

l10=Label(findwin,bg=backg,fg='white',text='CourseFee',font=('comic sans ms',20))
l10.place(relx=0.5 ,rely=0.65 ,anchor='sw')
e10=Label(findwin,text='{}'.format(j[-5]),bg='#ffe5e5',width=15,font=('comic sans ms',15))
e10.place(relx=0.5 ,rely=0.65 ,anchor='nw')

l6=Label(findwin,bg=backg,fg='white',text='location',font=('comic sans ms',20))
l6.place(relx=0.075,rely=0.5,anchor='sw')
e6=Label(findwin,text='{}'.format(j[-1]),bg='#ffe5e5',width=18,font=('comic sans ms',15))
e6.place(relx=0.075,rely=0.5,anchor='nw')
```

```
l7=Label(findwin,bg=backg,fg='white',text='NIRF\nRank',font=('comic sans ms',20))
            l7.place(relx=0.78,rely=0.35,anchor='sw')

e7=Label(findwin,text='{}'.format(j[3]),bg='#ffe5e5',width=6,font=('comic sans ms',15))
            e7.place(relx=0.78,rely=0.35,anchor='nw')

l11=Label(findwin,bg=backg,fg='white',text='Course\nDuration_YRS',font=('comic sans ms',20))
            l11.place(relx=0.78,rely=0.65,anchor='sw')

e11=Label(findwin,text='{}'.format(j[5]),bg='#ffe5e5',width=8,font=('comic sans ms',15))
            e11.place(relx=0.78,rely=0.65,anchor='nw')
            l12=Label(findwin,bg=backg,fg='white',text='Exam Month',font=('comic sans ms',20))
            l12.place(relx=0.075,rely=0.65,anchor='sw')
            e12=Label(findwin,text='{}'.format(j[-2]),bg='#ffe5e5',width=18,font=('comic sans ms',15))
            e12.place(relx=0.075,rely=0.65,anchor='nw')
            break
        else:
          error1=Label(findwin,text='College doesn\'t exist',font=('comic sans ms',20))
          error1.place(relx=0.1,rely=0.7)
          findwin.after(4000,destroy_widget,error1)
```

```
headerfind=Label(findwin,text='Search',bg=backg,fg='white',font=('comic
sans ms',28))
        headerfind.place(relx=0.5,rely=0.1,anchor='se')
        colent=Entry(findwin,width='15',font=('comic sans
ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)
        colent.place(relx=0.55,rely=0.75,anchor='w')
        colent.insert(0,'Enter College')
        findbutton=Button(findwin,text='Select',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=find)
        findbutton.place(relx=0.9,rely=0.75)
    file_menu.add_command(label="Find",command=openfindwin)
    if mode=='user':
        pass
    elif mode=='ADMIN-E':
        def opendelwin():
            engwin.destroy()
            delwin=Toplevel()
            delwin.geometry('950x600')
            delwin.config(bg=backg)
            def delcon():
                def delrec():
                    mspy.execute("delete from {} where
college='{}'".format(nameeng,delentcol.get()))
                    dcall.commit()
                    delwin.destroy()
```

```
            pass
        mspy.execute('select college from {}'.format(nameeng))
        d=mspy.fetchall()
        for j in d:
            if delentcol.get().upper()==j[0].upper().strip():

confirmdel=Label(delwin,text='Confirm\nDeletion',bg=backg,fg='white',font
=('comic sans ms',20))
                confirmdel.place(relx=0.6,rely=0.3,anchor='nw')
                confirmbutton=Button(delwin,text='Yes',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=delrec)
                confirmbutton.place(relx=0.6,rely=0.5,anchor='nw')
                break
        else:
            error1=Label(delwin,text='College doesn\'t exists',font=('comic
sans ms',20))
            error1.place(relx=0.1,rely=0.7)
            delwin.after(4000,destroy_widget,error1)
    dellabel=Label(delwin,text='Delete College
Details',bg=backg,fg='white',font=('comic sans ms',20))
    dellabel.place(relx=0.4,rely=0.2,anchor='sw')
    delcollab=Label(delwin,text='Enter the college\nto be
deleted',bg=backg,fg='white',font=('comic sans ms',15))
    delcollab.place(relx=0.1,rely=0.4,anchor='sw')
    delentcol=Entry(delwin,width='15',font=('comic sans
ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)
    delentcol.place(relx=0.1,rely=0.4,anchor='nw')
```

```
        delbutton=Button(delwin,text="Delete",font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=delcon)
        delbutton.place(relx=0.45,rely=0.5,anchor='nw')
      def openaddwin():
        engwin.destroy()
        addwin=Toplevel()
        addwin.geometry('950x1200')
        addwin.config(bg=backg)
        def addinfo():
          mspy.execute('select college from
{}'.format(nameeng))#########################
          z=mspy.fetchall()
          for i in z:
            if e1.get().upper().strip()==i[0].upper():
              error1=Label(addwin,text='College exists',font=('comic sans
ms',20))
              error1.place(relx=0.1,rely=0.7)
              addwin.after(4000,destroy_widget,error1)
              break
          else:
              s="insert into {}
values('{}','{}','{}','{}','{}','{}','{}','{}','{}','{}','{}')".\

format(nameeng,e2.get(),e1.get(),e4.get(),e7.get(),e3.get(),e11.get(),e10.get(
),e8.get(),e9.get(),e12.get(),e5.get()+', '+e6.get())
              mspy.execute(s)
              dcall.commit()
```

```
                addwin.destroy()


        mylabel=Label(addwin,bg=backg,fg='white',text='ADD
INFO',font=('comic sans ms',28))
        mylabel.place(relx=0.5,rely=0.1,anchor='s')
        l1=Label(addwin,bg=backg,fg='white',text='College',font=('comic
sans ms',20))
        l1.place(relx=0.075,rely=0.2,anchor='sw')
        e1=Entry(addwin,bg='#ffe5e5',width=20,font=('comic sans ms',15))
        e1.place(relx=0.075,rely=0.2,anchor='nw')

l9=Label(addwin,bg=backg,fg='white',text='User\nReview',font=('comic
sans ms',20))
        l9.place(relx=0.62,rely=0.2,anchor='sw')
        e9=Entry(addwin,bg='#ffe5e5',width=6,font=('comic sans ms',15))
        e9.place(relx=0.62,rely=0.2,anchor='nw')
        l2=Label(addwin,bg=backg,fg='white',text='Type',font=('comic sans
ms',20))
        l2.place(relx=0.45,rely=0.2,anchor='sw')
        e2=Entry(addwin,bg='#ffe5e5',width=7,font=('comic sans ms',15))
        e2.place(relx=0.45,rely=0.2,anchor='nw')

l8=Label(addwin,bg=backg,fg='white',text='Avg\nPackage_LPA',font=('co
mic sans ms',20))
        l8.place(relx=0.78,rely=0.2 ,anchor='sw')
        e8=Entry(addwin,bg='#ffe5e5',width=6,font=('comic sans ms',15))
        e8.place(relx=0.78,rely=0.2,anchor='nw')
```

```
l3=Label(addwin,bg=backg,fg='white',text='ReqRank(ClosingRank)',font=('comic sans ms',20))
        l3.place(relx=0.075,rely=0.35,anchor='sw')
        e3=Entry(addwin,bg='#ffe5e5',width=20,font=('comic sans ms',15))
        e3.place(relx=0.075,rely=0.35,anchor='nw')

l4=Label(addwin,bg=backg,fg='white',text='TargetExam',font=('comic sans ms',20))
        l4.place(relx=0.5,rely=0.35,anchor='sw')
        e4=Entry(addwin,bg='#ffe5e5',width=12,font=('comic sans ms',15))
        e4.place(relx=0.5,rely=0.35,anchor='nw')

l10=Label(addwin,bg=backg,fg='white',text='CourseFee',font=('comic sans ms',20))
        l10.place(relx=0.5 ,rely=0.65 ,anchor='sw')
        e10=Entry(addwin,bg='#ffe5e5',width=15,font=('comic sans ms',15))
        e10.place(relx=0.5 ,rely=0.65 ,anchor='nw')
        l5=Label(addwin,bg=backg,fg='white',text='City',font=('comic sans ms',20))
        l5.place(relx=0.075,rely=0.5,anchor='sw')
        e5=Entry(addwin,bg='#ffe5e5',width=13,font=('comic sans ms',15))
        e5.place(relx=0.075,rely=0.5,anchor='nw')
        l6=Label(addwin,bg=backg,fg='white',text='State',font=('comic sans ms',20))
        l6.place(relx=0.5,rely=0.5,anchor='sw')
        e6=Entry(addwin,bg='#ffe5e5',width=13,font=('comic sans ms',15))
```

```
        e6.place(relx=0.5,rely=0.5,anchor='nw')

l7=Label(addwin,bg=backg,fg='white',text='NIRF\nRank',font=('comic sans
ms',20))
        l7.place(relx=0.78,rely=0.35,anchor='sw')
        e7=Entry(addwin,bg='#ffe5e5',width=6,font=('comic sans ms',15))
        e7.place(relx=0.78,rely=0.35,anchor='nw')

l11=Label(addwin,bg=backg,fg='white',text='Course\nDuration_YRS',font=(
'comic sans ms',20))
        l11.place(relx=0.78,rely=0.5,anchor='sw')
        e11=Entry(addwin,bg='#ffe5e5',width=8,font=('comic sans ms',15))
        e11.place(relx=0.78,rely=0.5,anchor='nw')
        l12=Label(addwin,bg=backg,fg='white',text='Exam
Month',font=('comic sans ms',20))
        l12.place(relx=0.075,rely=0.65,anchor='sw')
        e12=Entry(addwin,bg='#ffe5e5',width=18,font=('comic sans ms',15))
        e12.place(relx=0.075,rely=0.65,anchor='nw')
        addbutton=Button(addwin,text='Add',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=addinfo)
        addbutton.place(relx=0.8,rely=0.62)
    def openupdwin():
        engwin.destroy()
        updwin=Toplevel()
        updwin.geometry('1000x1200')
        updwin.config(bg=backg)
        def GO():
```

```
def updinfo():

updlist=[e2.get(),e4.get(),e7.get(),e3.get(),e11.get(),e10.get(),e8.get(),e9.get(
),e12.get(),e5.get()]
    for i in range(10):
        if actualdata[i]!=updlist[i]:
            ST="update {} set {}='{}' where
college='{}'".format(nameeng,colexperiment1[i],updlist[i],colent.get())
            mspy.execute(ST)
            dcall.commit()
    updwin.destroy()
mspy.execute('select * from {}'.format(nameeng))
z=mspy.fetchall()
for i in z:
    if colent.get().upper().strip()==i[1].upper().strip():
        global actualdata
        actualdata=list(i)
        del actualdata[1]
        colent.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        mylabel=Label(updwin,bg=backg,fg='white',text='UPDATE
INFO',font=('comic sans ms',28))
        mylabel.place(relx=0.5,rely=0.1,anchor='s')
        #be ready for disabled if statements

l1=Label(updwin,bg=backg,fg='white',text='College',font=('comic sans
ms',20))
```

```
l1.place(relx=0.075,rely=0.2,anchor='sw')
e1=Entry(updwin,bg='#ffe5e5',width=20,font=('comic sans ms',15))
e1.insert(0,'{}'.format(colent.get().upper()))
e1.place(relx=0.075,rely=0.2,anchor='nw')
e1.config(state='disabled', disabledbackground="#616e60",disabledforeground='white')


l9=Label(updwin,bg=backg,fg='white',text='User\nReview',font=('comic sans ms',20))
l9.place(relx=0.62,rely=0.2,anchor='sw')
e9=Entry(updwin,bg='#ffe5e5',width=6,font=('comic sans ms',15))
if not vuser.get():
    e9.insert(0,'{}'.format(i[-3]))
    e9.config(state='disabled', disabledbackground="#616e60",disabledforeground='white')
e9.place(relx=0.62,rely=0.2,anchor='nw')


l2=Label(updwin,bg=backg,fg='white',text='Type',font=('comic sans ms',20))
l2.place(relx=0.45,rely=0.2,anchor='sw')
e2=Entry(updwin,bg='#ffe5e5',width=7,font=('comic sans ms',15))
if not vtier.get():
    e2.insert(0,'{}'.format(i[0]))
```

```
            e2.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e2.place(relx=0.45,rely=0.2,anchor='nw')


l8=Label(updwin,bg=backg,fg='white',text='Avg\nPackage_LPA',font=('co
mic sans ms',20))
        l8.place(relx=0.78,rely=0.2 ,anchor='sw')
        e8=Entry(updwin,bg='#ffe5e5',width=6,font=('comic sans
ms',15))
        if not vavgpa.get():
            e8.insert(0,'{}'.format(i[-4]))
            e8.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e8.place(relx=0.78,rely=0.2,anchor='nw')


l3=Label(updwin,bg=backg,fg='white',text='ReqRank(ClosingRank)',font=('
comic sans ms',20))
        l3.place(relx=0.075,rely=0.35,anchor='sw')
        e3=Entry(updwin,bg='#ffe5e5',width=20,font=('comic sans
ms',15))
        if not vRank.get():
            e3.insert(0,'{}'.format(i[4]))
            e3.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e3.place(relx=0.075,rely=0.35,anchor='nw')
```

```
l4=Label(updwin,bg=backg,fg='white',text='TargetExam',font=('comic sans
ms',20))
        l4.place(relx=0.5,rely=0.35,anchor='sw')
        e4=Entry(updwin,bg='#ffe5e5',width=12,font=('comic sans
ms',15))
        if not vTE.get():
            e4.insert(0,'{}'.format(i[2]))
            e4.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e4.place(relx=0.5,rely=0.35,anchor='nw')


l10=Label(updwin,bg=backg,fg='white',text='CourseFee',font=('comic sans
ms',20))
        l10.place(relx=0.5 ,rely=0.65 ,anchor='sw')
        e10=Entry(updwin,bg='#ffe5e5',width=15,font=('comic sans
ms',15))
        if not vcourfee.get():
            e10.insert(0,'{}'.format(i[-5]))
            e10.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e10.place(relx=0.5 ,rely=0.65 ,anchor='nw')


l5=Label(updwin,bg=backg,fg='white',text='Location',font=('comic sans
ms',20))
        l5.place(relx=0.075,rely=0.5,anchor='sw')
```

```
e5=Entry(updwin,bg='#ffe5e5',width=30,font=('comic sans
ms',15))
if not vLOCATION.get():
    e5.insert(0,'{}'.format(i[-1]))
    e5.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
e5.place(relx=0.075,rely=0.5,anchor='nw')


l7=Label(updwin,bg=backg,fg='white',text='NIRF\nRank',font=('comic sans
ms',20))
l7.place(relx=0.78,rely=0.35,anchor='sw')
e7=Entry(updwin,bg='#ffe5e5',width=6,font=('comic sans
ms',15))
if not vNIRF.get():
    e7.insert(0,'{}'.format(i[3]))
    e7.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
e7.place(relx=0.78,rely=0.35,anchor='nw')


l11=Label(updwin,bg=backg,fg='white',text='Course\nDuration_YRS',font=
('comic sans ms',20))
l11.place(relx=0.78,rely=0.5,anchor='sw')
e11=Entry(updwin,bg='#ffe5e5',width=8,font=('comic sans
ms',15))
if not vcourdur.get():
    e11.insert(0,'{}'.format(i[5]))
```

```
                    e11.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
                e11.place(relx=0.78,rely=0.5,anchor='nw')


                l12=Label(updwin,bg=backg,fg='white',text='Exam
Month',font=('comic sans ms',20))
                l12.place(relx=0.075,rely=0.65,anchor='sw')
                e12=Entry(updwin,bg='#ffe5e5',width=18,font=('comic sans
ms',15))
                if not vexpec.get():
                    e12.insert(0,'{}'.format(i[-2]))
                    e12.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
                e12.place(relx=0.075,rely=0.65,anchor='nw')

updbutton=Button(updwin,text='UPDATE',command=updinfo,font=('comic
sans ms',12),bg='#c6ffc0',relief='raised')
                updbutton.place(relx=0.8,rely=0.65)
                break
            else:
                error1=Label(updwin,text="College doesn't exists",font=('comic
sans ms',20))
                error1.place(relx=0.1,rely=0.6)
                updwin.after(4000,destroy_widget,error1)
```

```
y=0.17;vtier=IntVar();vRank=IntVar();vNIRF=IntVar();vLOCATION=IntV
ar();vuser=IntVar();vTE=IntVar();vcourdur=IntVar();vcourfee=IntVar();vav
gpa=IntVar();vexpec=IntVar()

        a=Label(updwin,text='Select the fields to be
edited',bg=backg,fg='white',font=('comic sans
ms',20)).place(relx=0.05,rely=0.75,anchor='nw')


ctier=Checkbutton(updwin,text='Tier',variable=vtier,bg='lightblue',font=('co
mic sans ms',15))

        ctier.place(relx=0.05 ,rely=y+0.7,anchor='sw' )


cTE=Checkbutton(updwin,text='Target\nExam',variable=vTE,bg='lightblue',
font=('comic sans ms',15))

        cTE.place(relx=0.05,rely=y+0.7,anchor='nw')

        cNIRF=Checkbutton(updwin,text='NIRF-
RANK',variable=vNIRF,bg='lightblue',font=('comic sans ms',15))

        cNIRF.place(relx=0.225,rely=y+0.7,anchor='sw')


cRank=Checkbutton(updwin,text='ReqRank',variable=vRank,bg='lightblue',
font=('comic sans ms',15))

        cRank.place(relx=0.225,rely=y+0.7,anchor='nw')


ccourfee=Checkbutton(updwin,text='CourseFee',variable=vcourfee,bg='light
blue',font=('comic sans ms',15))

        ccourfee.place(relx=0.42 ,rely=y+0.7,anchor='sw')


ccourdur=Checkbutton(updwin,text='Course\nDuration_YRS',variable=vcou
rdur,bg='lightblue',font=('comic sans ms',15))

        ccourdur.place(relx=0.42,rely=y+0.7,anchor='nw')
```

```
cuser=Checkbutton(updwin,text='UserReview',variable=vuser,bg='lightblue'
,font=('comic sans ms',15))
        cuser.place(relx=0.595 ,rely=y+0.7,anchor='sw')

cavgpa=Checkbutton(updwin,text='AvgPackage_LPA',variable=vavgpa,bg='
lightblue',font=('comic sans ms',15))
        cavgpa.place(relx=0.595,rely=y+0.7,anchor='nw')

cLOCATION=Checkbutton(updwin,text='LOCATION',variable=vLOCATI
ON,bg='lightblue',font=('comic sans ms',15))
        cLOCATION.place(relx=0.8,rely=y+0.7,anchor='sw')

cexpec=Checkbutton(updwin,text='Expected\nMonth',variable=vexpec,bg='l
ightblue',font=('comic sans ms',15))
        cexpec.place(relx=0.8 ,rely=y+0.7,anchor='nw')
        colent=Entry(updwin,width='15',font=('comic sans
ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)
        colent.place(relx=0.55,rely=0.75,anchor='w')
        colent.insert(0,'Enter College')
        selebutton=Button(updwin,text='Select',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=GO)
        selebutton.place(relx=0.9,rely=0.75)


    file_menu.add_command(label="Add",command=openaddwin)
    file_menu.add_command(label="Update",command=openupdwin)
    file_menu.add_command(label="Delete",command=opendelwin)
```

```
    table(nameeng,colexperiment,engwin,290)
    engwin.mainloop()
def
callmedwin(namemed,tabletype=None,x=2400,y=700,collegewidth=200):
    engwin=Toplevel()
    engwin.config(bg=backg)
    engwin.geometry('{}x{}'.format(x,y))
    colexperiment = []
    mspy.execute("SHOW COLUMNS FROM {}".format(namemed))
    for column in mspy.fetchall():
        colexperiment.append(column[0])
    colexperiment1=list(colexperiment)
    del colexperiment1[1]

table(nameeng=namemed,column=colexperiment,win=engwin,width=200,c
ollwidth=collegewidth)
    menubar = Menu(engwin)
    engwin.config(menu=menubar)
    file_menu = Menu(menubar, tearoff=0)
    menubar.add_cascade(label="Tools", menu=file_menu)
    def openfindwin():
        findwin=Tk()
        findwin.geometry('850x700')
        findwin.config(bg=backg)
        def find():
            mspy.execute('select * from {}'.format(namemed))
```

```
        z=mspy.fetchall()
        for j in z:
            if j[0].upper().strip()==colent.get().upper():
                print(j[0].upper().strip(),colent.get().upper(),tabletype)
                if tabletype=='College':

l1=Label(findwin,bg=backg,fg='white',text='College',font=('comic sans
ms',20))
                    l1.grid(row=1,column=0)

e1=Label(findwin,text='{}'.format(j[0]),bg='#ffe5e5',width=20,font=('comic
sans ms',15))
                    e1.grid(row=1,column=1)

l9=Label(findwin,bg=backg,fg='white',text='OpeningRank',font=('comic
sans ms',20))
                    l9.grid(row=2,column=0)

e9=Label(findwin,text='{}'.format(j[2]),bg='#ffe5e5',width=6,font=('comic
sans ms',15))
                    e9.grid(row=2,column=1)

l2=Label(findwin,bg=backg,fg='white',text='ClosingRank',font=('comic sans
ms',20))
                    l2.grid(row=3,column=0)

e2=Label(findwin,text='{}'.format(j[3]),bg='#ffe5e5',width=7,font=('comic
sans ms',15))
                    e2.grid(row=3,column=1)
```

```
l3=Label(findwin,bg=backg,fg='white',text='Location',font=('comic sans
ms',20))
                l3.grid(row=4,column=0)

e3=Label(findwin,text='{}'.format(j[1]),bg='#ffe5e5',font=('comic sans
ms',15))
                e3.grid(row=4,column=1)
                break
            elif tabletype=='Category':

l1=Label(findwin,bg=backg,fg='white',text='Category',font=('comic sans
ms',20))
                l1.grid(row=1,column=0)

e1=Label(findwin,text='{}'.format(j[0]),bg='#ffe5e5',width=20,font=('comic
sans ms',15))
                e1.grid(row=1,column=1)

l2=Label(findwin,bg=backg,fg='white',text='Percentile',font=('comic sans
ms',20))
                l2.grid(row=2,column=0)

e2=Label(findwin,text='{}'.format(j[1]),bg='#ffe5e5',width=6,font=('comic
sans ms',15))
                e2.grid(row=2,column=1)

l3=Label(findwin,bg=backg,fg='white',text='Marks',font=('comic sans
ms',20))
```

```
                l3.grid(row=3,column=0)

e3=Label(findwin,text='{}'.format(j[2]),bg='#ffe5e5',width=7,font=('comic
sans ms',15))
                e3.grid(row=3,column=1)
                break
        else:
            error1=Label(findwin,text='{} Not
Found'.format(tabletype),bg=backg,fg='white',font=('comic sans ms',20))
            error1.grid(row=1,column=1,pady=45)
            findwin.after(4000,destroy_widget,error1)
    colentlab=Label(findwin,text='Enter {} to
search'.format(tabletype),bg=backg,fg='white',font=('comic sans ms',20))
    colentlab.grid(row=0,column=0,padx=10,pady=35)
    colent=Entry(findwin,width='15',font=('comic sans
ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)
    colent.grid(row=0,column=1,padx=20,pady=35)
    searchmed=Button(findwin,text='Search',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=find)
    searchmed.grid(row=0,column=2,pady=35)
  file_menu.add_command(label="Find",command=openfindwin)
  if mode=='user':
    pass
  elif mode=='ADMIN-M':
    def opendelwin():
        engwin.destroy()
        delwin=Toplevel()
```

```
delwin.geometry('950x600')
delwin.config(bg=backg)
def delcon():
    def delrec():
        mspy.execute("delete from {} where
{}='{}'".format(namemed,tabletype,delentcol.get()))
        dcall.commit()
        delwin.destroy()
        pass
    mspy.execute('select {} from {}'.format(tabletype,namemed))
    d=mspy.fetchall()
    for j in d:
        print(delentcol.get().upper(),j[0].upper().strip())
        if delentcol.get().upper()==j[0].upper().strip():

confirmdel=Label(delwin,text='Confirm\nDeletion',bg=backg,fg='white',font
=('comic sans ms',20))
            confirmdel.place(relx=0.6,rely=0.3,anchor='nw')
            confirmbutton=Button(delwin,text='Yes',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=delrec)
            confirmbutton.place(relx=0.6,rely=0.5,anchor='nw')
            break
    else:
        error1=Label(delwin,text='{} doesn\'t
exists'.format(tabletype),font=('comic sans ms',20))
        error1.place(relx=0.1,rely=0.7)
```

```
            delwin.after(4000,destroy_widget,error1)


        dellabel=Label(delwin,text='Delete {}
Details'.format(tabletype),bg=backg,fg='white',font=('comic sans ms',20))

        dellabel.place(relx=0.4,rely=0.2,anchor='sw')

        delcollab=Label(delwin,text='Enter the {}\nto be
deleted'.format(tabletype),bg=backg,fg='white',font=('comic sans ms',15))

        delcollab.place(relx=0.1,rely=0.4,anchor='sw')

        delentcol=Entry(delwin,width='15',font=('comic sans
ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)

        delentcol.place(relx=0.1,rely=0.4,anchor='nw')

        delbutton=Button(delwin,text="Delete",font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=delcon)

        delbutton.place(relx=0.45,rely=0.5,anchor='nw')

    def openaddwin():

        engwin.destroy()

        addwin=Toplevel()

        addwin.geometry('500x600')

        addwin.config(bg=backg)

        def addinfo():

            mspy.execute('select {} from {}'.format(tabletype,namemed))

            z=mspy.fetchall()

            for i in z:

                if e1.get().upper().strip()==i[0].upper():

                    error1=Label(addwin,text='{}
exists'.format(tabletype),font=('comic sans ms',20))
```

```
                error1.place(relx=0.1,rely=0.7)
                addwin.after(4000,destroy_widget,error1)
                break
            else:
              if tabletype=='Category':
                s="insert into {}
values('{}','{}','{}')".format(namemed,e1.get(),e2.get(),e3.get())
              elif tabletype=='College':
                s="insert into {}
values('{}','{}','{}','{}')".format(namemed,e1.get(),e2.get(),e3.get(),e4.get())
              mspy.execute(s)
              dcall.commit()
              addwin.destroy()


        mylabel=Label(addwin,bg=backg,fg='white',text='ADD
INFO',font=('comic sans ms',28))
        mylabel.grid(row=0,column=1,pady=30)
        if tabletype=='College':
            l1=Label(addwin,bg=backg,fg='white',text='College',font=('comic
sans ms',20))
            l1.grid(row=1,column=0,padx=10,pady=10)
            e1=Entry(addwin,bg='#ffe5e5',width=20,font=('comic sans
ms',15))
            e1.grid(row=1,column=1,padx=10,pady=10)

l2=Label(addwin,bg=backg,fg='white',text='Location',font=('comic sans
ms',20))
```

```
        l2.grid(row=2,column=0,padx=10,pady=10)
        e2=Entry(addwin,bg='#ffe5e5',width=20,font=('comic sans
ms',15))
        e2.grid(row=2,column=1,padx=10,pady=10)

l3=Label(addwin,bg=backg,fg='white',text='OpeningRank',font=('comic
sans ms',20))
        l3.grid(row=3,column=0,padx=10,pady=10)
        e3=Entry(addwin,bg='#ffe5e5',width=7,font=('comic sans ms',15))
        e3.grid(row=3,column=1,padx=10,pady=10)

l4=Label(addwin,bg=backg,fg='white',text='ClosingRank',font=('comic sans
ms',20))
        l4.grid(row=4,column=0,padx=10,pady=10)
        e4=Entry(addwin,bg='#ffe5e5',width=6,font=('comic sans ms',15))
        e4.grid(row=4,column=1,padx=10,pady=10)
        addbutton=Button(addwin,text='Add',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=addinfo)
        addbutton.grid(row=5,column=1,padx=50,pady=10)
      elif tabletype=='Category':

l1=Label(addwin,bg=backg,fg='white',text='Category',font=('comic sans
ms',20))
        l1.grid(row=1,column=0,padx=10,pady=10)
        e1=Entry(addwin,bg='#ffe5e5',width=20,font=('comic sans
ms',15))
        e1.grid(row=1,column=1,padx=10,pady=10)
```

```
l2=Label(addwin,bg=backg,fg='white',text='Percentile',font=('comic sans
ms',20))
            l2.grid(row=2,column=0,padx=10,pady=10)
            e2=Entry(addwin,bg='#ffe5e5',width=6,font=('comic sans ms',15))
            e2.grid(row=2,column=1,padx=10,pady=10)
            l3=Label(addwin,bg=backg,fg='white',text='Marks',font=('comic
sans ms',20))
            l3.grid(row=3,column=0,padx=10,pady=10)
            e3=Entry(addwin,bg='#ffe5e5',width=7,font=('comic sans ms',15))
            e3.grid(row=3,column=1,padx=10,pady=10)
            addbutton=Button(addwin,text='Add',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=addinfo)
            addbutton.grid(row=4,column=1,padx=50,pady=10)
        def openupdwin():
            engwin.destroy()
            updwin=Toplevel()
            updwin.geometry('1000x1200')
            updwin.config(bg=backg)
            def GO():
                def updinfo():
                    if tabletype=='Category':
                        updlist=[e1.get(),e2.get(),e3.get()]
                        for i in range(len(actualdata)):
                            if actualdata[i]!=updlist[i]:
```

```
                    ST="update {} set {}='{}' where
category='{}'".format(namemed,colexperiment1[i],updlist[i],colent.get())
                    mspy.execute(ST)
                    dcall.commit()
                    break
                else:
                    error1=Label(updwin,text='Category Not
Found',bg=backg,fg='white',font=('comic sans ms',20))
                    error1.place(relx=0.5,rely=0.5)
                    updwin.after(3000,error1,destroy_widget)
            elif tabletype=='College':
                updlist=[e1.get(),e2.get(),e3.get(),e4.get()]
                for i in range(len(actualdata)):
                    print(actualdata[i],updlist[i])
                    if actualdata[i]!=updlist[i]:
                        ST="update {} set {}='{}' where
college='{}'".format(namemed,colexperiment[i],updlist[i],colent.get())
                        print(ST)
                        mspy.execute(ST)
                        dcall.commit()
            updwin.destroy()
        mspy.execute('select * from {}'.format(namemed))
        z=mspy.fetchall()
        for i in z:
            if colent.get().upper().strip()==i[0].upper().strip():
```

```
updb=Button(updwin,text='Update',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=updinfo)
updb.place(relx=0.65,rely=0.55,anchor='sw')
actualdata=list(i)
colent.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
mylabel=Label(updwin,bg=backg,fg='white',text='UPDATE
INFO',font=('comic sans ms',28))
mylabel.place(relx=0.5,rely=0.1,anchor='s')
if tabletype=='Category':
    #be ready for disabled if statements

l1=Label(updwin,bg=backg,fg='white',text='Category',font=('comic sans
ms',20))
    l1.place(relx=0.075,rely=0.2,anchor='sw')
    e1=Entry(updwin,bg='#ffe5e5',width=20,font=('comic sans
ms',15))
    e1.insert(0,'{}'.format(colent.get().upper()))
    e1.place(relx=0.075,rely=0.2,anchor='nw')
    e1.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')


l2=Label(updwin,bg=backg,fg='white',text='Percentile',font=('comic sans
ms',20))
    l2.place(relx=0.45,rely=0.2,anchor='sw')
    e2=Entry(updwin,bg='#ffe5e5',width=6,font=('comic sans
ms',15))
```

```
                    if not vpercent.get():
                        e2.insert(0,'{}'.format(i[1]))
                        e2.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
                    e2.place(relx=0.45,rely=0.2,anchor='nw')



l3=Label(updwin,bg=backg,fg='white',text='Marks',font=('comic sans
ms',20))
                    l3.place(relx=0.62,rely=0.2,anchor='sw')
                    e3=Entry(updwin,bg='#ffe5e5',width=7,font=('comic sans
ms',15))
                    if not vmark.get():
                        e3.insert(0,'{}'.format(i[2]))
                        e3.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
                    e3.place(relx=0.62,rely=0.2,anchor='nw')


                  elif tabletype=='College':


l1=Label(updwin,bg=backg,fg='white',text='College',font=('comic sans
ms',20))
                    l1.place(relx=0.075,rely=0.2,anchor='sw')
                    e1=Entry(updwin,bg='#ffe5e5',width=20,font=('comic sans
ms',15))
                    e1.insert(0,'{}'.format(colent.get().upper()))
                    e1.place(relx=0.075,rely=0.2,anchor='nw')
```

```
                    e1.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')



l2=Label(updwin,bg=backg,fg='white',text='Location',font=('comic sans
ms',20))
                    l2.place(relx=0.075,rely=0.4,anchor='sw')
                    e2=Entry(updwin,bg='#ffe5e5',font=('comic sans ms',15))
                    if not vloc.get():
                        e2.insert(0,'{}'.format(i[1]))
                        e2.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
                    e2.place(relx=0.075,rely=0.4,anchor='nw')



l3=Label(updwin,bg=backg,fg='white',text='OpeningRank',font=('comic
sans ms',20))
                    l3.place(relx=0.45,rely=0.4,anchor='sw')
                    e3=Entry(updwin,bg='#ffe5e5',width=9,font=('comic sans
ms',15))
                    if not vor.get():
                        e3.insert(0,'{}'.format(i[2]))
                        e3.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
                    e3.place(relx=0.45,rely=0.4,anchor='nw')
```

```
l4=Label(updwin,bg=backg,fg='white',text='ClosingRank',font=('comic sans
ms',20))
                    l4.place(relx=0.78,rely=0.4 ,anchor='sw')
                    e4=Entry(updwin,bg='#ffe5e5',width=9,font=('comic sans
ms',15))
                    if not vcr.get():
                        e4.insert(0,'{}'.format(i[3]))
                        e4.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
                    e4.place(relx=0.78,rely=0.4,anchor='nw')

updbutton=Button(updwin,text='UPDATE',command=updinfo,font=('comic
sans ms',12),bg='#c6ffc0',relief='raised')
                    updbutton.place(relx=0.8,rely=0.65)
                    break
            else:
                error1=Label(updwin,text="{} doesn't
exists".format(tabletype),font=('comic sans ms',20))
                error1.place(relx=0.1,rely=0.6)
                updwin.after(4000,destroy_widget,error1)


vloc=IntVar();vor=IntVar();vcr=IntVar();vpercent=IntVar();vmark=IntVar()
        a=Label(updwin,text='Select the fields to be
edited',bg=backg,fg='white',font=('comic sans ms',20))
        a.place(relx=0.05,rely=0.75,anchor='nw')
        if tabletype=='Category':
```

```
cpercent=Checkbutton(updwin,text='Percentile',variable=vpercent,bg='lightb
lue',font=('comic sans ms',15))
            cpercent.place(relx=0.075 ,rely=0.7,anchor='sw' )

cmark=Checkbutton(updwin,text='Marks',variable=vmark,bg='lightblue',fon
t=('comic sans ms',15))
            cmark.place(relx=0.275,rely=0.7,anchor='sw')
        elif tabletype=='College':

cloc=Checkbutton(updwin,text='LOCATION',variable=vloc,bg='lightblue',f
ont=('comic sans ms',15))
            cloc.place(relx=0.075,rely=0.7,anchor='sw')

cvor=Checkbutton(updwin,text='OpeningRank',variable=vor,bg='lightblue',f
ont=('comic sans ms',15))
            cvor.place(relx=0.225 ,rely=0.7,anchor='sw')

cvcr=Checkbutton(updwin,text='ClosingRank',variable=vcr,bg='lightblue',fo
nt=('comic sans ms',15))
            cvcr.place(relx=0.4,rely=0.7,anchor='sw')


        colent=Entry(updwin,width='15',font=('comic sans
ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)
        colent.place(relx=0.55,rely=0.75,anchor='nw')
        colent.insert(0,'Enter {}'.format(tabletype))
        selebutton=Button(updwin,text='Select',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=GO)
        selebutton.place(relx=0.9,rely=0.75,anchor='nw')
```

```
        file_menu.add_command(label="Add",command=openaddwin)
        file_menu.add_command(label="Update",command=openupdwin)
        file_menu.add_command(label="Delete",command=opendelwin)
def mainwin(nameu):
    def medical():
        expe=Label(mainwin,text='Explore Medical',font=('comic sans ms',28))
        expe.grid(row=1,column=1,padx=15,pady=20)
        ne24ct=Label(mainwin,text='Neet Cutoff
2024',bg=backg,fg='white',font=('comic sans ms',28))
        ne24ct.grid(row=2,column=0,pady=20,padx=15)
        mbbs24ctb=Button(mainwin,text='MBBS',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('mbbs202
4','Category',750))
        mbbs24ctb.grid(row=3,column=0,padx=15)
        bds24ctb=Button(mainwin,text='BDS',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('bds2024',
'Category',750))
        bds24ctb.grid(row=3,column=1,padx=15)
        bsc24ctb=Button(mainwin,text='BSC',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('bsc2024',
'Category',750))
        bsc24ctb.grid(row=3,column=2,padx=15)
        ne23ct=Label(mainwin,text='Neet Cutoff
2023',bg=backg,fg='white',font=('comic sans ms',28))
        ne23ct.grid(row=4,column=0,pady=20,padx=15)
```

```
mbbs23ctb=Button(mainwin,text='MBBS',font=('comic sans ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('MBBS2023b','Category',750))

mbbs23ctb.grid(row=5,column=0,padx=15)

bsc23ctb=Button(mainwin,text='BSC',font=('comic sans ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('bsc2023b','Category',750))

bsc23ctb.grid(row=5,column=1,padx=15)

necw=Label(mainwin,text='College-wise cutoff',bg=backg,fg='white',font=('comic sans ms',28))

necw.grid(row=6,column=0,pady=20,padx=15)

mbbscwb=Button(mainwin,text='MBBS',font=('comic sans ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('mbbs2023a',collegewidth=500,tabletype='College'))

mbbscwb.grid(row=7,column=0,padx=15,pady=20)

bdscwb=Button(mainwin,text='BDS',font=('comic sans ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('bds2023a',collegewidth=500,tabletype='College'))

bdscwb.grid(row=7,column=1,padx=15,pady=20)

bsccwb=Button(mainwin,text='BSC',font=('comic sans ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('BSC2023A',collegewidth=500,tabletype='College'))

bsccwb.grid(row=7,column=2,padx=15,pady=20)

macol=Label(mainwin,text='Dream College',bg=backg,fg='white',font=('comic sans ms',28))

macol.grid(row=8,column=0,padx=15,pady=20)

macolb=Button(mainwin,text='AIIMS',font=('comic sans ms',12),bg='#c6ffc0',relief='raised',command=lambda:callmedwin('AIIMS',tabletype='College',collegewidth=500))
```

```
macolb.grid(row=8,column=1,pady=20)
def openexplore1():
    exploremedc1=Toplevel()
    exploremedc1.config(bg=backg)
    exploremedc1.geometry('900x1000')
    h1=Label(exploremedc1,text='Top Medical Courses List Offered in \nIndia After Clearing NEET',bg='lightblue',font=('comic sans ms',28))
    h1.grid(column=0,padx=30,pady=30)
    hc1=Label(exploremedc1,text="Bachelor of Medicine, Bachelor of Surgery – MBBS \
        \n\nBachelor of Dental Surgery – BDS\
        \n\nBachelor of Ayurvedic Medicine and Surgery – BAMS\
        \n\nBachelor of Unani Medicine and Surgery – BUMS\
        \n\nBachelor of Homeopathy Medicine and Surgery – BHMS\
        \n\nBachelor of Naturopathy and Yogic Science – BNYS\
        \n\nBachelor of Veterinary Sciences and Animal Husbandry – B.V.Sc & AH\
        \n\nBachelor of Physiotherapy – B.Pth or BPT\
        \n\nBachelor of Siddha Medicine and Surgery – BSMS",bg=backg,fg='white',font=('comic sans ms',17),justify='left')
    hc1.grid(column=0,padx=30,pady=30)
def openexplore2():
    exploremedc2=Toplevel()
    exploremedc2.config(bg=backg)
    exploremedc2.geometry('900x1000')
```

```
h2=Label(exploremedc2,text='List of Paramedical Courses Under
NEET ',bg='lightblue',font=('comic sans ms',28))
h2.grid(column=0,padx=30,pady=30)
hc2=Label(exploremedc2,text="Bachelor of Occupational Therapy\
    \nB.Sc Nursing\
    \nB.Sc in Dialysis Therapy\
    \nB.Sc. Medical Lab Technology\
    \nB.Sc in Optometry\
    \nB.Sc in X-Ray Technology\
    \nB.Sc in Nuclear Medicine Technology\
    \nB.Sc in Operation Theatre Technology\
    \nB.Sc. in Medical Record Technology\
    \nB.Sc. in Medical Imaging Technology\
    \nB.Sc. in Anaesthesia Technology\
    \nBachelor of Veterinary Science (B.V.Sc)\
    \nB.Sc Agriculture\
    \nBachelor of Radiation Technology\
    \nBachelor of Physiotherapy\
    \nB.Sc. in Nuclear Medicine Technology\
    \nB.Sc. in Agriculture",bg=backg,fg='white',font=('comic sans
ms',17),justify='left')
hc2.grid(column=0,padx=30,pady=30)

explorel=Label(mainwin,text='Explore_more',bg=backg,fg='white',font=('co
mic sans ms',20))
explorel.grid(row=9,column=0,padx=15,pady=20)
```

```
    exploreb1=Button(mainwin,text='Explore
Medical_Courses',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=openexplore1)

    exploreb1.grid(row=9,column=1,padx=15,pady=20)

    exploreb2=Button(mainwin,text='Explore
ParaMedical_Courses',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=openexplore2)

    exploreb2.grid(row=9,column=2,padx=15,pady=20)

  def engine():

    expe=Label(mainwin,text='Explore Engineering',font=('comic sans
ms',28))

    expe.grid(row=1,column=1,padx=15,pady=20)

    cseb=Button(mainwin,text='Computer Science \nand
Engineering',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('CSE'))

    cseb.grid(row=2,column=0,padx=15,pady=20)

    eeeb=Button(mainwin,text='Electrical and \nElectronics
Engineering',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('EEE'))

    eeeb.grid(row=2,column=1,padx=15,pady=20)

    meb=Button(mainwin,text='Mechanical Engineering',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('Mechanic
al'))

    meb.grid(row=2,column=2,padx=15,pady=20)

    ceb=Button(mainwin,text='Civil Engineering',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('Civil'))

    ceb.grid(row=2,column=3,padx=15,pady=20)
```

```
    che=Button(mainwin,text='Chemical Engineering',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('Chemical'
))

    che.grid(row=3,column=0,padx=15,pady=20)

    eceb=Button(mainwin,text='Electronics and \nCommunication
Engineering',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('ECE'))

    eceb.grid(row=3,column=1,padx=15,pady=20)

    itb=Button(mainwin,text='Information Technology',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('IT'))

    itb.grid(row=3,column=2,padx=15,pady=20)

    aeb=Button(mainwin,text='Aerospace Engineering',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('Aerospac
e'))

    aeb.grid(row=3,column=3,padx=15,pady=20)

    bteb=Button(mainwin,text='Biotechnology Engineering',font=('comic
sans
ms',20),bg='#c6ffc0',relief='raised',command=lambda:callengwin('Biotechno
logy'))

    bteb.grid(row=4,column=0,padx=15,pady=20)


  def callprofilewin():

    profilewin=Toplevel()

    profilewin.config(bg=backg)

    profilewin.geometry('950x1200')

    profilewin.config(bg=backg)

    mspy.execute("select * from student where name='{}'".format(nameu))

    pr=mspy.fetchone()
```

```
mylabel=Label(profilewin,bg=backg,fg='white',text='PROFILE',font=('comi
c sans ms',28))
    mylabel.place(relx=0.5,rely=0.1,anchor='s')
    #e is not an entry box here alone
    l1=Label(profilewin,bg=backg,fg='white',text='UserName',font=('comic
sans ms',20))
    l1.place(relx=0.075,rely=0.2,anchor='sw')
    e1=Label(profilewin,text='{}'.format(pr[0]),bg='#ffe5e5',font=('comic
sans ms',15))
    e1.place(relx=0.075,rely=0.2,anchor='nw')
    l9=Label(profilewin,bg=backg,fg='white',text='Age',font=('comic sans
ms',20))
    l9.place(relx=0.62,rely=0.2,anchor='sw')
    e9=Label(profilewin,text='{}'.format(pr[8]),bg='#ffe5e5',font=('comic
sans ms',15))
    e9.place(relx=0.62,rely=0.2,anchor='nw')
    l2=Label(profilewin,bg=backg,fg='white',text='Gender',font=('comic
sans ms',20))
    l2.place(relx=0.45,rely=0.2,anchor='sw')
    e2=Label(profilewin,text='{}'.format(pr[1]),bg='#ffe5e5',font=('comic
sans ms',15))
    e2.place(relx=0.45,rely=0.2,anchor='nw')
    l8=Label(profilewin,bg=backg,fg='white',text='Class',font=('comic sans
ms',20))
    l8.place(relx=0.72,rely=0.2 ,anchor='sw')
    e8=Label(profilewin,text='{}'.format(pr[7]),bg='#ffe5e5',font=('comic
sans ms',15))
```

```
e8.place(relx=0.72,rely=0.2,anchor='nw')
l3=Label(profilewin,bg=backg,fg='white',text='Email',font=('comic sans ms',20))
l3.place(relx=0.075,rely=0.35,anchor='sw')
e3=Label(profilewin,text='{}'.format(pr[2]),bg='#ffe5e5',font=('comic sans ms',15))
e3.place(relx=0.075,rely=0.35,anchor='nw')
l4=Label(profilewin,bg=backg,fg='white',text='PhoneNo',font=('comic sans ms',20))
l4.place(relx=0.5,rely=0.35,anchor='sw')
e4=Label(profilewin,text='{}'.format(pr[3]),bg='#ffe5e5',font=('comic sans ms',15))
e4.place(relx=0.5,rely=0.35,anchor='nw')
l5=Label(profilewin,bg=backg,fg='white',text='City',font=('comic sans ms',20))
l5.place(relx=0.075,rely=0.5,anchor='sw')
e5=Label(profilewin,text='{}'.format(pr[4]),bg='#ffe5e5',font=('comic sans ms',15))
e5.place(relx=0.075,rely=0.5,anchor='nw')
l6=Label(profilewin,bg=backg,fg='white',text='State',font=('comic sans ms',20))
l6.place(relx=0.5,rely=0.5,anchor='sw')
e6=Label(profilewin,text='{}'.format(pr[5]),bg='#ffe5e5',font=('comic sans ms',15))
e6.place(relx=0.5,rely=0.5,anchor='nw')

e10=Label(profilewin,bg=backg,fg='white',text='{}'.format(pr[9]),font=('comic sans ms',20))
```

```
e10.place(relx=0.05 ,rely=0.05 ,anchor='nw')
#inserting checkbox

vname=IntVar();vgen=IntVar();vEm=IntVar();vPh=IntVar();vci=IntVar();vs
t=IntVar();vpass=IntVar();vcla=IntVar();vage=IntVar();vstre=IntVar()
a=Label(profilewin,text='Select the fields to be edited(If editing is
req)',bg=backg,fg='white',font=('comic sans
ms',20)).place(relx=0.05,rely=0.65,anchor='sw')

cname=Checkbutton(profilewin,text='Name',variable=vname,bg='lightblue',f
ont=('comic sans ms',15))
cname.place(relx=0.075 ,rely=0.7,anchor='sw' )

cage=Checkbutton(profilewin,text='Age',variable=vage,bg='lightblue',font=(
'comic sans ms',15))
cage.place(relx=0.075,rely=0.75,anchor='sw')

cgen=Checkbutton(profilewin,text='Gender',variable=vgen,bg='lightblue',fo
nt=('comic sans ms',15))
cgen.place(relx=0.225,rely=0.7,anchor='sw')

cclass=Checkbutton(profilewin,text='Class',variable=vcla,bg='lightblue',font
=('comic sans ms',15))
cclass.place(relx=0.225,rely=0.75,anchor='sw')

cEm=Checkbutton(profilewin,text='Email',variable=vEm,bg='lightblue',font
=('comic sans ms',15))
cEm.place(relx=0.4 ,rely=0.7,anchor='sw')
```

```
cPh=Checkbutton(profilewin,text='PhoneNo',variable=vPh,bg='lightblue',fo
nt=('comic sans ms',15))
    cPh.place(relx=0.4,rely=0.75,anchor='sw')

cpass=Checkbutton(profilewin,text='password',variable=vpass,bg='lightblue'
,font=('comic sans ms',15))
    cpass.place(relx=0.575 ,rely=0.7,anchor='sw')

cci=Checkbutton(profilewin,text='City',variable=vci,bg='lightblue',font=('co
mic sans ms',15))
    cci.place(relx=0.575,rely=0.75,anchor='sw')

cst=Checkbutton(profilewin,text='State',variable=vst,bg='lightblue',font=('co
mic sans ms',15))
    cst.place(relx=0.75,rely=0.7,anchor='sw')

cstre=Checkbutton(profilewin,text='stream',variable=vstre,bg='lightblue',fon
t=('comic sans ms',15))
    cstre.place(relx=0.75 ,rely=0.75,anchor='sw' )


    def delacc():
        delwin=Toplevel()
        delwin.config(bg=backg)
        def mspydelet():
            mspy.execute("delete from student where
name='{}'".format(nameu))
            dcall.commit()
```

```
            profilewin.destroy()
            mainwin.destroy()
            delwin.destroy()
            delwin.mainloop()
        Label(delwin,text='COFIRM
DELETION',bg=backg,fg='white',font=('comic sans ms',28)).pack()
        Button(delwin,text='yes',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=mspydelet).pack()


    def select():

l=[['name',vname.get()],['age',vage.get()],['Gender',vgen.get()],['class',vcla.g
et()],['Email',vEm.get()],['PhoneNo',vPh.get()],['stream',vstre.get()],['City',vc
i.get()],['State',vst.get()],['password',vpass.get()]]
        editwin=Toplevel()
        editwin.geometry('950x1200')
        editwin.config(bg=backg)

mylabel=Label(editwin,bg=backg,fg='white',text='EDIT',font=('comic sans
ms',28))
        mylabel.place(relx=0.5,rely=0.1,anchor='s')

l1=Label(editwin,bg=backg,fg='white',text='UserName(Unique)',font=('comi
c sans ms',20))
        l1.place(relx=0.075,rely=0.2,anchor='sw')

e1=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=20,font=
('comic sans ms',15))
```

```
        e1.insert(0,'{}'.format(pr[0]))
        e1.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e1.place(relx=0.075,rely=0.2,anchor='nw')


        l9=Label(editwin,bg=backg,fg='white',text='Age',font=('comic sans
ms',20))
        l9.place(relx=0.62,rely=0.2,anchor='sw')

e9=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=4,font=('
comic sans ms',15))
        if not l[1][1]:
            e9.insert(0,'{}'.format(pr[8]))
            e9.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e9.place(relx=0.62,rely=0.2,anchor='nw')


        l2=Label(editwin,bg=backg,fg='white',text='Gender',font=('comic
sans ms',20))
        l2.place(relx=0.45,rely=0.2,anchor='sw')

e2=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=7,font=('
comic sans ms',15))
        if not l[2][1]:
            e2.insert(0,'{}'.format(pr[1]))
            e2.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e2.place(relx=0.45,rely=0.2,anchor='nw')
```

```
        l8=Label(editwin,bg=backg,fg='white',text='Class',font=('comic sans
ms',20))
        l8.place(relx=0.72,rely=0.2 ,anchor='sw')

e8=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=4,font=('
comic sans ms',15))
        if not l[3][1]:
            e8.insert(0,'{}'.format(pr[7]))
            e8.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e8.place(relx=0.72,rely=0.2,anchor='nw')


        l3=Label(editwin,bg=backg,fg='white',text='Email',font=('comic sans
ms',20))
        l3.place(relx=0.075,rely=0.35,anchor='sw')

e3=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=20,font=
('comic sans ms',15))
        if not l[4][1]:
            e3.insert(0,'{}'.format(pr[2]))
            e3.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e3.place(relx=0.075,rely=0.35,anchor='nw')


        l4=Label(editwin,bg=backg,fg='white',text='PhoneNo',font=('comic
sans ms',20))
        l4.place(relx=0.5,rely=0.35,anchor='sw')
```

```
e4=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=12,font=
('comic sans ms',15))
        if not l[5][1]:
            e4.insert(0,'{}'.format(pr[3]))
            e4.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e4.place(relx=0.5,rely=0.35,anchor='nw')


        l10=Label(editwin,bg=backg,fg='white',text='Stream',font=('comic
sans ms',20))
        l10.place(relx=0.5 ,rely=0.65 ,anchor='sw')

e10=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=15,font
=('comic sans ms',15))
        if not l[6][1]:
            e10.insert(0,'{}'.format(pr[9]))
            e10.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
        e10.place(relx=0.5 ,rely=0.65 ,anchor='nw')


        l5=Label(editwin,bg=backg,fg='white',text='City',font=('comic sans
ms',20))
        l5.place(relx=0.075,rely=0.5,anchor='sw')

e5=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=10,font=
('comic sans ms',15))
```

```
    if not l[7][1]:
        e5.insert(0,'{}'.format(pr[4]))
        e5.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
    e5.place(relx=0.075,rely=0.5,anchor='nw')


    l6=Label(editwin,bg=backg,fg='white',text='State',font=('comic sans
ms',20))
    l6.place(relx=0.5,rely=0.5,anchor='sw')

e6=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=10,font=
('comic sans ms',15))
    if not l[8][1]:
        e6.insert(0,'{}'.format(pr[5]))
        e6.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
    e6.place(relx=0.5,rely=0.5,anchor='nw')


    l7=Label(editwin,bg=backg,fg='white',text='Create
password',font=('comic sans ms',20))
    l7.place(relx=0.075,rely=0.65,anchor='sw')

e7=Entry(editwin,relief='raised',borderwidth=5,bg='#ffe5e5',width=18,font=
('comic sans ms',15))
    if not l[9][1]:
        e7.insert(0,'{}'.format(pr[6]))
        e7.config(state='disabled',
disabledbackground="#616e60",disabledforeground='white')
```

```
e7.place(relx=0.075,rely=0.65,anchor='nw')


def savechange():

val=[e1.get(),e9.get(),e2.get(),e8.get(),e3.get(),e4.get(),e10.get(),e5.get(),e6.
get(),e7.get()]
    field=[];values=[];count=0
    for i in l:
        count+=1
        if i[1]==1:
            field.append(i[0])
            values.append(val[count-1])
    for j in range(len(field)):
        mspy.execute("update student set {}='{}' where
name='{}'".format(field[j],values[j],nameu))
        dcall.commit()
    editwin.destroy()
    profilewin.destroy()


scb=Button(editwin,text='Save',font=('comic sans
ms',12),bg='#c6ffc0',relief='raised',command=savechange)
scb.place(relx=0.5,rely=0.8)
sele=Button(profilewin,text='Select',command=select,font=('comic sans
ms',12),bg='#c6ffc0',relief='raised')
sele.place(relx=0.75,rely=0.85)
```

```
        dele=Button(profilewin,text='Delete
Account',command=delacc,font=('comic sans
ms',12),bg='#c6ffc0',relief='raised')

        dele.place(relx=0.7,rely=0.1,anchor='sw')

        profilewin.mainloop()

    mainwin=Tk()

    mainwin.config(bg=backg)

    mainwin.geometry('1600x900')

    Label(mainwin,text='Welcome
{}'.format(nameu),bg=backg,fg='white',font=('comic sans
ms',28)).grid(row=0,column=3,padx=10)

    if nameu not in ('ADMIN-E','ADMIN-M'):

        Button(mainwin,text='Profile',font=('comic sans
ms',20),bg='#c6ffc0',relief='raised',command=callprofilewin).grid(row=0,col
umn=2)

        mspy.execute("select stream from student where
name='{}'".format(nameu))

        #global r

        r=mspy.fetchone()[0]

        if r=='Medical':

            medical()

        elif r=='Engineering':

            engine()

    elif nameu=='ADMIN-E':

        engine()

    elif nameu=='ADMIN-M':

        medical()
```

```
def opensignup():
    signwin=Tk()
    signwin.geometry('950x1200')
    signwin.config(bg=backg)
    mylabel=Label(signwin,bg=backg,fg='white',text='SIGN
UP',font=('comic sans ms',28))
    mylabel.place(relx=0.5,rely=0.1,anchor='s')

l1=Label(signwin,bg=backg,fg='white',text='UserName(Unique)',font=('com
ic sans ms',20))
    l1.place(relx=0.075,rely=0.2,anchor='sw')
    e1=Entry(signwin,bg='#ffe5e5',width=20,font=('comic sans ms',15))
    e1.place(relx=0.075,rely=0.2,anchor='nw')
    l9=Label(signwin,bg=backg,fg='white',text='Age',font=('comic sans
ms',20))
    l9.place(relx=0.62,rely=0.2,anchor='sw')
    e9=Entry(signwin,bg='#ffe5e5',width=4,font=('comic sans ms',15))
    e9.place(relx=0.62,rely=0.2,anchor='nw')
    l2=Label(signwin,bg=backg,fg='white',text='Gender',font=('comic sans
ms',20))
    l2.place(relx=0.45,rely=0.2,anchor='sw')
    e2=Entry(signwin,bg='#ffe5e5',width=7,font=('comic sans ms',15))
    e2.place(relx=0.45,rely=0.2,anchor='nw')
    l8=Label(signwin,bg=backg,fg='white',text='Class',font=('comic sans
ms',20))
    l8.place(relx=0.72,rely=0.2 ,anchor='sw')
    e8=Entry(signwin,bg='#ffe5e5',width=4,font=('comic sans ms',15))
```

```
e8.place(relx=0.72,rely=0.2,anchor='nw')
l3=Label(signwin,bg=backg,fg='white',text='Email',font=('comic sans ms',20))
l3.place(relx=0.075,rely=0.35,anchor='sw')
e3=Entry(signwin,bg='#ffe5e5',width=20,font=('comic sans ms',15))
e3.place(relx=0.075,rely=0.35,anchor='nw')
l4=Label(signwin,bg=backg,fg='white',text='PhoneNo',font=('comic sans ms',20))
l4.place(relx=0.5,rely=0.35,anchor='sw')
e4=Entry(signwin,bg='#ffe5e5',width=12,font=('comic sans ms',15))
e4.place(relx=0.5,rely=0.35,anchor='nw')

l10=Label(signwin,bg=backg,fg='white',text='Stream\nEngineering\\Medical',font=('comic sans ms',20))
l10.place(relx=0.5 ,rely=0.65 ,anchor='sw')
e10=Entry(signwin,bg='#ffe5e5',width=15,font=('comic sans ms',15))
e10.place(relx=0.5 ,rely=0.65 ,anchor='nw')
l5=Label(signwin,bg=backg,fg='white',text='City',font=('comic sans ms',20))
l5.place(relx=0.075,rely=0.5,anchor='sw')
e5=Entry(signwin,bg='#ffe5e5',width=10,font=('comic sans ms',15))
e5.place(relx=0.075,rely=0.5,anchor='nw')
l6=Label(signwin,bg=backg,fg='white',text='State',font=('comic sans ms',20))
l6.place(relx=0.5,rely=0.5,anchor='sw')
e6=Entry(signwin,bg='#ffe5e5',width=10,font=('comic sans ms',15))
e6.place(relx=0.5,rely=0.5,anchor='nw')
```

```
    l7=Label(signwin,bg=backg,fg='white',text='Create
password',font=('comic sans ms',20))
    l7.place(relx=0.075,rely=0.65,anchor='sw')
    e7=Entry(signwin,bg='#ffe5e5',width=18,font=('comic sans ms',15))
    e7.place(relx=0.075,rely=0.65,anchor='nw')
    def subsigninfo():
        mspy.execute('select name from student')
        z=mspy.fetchall()
        for i in z:
            if e1.get()==i[0]:#no upper because it is created by user
                error1=Label(signwin,text='UserName exists',font=('comic sans
ms',20))
                error1.place(relx=0.1,rely=0.7)
                break
        else:
            s="insert into student
values('{}','{}','{}','{}','{}','{}','{}','{}','{}','{}')".\

format(e1.get(),e2.get(),e3.get(),e4.get(),e5.get(),e6.get(),e7.get(),e8.get(),e9.
get(),e10.get())
            mspy.execute(s)
            dcall.commit()
            Mes=Label(signwin,text='Sign Up successful\nPls Sign
in',font=('comic sans ms',20))
            Mes.place(relx=0.1,rely=0.7)
            signwin.after(5000,destroy_widget,signwin)
```

```
signupsub=Button(signwin,text='Submit',command=subsigninfo,font=('comic sans ms',10),relief='raised',bg='#c6ffc0')
    signupsub.place(relx=0.6,rely=0.73)
    signwin.mainloop()
backg="#212121"
root=Tk()
root.config(bg=backg)
root.geometry('500x600')
mylabel=Label(root,text='LOGIN',bg=backg,font=('comic sans ms',28),fg='White').grid(column=0,pady=100)
labn=Label(root,text='Enter name',bg=backg,font=('comic sans ms',20),fg='White').grid(column=0,pady=15)
labp=Label(root,text='Enter password',bg=backg,font=('comic sans ms',20),fg='White').grid(column=0,pady=15)
epass=Entry(root,width='15',show='*',font=('comic sans ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)
epass.grid(column=1,row=2,pady=15,padx=20)
enam=Entry(root,width='15',font=('comic sans ms',15),bg='#ffe5e5',relief='raised',borderwidth=8)
enam.grid(column=1,row=1,pady=15,padx=20)
logsub=Button(root,text='Login',font=('comic sans ms',12),bg='#c6ffc0',command=checklog,relief='raised').grid(column=1,pady=15,padx=10)
signupb=Button(root,text='Sign up',font=('comic sans ms',12),bg='#fff9ae',command=opensignup).grid(column=0,row=3,padx=(100,5),pady=15)
root.mainloop()
```

6 Output

6.1 LOGIN/SIGNUP

User Name can be the 'Name of the student' or 'ADMIN-E'(for engineering) Or 'ADMIN-M'(for medical). If the student has an account already, he/she can login directly. Else he/she can go for signup. Username is Unique because, It is defined as the primary key. He/She will enter the details to create an account. These details are stored in Student table. This username and password is used to login later. The pic1 shows that entering wrong set of values will raise an error.

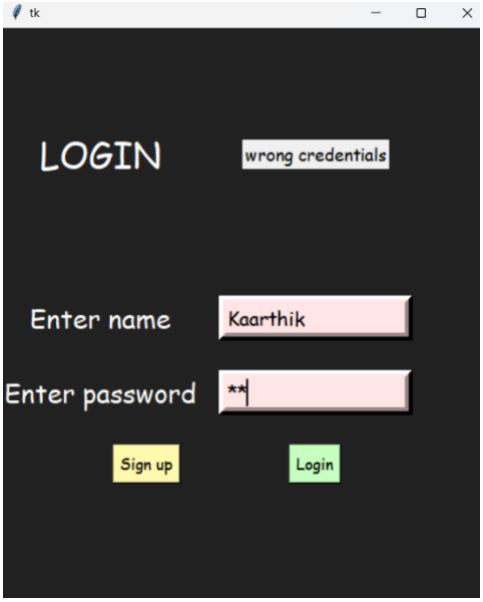

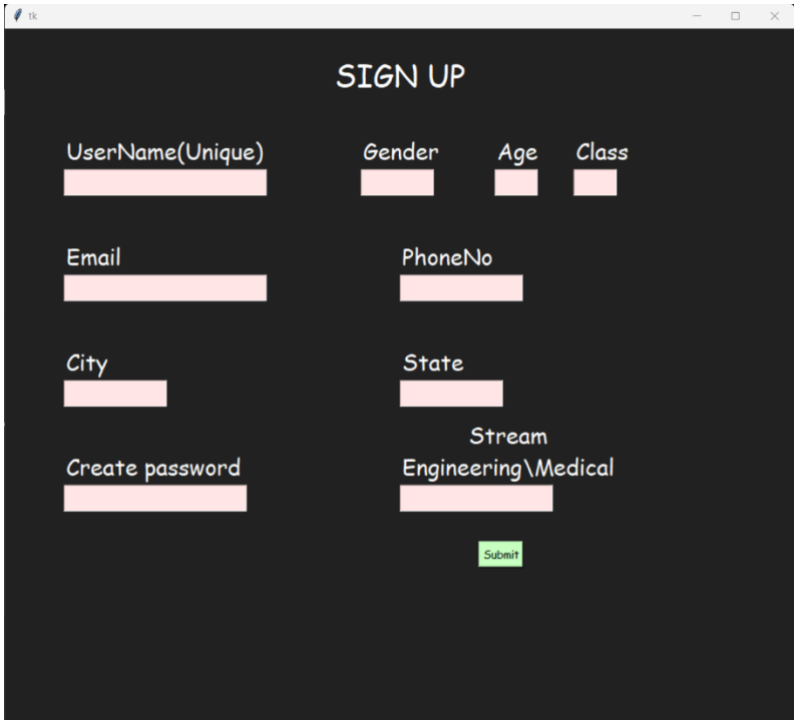

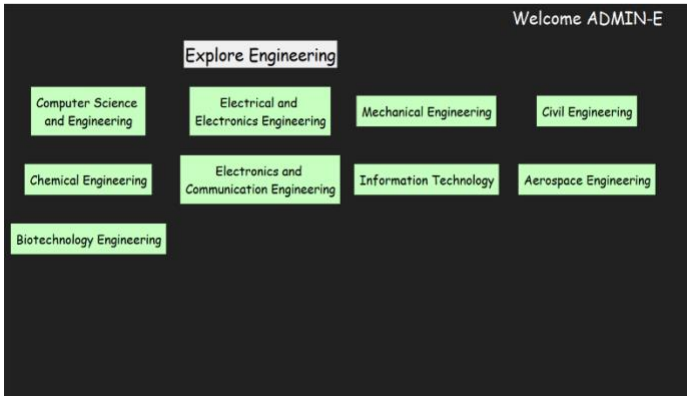

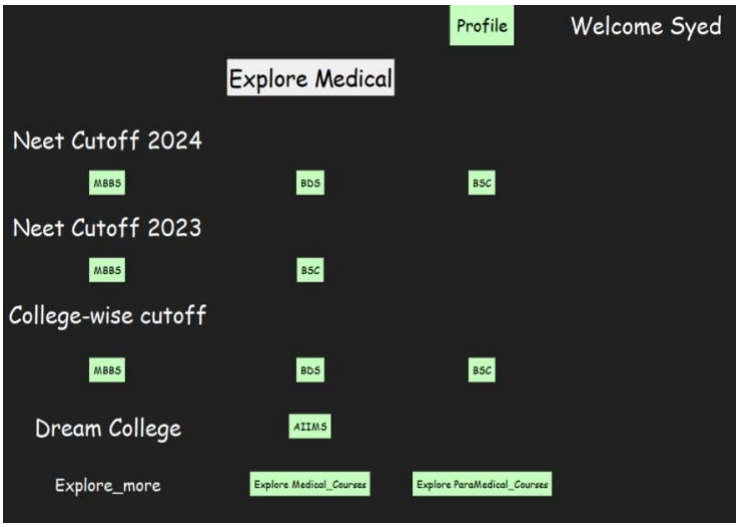

6.2 MAIN WINDOW

This window allows the user to view the different fields available in each stream. Two pictures are shown. Pic1 shows the window for a user who has chosen his stream to be engineering. Pic2 shows a window for a user who has chosen his stream to be medical. The user can click the fields to know more about them. Same will be displayed for an admin. But profile option won't be present.

6.3 PROFILE WINDOW

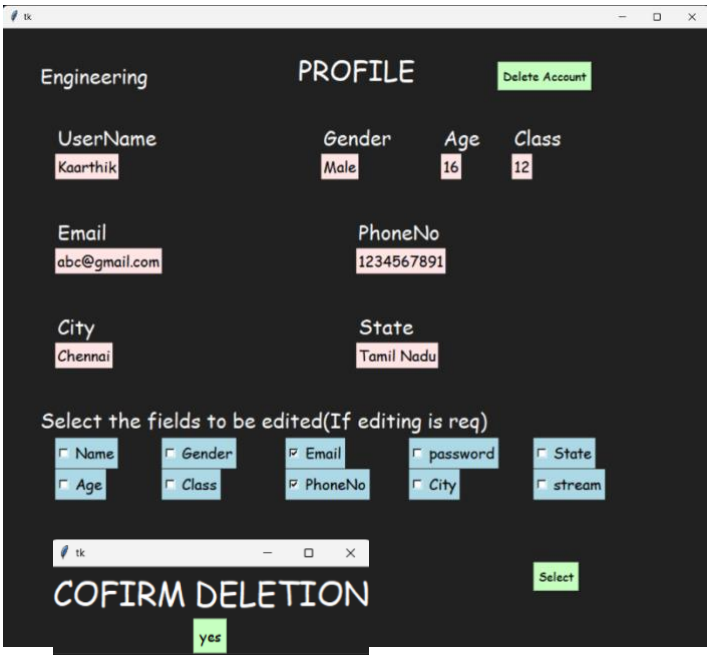

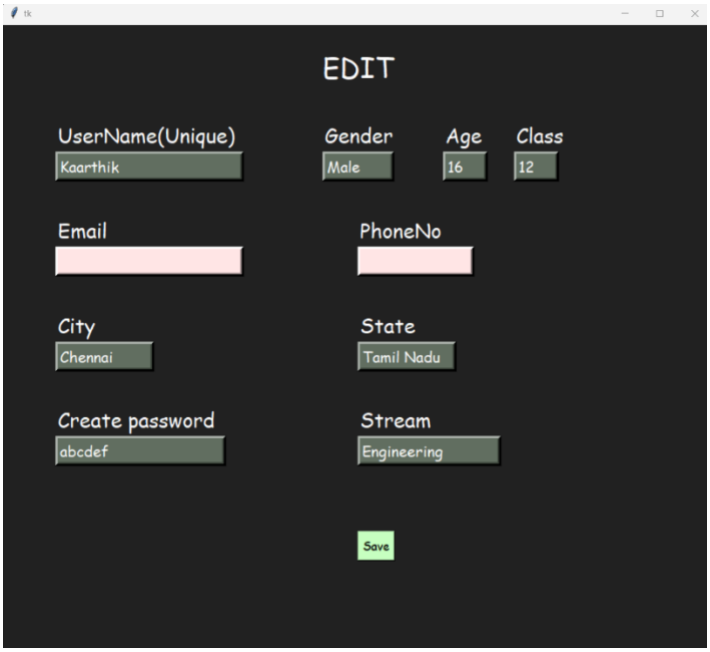

Pic1 shows the details of the user. This window facilitate the user to edit the details by clicking the required checkboxes. Pic2 shows the new edit window that accepts the entries for the selected fields. In pic1 , Delete account deletes the user's account permanently. A small confirmation message box will pop up to delete the user account.

6.4 VIEWING TABLE (ADMIN MODE)

tk

Tools

tier	College	TargetExam	NIRF_RANK	ReqRank	Cou
2	JADAVPUR UNIVERSITY	AP EAMCET	13	209	4
2	NIT TIRUCHIRAPPALI(TRI	JEE MAINS	21	1224(OS)_5066(HS)	4
3	AMRITA UNIVERSITY	AEEE	15	19971	4
2	BITS PILANI	BITSAT	25	331	4
3	BMS college	KEA CET	83	1027	4
1	IIT Bombay	JEE ADV	4	68	4
1	IIT DELHI	JEE ADV	3	116	4
1	IIT KANPUR	JEE ADV	5	248	4
1	IIT KHARAGPUR	JEE ADV	7	415	4
1	IIT MADRAS	JEE ADV	1	159	4
3	JAYPEE(NOIDA)	JEE MAINS	156	48918	4
3	MAIT	CMAT	201	46402	4
3	MSIT	CMAT	251	56879	4
2	NIT SURATHKAL	JEE MAINS	12	1615(OS)_2933(HS)	4
2	NITWARANGAL	JEE MAINS	53	2186(OS)_2804(HS)	4
3	PES UNIVERSITY	KEA CET	NULL	4370	6
3	USIT	CMAT	84	29566	4

tk

Tools

_Yr	CourseFee_Rs	AvgPackage_LPA	UserReview	ExamMonth	Location
	57100	10	4.2	April	Pilani, Rajasthan
	166050	27.2	4.2	Jan & April	Tiruchirappalli, Tamil Nadu
	180500	7	4	Jan&April	COMBATORE,TAMIL NADU
	571575	20.9	4.1	May & June	Basavanagudi, Bangalore
	438100	8	4.3	August	Bangalore, Karnataka
	218500	21.8	4.4	May	Mumbai,Maharashtra
	235500	17.6	4.3	May	Hauz Khas, New Delhi
	216200	18.1	4.4	May	Kanpur, Uttar Pradesh
	217400	24	4.3	May	Kharagpur, West Bengal
	227550	19	4.2	May	Chennai, Tamil Nadu
	41000	7	4.1	Jan&April	NOIDA
	180500	6	3.7	April	New Delhi, Delhi
	172500	6.5	3.8	MAY	Banashankari, Bangalore
	155570	27.68	4.4	NULL	Karnataka
	157000	29.67	4	Jan & April	Warangal, Telangana
	480000	8	4	August	Dwarka, New Delhi
	185500	9.98	3.9	May	New Delhi, Delhi

Tools
- Find
- Add
- Update
- Delete

The picture shows the data of CSE branch. It has a vertical scrollbar to the left and horizontal scroll provide only Find option. Admin has all the access to these tools. Let's explore each option.

6.4.1 Find

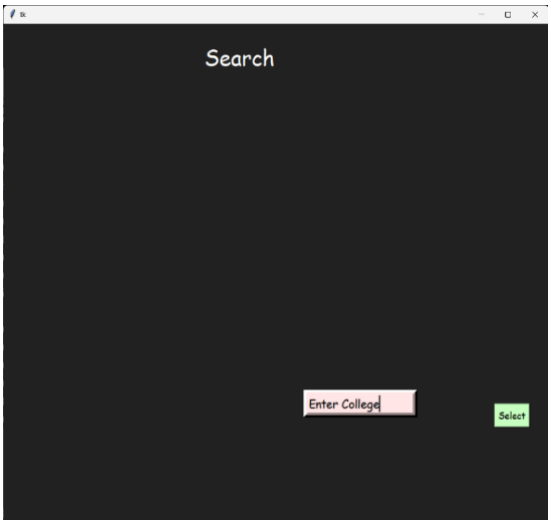

It helps the user to find the details of one particular college by typing the name in the entry box. If the entry data doesn't match the college data present in the table, it shows an error. If it matches, then the corresponding data will be displayed

6.4.2 Add

This method is designed for an admin. He can add records to the table (as shown above). Pic2 shows, Trying to add an existing college will raise an error.

6.4.3 Delete

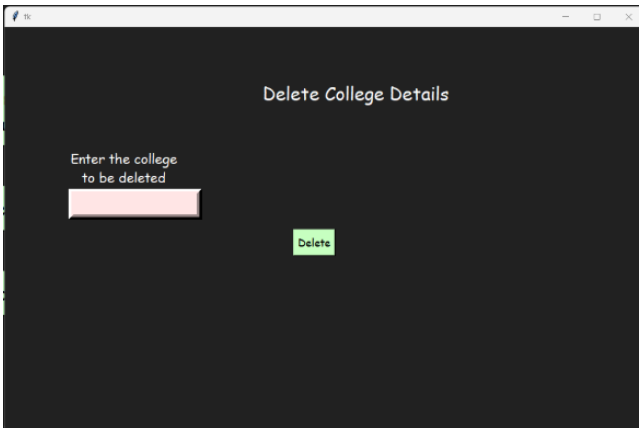

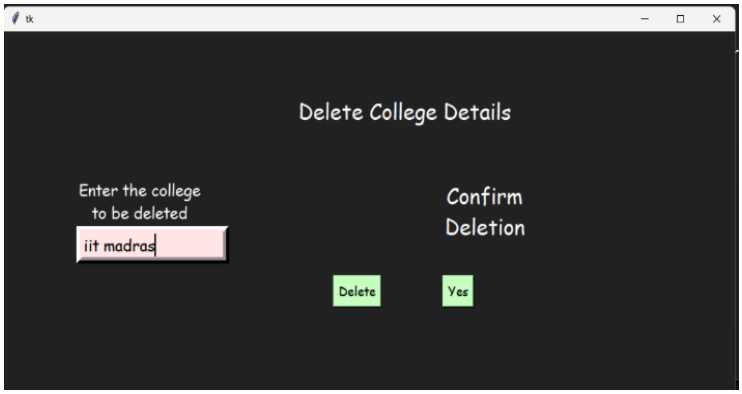

It is designed for the admin. He can delete the records by entering the college name. A confirmation Message will be displayed in the same window.

6.4.4 Update

It is designed for the admin. He can update the existing records. The Entry boxes are displayed after selecting the fields to be edited.

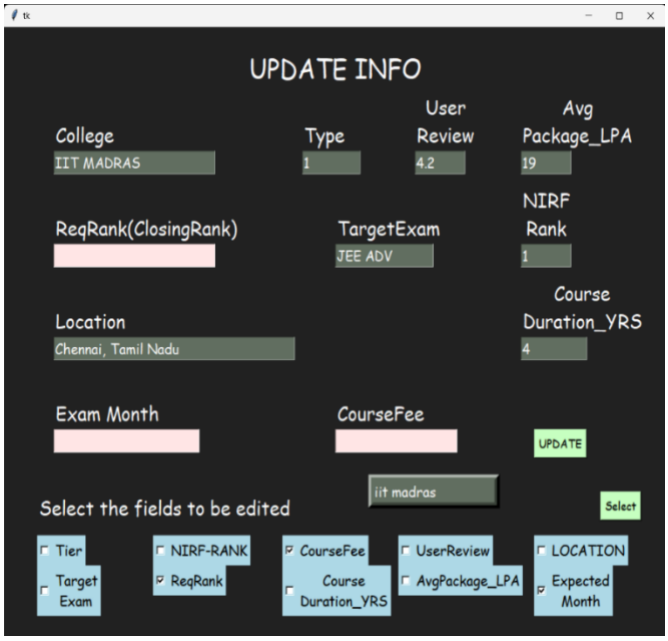

7 Conclusion

- Potential Extensions:

Integration with Online Career Resources. The project could be extended to integrate with online APIs for job postings or educational resources.

- Advanced Machine Learning Integration:

With further development, the project could integrate machine learning models to predict career success based on historical user data.

- Mobile Application:

A mobile version using a framework like Kivy can be developed to make the platform more accessible.

- Machine Learning Integration:

In future iterations, machine learning algorithms can be added to provide more advanced and predictive career recommendations.

- Data Visualization:

Use libraries like matplotlib to graphically represent career trends, skill gaps, and suggestions.

- Career Tracking:

Users can track their progress and the steps needed to pursue their desired career.

- Skill and Interest Matching:

The system will use predefined criteria to match a user's skills and interests with suitable career paths. This includes:

- Filtering careers based on educational qualifications.
- Matching skill sets with the job requirements.
- Providing alternatives if the user lacks certain qualifications.

- Dynamic Recommendation:

The system will suggest further educational or training resources (such as certification courses) if a user's current skills do not fully align with any career path.

Other aspects can also be included like :

- Arts and Humanities
- Business and Management

- Information Technology
- Law
- Creative Fields
- Public Services

We also aim to focus on other target exams as well, for example NDA, SAT and Foreign university exams etc.

8 Bibliography

https://collegedunia.com/exams/neet/cutoff

https://medicine.careers360.com/articles/neet-cut-off-2023-for-mbbs-bds-bams

https://mbbscouncil.com/listing/expected-neet-cut-off-for-aiq-state-quota-mbbs/

https://www.shiksha.com/medicine-health-sciences/neet-exam-cutoff

https://www.geeksforgeeks.org/python-tkinter-treeview-scrollbar/

https://engineering.careers360.com/articles/list-of-engineering-courses-after-12th

https://www.shiksha.com/engineering-chp

https://cac.annauniv.edu/aidetails/ai_ug_courses.html

https://www.topuniversities.com/courses/engineering/which-type-engineering-should-you-study

https://collegedunia.com/courses/engineering

https://www.britannica.com/technology/civil-engineering

https://civil.iitm.ac.in/

https://www.quora.com/How-is-civil-engineering-department-at-IIT-Madras

https://www.tmu.ac.in/blog/mechanical-engineering-course-details-full-form-fees-admission-eligibility-subjects-college

https://www.milligan.edu/wp-content/uploads/2014/11/Engineering-Curriculum-Mechanical-1.pdf

https://www.topuniversities.com/courses/engineering-mechanical/guide

https://www.mahindrauniversity.edu.in/programs/b-tech/mechanical-engineering/