

GRAPHIC ERA DEEMED TO BE UNIVERSITY



Batch 2019-23

A

Mini Project Report

On

Face Recognition

Based Attendance System

Submitted To:

Ms. Parul Madan (Department of CSE)

Mr. Pankaj Kumar (Department of CSE)

Submitted By:

Gaurangi Tripathi

B. Tech CSE

Section E

2014657(25)

6th Semester

Problem Statement

Manually taking attendance risks missing someone, consuming man power and time. Face recognition-based attendance system is a solution to the problem of recognizing faces for the purpose of collecting attendance by utilizing face recognition technology based on high-definition monitor video and other information technology. Face recognition is the ability of a computer system to detect and recognize human faces quickly and accurately in real time. Faces can be detected and recognized automatically and instantly by the human brain. However, on the level of the human brain, it is extremely impossible to perform all of the tough activities on a computer. Face recognition is an important component of biometrics. Basic human characteristics are linked to current data in biometrics. Facial traits are retrieved and implemented using efficient algorithms.

Introduction

In the information era, one of the most important issues is authentication. Human facial recognition (HFR) is one of the approaches that can be utilized for user authentication. Computer vision is a discipline that describes how to reconstruct, interrupt, and interpret a 3D scene from its 2D images in terms of the structure inherent in the scene. It is concerned with utilizing computer software and hardware to model and replicate human vision. Face detection and recognition is a kind of computer vision technology that can recognize and detect people's faces in image files or video frames or in real time using a webcam. Humans find this simple, but computers require exact instructions. Buildings, automobiles, animals, and other objects that aren't human faces may appear in the images or in the video frame. We built an attendance system based on face recognition since continuous observation enhances performance for estimating attendance.

This project provides an involuntary attendance marking system that operates without human intervention. The system can also be used to maintain track of employees or students or other instructional activities where attendance is critical. This approach replaces traditional student identification methods such as calling the student's name, checking the student's identity cards, and keeping track of each employee in the company. In order to be recognized, students or employees must also register in the database. The user-friendly interface allows for on-the-spot registration. In this project, we used OpenCV's LBPH Face Recognizer and HaarCascade Classifiers for Face detection and recognition.

Objective

The objective of this project is to build a face recognition-based automated student attendance system, in which a human stand in front of the device and a camera compares the face to a database and then identify the face and records the attendance. The following are expected outcomes in order to meet the objectives:

The following are expected outcomes in order to meet the objectives:

- Extracting useful features from the detected face.
- To classify the features so that the detected face can be recognized.
- To keep attendance record of the person who has been identified.

Motivation

We strive to deliver a valued face recognition-based attendance service wherever attendance is critical or important for the functioning of the organization. Reduce manual process errors by using facial recognition technology to deliver an automated and dependable attendance system. The attendance system will be more authentic as we develop a system that can recognize faces and compare them with its own database. Our main purpose is to streamline and organize the tracking and management of attendance and absenteeism. Also, increase privacy and security so that no proxy or alteration is possible.

Methodology

Face detection is the act of recognizing and locating all of the faces contained in a single image or video, independent of their size, scale, orientation, age, or emotion. Face Recognition, on the other hand, is a visual pattern recognition problem in which the face, which is represented as a three-dimensional object that is sensitive to fluctuating illumination, position, and other aspects, must be identified from recorded photos. The issue of "Where is the face?" is answered through face detection. It recognizes an object in the input image as

a "face" and locates it. Face Recognition, on the other hand, provides an answer to the question of who this person is Or, to put it another way, whose face is it? Based on the database of faces it uses to check this input image, it determines whether the identified face is someone recognized or unknown. As can be observed, the output of face detection (the detected face) is the input to the face recognizer, and the output of the face recognizer is the final conclusion, i.e., face known or face unknown.

Below is the flowchart of the face recognition-based attendance system which depicts the complete working of the project.

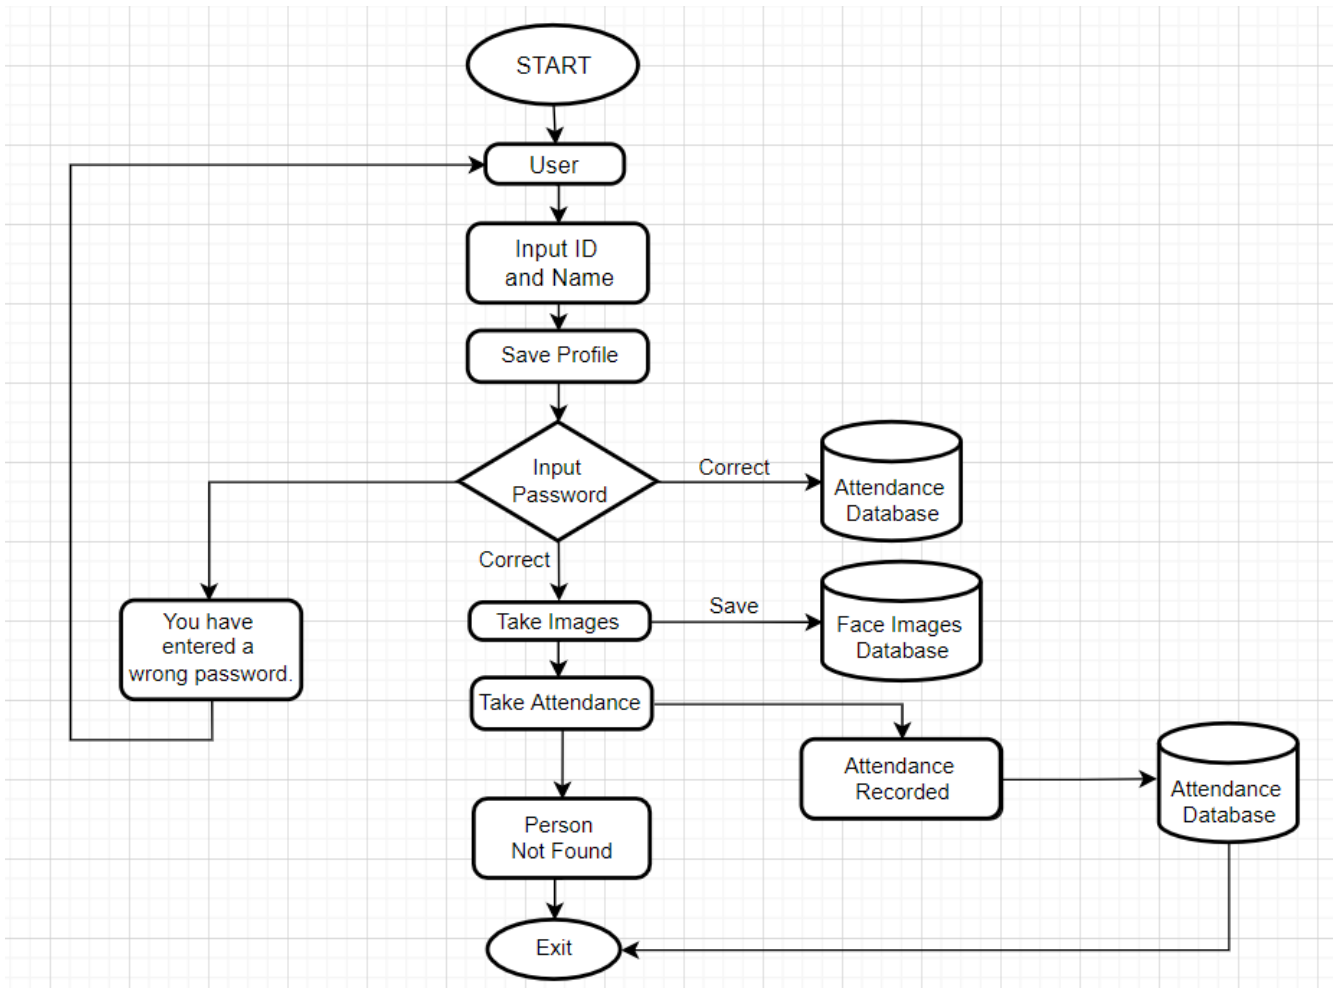


Figure 1. Flowchart of the Project

The task of face recognition can be divided into two parts. The first phase is a classification task, which accepts any image as input and returns a binary result of yes or no, indicating whether the image contains any faces. The face localization task, which takes an image as input and outputs the location of any face or faces within that picture as a bounding box with (x, y, width, height), is the second stage. After capturing the image, the system will evaluate the pictures in its database for equality and return the most relevant result. For the above working, Local Binary Patterns Histogram (LBPH) Algorithm and Haar Cascade Classifier of OpenCV is used for capturing face images, training images, face detection and recognition for the attendance system.

OpenCV

OpenCV is a cross-platform library that can be used to create real-time computer vision applications. It focuses primarily on image processing, video capture, and analysis, with capabilities such as face detection and object detection. To find faces in an image or video or real-time webcam, OpenCV use machine learning methods because faces are so complex, there is no easy way that can tell you whether or not it identified a face. Instead, thousands of little patterns and characteristics must be matched to accurately identify the face of a human. The algorithms divide the work of recognizing the face into thousands of smaller, manageable tasks known as Classifiers.

The OpenCV library has the following features:

- Read and write images
- Capture and save videos
- Process images (filter, transform)
- Perform feature detection
- Detect specific objects such as faces, eyes, cars, in the videos or images.
- Analyze the video, including estimating motion, removing the background, and tracking objects.

Local Binary Patterns Histogram (LBPH) Algorithm

Local Binary Pattern (LBP) is a basic yet effective texture operator that labels pixels in an image by thresholding each pixel's neighborhood and treating the result as a binary number. On some datasets, it has also been discovered that combining LBP with the histograms of oriented gradients (HOG) descriptors boosts detection performance significantly. We can represent the facial photos with a simple data vector using the LBP and histograms. LBP can be utilized for face recognition applications because it is a visual descriptor.

The LBPH algorithm has five steps:

1. **Parameters:** the LBPH uses 4 parameters:
 - **Radius:** The radius represents the radius surrounding the center pixel and is used to generate the circular local binary pattern. Normally, it is set to 1.
 - **Neighbors:** The number of sample points required to construct a circular local binary pattern. Normally, it is set to 8.
 - **Grid X:** The number of cells in the horizontal direction. The more cells, the finer the grid, the higher the dimensionality of the resulting feature vector. Normally, it is set to 8.
 - **Grid Y:** The number of cells in the vertical direction. The more cells, the finer the grid, the higher the dimensionality of the resulting feature vector. Normally, it is set to 8.
2. **Training the Algorithm:** To train the algorithm, we'll need a dataset containing the faces of the persons we're trying to recognize. We must also assign each image an ID (which might be a number or a person's name) so that the algorithm can recognize an input image and provide you with an output. The ID for all images of the same individual must be the same.
3. **Applying the LBP operation:** The LBPH's first computational step is to build an intermediate image that better describes the original image by highlighting the facial features. To do so, the algorithm employs a sliding window idea based on the radius and neighbors' parameters.


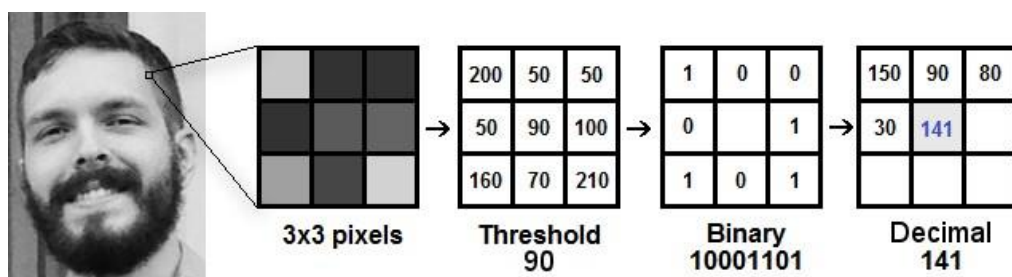


Figure 2. LBP Operation

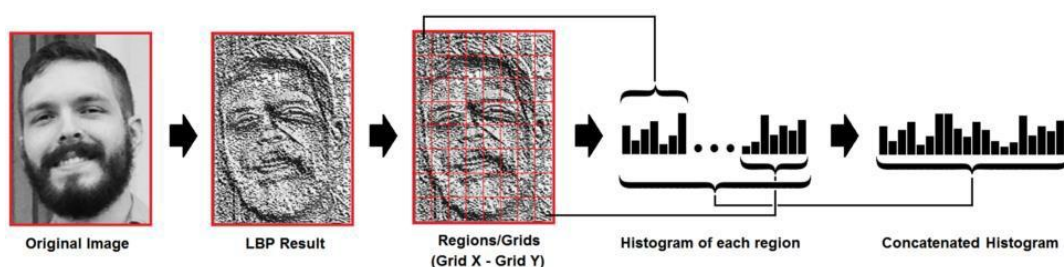

4. **Extracting the Histograms:** Using the image created in the previous phase, we can now divide the image into numerous grids using the Grid X and Grid Y parameters, as can be seen in the following image:

5. **Performing face recognition:** The algorithm has already been trained at this point. Each image from the training dataset is represented by a different histogram. As a result, given an input image, we repeat the procedures for this new image, resulting in a histogram that describes the image. So, all we have to do to identify the image that matches the input image is compare two histograms and return the image with the closest histogram. As a result, the ID from the image with the closest histogram is the algorithm's output. The calculated distance between the histograms, which can be used as a 'confidence' measurement, should also be returned by the algorithm. Note that despite the label 'confidence,' lower confidences are desirable because they indicate a closer distance between the two histograms. Then we can use a threshold and the 'confidence' to determine whether the algorithm accurately recognized the image. If the confidence is less than the stated threshold, we can assume that the algorithm has effectively recognized it.

Haar Cascade Classifier

The Haar Cascade classifier is a machine learning-based object detection approach in which a cascade function is trained from a large number of positive and negative images. It is then used to detect the things in the other images based on the training. The majority of the images we encounter are RGB channel images (Red, Green, Blue). As a result, when OpenCV reads an RGB image, it stores it in the BGR (Blue, Green, Red) channel. This BGR channel must be converted to gray channel for image recognition purposes. The reason for this is because gray channel is simple to process and computationally less intensive because it just has one black-and-white channel. We use an inherent function called **detectMultiScale** with the face cascade classifier, which is an object loaded using **haarcascade frontal face default.xml** file. This function will assist us in locating the new image's features and locations. To detect the features of the new image, it will use all of the features from the face cascade classifier object. The function **detectMultiScale** returns 4 values — x-coordinate, y-coordinate, width(w) and height(h) of the identified facial feature. It will create a rectangle around the face based on these four variables. In this manner, it will detect and recognize the person's face, as well as identify the person's name and ID for the attendance.

GUI Interface

The snapshots below demonstrate the GUI Interface of the attendance system, which is divided into several sections as mentioned below.

Main Window: It contains the options such Enter ID, Enter Name and Take images and Save Profile. The user will choose the preferred option based on its accessibility.

Attendance System

Help

Face Recognition Based Attendance System

29-June-2022 | 10:48:44

For Already Registered

Take Attendance

ID	NAME	DATE	TIME
----	------	------	------

Quit

For New Registrations

Enter ID

Clear

Enter Name

Clear

Images Taken for ID : 2015044

Take Images

Save Profile

Total Registrations till now : 0

Set Password Window: It is used to input the password of the concerned authority to record the attendance of the student like Faculty or Staff Members.

Face Recognition Based Attendance System

30-June-2022 | 15:14:04

For Already Registered

Take Attendance

Attendance

ID	NAME	DATE	TIME
----	------	------	------

Quit

For New Registrations

Enter ID

2015044 Clear

Enter Name

Abhinav Mohan Bhatia Clear

1)Take Images 2)Take Images

Take Images

Save Profile

Total Registrations till now : 0

Old P...

Please enter a new password below

OK Cancel

For Already Registered

Take Attendance

Attendance

ID	NAME	DATE	TIME
----	------	------	------

Quit

For New Registrations

Enter ID

2015044 Clear

Enter Name

Abhinav Mohan Bhatia Clear

1)Take Images 2)Take Images

Take Images

Save Profile



Total Registrations till now : 0

Password Registered

New password was registered successfully!!

OK

Take Pictures Window: This window allows to capture images of the student and save to database for analyzing the student based upon the name and id of the student.

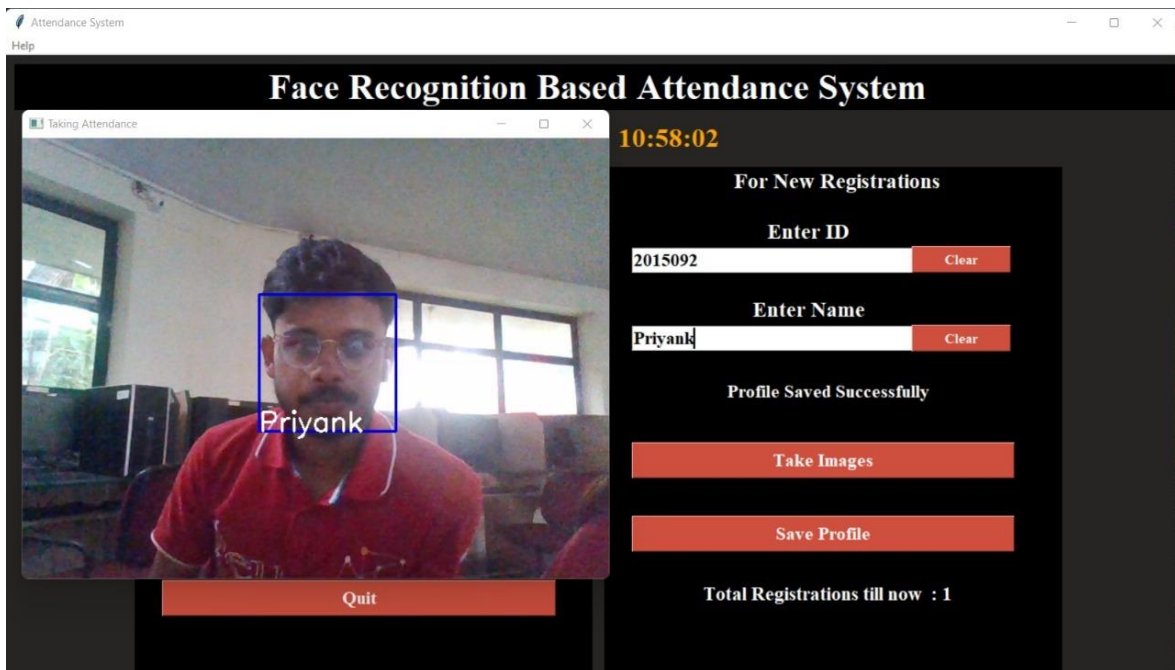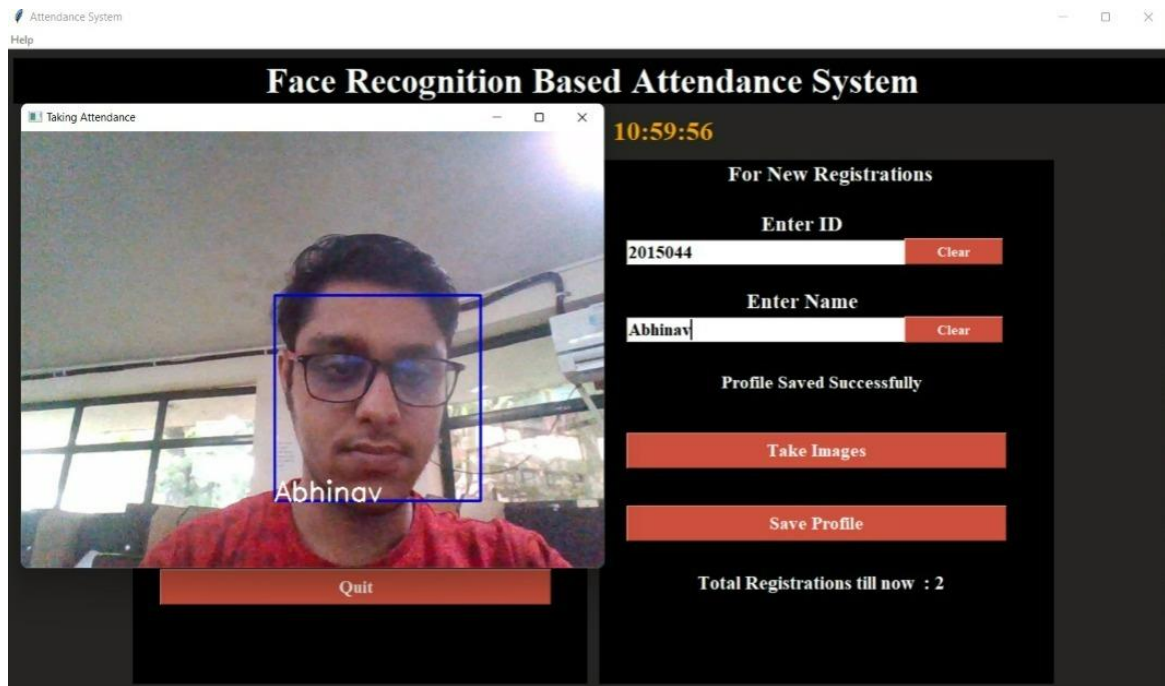

Take Attendance Window: This window allows to record attendance of a particular student after successful registration through Take Images Window.

Face Recognition Based Attendance System

29-June-2022 | 11:48:19

For Already Registered

Take Attendance

Attendance

ID	NAME	DATE	TIME
2015044	Abhinav	29-06-2022	11:48:09
2015092	Priyank	29-06-2022	11:04:41
2015044	Abhinav	29-06-2022	11:00:59
2015092	Priyank	29-06-2022	10:58:28

Quit

For New Registrations

Enter ID
2015044 Clear

Enter Name
Abhinav Clear

1)Save Profile 2)Take Images

Take Images

Save Profile

Total Registrations till now : 3

Result

We tested the attendance-based system with a range of users, and it was able to recognize the users' faces with their names and IDs, as well as successfully recorded their attendance. The following are a few snapshots of the attendance taken.

Below is the snapshot of the saved attendance details in the desired file location in the system for further training of the users face for the recognition of the user to record the attendance.

SERIAL NO.	ID	NAME
1	2015092	Priyank
2	2015044	Abhinav

The above snapshots demonstrate the information of the users saved in the .csv file which is the attendance recorded for the day.

Conclusion

In this system, we implemented a face recognition-based attendance system for a school, college, or any other organization to track students and employee's attendance. It will save time and effort, especially if the organization has a significant number of employees or pupils. The goal of the Automated Attendance Method is to eliminate the shortcomings of the traditional (manual) system. A face recognition-based attendance system is discussed in detail in this report. The suggested method identifies individuals by comparing their input image from a webcam to the train image. This suggested method could detect and localize a face from an input facial image received from a video frame being recorded. OpenCV's LBPH and Haar Cascade Classifier are used to record attendance using face detection and identification. The project was effective in registering the user, identifying the user's face, and recording the user's attendance.